



Research and Development

VERIFICATION AND TRANSFER OF THERMAL POLLUTION MODEL

Volume II. User's Manual for
Three-dimensional Free-surface Model

Prepared for

Office of Water and Waste Management
EPA Regions 1-10

Prepared by

Industrial Environmental Research
Laboratory
Research Triangle Park NC 27711

RESEARCH REPORTING SERIES

Research reports of the Office of Research and Development, U.S. Environmental Protection Agency, have been grouped into nine series. These nine broad categories were established to facilitate further development and application of environmental technology. Elimination of traditional grouping was consciously planned to foster technology transfer and a maximum interface in related fields. The nine series are:

1. Environmental Health Effects Research
2. Environmental Protection Technology
3. Ecological Research
4. Environmental Monitoring
5. Socioeconomic Environmental Studies
6. Scientific and Technical Assessment Reports (STAR)
7. Interagency Energy-Environment Research and Development
8. "Special" Reports
9. Miscellaneous Reports

This report has been assigned to the INTERAGENCY ENERGY-ENVIRONMENT RESEARCH AND DEVELOPMENT series. Reports in this series result from the effort funded under the 17-agency Federal Energy/Environment Research and Development Program. These studies relate to EPA's mission to protect the public health and welfare from adverse effects of pollutants associated with energy systems. The goal of the Program is to assure the rapid development of domestic energy supplies in an environmentally-compatible manner by providing the necessary environmental data and control technology. Investigations include analyses of the transport of energy-related pollutants and their health and ecological effects; assessments of, and development of, control technologies for energy systems; and integrated assessments of a wide range of energy-related environmental issues.

EPA REVIEW NOTICE

This report has been reviewed by the participating Federal Agencies, and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the Government, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161.

EPA-600/7-82-037b

May 1982

VERIFICATION AND TRANSFER
OF THERMAL POLLUTION MODEL

VOLUME II: USER'S MANUAL FOR THREE-DIMENSIONAL
FREE-SURFACE MODEL

By

Samuel S. Lee, Subrata Sengupta,
S. Y. Tuann and C. R. Lee
Department of Mechanical Engineering
University of Miami
Coral Gables, Florida 33124

NASA Contract No. NAS 10-9410

NASA Project Manager: Roy A. Bland

National Aeronautics and Space Administration
Kennedy Space Center
Kennedy Space Center, Florida 32899

EPA Interagency Agreement No. 78-DX-0166

EPA Project Officer: Theodore G. Brna

Industrial Environmental Research Laboratory
Office of Environmental Engineering and Technology
Research Triangle Park, North Carolina 27711

Prepared for:

U. S. Environmental Protection Agency
Office of Research and Development
Washington, D. C. 20460

PREFACE

This volume presents the description and program documentation of the three-dimensional, free-surface mathematical model for thermal pollution analysis and prediction for shallow water bodies, for example, lakes and coastal waters. The program was developed by the Thermal Pollution Group at the University of Miami, and was successfully verified through application to several sites. This success was made possible by funding and technical assistance provided by the National Aeronautics and Space Administration (NASA) and the Environmental Protection Agency (EPA).

The model is time dependent, and the leap-frog and DuFort-Frankel schemes are adopted for solving the predictive equations based on the conservation principles of mass, momentum and energy. The model has been developed with minimal physical and site restrictive assumptions, and its algorithm has sufficient generality to allow for different boundary conditions specified at open boundaries. The program shows both the temporal and spatial variations of the surface water height. It computes three-dimensional velocity and temperature fields. The model can serve as an effective means for hydrothermal analysis and prediction. Plotting programs employed for representing the numerous results are also included.

The volume is intended as a user's manual and, as such, presents specific instructions regarding data preparation for program execution. To illustrate further, an example case is included here with its input data, hard copy printout and plots. The complete listing of the program and its accessories is also included.

ABSTRACT

A mathematical model that can be used for the analysis of thermal discharge from power plants into tidal estuaries and coastal waters is described. This transient, free-surface, three-dimensional model can be applied to predict the water temperature as a function of time and position in a specified region.

In situations of practical relevance, the specified coastal or off-shore region will be a water body of irregular bottom topography with possible islands or keys. The user specified the boundary and boundary conditions, as well as the water depth distribution. Semi-diurnal tide is considered in the model. Hourly weather data is needed for wind stress calculation and heat exchange between water and the atmosphere. The ambient temperature is assumed of a sinusoidal form of 24-hour period. The ambient turbulence is included by an eddy viscosity and diffusivity formulation. The appropriate values are to be calibrated against measured currents.

CONTENTS

Preface	ii
Abstract	iii
Figures	v
Tables	vi
Symbols	vii
Acknowledgments	viii
1. Introduction	1
2. Recommendations	4
3. Program Description and Flow Chart for Main Program (ANCMN)	5
Description of program algorithm	5
Flow chart	7
Subroutine descriptions	11
4. List of Program Symbols of Main Program	18
Description of main variables	18
Marker matrices	21
Depth matrix and its derivatives	25
Dimensions of subscripted quantities	25
Other program symbols	26
5. Preparation of Simulation Run	30
6. Input Data	34
7. Plotting Program	38
Description and flow chart for plotting program ...	38
Subroutines	39
Input data	43
References	46
Appendices	47
A. Example Case	47
Introduction	47
Problem statement	49
Calculation of parameters and input data	51
Execution deck	56
Sample output	62
Sample plotting	71
B. Fortran Source Program Listing	75
List of subroutines of the model	75
Subroutine listing	78

FIGURES

<u>Number</u>		<u>Page</u>
1	Flow chart for calculating program ANCMN and its subroutines	8
2	Relative position and designation of the variables	19
3	Space-staggered grid system - plan	20
4	MAR (i, j) matrix	22
5	MEX (i, j) matrix	22
6	MEY (i, j) matrix	23
7	MX (i, j) and MY (i, j) matrices	24
8	Flow chart for plotting program PLOTMN and its subroutines	40
9	Anclote Anchorage location in the state of Florida	48
10	Grid work for the Anclote Anchorage	50
11	Semidiurnal tide for June 19-20, 1978 at south end of Anclote Key	54
12	Surface velocity, Anclote Anchorage by modeling	71
13	UW velocity, Anclote Anchorage by modeling	72
14	VW velocity, Anclote Anchorage by modeling	73
15	Surface temperature, Anclote Anchorage by modeling	74

TABLES

<u>Number</u>		<u>Page</u>
1	Governing Equations	5
2	Subroutines of ANCMN	9
3	Symbols Used in the Program	21
4	Size of the Matrices	25
5	Input Data for ANCMN	34
6	Subroutines of PLOTMN	41
7	Input Data for PLOTMN	44

SYMBOLS

A_v	Vertical eddy viscosity, $\text{cm}^2 \text{sec}^{-1}$	T	Water temperature, deg C
B_h	Horizontal eddy diffusivity, $\text{cm}^2 \text{sec}^{-1}$	T_a	Air temperature, deg F
B_v	Vertical eddy diffusivity, $\text{cm}^2 \text{sec}^{-1}$	T_{ave}	Average of air and dewpoint temperatures, deg F
f	Coriolis factor, sec^{-1}	T_d	Dewpoint temperature, deg F
	Relative humidity in fraction of unit	T_e	Equilibrium temperature, deg F
g	Acceleration of gravity, cm sec^{-2}	T_s	Ambient surface tempera- ture, deg F
h	Local water depth with re- spect to mean sea level, cm	u	Component of water velocity along x-axis, cm sec^{-1}
H	Total water depth, cm		Wind speed, mph
H_s	Gross solar radiation, $\text{BTU ft}^{-2} \text{day}^{-1}$	v	Component of water velocity along the y-axis, cm sec^{-1}
I	Node index in the direction of the x-axis	w	Component of water velocity along the z-axis, cm sec^{-1}
J	Node index in the direction of the y-axis	η	Displacement of the free surface with respect to the mean water level, cm
K	Node index in the direction of the z-axis	ρ	Water density, gm cm^{-3}
K_s	Surface heat exchange co- efficient, $\text{BTU ft}^{-2} \text{day}^{-1}$ deg F $^{-1}$	Ω	Nondimensional vertical fluid velocity
L	Reference length, cm	σ	Nondimensional vertical coordinate
P	Pressure, dynes cm^{-2}		
t	Time, sec		

ACKNOWLEDGMENTS

This work was supported by a contract from the National Aeronautics and Space Administration (NASA-KSC) and the Environmental Protection Agency (EPA-RTP).

The authors express their sincere gratitude for the technical and managerial support of Mr. Roy A. Bland, the NASA-KSC project manager of this contract, and the NASA-KSC remote sensing group. Special thanks are also due to Dr. Theodore G. Brna, the EPA-RTP project manager, for his guidance and support of the experiments, and to Mr. Albert W. Morenault from Florida Power Company (FPC), Tarpon Springs, and his data collection group for data acquisition. The support of Mr. Charles H. Kaplan of EPA was extremely helpful in the planning and reviewing of this project.

SECTION 1

INTRODUCTION

The analysis of thermal discharges is important in order to minimize the environmental impact and to manage efficiently and safely the waste heat problems. The study of technological solutions to the problems of heated water disposal involves complicated relationships, such as the location, geometry and types of the discharge outlet, the flow condition and temperature of the receiving water body, the meteorological conditions of the site, the waste heat output of the power plant, etc. A thorough understanding of the thermal effects and physical processes of heated water dispersion to the environment is an essential part of serving the rapidly growing demand for electrical energy, while reducing the possible impact on the receiving ecosystem.

The thermal effluent from a power plant will have variable consequences on the aquatic life of a receiving water body and the adjacent environment depending on the temperature rise. Therefore, the prime objective of the heated water discharge system is to bring the discharged water into thermal equilibrium with the surrounding water by bringing thermal outfall to the mainstream of the water body, whereby the mixing and convective processes will increase the surface heat transfer to the atmosphere. Thus, the temperature rise within the tolerance of natural environmental conditions is very important on the disposal system design and the standards for regulating thermal effluent.

Under limited circumstances, in-situ measurements can serve for diagnostic and monitoring purposes for meeting the need of analyzing thermal impact on receiving water body. However, to provide a priori information about the nature and extent of thermal impact for site selection and discharge system design, numerical modeling for simulating hydrothermal behavior of the water body is imperative.

During the past years, many numerical models have been developed for hydrothermal studies. Dunn et al. (1975) gave a presentation of different models developed up to then. They applied those models to the Point Beach Nuclear Power Plant and compared the performance of various models in predicting a standard data base. A general conclusion that can be made from their analysis is that though some models may perform well under certain conditions, a generalized model which accounts for wind, current, tide, bottom topography and diverse meteorological conditions is yet to be developed.

Since 1974 the Thermal Pollution Group at the University of Miami has endeavored to develop a mathematical package for hydrothermal studies. The primary motivation behind the effort was to develop a series of models which make minimal site restrictive assumptions enabling application to diverse basin and discharge configurations. Two separate formulations were made, one with the rigid-lid approximation and the other with the free-surface included. The details of the package and formulation are presented in a number of reports by Lee et al. (1978).

The present report concerns the UM's free-surface model and its application to the Anclote Anchorage in Florida for waste heat discharge from a power plant. The features of the model are: a) three-dimensional, b) nonlinear, c) time-dependent, d) irregular topography, e) driving forces including wind, tide, heat and mass flux, f) graphical representation of results of velocity and temperature fields, g) prediction of temporal and spatial variation of water surface.

The descriptions of the main program and its subroutines, main algorithm and flow chart, program symbols, input data and logic parameters, as well as the description of associated plotting programs, are contained herein for the ready access of the computer program package to the user. A preliminary review on existing three-dimensional free-surface models, basic concepts of the present model, assumptions, approximations, governing equations, initial and boundary conditions, finite difference implementation and numerical solution methods is presented in Lee et al. (1979) and Carter (1977).

The report also contains a plotting program which is used to analyze the results of the main calculation. A subroutine to compare the calculated temperature field with that obtained by IR scanning is presented in the program. Note that the IR temperature is interpreted by hand from the mosaic film and then read in for isotherm plotting and comparison.

The model has been tested for its adaptability. That is, the model allows for program modifications so that different initial and boundary conditions could be considered. The main program has several flag statements which make different usage of same program possible. Any program modification for the purpose of model transition should be made with care, and the new program should be validated by sample runs to assure that the effect of the modification is as desired. The same is also applicable to the plotting program.

The program therefore contains two parts. Part 1 is primary and performs calculations; Part 2 is secondary and is for analyzing and plotting the results of Part 1. ANCMN is the driving program of Part 1. The input contains parameters, geometrical and initial data, or tape which stores intermediate results; output contains printout of results at preset time intervals, in both hard copy and tape form. The hard copy printout provides the base for analysis, upon which decisions and choice of the plots needed for further analysis and detailed comparison with measured

results can be made. PLOTMN is the driving program of Part 2. The tape output from Part 1 is the main input. In addition, control cards assigning choice of plot, plot size, simulation hour and measured result for comparison are also required. Output is in printout and plot tape. The latter is used for plotting by CALCOMP plotter.

SECTION 2

RECOMMENDATIONS

The model can be enlarged to handle any passive constituent, dissolved or suspended, possessing arbitrary decay characteristics. The formulation of the constituent transport is based on the convection-diffusion equation, which is analogous to the thermal transport equation in the present model. The enlarged model would then be an ideal tool to study the ecological response of aquatic biota to the thermal effluents of the power plant.

The model can be modified to include bouyancy effects caused by fresh water/salt water sensing by including a salinity-dispersion equation. This equation will be of similar form to the energy equation.

The code is written for a constant grid size. Modifications can be made to incorporate a coarse grid for the complete field in comparison with a fine grid near the discharge location. This will allow a more accurate prediction of plume behavior in the near field. A penalty in computational cost will be incurred.

SECTION 3

PROGRAM DESCRIPTION AND FLOW CHART FOR MAIN PROGRAM (ANCMN)

DESCRIPTION OF PROGRAM ALGORITHM

The governing partial differential equations are given in Table 1; the symbols and definitions are referenced in Nomenclature. The problem is set up as an initial-boundary value problem, so values of dependent variables are assumed known initially and prescribed on boundaries. Values at successive time steps are obtained by using a true explicit scheme. The leap-frog finite difference format is used to calculate surface elevation η and two horizontal velocity components, u and v , at time $n+1$, where n is the present time step. The variables at times $n-1$ and n are all known. The sequence in which calculations are performed is as follows:

1. Integrate the surface elevation equation using central-time central-space (CTCS) differencing. That is, η^{n-1} , η^n and u^n , v^n and h . Note that h is independent of time while the present water depth $H^n = h + \eta^n$ is needed in this calculation. In the subroutine BETA, not only η^{n+1} but also $\Omega^{n+1}(i, j, k)$, the modified vertical velocity in transform (σ) plane, is accomplished immediately after the η computation.
2. The next task in the sequence is to calculate the nonlinear inertia terms that appear in the horizontal momentum equations. Here, two subroutines are involved: BNRTIA is

TABLE 1. Governing Equations

Continuity Equation*:

$$\frac{\partial Hu}{\partial x} + \frac{\partial Hv}{\partial y} + H \frac{\partial \Omega}{\partial \sigma} + \frac{\partial \eta}{\partial t} = 0$$

u Momentum Equation:

$$\begin{aligned} \frac{\partial Hu}{\partial t} + \frac{\partial Huu}{\partial x} + \frac{\partial Hvu}{\partial y} + H \frac{\partial \Omega u}{\partial \sigma} + (1 + \sigma) \frac{\partial u}{\partial \sigma} \frac{\partial \eta}{\partial t} - fvH \\ = - \frac{H}{\rho} \frac{\partial p}{\partial x} - gH \left(\sigma \frac{\partial H}{\partial x} + \frac{\partial \eta}{\partial x} \right) + \frac{Av}{H} \frac{\partial^2 u}{\partial \sigma^2} \end{aligned}$$

v Momentum Equation:

$$\begin{aligned} \frac{\partial H v}{\partial t} + \frac{\partial H u v}{\partial x} + \frac{\partial H v v}{\partial y} + H \frac{\partial \Omega v}{\partial \sigma} + (1 + \sigma) \frac{\partial v}{\partial \sigma} \frac{\partial \eta}{\partial t} + f u H \\ = - \frac{H}{\rho} \frac{\partial p}{\partial y} - g H \left(\sigma \frac{\partial H}{\partial y} + \frac{\partial \eta}{\partial y} \right) + \frac{A v}{H} \frac{\partial^2 v}{\partial \sigma^2} \end{aligned}$$

Energy Equation:

$$\begin{aligned} \frac{\partial H T}{\partial t} + \frac{\partial H u T}{\partial x} + \frac{\partial H v T}{\partial y} + H \frac{\partial \Omega T}{\partial \sigma} + (1 + \sigma) \frac{\partial T}{\partial \sigma} \frac{\partial \eta}{\partial t} \\ = \frac{\bar{B}_v}{H} \frac{\partial^2 T}{\partial \sigma^2} + B_h \left[\frac{\partial}{\partial x} \left(H \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left(H \frac{\partial T}{\partial y} \right) \right] \end{aligned}$$

* This equation is vertically integrated to yield a) prognostic equation for η , and b) synoptic equation for Ω ; they are

$$\begin{aligned} \frac{\partial \eta}{\partial t} &= - \int_{-1}^0 \left(\frac{\partial H u}{\partial x} + \frac{\partial H v}{\partial y} \right) d\sigma \\ \Omega &= \frac{\sigma}{H} \frac{\partial \eta}{\partial t} + \frac{1}{H} \int_{\sigma}^0 \left(\frac{\partial H u}{\partial x} + \frac{\partial H v}{\partial y} \right) d\sigma. \end{aligned}$$

The latter, upon transformation, yields the actual vertical velocity

$$w = \Omega H + (1 + \sigma) \frac{\partial \eta}{\partial t} + u \frac{\partial H}{\partial x} + v \frac{\partial H}{\partial y} + u \frac{\partial \eta}{\partial x} + v \frac{\partial \eta}{\partial y}$$

for interior points, while ABNR3 is for open boundary points. Note, for the Anclole Anchorage sample problem, the open boundaries are at $j = 1$ and $j = 14$, and the imposing tides are applied at points immediately outside these open boundaries. Therefore, program modification is needed if different open boundary conditions are employed.

3. Following the inertia terms computations, which may be skipped if the Rossby Number is very close to zero, new values of u and v at $n+1$ are computed for all points in the grid. Again, the leap-frog and central-space scheme is used, but DuFort-Frankel differencing is applied to the vertical momentum diffusion terms. Two subroutines are called here, BVEL for interior points and ASAF3 for open boundary points. Since velocity at all points is calculated without distinction, a subroutine GIVENU is needed to specify the given discharge or flowrate at particular points, that is, to replace

calculated velocities at those points with known values.

Steps 1, 2 and 3 are calculations for surface elevation, modified vertical velocity and horizontal velocity components; they constitute the V-calculation. Whether the V-calculation is to be carried out or not depends on flagged statement KVEL = 1 or 0. The next group of calculations is for thermal transport, or T-calculation, and it involves the energy equation only. Similarly, this group is to be flagged by statement whether KTEMP is unity or zero.

4. The convective term in the energy equation is calculated next, using either a given velocity field, in the case of KVEL = 0, or the presently known velocity field at $n+1$, in the case of KVEL = 1. The subroutine for this purpose is CONV.
5. The energy equation itself is then integrated over time to obtain T at $n+1$. The forward-time, central-space (FTCS) and DuFort-Frankel differencing for the vertical diffusion term are used in the calculation. The subroutine involved is TCOMPT. Since temperatures at all points are computed without distinction as to whether the points are with given temperatures or not, subroutine GIVENT is needed to respecify the temperature at the given points.

Clearly, Steps 4 and 5 make up the T-calculation. In either of V- or T-calculations, vertical velocity w is involved. Instead of w , the rate of change of surface elevation, $\frac{\partial \eta}{\partial t}$, is used for convection in vertical direction.

6. The actual vertical velocity, w , is computed when it is needed for printout. The subroutine is WCAL, and instead of u^{n+1} and v^{n+1} which are defined at half J and half I respectively, the interpreted velocities at center of grid cell are used in this calculation. Since a space-staggered scheme is used, the water level and vertical velocity are described at the center of grid cell, while the horizontal velocities are described at the edges of cells.
7. The real time (or simulation time) is checked and Steps 1 through 6 are repeated; that is, the above procedure is repeated for $n+2$ using values at $n+1$ and n .

Reference to the flow chart presented in Figure 1 will clarify the description of program algorithm.

FLOW CHART

Figure 1 shows the main flow chart of the three-dimensional, free-surface program applied to the Anclote Anchorage. In the flow chart, the subroutines and their functions are described briefly. Table 2 lists the subroutines called in the main-program, ANCMN.

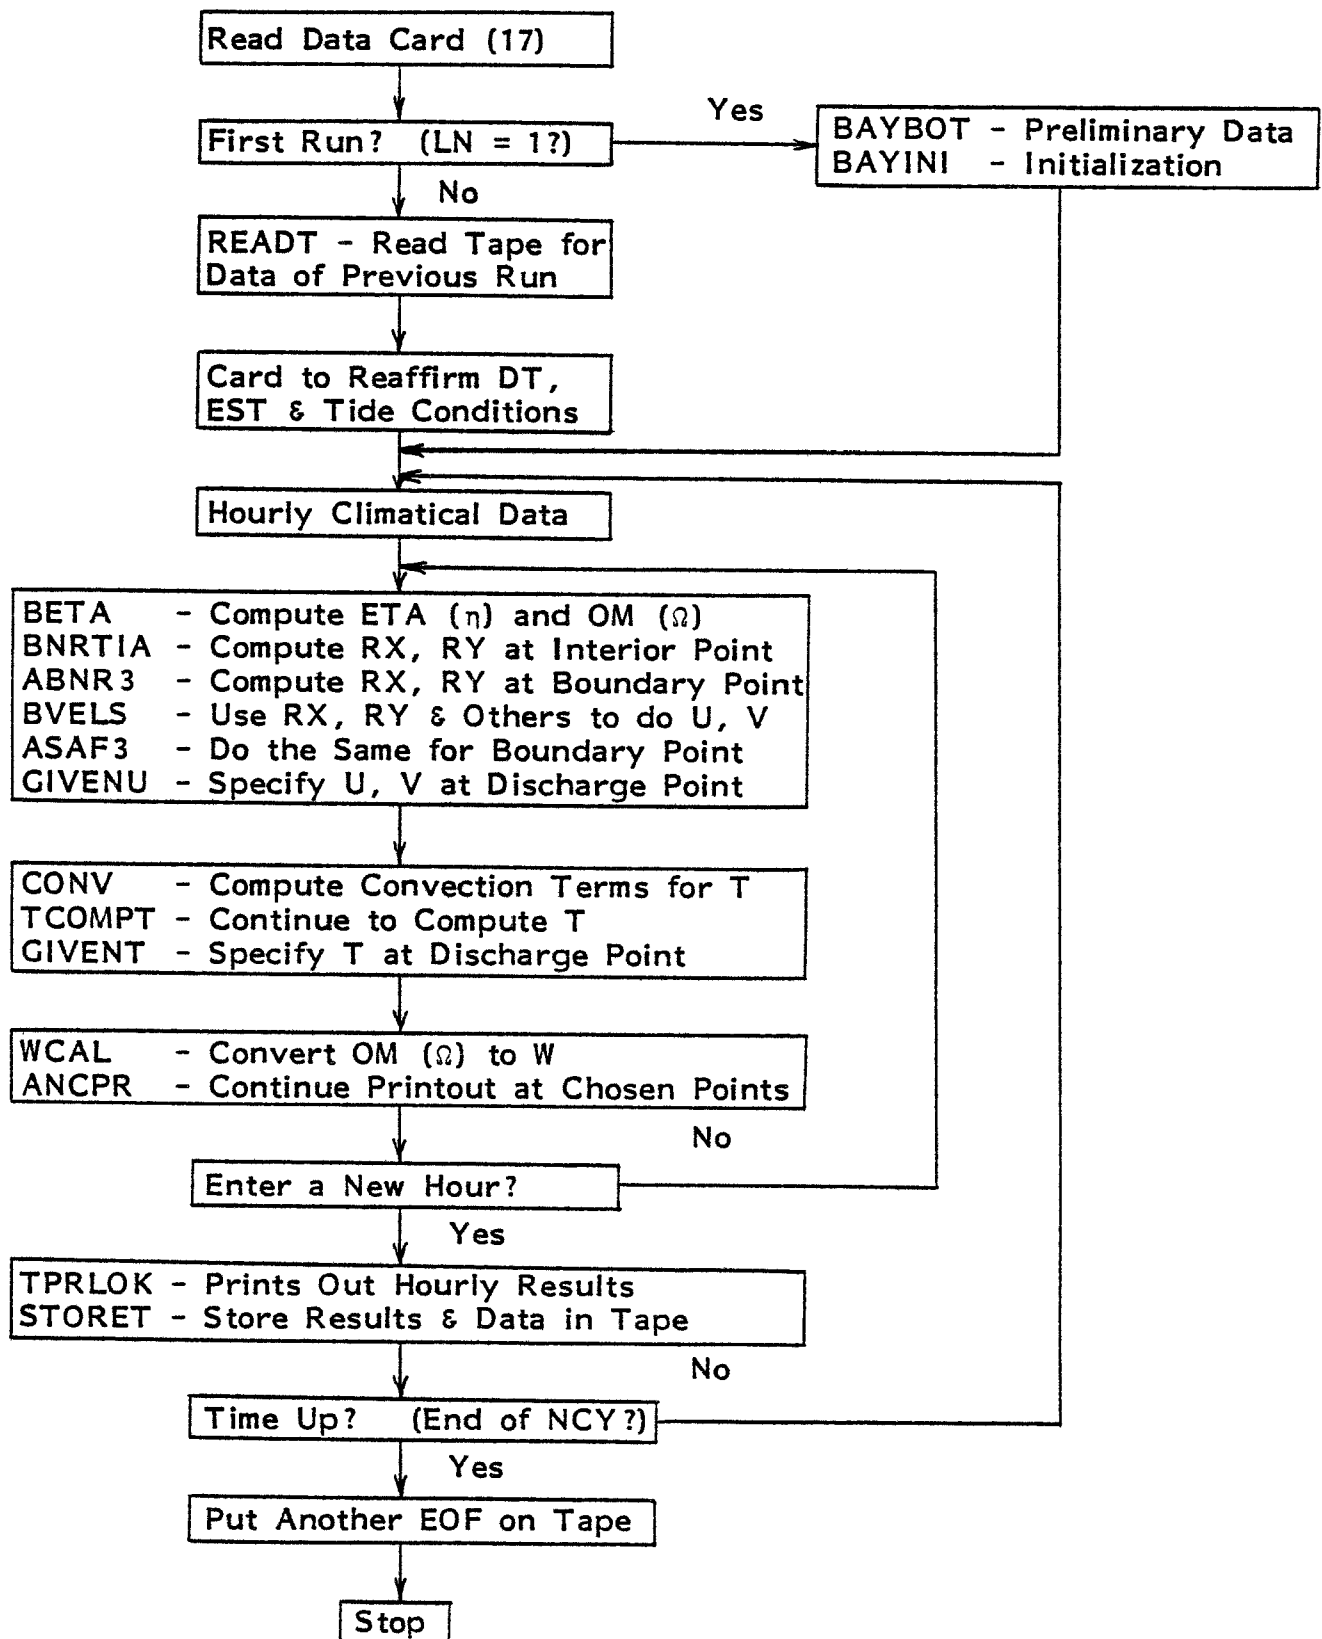


Figure 1. Flow chart for calculating program ANCMN and its subroutines

TABLE 2. Subroutines Required in Main Calculating Program ANCMN

No.	Name	Description	Remark
1	BAYBOT	Reads in bay bottom sounding (H) and various grid book-keeping matrices, calculates depth matrices accordingly.	Skip if LN=1, depends on problem and grid work, data file AMATN preferred.
2	BAYINI	Initializes the dependent variables such as U, V, W, T, ETA, RX, RY also set 10 ⁹ to values outside the calculation region.	Also depends on problem and run conditions. RX RY are inertia terms.
3	READT	Reads in stored data from tape for continuing run.	Skip if LN=1.
4	IRREAD	If required, it reads in IR data as initial temperature; thus it replaces T input from READT.	No need if T-calculation began with ambient temperature.
5	EQTEMP	Calculates the equilibrium temperature over that hour.	Number of hour is NCY.
6	BETA	Calculates surface elevation ETA and vertical velocity OM (Ω).	Mandatory in V-calculation.
7	BNRTIA	Calculates inertia terms of momentum eq. for boundary pts.	Skip if ROSSBY = 0.
8	ABNR3	Calculates inertia terms of momentum eq. for boundary pts. on north and south exit of the anchorage.	Skip if ROSSBY = 0.
9	BVELS	Calculates velocity at interior pts. - main part of velocity calculation.	
10	ASAF3	Calculates velocity at boundary pts. along north and south boundaries.	
11	GIVENU	Specifies velocity at control pts., such as discharge, intake and river head.	

TABLE 2. Subroutines Required in Main Calculating Program ANCMN
(Continued)

No.	Name	Description	Remark
12	CONV	Calculates convective terms of energy equilibrium.	Depends on run condition.
13	TCOMPT	Calculates temperature.	
14	GIVENT	Specifies temperature at discharge outlet.	
15	WCAL	Converts the OM (Ω) vertical velocity to physical vertical velocity W.	
16	ANCPR	Prints surface elevation, velocity (mag. with dir.) and temperature at 4 chosen locations after completion of marching of DT, i.e. printout after each time step.	Locations are to be chosen by user.
17	TPRLOK	Prints out the velocity field, water depth, surface elevation and temperature field after one hour of simulation time.	Skip if KSTORE = 0.
18	STORET	After TPRLOK for printout, the same data and relevant parameters are stored onto tape, either for later plotting or for continued calculation.	
19	ZZ1	A subroutine called by ANCPR and TPRLOK; it is for finding velocity dir. based on U and V components.	
20	AMATN	Is a data file containing all grid matrices and bottom depth matrix to be read in BAYBOT.	Same data could be in card form, inserted after TINIT card.
21	C2007	Climatical data used in the run; the data is on hourly basis.	Could also be in card form.

SUBROUTINE DESCRIPTIONS

This section describes the subroutines used in ANCMN, in order of their appearance.

BAYBOT

It reads the marker matrix MAR; the elevation matrix ELEV which is changed to depth matrix H by adding a constant STAGE; then four more marker matrices, MEX, MEY, MX and MY. It interpolates H according to marker MEX, MX and MY to find additional depth matrices, called HB, HU and HV, respectively.

BAYINI

It initializes most of the variable matrices. Since the initial condition for velocity is a quiescent condition, U1, U2, U3, V1, V2, V3, RX, RY, ETA1, ETA, ETA3, UB, VB, OM, W and TC are set to zero. The quiet bay is assumed to have a constant temperature TINIT to begin with, so T1, T2, T3 and TB are set to TINIT.

READT

This subroutine reads in input parameters, physical quantities and intermediate results stored on tape.

IRREAD

It reads in in-situ measured or IR scanned temperature as an alternative initial condition to temperature calculation. This temperature is interpolated by hand and stored in the form of matrix T1.

EQTEMP

It calculates the equilibrium temperature T_e and surface heat exchange coefficient K_s of a natural water surface. The procedures for these calculations are as follows:

$$1. \quad T_d = T_a - (14.55 + 0.114 T_a)(1-f) - [(2.5 + 0.007 T_a)(1-f)]^3$$

where T_d = dewpoint temperature in °F
 T_a = air temperature in °F
 f^a = relative humidity in fraction of unit

$$2. \quad \beta = 0.255 - 0.0085 T_{ave} + 0.000204 T_{ave}^2$$

where $T_{ave} = \frac{1}{2}(T_s + T_d)$, and β is an intermediate step
 T_s = ambient surface temperature in °F

$$3. \quad f(u) = 70 + 0.7 u^2, \text{ and } u \text{ is wind speed in mph}$$

$$4. K_s = 15.7 + (\beta + 0.26) f(u)$$

where K_s = surface heat exchange coefficient in BTU/(ft² day °F)

$$5. T_e = T_d + \frac{H_s}{K_s}$$

where T_e = equilibrium temperature in °F

H_s = gross solar radiation in BTU/(ft² day)

Note: The T_a , f , u , H_s and T_s are climatological data; however, care must be taken for the hourly data TAIR, HUMID, WIND, SRAD and TSURF are in metric units. Therefore, in the above calculations, the basic data must first be transformed into English units, then the final results, T_e and K_s , must again be transformed back to metric units. T_e (TEQ) and K_s (SK) are used in subroutine CONV for T-calculation.

BETA

Computes η^{n+1} (ETA3) and Ω^{n+1} (OM) by using central differencing from the continuity equation. The vertical integration is done using Simpson's rule. The following symbols are used:

DR = depth at half-integer j point on right edge, i + 1, of the cell.

DL = depth at half-integer j point on left edge, i, of the cell.

D2 = depth at half-integer i point on upper edge, j + 1, of the cell.

D1 = depth at half-integer i point on lower edge, j, of the cell.

$$DHUX = \frac{\partial Hu}{\partial x}$$

$$DHVY = \frac{\partial Hv}{\partial y}$$

AH = total depth at the center of the cell, a half-grid point.

BNRTIA

It computes the sums of the nonlinear inertia terms, RX and RY, in the x and y momentum equation at each interior point of the domain. Note that RX (i, j, k) = RY (i, j, k) = 0 for k = KN. The following symbols are used, in their order of appearance:

AH = depth either at u-point or at v-point

$$DET = \frac{\partial \eta}{\partial t}$$

$$DHUUX = \frac{\partial Huu}{\partial x}$$

$$DHUVX = \frac{\partial Huv}{\partial x}$$

$$DHUVY = \frac{\partial Huv}{\partial y}$$

$$DHVVY = \frac{\partial Hvv}{\partial y}$$

D2 = depth at forward half-grid point in either x or y direction.

D1 = depth at backward half-grid point in either x or y direction.

UBAR2 = average u at forward half-grid point.

UBAR1 = average u at backward half-grid point.

VBAR2 = average v at forward half-grid point.

VBAR1 = average v at backward half-grid point.

E2 = averaged η at (i, j + 1) or (i + 1, j)

E1 = averaged η at (i, j)

D2 = depth at (i, j + 1) or (i + 1, j)

D1 = depth at (i, j)

$$DUOMS = \frac{\partial u\Omega}{\partial \sigma}$$

$$DVOMS = \frac{\partial v\Omega}{\partial \sigma}$$

$$DUS = \frac{\partial u}{\partial \sigma}$$

$$DVS = \frac{\partial v}{\partial \sigma}$$

$$RX = \frac{\partial Huu}{\partial x} + \frac{\partial Huv}{\partial y} + H \frac{\partial u\Omega}{\partial \sigma} + (1 + \sigma) \frac{\partial u}{\partial \sigma} \frac{\partial \eta}{\partial t}$$

$$RY = \frac{\partial Huv}{\partial x} + \frac{\partial Hvv}{\partial y} + H \frac{\partial v\Omega}{\partial \sigma} + (1 + \sigma) \frac{\partial v}{\partial \sigma} \frac{\partial \eta}{\partial t}$$

ABNR3

It computes RX and RY for points on boundary. The tide heights at half-grid points outside the north and south boundary are computed first. Since the open boundary is in x-direction, that is, only the v-point appears, RX = 0 and RY is given by

$$RY = \frac{\partial Huv}{\partial x} + \frac{\partial Hvv}{\partial y} + H \frac{\partial u\Omega}{\partial \sigma} + (1 + \sigma) \frac{\partial v}{\partial \sigma} \frac{\partial \eta}{\partial t}$$

In the computation, it is assumed:

D2 = depth at half-grid point just outside the boundary
 = HV (i, JN) + North Tide Height, if D2 is HB (i, JN)
 = HV (i, 1) + South Tide Height, if D2 is HB (i, 0)

VBAR2 = v at half-grid point just outside the boundary
 = V2 (i, JN, K) if it is north boundary
 = V2 (i, 1, k) if it is south boundary

BVELS

It calculates u^{n+1} (U3) and v^{n+1} (V3) at interior points by central time differencing and DuFort-Frankel scheme. Note that the horizontal diffusion of momentum is neglected in the model.

The equations for u and v are

$$\begin{aligned}\frac{1}{H} \frac{\partial Hu}{\partial t} &= fv - g \frac{\partial \eta}{\partial x} + \frac{A_v}{H^2} \frac{\partial^2 u}{\partial \sigma^2} - \frac{1}{H} RX \\ \frac{1}{H} \frac{\partial Hv}{\partial t} &= -fu - g \frac{\partial \eta}{\partial y} + \frac{A_v}{H^2} \frac{\partial^2 v}{\partial \sigma^2} - \frac{1}{H} RY\end{aligned}$$

where RX and RY are the nonlinear inertia terms.

The following symbols are introduced for brevity.

$A2$ = Coriolis term

$A4 = g \frac{\partial \eta}{\partial x}$ or $g \frac{\partial \eta}{\partial y}$

$A5 = \frac{1}{H} RX$ or $\frac{1}{H} RY$

$A6$ = the rest of vertical diffusion term.

ASAF3

This calculates v^{n+1} (V3) at the v -points on the south ($j = 1$) and north ($j = JN$) boundaries. It is similar to ABNR3. The tide heights at imaginary half-grid points just outside the south and north boundary are computed first. The term $\frac{\partial \eta}{\partial y}$ is calculated at v -point at both $j = 1$ and JN , with tide height at outside half-grid point and η at inside half-grid point. Since the u velocity on these boundaries are assumed zero, the Coriolis force term $B2$ is set to zero. Symbols $B4$, $B5$ and $B6$ stand for pressure, convection and diffusion terms respectively.

GIVENU

It specifies velocities at cooling system outlet and intake. These velocities are determined from power plant flowrate. The river flowrate is also simulated by imposing velocities at river entry point.

CONV

It computes the sum of the convective terms in the energy equation at each point. Note that T is designated at half-grid points. The following symbols are used in this subroutine:

AH = depth at point (i, j) where $TC(i, j, k)$ is to be calculated.

DR = depth at forward u-point

DL = depth at backward u-point

D2 = depth at forward v-point

D1 = depth at backward v-point

DTZ (i, j) = temperature slope $\frac{\partial T}{\partial \sigma}$ at the surface

UR = forward u but at T-level

UL = backward u but at T-level

$$DHUTX = \frac{\partial HuT}{\partial x}$$

VR = forward v but at T-level

VL = backward v but at T-level

$$DHVTY = \frac{\partial HvT}{\partial y}$$

The convection term TC is written for

$$TC = \frac{\partial HuT}{\partial x} + \frac{\partial HvT}{\partial y} + H \frac{\partial \Omega T}{\partial \sigma} + (1 + \sigma) \frac{\partial T}{\partial \sigma} \frac{\partial \eta}{\partial t}$$

TCOMPT

This subroutine computes temperature T^{n+1} (T3) for each point in the domain. The equation is

$$\frac{1}{H} \frac{\partial HT}{\partial t} = \frac{B_v}{H^2} \frac{\partial^2 T}{\partial \sigma^2} + B_h \left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right) - \frac{1}{H} TC$$

where TC is the convection term obtained from subroutine CONV. The boundary condition on solid boundary is adiabatic, but on open boundary, T is assumed known. There are three different formulas for computing the $\frac{\partial^2 T}{\partial \sigma^2}$ although the same DuFort-Frankel format is used throughout. This is because the surface temperature slope is DTZ (i, j) and the bottom is adiabatic. The symbols here are

$$D2TX = \frac{\partial^2 T}{\partial x^2} \qquad D2TY = \frac{\partial^2 T}{\partial y^2}$$

GIVENT

It specifies the temperature of cooling system discharge water and river delivery.

WCAL

This subroutine calculates vertical velocity w (i, j, k) from modified vertical velocity Ω (i, j, k) by using σ -transformation formula. The following symbols are used:

$$DEX = \frac{\partial \eta}{\partial x}$$

$$DEY = \frac{\partial \eta}{\partial y}$$

$$DAHx = \frac{\partial H}{\partial x}$$

$$DAHy = \frac{\partial H}{\partial y}$$

ANCPR

It prints continuous records of elevation, velocity and temperature at certain particular points.

All data are printed on a single line, with the first item on the line being the total simulation time TTOT in sec. Items for each point are: surface elevation, resultant velocity, direction in which the velocity vector points (deg positive clockwise from North), and temperature, in that order.

TPRLOK

This subroutine performs the major printing tasks. The following variables are printed hourly, or controlled by printout interval TPRT:

AVR = resultant velocity, cm/sec

ANG = direction in which the velocity points

W = vertical velocity, cm/sec

ETA = surface elevation, cm

T2 = temperature, deg C

After TPRLOK is executed, the main program ANCMN prints out the total depth, $H = h + \eta$, at each point. Thus, the hourly printout of the relevant variables is completed. In this subroutine, there are two flags, KUV and KPROF. If both are zero, it skips the printing of velocity components u and v either presented in layers ($k = 1, KZ$) or in cross section along x -direction ($j = 1, JM$). These two flags are flipped only by interchanging the statements in the subroutine.

STORET

It records all the relevant data and results of the preceding simulation hour. STORET puts one EOF on tape after each block, while the main program ANCMN puts another EOF after the last block of data is recorded.

ZZ1

This subroutine finds the direction of the resultant horizontal velocity.

SECTION 4

LIST OF PROGRAM SYMBOLS OF MAIN PROGRAM

This section presents the program symbols and their definition in alphabetical order. In many cases, the symbols are described with the aid of diagram to show the definition.

DESCRIPTION OF MAIN VARIABLES

The relative position and designation of variables are shown in Figure 2. The water depth, h , is described in integer values of i and j ; the u -component is described at half-integer value of j and integer values of i and k ; the v -component at half-integer value of i and integer values of j and k ; the w -component at integer value of k and half-integer values of i and j ; the surface elevation, η , is described at half-integer values of i and j ; and the temperature, T , is described at half-integer values of i , j and k . The modified vertical velocity, Ω , is described at the same place as w -component. Figure 3 shows the space-staggered grid system in horizontal projection.

Table 3 lists all the symbols used for dependent variables appearing in the program. Since three levels of time step are used, same variable at different level is assigned with different symbols. The rule for symbolizing the dependent variables is: for variable $F(i\Delta x, j\Delta y, k\Delta \sigma, n\Delta t)$, $F1(i, j, k)$ is used to denote the value of variable at $n-1$; $F2(i, j, k)$ is the present value; while $F3(i, j, k)$ is the value at $n+1$ thus to be computed; and $FB(i, j, k)$ is the interpreted value of $F2(i, j, k)$ at a set of grid points differing from where it is designated.

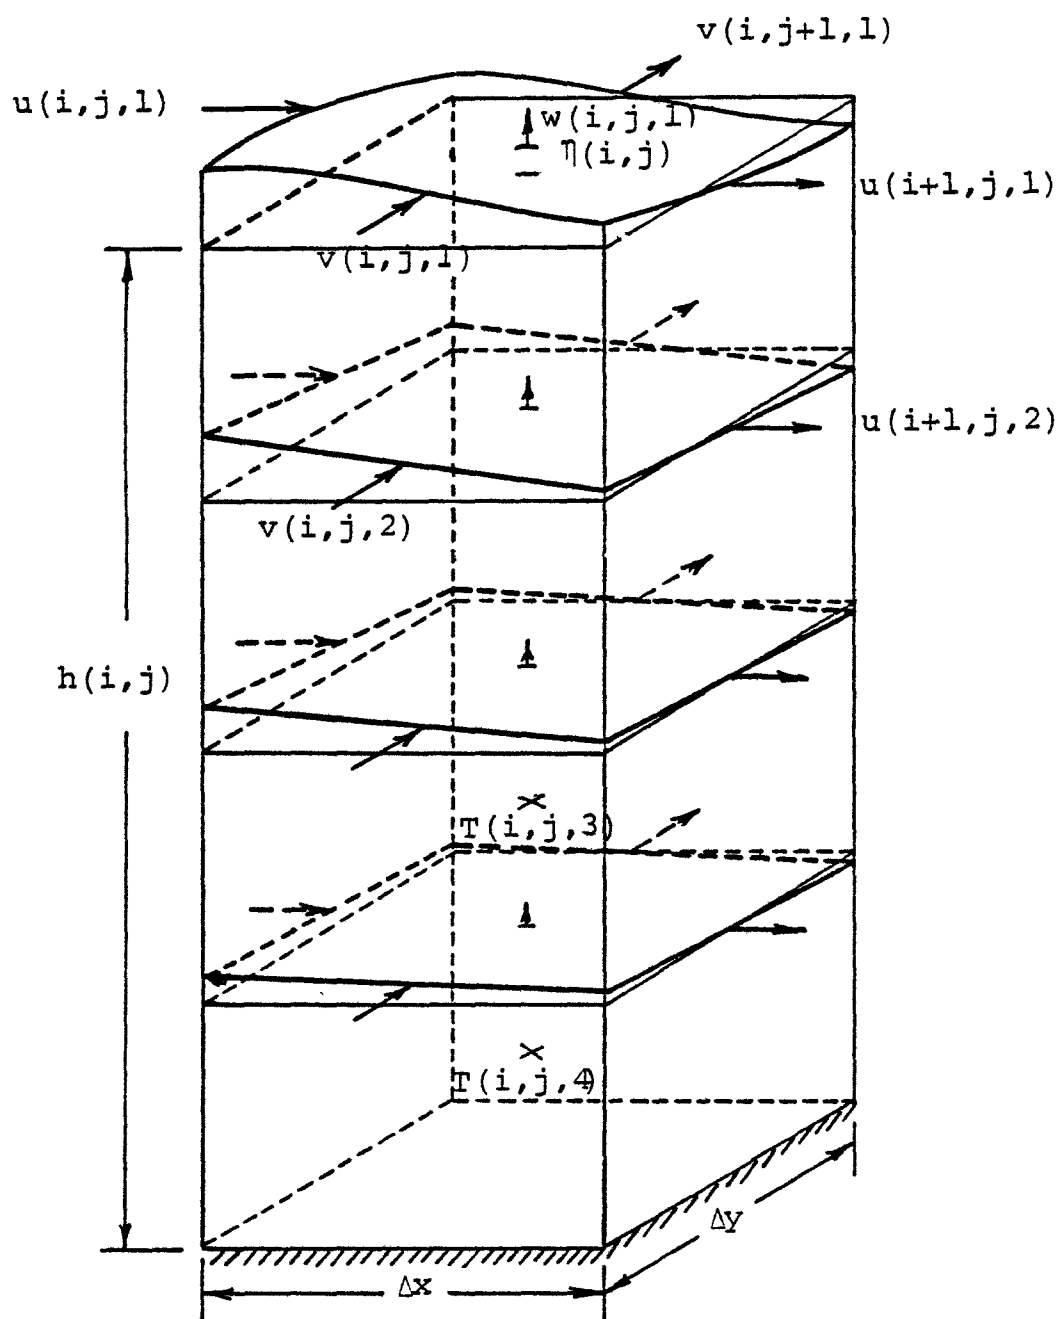


Figure 2. Relative position and designation of the variables

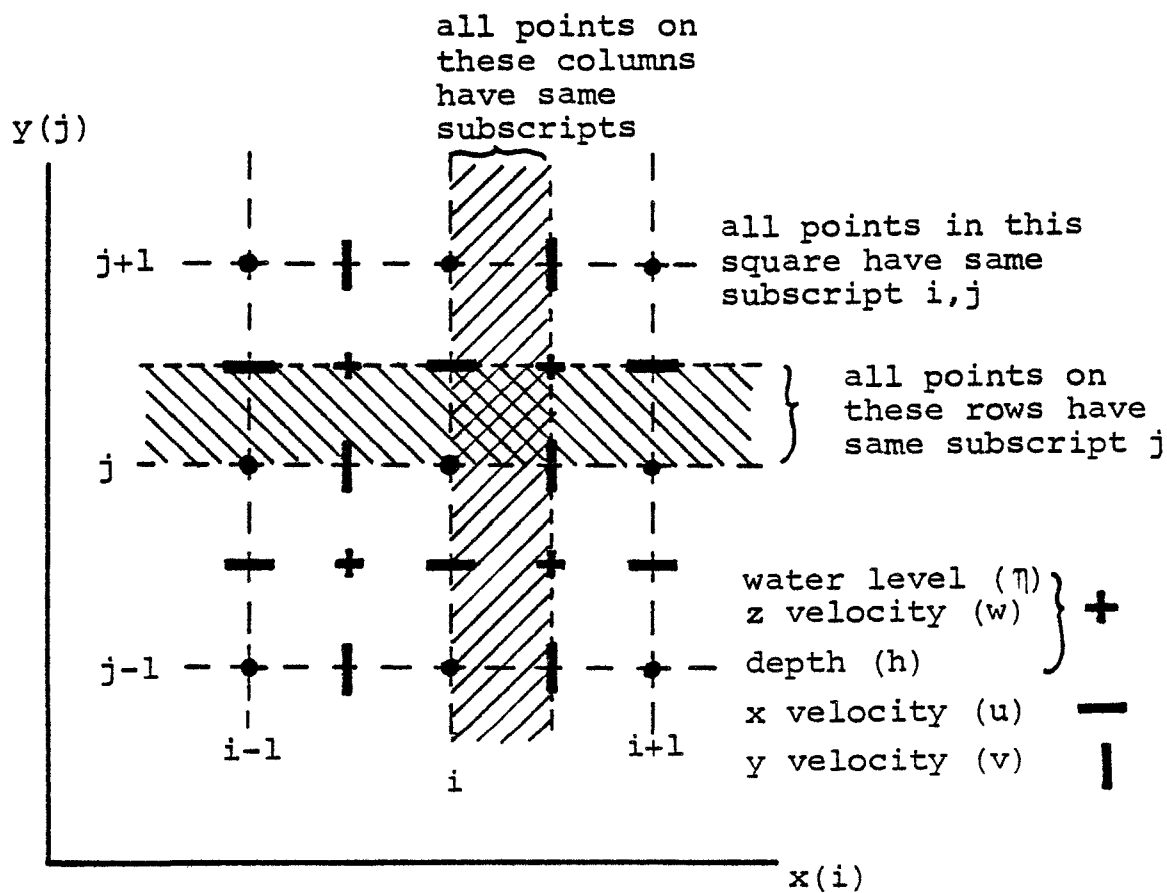


Figure 3. Space-staggered grid system - plan

TABLE 3. Symbols used in the program

Symbols	Argument	Description
U1, U2, U3, UB	(i, j, k)	u-component
V1, V1, V3, VB	(i, j, k)	v-component
T1, T2, T3, TB	(i, j, k)	Temperature T
ETA1, ETA2, ETA3	(i, j)	Surface Elevation η
TIDE1N, TIDE2N, TIDE3N	(i)	Tide Outside North Boundary
TIDE1S, TIDE2S, TIDE3S	(i)	Tide Outside South Boundary
DTZ	(i, j)	Heat Exchange at Water Surface
RX; RY; TC	(i, j, k)	Convection Terms in u; v; T equation
W; OM	(i, j, k)	w-component; Non-dimensional Ω
WAT	(i, j)	Total Water Depth or $h + \eta$

Note: In the program ANCMN, ETA2 is labeled as ETA and ETX; the former is used for calculation while the latter for printout.

MARKER MATRICES

The following integer-valued matrices are introduced to describe the grid system and to distinguish boundary from interior.

MAR (i, j)

MAR (i, j) identifies nodes in the full-grid system, i.e.

MAR = 0, (i, j) outside of boundary, hence no calculation

MAR = 1, (i, j) inside or on a boundary, as shown in Figure 4.

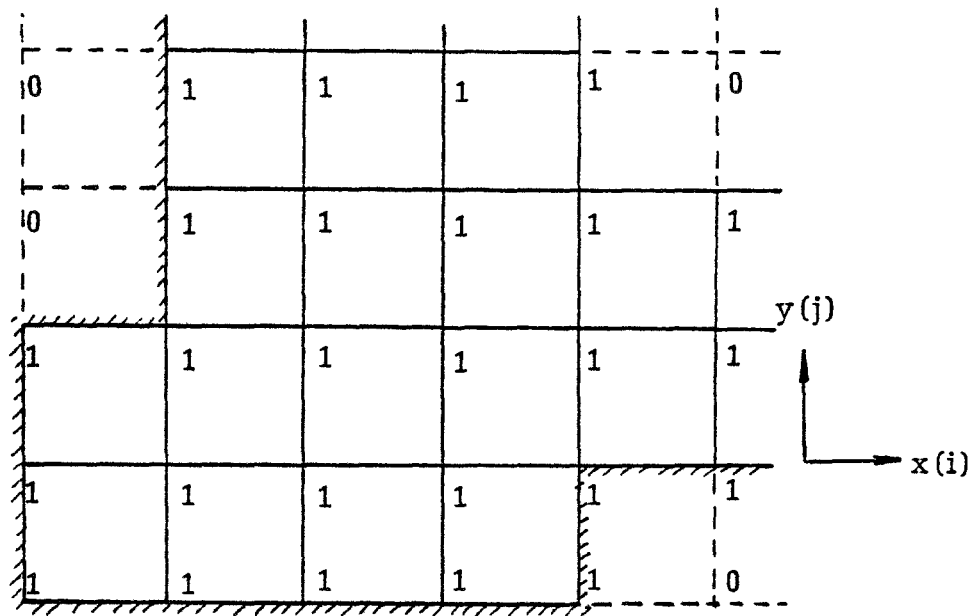


Figure 4. MAR (i, j) matrix

MEX (i, j)

MEX (i, j) provides marker to the half-grid system with reference to the y-direction boundaries, i.e.

MEX = 0, (i, j) outside of y-boundary, or exterior

MEX = 1, (i, j) just inside an east boundary

MEX = 2, (i, j) just inside a west boundary

MEX = 3, (i, j) nowhere near to y-boundary, or interior, as shown in Figure 5.

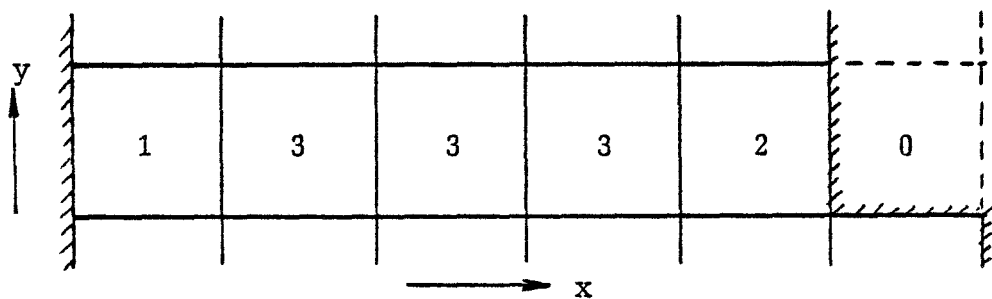


Figure 5. MEX (i, j) matrix

MEY (i, j)

MEY (i, j) provides marker to the half-grid system with reference to the x-direction boundaries, as shown in Figure 6.

MEY = 0, (i, j) outside of x-boundary, or exterior

MEY = 1, (i, j) just inside a south boundary

MEY = 2, (i, j) just inside a north boundary

MEY = 3, (i, j) nowhere near to x-boundary, or interior

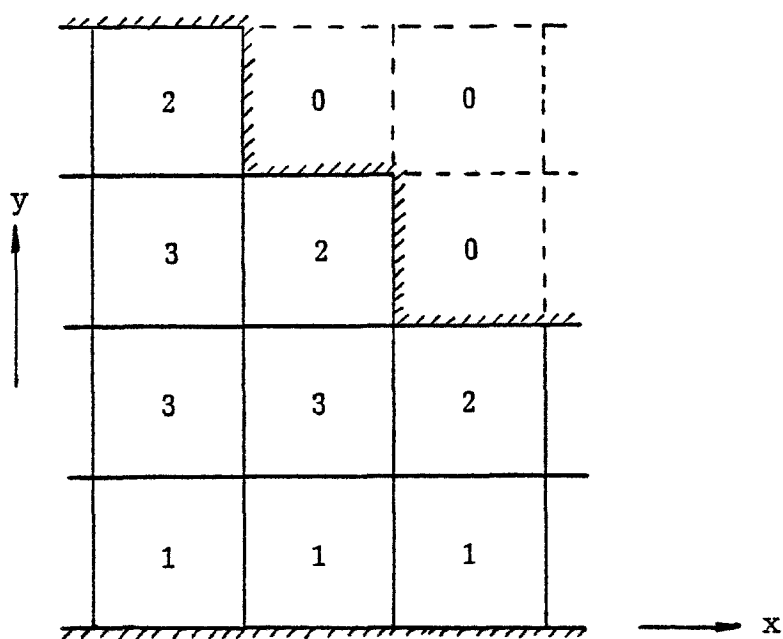


Figure 6. MEY (i, j) matrix

MX (i, j)

MX (i, j) provides marker to u-points, as shown in Figure 6.

MX = 0, (i, j) outside of y-boundary, or exterior

MX = 1, (i, j) on east boundary

MX = 2, (i, j) on west boundary

MX = 3, (i, j) nowhere near to y-boundary

$MY(i, j)$

$MY(i, j)$ provides marker to v-points, as also shown in Figure 6.

$MY = 0$, (i, j) outside of x-boundary, or exterior

$MY = 1$, (i, j) on south boundary

$MY = 2$, (i, j) on north boundary

$MY = 3$, (i, j) nowhere near to x-boundary

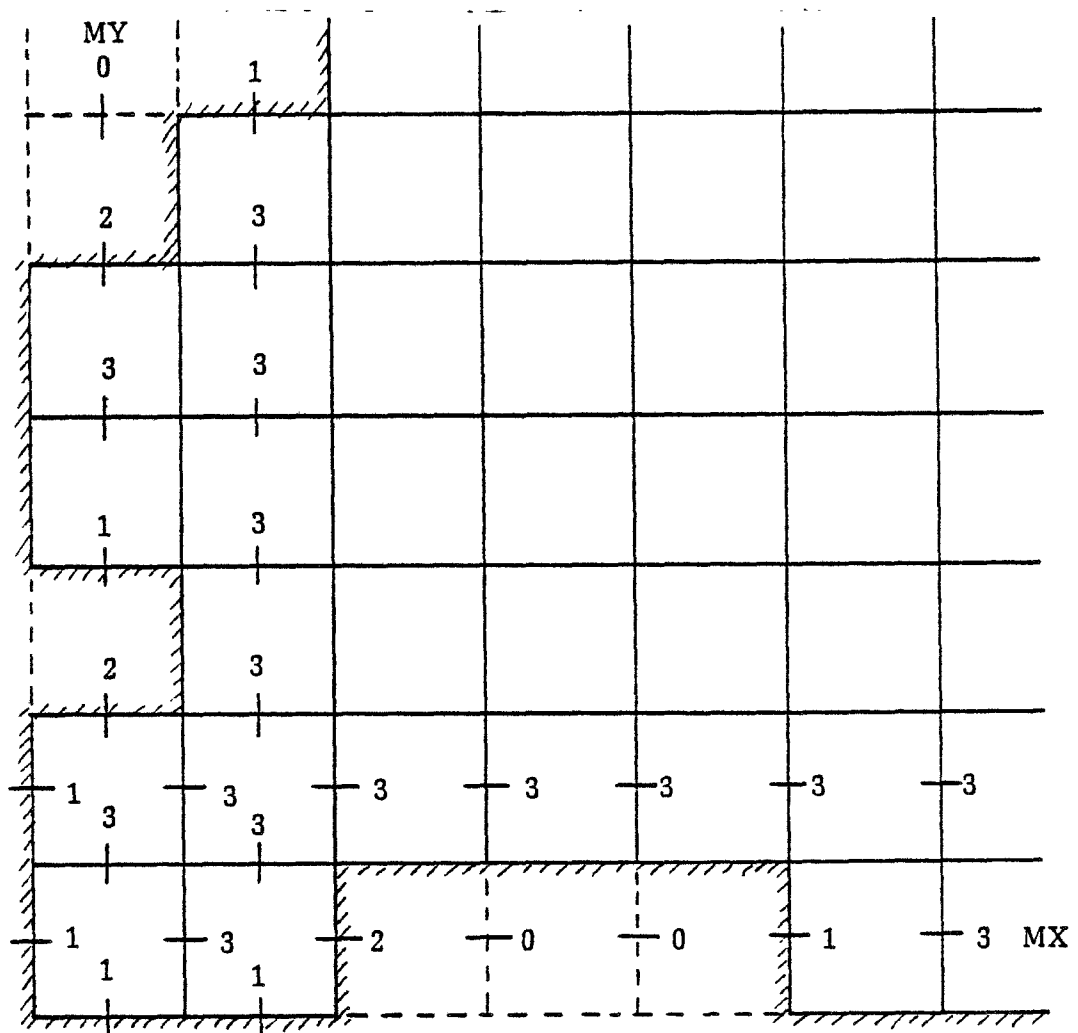


Figure 7. $MX(i, j)$ and $MY(i, j)$ matrices

DEPTH MATRIX AND ITS DERIVATIVE

The bathymetry of the area of interest is given by the matrix $ELEV(i, j)$ designated at full-grid points. The values in feet are positive for lake or inland waters as elevation above MSL. However, for coastal water, the depths are read from the survey chart and are designated by positive values. For certain periods of the year, the water level may differ from MSL; a stage ($STAGE1$) is added to the $ELEV(i, j)$ to obtain the actual depth matrix $H(i, j)$. Note that the values of $H(i, j)$ are in cm. To facilitate the calculation, the matrices $HB(i, j)$, $HU(i, j)$ and $HV(i, j)$ are derived from $H(i, j)$, and are for depths at half-grid points, u-points and v-points, respectively. Thus, the following real-valued matrices are introduced.

$ELEV(i, j)$ elevations of the bottom with respect to MSL

$HB(i, j)$ depth at half-grid points, in accordance with MEX/MEY

$HU(i, j)$ depth at u-points, in accordance with MX

$HV(i, j)$ depth at v-points, in accordance with MY

SIZE OF THE MATRICES, OR DIMENSIONS OF SUBSCRIPTED QUANTITIES

Let the grid work consist of $IN \times JN \times KN$ nodes, i.e. IN nodes in $x(i)$ direction, JN nodes in $y(j)$ direction, and KN levels in $z(k)$ direction. Then there are $IM = IN - 1$ half-grid points in x -direction, $JM = JN - 1$ half-grid points in y -direction, and $KZ = KN - 1$ layers in z -direction.

The values IN , JN , KN , IM and JM are the parameters to be specified at the beginning of the program and are determined by the grid used. Therefore, the dimensions of the matrices are given in terms of these parameters. Table 4 shows the size of the matrices already defined.

TABLE 4. Size of the Matrices

Symbol	Least Size	Given Size
$UI, U2, U3$	(IN, JM, KN)	(IN, JN, KN)
$V1, V2, V3$	(IM, JN, KN)	(IN, JN, KN)
$T1, T2, T3, TC, TB$	(IM, JM, KZ)	(IM, JM, KN)
UB, VB	(IM, JM, KZ)	(IM, JM, KN)
W, OM	(IM, JM, KN)	(IM, JM, KN)

TABLE 4. Size of the Matrices
(Continued)

Symbol	Least Size	Given Size
RX, RY	(IM, JM, KZ)	(IN, JN, KN)
ETA1, ETA, ETX, ETA3	(IM, JM)	(IM, JM)
WAT, DTZ	(IM, JM)	(IM, JM)
ELEV, H	(IN, JN)	(IN, JN)
HB	(IM, JM)	(IM, JM)
HU	(IN, JM)	(IN, JN)
HV	(IM, JN)	(IN, JN)
TIDE1N ... TIDE3S	(IM)	(IM)
AVR, ANG	(JM)	(JM)
MAR	(IN, JN)	(IN, JN)
MEX, MEY	(IM, JM)	(IM, JM)
MX	(IN, JM)	(IN, JN)
MY	(IM, JN)	(IN, JN)

AVR and ANG are used to facilitate printout of velocity and angle respectively.

OTHER SYMBOLS OCCURRING IN PROGRAM ANCMN

ALREF: Reference horizontal length L in cm.

AV: Vertical eddy viscosity, estimated by means of

$$A_v = 0.0018 H^{4/3}, \text{ H in cm, } A_v \text{ in cm}^2 \text{ sec}^{-1}.$$

BH: Horizontal eddy diffusivity, estimated by means of

$$B_h = 0.0018 L^{4/3}, \text{ L in cm, } B_h \text{ in cm}^2 \text{ sec}^{-1}.$$

BV: Vertical eddy diffusivity, estimated by the same formula as A_v .

thus turbulent Prandtl No. is one.

DHR: Time increment in hour as simulation continues.

DTX: As a check on when to printout.

DS: Increment in σ -direction, in fraction of unit.

DT: Time step in second.

DX: Increment in x-direction, in cm.

DY: Increment in y-direction, in cm.

DUMS: 2DS.

DUMX: 2DX.

DUMY: 2DY.

EST: Eastern standard time in the day of simulation.

FCOR: Coriolis factor = $2W_e \sin(\text{latitude})$, sec^{-1} .

W_e = earth's angular rate of rotation.

G: Earth's gravitation = 980 cm sec^{-2} .

I: Index for x-axis.

IGO: Flag. Set as 1 initially; it changes to 0 when the calculation becomes unstable.

IM: Maximum number of half-grid point in x-direction.

IN: Maximum number of full-grid point in x-direction.

J: Index for y-axis.

JCTR: Index for simulation hour.

JM: Maximum number of half-grid point in y-direction.

JN: Maximum number of full-grid point in x-direction.

K: Index for σ -axis.

KN: Maximum number of full-grid point in σ -direction.

KZ: Maximum number of half-grid point in σ -direction.

KSTORE: Flag. Set as 1 to store hourly result on tape.

Set as 0 if no store is needed.

KVEL: Flag. Set as 1 if velocities are to be calculated, otherwise set as 0.

KTEMP: Flag. Set as 1 if temperature is to be calculated, otherwise set as 0.

LN: Set as 1 for 1st run of present case; set as n for subsequent nth run.

MBLOK: Data block number which is to compare with data block NBLOK which is to be read in. Used only when LN > 1.

NBLOK: Index for data block.

NCASE: Case number.

NCY: Number of hours to be simulated in this run.

QQ: 57.3, used for changing from deg to rad.

ROSSBY: Rossby number.

RR: Water density, = 1.

RWEX: Number of hours between climatological input data, = 1.

TABN: Ambient water temperature outside of north entrance.

TABS: Ambient water temperature outside of south entrance.

THETA: Angle between north and y-axis, clockwise positive.

TINIT: Water temperature at initial instant before the waste heat discharge start.

TPRT: Time between printouts, in sec.

TTOT: Total simulation time, in sec.

TZ: Record of time for hourly printout.

TZERO: EST hour at the beginning of present simulation run.

The following symbols are used to specify tidal condition.

AMPLIT: Tide amplitude, in cm.

DPHASE: Phase lag per Δx , in hour.

PERIOD: Tide period, in hour.

PHASE: Phase difference between tides at north and south entrance.

STAGE: Difference in cm between daily mean level and short-term (weekly) average sea level.

STAGE1: Difference in cm between short-term (weekly) average sea level and long term average level (MSL).

TSHIFT: Time shift for adjusting tide with EST, in hour.

The following symbols are used to specify the hourly climatological conditions.

TAIR: Ambient air temperature, deg C.

HUMID: Relative humidity, fraction.

WIND: Wind speed, cm sec^{-1} .

WDIR: Direction from which wind is coming, deg measured clockwise from North.

SRAD: Gross solar radiation, in $\text{BTU}/(\text{ft}^2 \text{ day})$.

TSURF: Surface water temperature, deg C.

The following symbols are related to climatological data and appear in the calculation of wind stress, equilibrium ambient temperature and heat exchange at surface.

EPSLON: Direction to which wind blows, in rad.

WPR: Wind speed in m sec^{-1} .

CTEN: Empirical constant appears in wind stress formula.

TAU: Wind stress τ .

TAUX: x-component of wind stress τ_x .

TAUY: y-component of wind stress τ_y .

TDEW: Dewpoint temperature, deg C.

TEQ: Equilibrium temperature, deg C.

SK: Surface heat exchange coefficient in $\text{cal}/(\text{cm}^2 \text{ sec } ^\circ\text{C})$.

SECTION 5

PREPARATION OF SIMULATION RUN

This section describes the preparation work needed for ANCMN run. The flow chart and the associated subroutines in Figure 1 and Table 2 are referred to in the following description.

1. Specify number of full-grid points, IN, JN, KN and number of half-grid points, IM, JM, in PARAMETER statement. Although the domain of solution under consideration is usually smaller than the rectangular space of IN x JN x KN, the marker matrices will assure that the grid points outside of domain skip the calculation. To have a clear print-out, the variables at off domain point have been set to 10^9 . This value is beyond the capacity of the computer printout in printing real numbers (F format) so that stars will be printed and show the off domain area.

2. Specify run number by input data LN, card #2:

For LN = 1, i.e. first run, data file or card deck of AMATN is needed.

For LN > 1, i.e. subsequent run, tape with previous result is needed.

Specify flag for storage by KSTORE, card #3:

For KSTORE = 0, desire no storage.

For KSTORE = 1, tape must be provided for storing results.

Specify flag for velocity calculation by KVEL, card #4:

For KVEL = 0, no V-calculation, thus thermal dispersion only.

For KVEL = 1, do V-calculation, thus circulation included.

Specify flag for temperature calculation by KTEMP, card #5:

For KTEMP = 0, no T-calculation, thus only a hydrodynamic model.

For KTEMP = 1, do T-calculation, a complete hydrothermal model.

Specify data block number MBLOK, to make sure the data read in from tape is correct, card #6.

Specify number of hours to be simulated in this run by NCY, card #7.

Specify the time between successive printouts by TPRT, card #8.

Specify grid size by input data DX, DY, DS, card #9.

Specify time step DT and tide data STAGE, AMPLIT, PHASE, DPHASE, PERIOD, TSHIFT by input data, card #10.

Specify Coriolis factor FCOR and stage STAGE1 by data, card #11.

Specify the angle between North and the y-axis of grid system by THETA, card #12.

Specify reference length ALREF and Rossby No. ROSSBY, card #13.

Specify number of hours between weather observations RWEX, card #14.

Specify TZERO, the Eastern Standard Time when the simulation starts, card #15.

Specify water density, vertical eddy viscosity, vertical eddy and horizontal eddy diffusivity, RR, AV, BV, BH, card #16.

Specify initial temperature TINIT, a constant for whole domain, card #17.

3. In general, the first run of present case has:

LN = 1, KSTORE = 1, KVEL = 1, KTEMP = 1, MBLOK = 0.

Then the subroutines BAYBOT and BAYINI are used to initialize the calculation. This includes reading matrices, MAR, ELEV, MEX, MEY, MX, MY, by BAYBOT from data file AMATN. The same subroutine calculates the derivative height matrices, HB, HU and HV. The initialization of various variable matrices is done in subroutine BAYINI and in the main program itself.

4. In general, the continued n^{th} run has the same NCASE with:

LN = n, KSTORE = 1, KVEL = 1, KTEMP = 1.

MBLOK = index number of the data block which is to be read in; the calculation will continue thereafter. In fact, the data being read contains all the information needed to continue the run. However, to allow for the freedom of matching tide of different amplitude, period and phase shift, an additional card (#18) specifying NBLOK, TTOT, DT, EST, AMPLIT, PHASE, DPHASE, PERIOD and TSHIFT is needed.

The data may be same as those contained in the tape or different from them so that the calculation goes on to follow another tide format. In accordance with this change of tide, the NBLOK, TTOT, DT, EST may be reset.

5. The main loop in the main program ANCMN is the hourly simulation loop, which is started with hourly climatological data card containing TAIR, HUMID, WIND, WDIR, SRAD and TSURF. The wind stress and equilibrium temperature are then computed and held thereafter as constants throughout that hour.

The main part of the hourly loop is an internal loop for Δt increment, in which the main calculation is done in the order of (η, Ω) , (u, v) , T, W , then a printout of elevation, surface velocity and surface temperature at certain chosen half-grid points.

6. The V-calculation controlled by flag KVEL consists of subroutines BETA, BNRTIA, ABNR3, BVEL, ASAF3 and GIVENU. BETA computes η and Ω . BNRTIA and ABNR3 compute the convection terms, RX and RY, for the momentum equations; this computation is decided by whether ROSSBY is zero or not. The (u, v) calculations are done by BVELS and ASAF3. The given velocities at control points are re-specified by GIVENU. The BNRTIA and BVELS are for interior points while ABNR3 and ASAF3 perform the same purpose except for normal velocity points along open boundaries, where the water elevation is specified as a function of time.

The T-calculation controlled by flag KTEMP consists of CONV, TCOMPT and GIVENT. CONV computes the convective term TC, then TCOMPT computes T, and GIVENT respecifies T at discharge points.

After the completion of marching forward to $(n+1)\Delta t$, the variables are relabeled and UB and VB are computed as the horizontal components of velocity at centers of (I, J) blocks. Finally, before the printout of newly obtained variables at fixed locations to serve as flow development at fixed point, the surface velocity and temperature at a critical point are compared with preset values to see whether an instability has developed. If instability does occur, the program terminates after producing a hard copy of the latest result.

7. The subroutine ANCPR produces step-by-step records of surface elevation, surface velocity and surface temperature at certain chosen points. These points are selected because of the variables that are believed to undergo the most change, as they are close to open boundaries, river exit and discharge outlet.

The hourly loop included subroutines SOTRET and TPRLOK too; the former stores the hourly results as well as all pertinent data onto tape for later uses, and the latter produces a printout of resultant horizontal velocities, vertical velocities, temperatures at four levels

and elevation of free surface. In addition, the main program ANCMN itself does the calculation and printout of total water depth, $H = h + \eta$, before starting next hourly loop.

8. ANCMN performs the hourly loop NCY a number of times. Therefore, NCY number of climatological data cards are needed to provide the necessary data.

SECTION 6

INPUT DATA

The input cards for running ANCMN are given in Table 5 below. Note that the data symbols have already been defined in the previous section; however, the following remarks should be considered.

- * Free format is used for all data input.
- * Distinction must be made for integer and real number.
- * The order of these cards must be followed.

TABLE 5. Input Data for ANCMN

Input	Card Content	Symbol	Definition/Value
#1	1	NCASE	= Case No.
#2	1	LN	= 1, if it is first run then data file or card deck AMATN is needed in #18 = n, if it is n th run
#3	1	KSTORE	= 0 no store, then there are no continued runs = 1 store intermediate results on tape for plotting or next run
#4	1	KVEL	= 0 no V-calculation, i.e. dispersion of T by given (u, v) field = 1 do V-calculation, so momentum is under dispersion
#5	1	KTEMP	= 0 no T-calculation, i.e. hydrodynamic only = 1 i.e. hydrothermal model
#6	1	MBLOK	= No. of latest hour of last run

TABLE 5. Input Data for ANCMN
(Continued)

Input	Card Content	Symbol	Definition/Value
#7	1	NCY	= Number of hours intended for simulation in this run
#8	1	TPRT	= 3600 seconds, hourly loop
#9	3	DX	= x-direction grid size in cm
		DY	= y-direction grid size in cm
		DS	= σ -direction grid size in nondimensional unit
#10	7	DT	= Time step in sec, follows $\Delta T < \frac{\text{Min}(\Delta X, \Delta Y)}{\sqrt{2gh_{\text{max}}}}$
		STAGE	= Average level of tide-MWL, in cm
		AMPLIT	= Amplitude of tide, in cm
		PHASE	= Phase lag of the north tide behind the south tide, in hr
		DPHASE	= Phase lag in east-west direction, in hour per Δx
		PERIOD	= Period of tide at entrances, in hr
		TSHIFT	= Time shift (in hr) for tide to agree with EST time
#11	2	FCOR	= Coriolis factor = $2W_e \sin(\text{lat})$, in sec
		STAGE1	= MWL-MSL (datum for sounding), if MWL $\neq$ MSL, in cm
#12	1	THETA	= Clockwise angle from North to the y-axis of grid work, in deg
#13	2	ALREF	= Horizontal reference length, in cm

TABLE 5. Input Data for ANCMN
(Continued)

Input	Card Content	Symbol	Definition/Value
		ROSSBY	= Rossby No. which controls whether advection is needed to account for in the equations of motion, zero or nonzero
#14	1	RWEX	= Number of hours between climatical data, generally it agrees with hourly loop
#15	1	TZERO	= EST when the simulation run starts
#16	4	RR	= Density of water = 1.0
		AV	= $0.002 (AHREF)^{4/3}$, AHREF = reference depth in cm
		BV	= Same value as A_v
		BH	= $0.002 (ALREF)^{4/3}$
#17	1	TINIT	= Initial temperature, a constant for the whole domain
#18	A deck of cards or data file, called AMATN, to specify matrices MAR, ELEV, MEX, MEY, MX and MY. It is required only if LN = 1.		
#19	9	NBLOK	= To reset data block number
		TOTT	= To reset total time in sec if necessary
		DT	= To reset time step ΔT if necessary
		EST	= To reset EST
		AMPLIT	= If tide changes
		PHASE	= New phase lag
		DPHASE	= New phase lag per ΔX
		PERIOD	= If tide has different period

TABLE 5. Input Data for ANCMN
(Continued)

Input	Card Content	Symbol	Definition /Value
#20	A deck of NCY cards, each card contains six hourly weather data:	TSHIFT	= Time shift of the new tide
		TAIR	= Air temperature, deg C
		HUMID	= Relative humidity in fraction of unit
		WIND	= Surface wind speed, cm/sec
		WDIR	= Wind direction, from which direction wind is blowing
		SRAD	= Gross solar radiation, BTU/(ft ² day)
		TSURF	= Ambient surface water temperature, deg C

SECTION 7

PLOTTING PROGRAM

This section presents the descriptions of main plotting program PLOTMN and its subroutines. As mentioned earlier, the plotting and analyzing of the results constitute Part 2 of the three-dimensional, free-surface model. Here, the tape containing the hourly results of simulation is the main input. The control data cards help the user to choose the hour, the plot and the comparison. The output is in a plot tape which is used by a CALCOMP plotter to generate plots.

DESCRIPTION AND FLOW CHART OF PLOTMN

The purpose of PLOTMN is to read in the measured and/or calculated temperature fields and to plot the isotherms. In addition, the calculated velocity field is plotted in σ -planes (σ -axis), in certain x-cross sections (y-axis) and in y-cross sections (x-axis), and the surface elevation field is plotted in contour plots.

Since the main input is the data block from Part 1, the symbols and their dimensions agree with those that appear in ANCMN. In order to store the IR scanned surface temperature at four tidal stages for later comparison with calculated results, a TIR (IM, JM, 4) matrix is added. It is to be noted that temperature fields are interpolated at half-grid points from the mosaic IR images by hand. Several data cards containing the quantities to be used in plot caption are read in as well as control cards which assign the data block to be used (NPLOT) and the plot to be done (IPLOT). A flag NSTAND is to assign which measured temperature field is to be compared with the calculated. The algorithm for PLOTMN is simple and straightforward since no complicated calculation is involved. The only calculation is to compute average deviation of calculated temperature field from measured temperature field at the same tide stage. The average deviation is given by

$$\delta^2 = \frac{\sum_{i,j} (TB(i, j, 1) - TIR(i, j))^2}{\sum_{i,j} (i, j)}$$

where TB is the calculated temperature while TIR is the measured temperature by infrared, and $\sum_{i,j} (i, j)$ is the number of surface half-grid points in the domain.

The isotherms of TIR and TB are the plots of main concern, as one is to be compared with the other in order to assess the accuracy of the model in predicting the hydrothermal dispersion of waste heat. Occasionally, the water surface contour, the surface current and the velocity profile are also of interest, as they depict the circulation set up by the tide and the wind in conformity with the configuration and bathymetry of the waters. The surface elevation contour is done by the subroutine ECHKON which is also used for plotting isotherms, but care must be taken to assign the contour values, since the surface elevation changes with tide; thus, the hard copy printout of surface elevation ETA must be consulted in order to choose the right contour values. The surface current is done by PLOTUV, while the velocity profiles in $j(y)$ -cross sections and $i(x)$ -cross sections are plotted by PLOTUW and PLOTVW, respectively. It is noted that the velocity scale for horizontal components is different from that for vertical component. The ratio is to remain the same as the ratio of horizontal to vertical length scale. Therefore, the velocity profiles are exaggerated in vertical direction; however, since the horizontal velocities of the top level ($\sigma = 0$) are plotted right on the water surface, they show free-surface profiles too. Note that the j -sections and i -sections are fixed by given I - J -values. They are chosen by the user's concern about the effect of plan-form configuration and bathymetry on currents.

The flow chart for the main program PLOTMN is presented in Figure 4, and the subroutines are listed in Table 4 for quick reference. It is to be noted that several CALCOMP subroutines are also listed.

SUBROUTINES

ECHKON

This subroutine calls subroutines CONLIN and ENDER. This program was developed by the National Hurricane center for map contouring using CALCOMP or MILGO-type plotter. ECHKON is the entry point for the package. It scans the rectangular gridded scalar field, such as surface temperature or surface elevation, to determine where to start a new contour. Each contour is done in a loop. Inside the loop the subroutine CONLIN is called to do the interpolation and drawing, and ENDER is called by CONLIN to label each contour of the same contour value. The exit of contour loop in ECHKON is made when the final contour value increased by increment has reached the specified maximum. Here, ECHKON is used for contouring TIR($i, j, N = 1, 4$), TB($i, j, 1$) and ETA(i, j).

PLOTUV

It computes the horizontal resultant velocity from components u and v at each level. In general, there are four levels corresponding to $k = 1$ to 4. However, for the present problem, only the surface current is of interest; therefore, KPLOT is set to 1.

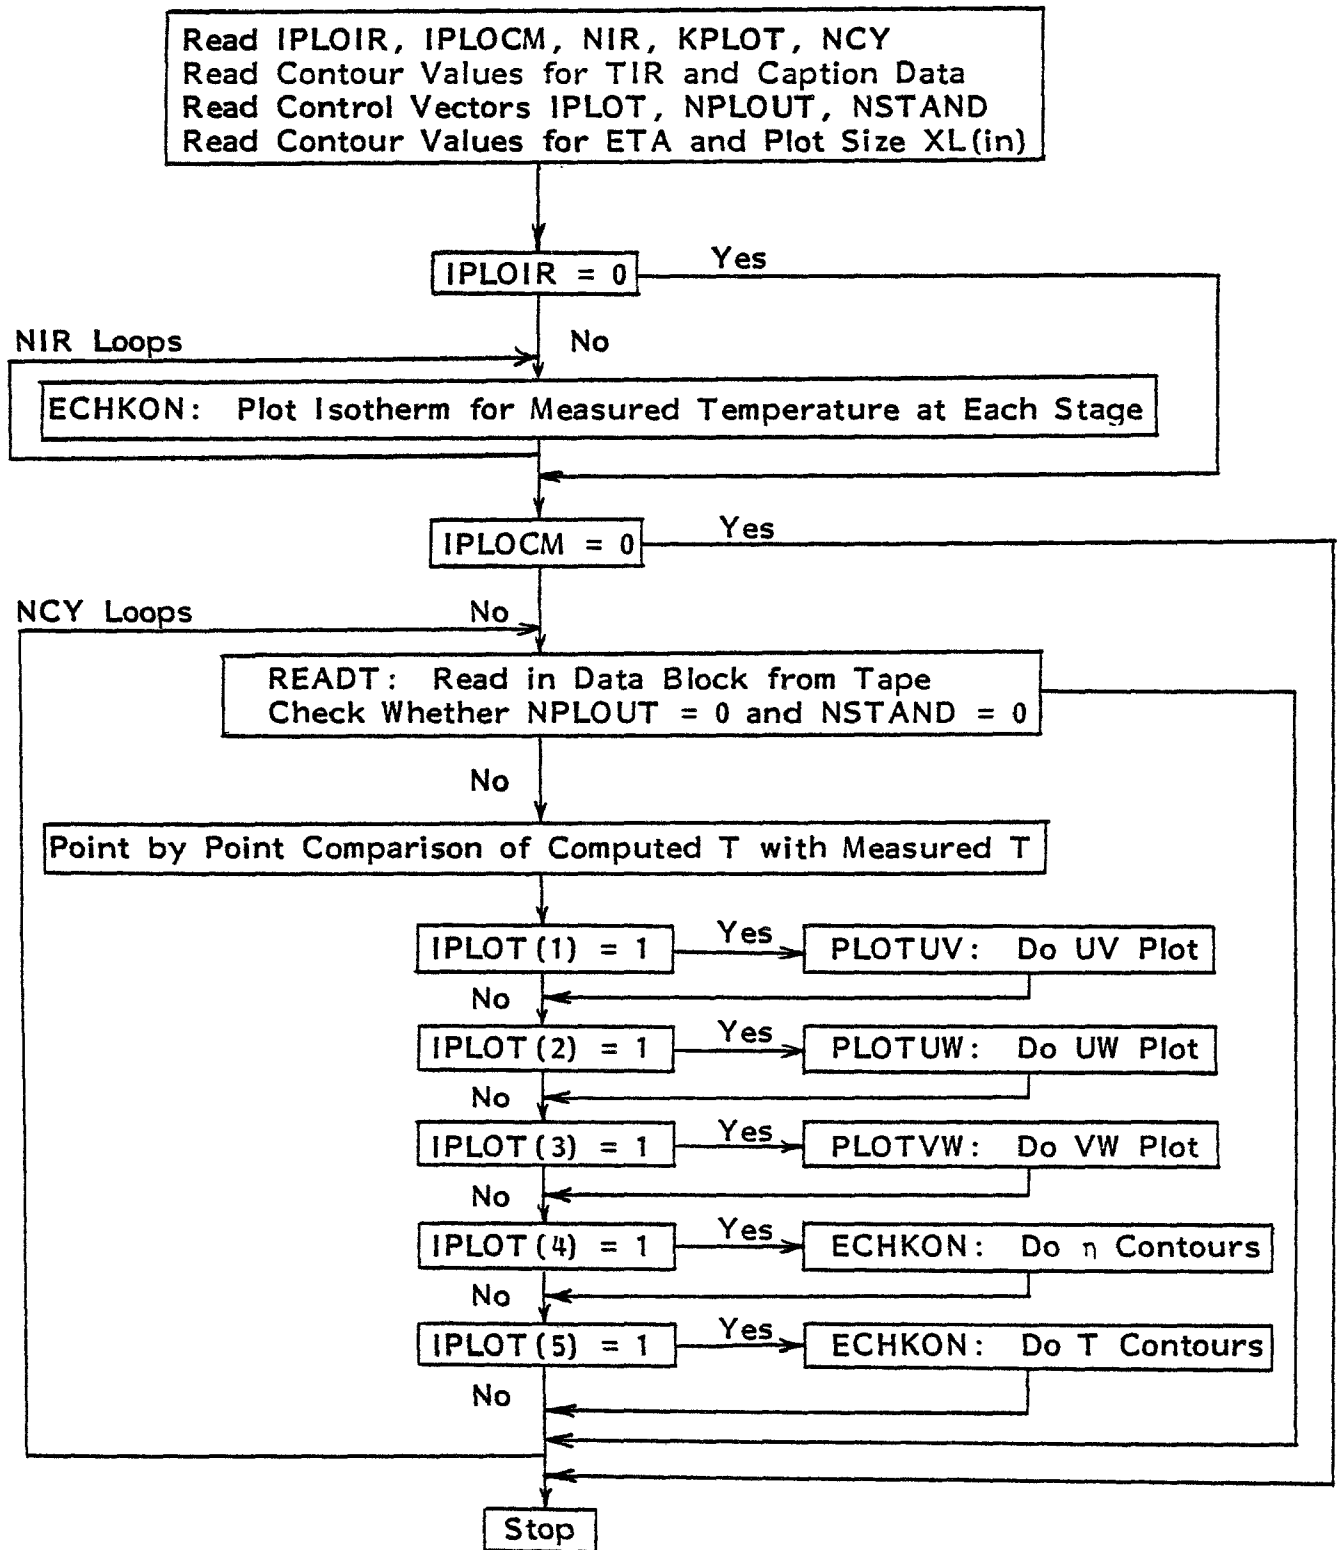


Figure 8. Flow chart for plotting program PLOTMN and its subroutines

TABLE 6. Subroutines Required in Main Plotting Program PLOTMN

No.	Name	Description	Remark
1	FACTOR		
2	PLOTS	Are CALCOMP Subroutines	In UCS * ACALCOMP of UNIVAC 1100
3	PLOT		
4	ECHKON	Subroutine for plotting isotherms and contour of surface elevation; also draws the domain	Calls subroutines ENDER, CONLIN, OUTLIN
5	READT	Same as READT in ANCMN, for read in-stored data from tape	
6	PLOTUV	Plot U, V on different layer, to select the layer one can choose KPLOT value; normally it is the surface layer	Calls subroutine OUTLIN
7	PLOTUW	Plot U, W on chosen J sections west-east across the bay	J section once chosen is fixed
8	PLOTVW	Plot V, W on chosen I sections south-north across the bay	I section once chosen is fixed
9	CAPTN1	Write common heading on each diagram	
10	CAPTN2	Write title for UV Plot	
11	CAPTN3	Write title for IR-T isotherms	
12	CAPTN4	Write deviation of calculated temperature from IR-T	
13	CAPTN5	Write tidal stage on the diagram	
14	CAPTN6	Write title for UW plot	
15	CAPTN7	Write title for VW plot	
16	CAPTN8	Write title for surface eleva- tion contours	

**TABLE 6. Subroutines Required in Main Plotting Program PLOTMN
(Continued)**

No.	Name	Description	Remark
17	CAPTN9	Write title for calculated surface isotherm	
18	ENDER	Write contour value to label contour	Subroutine of CONLIN
19	CONLIN	Called upon to draw individual contour	Subroutine of ECHKON
20	OUTLIN	Called upon to draw outline of the computational domain	Subroutine of ECHKON and PLOTUV
21	FIT	Fit a parabola to three point used in PLOTUV to interpolate water depth	Subroutine of PLOTUV
22	VECT	Calculates the velocity and calls AROHD to draw the vector	Subroutine of PLOTUV
23	AROHD	Are CALCOMP subroutines, called upon in various subroutines used in PLOTMN	In library file UCS * ACALCOMP of UNIVAC 1100
24	NUMBER		
25	SYMBOL		

PLOTUW

It computes the resultant velocity based on components u and w . As mentioned, the vertical and horizontal components cannot be made to the same scale; therefore, the velocity profiles are distorted. The j -cross sections on which the velocity is computed and plotted are preassigned in the subroutine itself. For the present problem, plots are drawn for $j = 4, 8, 12$. All three plots are done on the same sheet.

PLOTVW

It computes the resultant velocity based on components v and w , and plots the velocity vectors on the vertical cross section along y -direction. The i values are likewise preassigned in the subroutine. Here plots are drawn for $i = 4, 8, 12$ and are on one sheet.

INPUT DATA

Table 7 lists the data to for PLOTMN. Free format is used generally. The total input consists of data cards and data files, but in the list, the input data have been numbered in the order of their appearance, regardless of whether card form or file form is used.

TABLE 7. Input Data for PLOTMN

Input	Card Content	Symbol	Definition/Value
#1	5	IPLOIR	= 0, if no isotherm of IR obtained temperature is desired = 1, otherwise
		IPLOCM	= 0, if no isotherm of computed temperature is to be plotted = 1, otherwise
		NIR	= Number of IR obtained temperature fields
		KPLOT	= Number of the σ -level to be plotted
		NCY	= Number of simulation hours
#2	NIR	TL(I)	= Array of min. contour values for TIR
#3	NIR	TH(I)	= Array of max. contour values for TIR
#4	NIR	TI(I)	= Array of increment values for TIR contouring
#5	NIR	TA1(I)	= Array of ambient temperature, assigned to out-domain points
#6	NIR	Q1(I)	= Array of EST time, for caption
#7	NIR	Q2(I)	= Array of wind speed values, for caption on TIR plot
#8	NIR	Q3(I)	= Array of wind direction values, for caption on TIR Plot
#9	NIR	Q4(I)	= Array of air temperature for caption on TIR plot
#10	NIR	Q5(I)	= Array of discharge temperature for caption on TIR plot
#11	1	Q6	= Discharge flowrate, for caption in general
#12	5	IPLOT(I)	= Array of integers to assign the plot desired

**TABLE 7. Input Data for PLOTMN
(Continued)**

Input	Card Content	Symbol	Definition/Value
#13	NCY	NPLOUT(I)	= Array of integers to assign the hour desired to be plotted
#14	NCY	NSTAND(I)	= Array of intergers to assign the TIR to be compared with
#15	NIR	ETAL(I)	= Array of min. contour values for ETA
#16	NIR	ETAH(I)	= Array of max. contour values for ETA
#17	NIR	ETAINT(I)	= Array of increment values for ETA contouring
#18	1	XL	= Plot size in x-direction (in)
#19	2	DX, DY	= Spacing in x- and y-direction (cm)
#20	Data File	I, J	= The (i, j) value of boundary nodes, used for drawing domain's boundary
#21	Data File	TIR(I,J,N)	= To read in the IR measured temperature fields of different tidal stage, files like HDATA, EDATA, LDATA, FDATA

REFERENCES

- Carter, C. V. The Hydrothermal Characteristics of Shallow Lakes. Ph.D. Thesis, Department of Mechanical Engineering, University of Miami, Coral Gables, Florida. December 1977.
- Dunn, W. E., Policastro, A. J. and R. A. Paddock. Surface Thermal Plumes: Evaluation of Mathematical Models for the Near and Complete Field. Part One and Two. Energy and Environmental Systems Division, Great Lakes Project, Argonne National Lab., May 1975.
- Lee, S. S. and S. Sengupta. Three-dimensional Thermal Pollution Models Volume I = Review. Department of Mechanical Engineering, SEA, University of Miami, Coral Gables, Florida, 1978.
- Tuann, S. Y., Lee, S. S., Sengupta, S. and C. R. Lee. Application of Three-dimensional, Free-surface Model to Shallow Tidal Waters. Proceedings of the Third International Symposium on Computer Methods for Partial Differential Equations, Bethlehem. June 1979.

APPENDIX A

EXAMPLE CASE

INTRODUCTION

The present model has been successfully applied to thermal dispersion study at Anclote Anchorage. The Anchorage is located on Florida's Gulf coast and north of St. Petersburg (Figure 9). It is a relatively shallow passage between the mainland and the Anclote Key. A series of barrier islands separates the anchorage from the Gulf of Mexico. Through natural channels to the north and south of the Keys, the Anchorage has an unrestricted exchange of water with the Gulf.

The Anclote power plant operated by the Florida Power Corporation has two 515 MW, oil-fired, electrical generating units. Once-through cooling water is drawn from the Anclote River through a man-made canal. The six pumps delivering a total of 1,990,000 gpm ($125.6 \text{ m}^3/\text{sec}$) are designed to raise the water temperature 2.8°C above the ambient. The heated water is discharged back into the Anchorage through the discharge canal with a dredged submarine extension. The designed total flowrate is approximately 53 times the long-term average flowrate of the Anclote River. At present, only Unit 1 is operative while Unit 2 is still pending permission. That is, the present flowrate is $62.8 \text{ m}^3/\text{sec}$ (995,000 gpm).

The principal driving mechanism for current circulation is tidal flux at the north and south entrances of the Anchorage. The tide is predominantly semidiurnal with mean range of 2 feet. Earlier measurements of temperature and salinity indicated the currents flow in and out through both entrances; however, the exchange appears to be stronger in the south than in the north, or the currents generally flow north during flood tide and south during ebb tide. Moreover, the wind plays an important part too. The surface current direction depends on wind blowing at wind speeds exceeding 15 mph.

The model as applied to the Anclote Anchorage shows its capacity of considering the effects of geometry and bathymetry, spatio-temporal variation of the free surface, various boundary conditions, including tides of different phase and range, surface heat transfer based on equilibrium temperature concept, and changing meteorological conditions. In addition, turbulence has been considered by using the eddy transport concept, and the effects of baroclinicity have been included. Again, the user should refer to Tuann et al. (1979) for the general review, mathe-

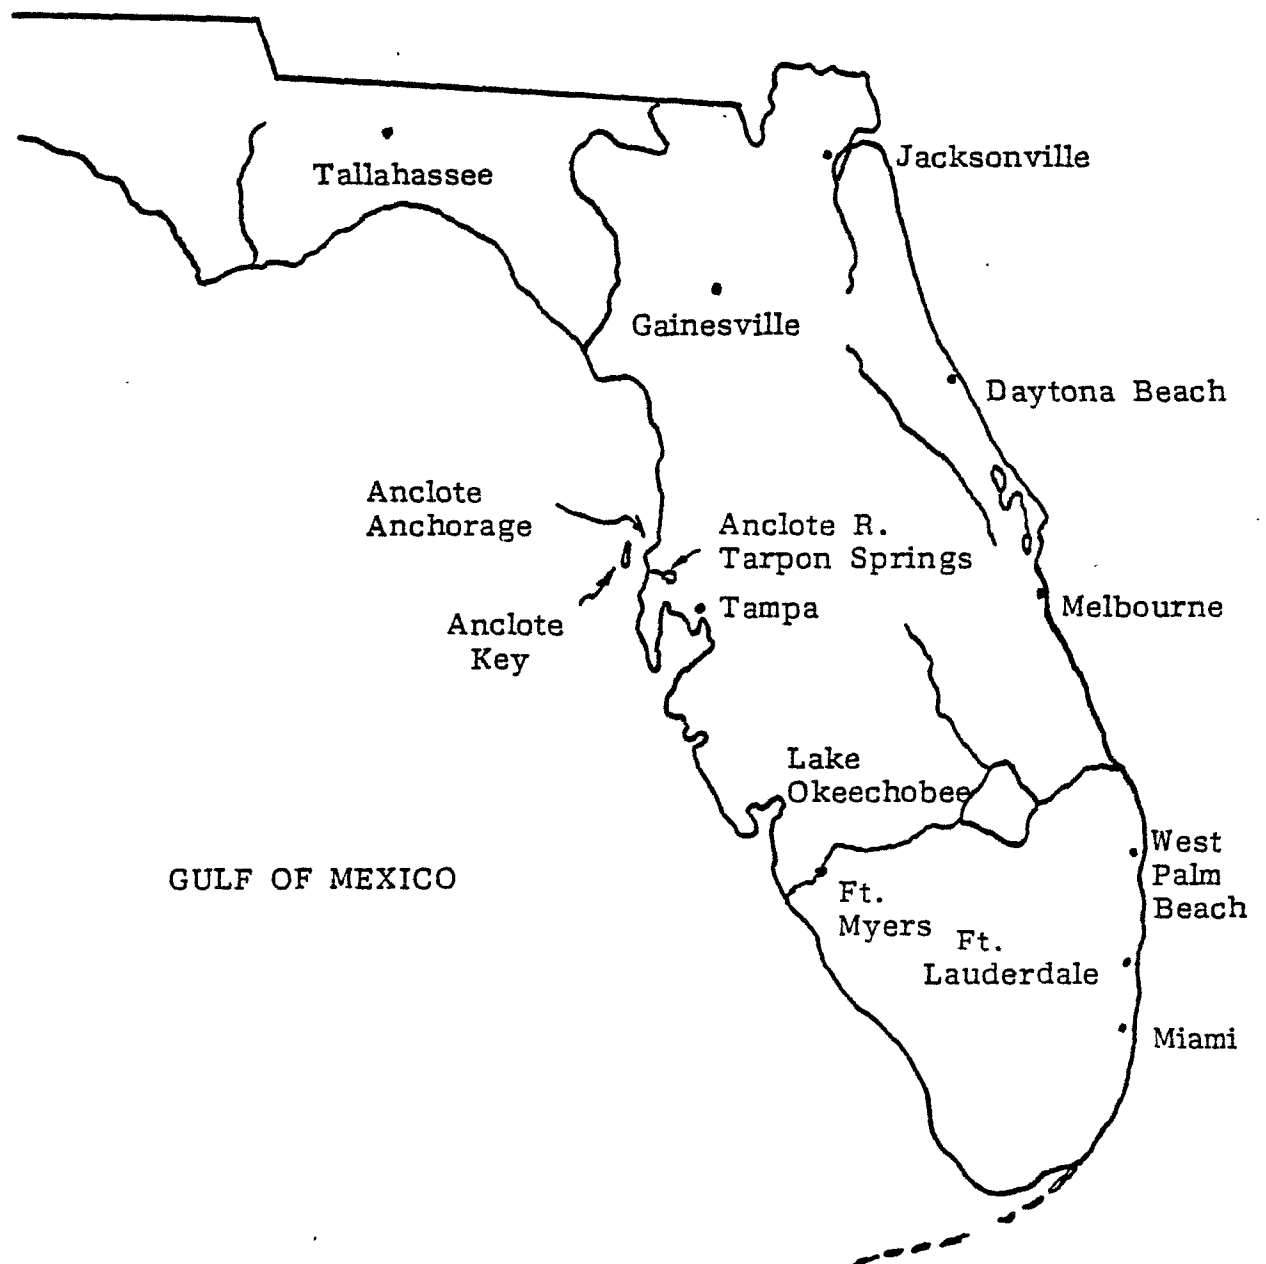


Figure 9. Anclote Anchorage location in the state of Florida

mathematical formulation, finite difference implementation and numerical method of solution.

The finite difference grid work is three dimensional and is designed to cover the area of interest. The grid size $\Delta x \times \Delta y \times \Delta \sigma$ is that the least number of vertical layers is four. That is, a 4-layer, 5-level, vertical partition is a reasonable choice for the present generation of computer. The grid work is allowed to orient away from north-south, east-west system, but in general, the x-axis of the grid system aligns with west-east, and y-axis with south-north. Thus, the subscript i increases eastward, while j increases northward. The z-axis is chosen upward from mean water surface, while the subscript k increases downward from the water surface. That is, the $k = 1$ level is the free surface which is continuously changing, while $k = 5$ is always the bottom.

For the study of Anclote Anchorage, the grid is $16 \times 14 \times 5$ with five levels, each with 224 nodes for a total of 1120 nodes. The grid size used is $\Delta x = \Delta y = 417$ m. Depths off the natural coastal line are read from the Coast and Geodetic Survey chart. The maximum depth is 4 m at the south end of Anclote Key. It was found that gravity waves were the dominating consideration with regard to the maximum allowable time step Δt . A 15 second magnitude of Δt was found to work well for the present grid system.

Numerical results were obtained with the University of Miami Computing Center UNIVAC 1100 computer. The time histories of the three velocity components, (u, v, w), the surface elevation, η , and the temperature, T, for a 24-hour simulation period were obtained with about 90 minutes of computer time in most cases. This is a time ratio of about 16:1 (the ratio of real time to computer time).

PROBLEM STATEMENT

Florida Power Corporation has a fossil fuel power plant situated at Tarpon Springs on the Anclote Anchorage. The discharge rate is $62.8 \text{ m}^3/\text{sec}$ of water at temperatures, in general, 2.8°C above the ambient water. On June 19-20, 1978, a team carried out an in-situ data acquisition mission to gather field data on temperature and current. At the same time, four flights by NASA/KSC were undertaken to obtain temperature by remote sensing method. These four flights were intended to cover four different tidal stages in the Anchorage. The remotely sensed data were processed into digicolor film. The in-situ measurement of surface water temperature at the time when the airborne IR data was undertaken provides a reference for IR temperature. With this reference, the isotherms were drawn from the digicolor film. The in-situ current measurement data were used in plotting current of different depth. The ground measured temperatures were used to draw surface and subsurface isotherms.

Once the model has been verified for its versatility and its capacity,

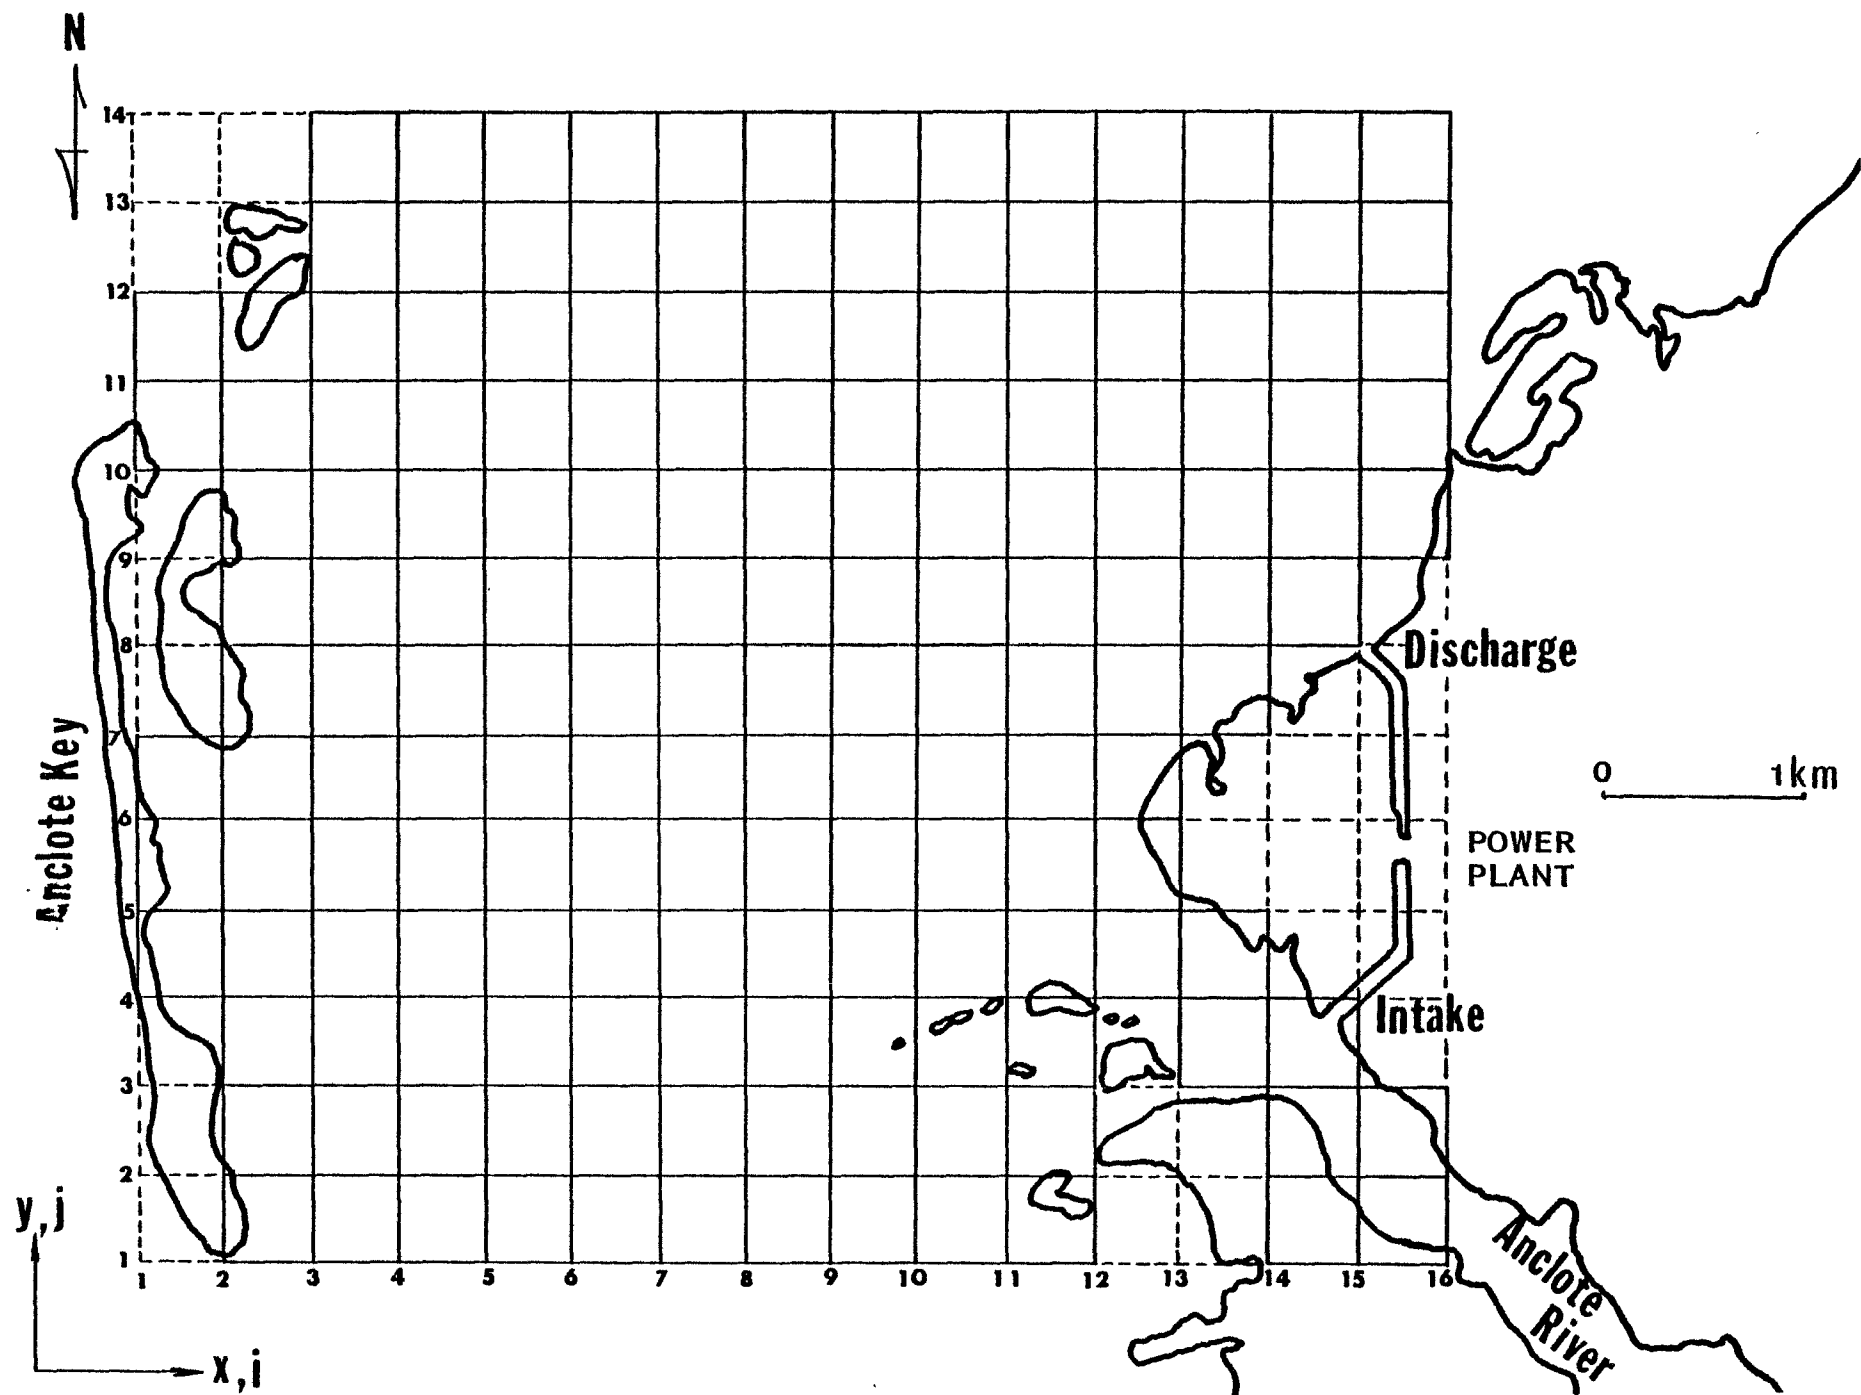


Figure 10. Grid work for the Anclore Anchorage

and in particular, to the prediction of hydrothermal development in well-mixed shallow coastal waters, the model was run with actual tidal and meteorological data as input, but the initial temperature condition either could be that of uniform state, that is to assume the power plant start impulsively, or could be that of an IR temperature field, that is using IR data as the initial temperature field. The demonstrative runs were carried out to simulate the hydrothermal situation for several days. The predicted current fields are verified against the in-situ measured currents, and the predicted isotherms are verified against the IR-obtained surface isotherms and the in-situ measured subsurface isotherms.

CALCULATION OF PARAMETERS AND INPUT DATA

In this section, the specification grid system, reference and physical parameters, tidal and meteorological data, discharge and intake velocities, ambient and discharge temperatures will be presented. The actual calculation of some input data quantities is carried out in detail for the purpose of demonstration.

Grid System

The map indicating the exact locations of power plant, intake and discharge outlets, and the sounding of the Anchorage was used to determine the size of the domain, the grid system to cover it, and the arrangement of intake and discharge points in the system. So, a domain of about 6 km x 5 km covering most of the Anchorage was used. A grid system of 16 x 14 was selected in the horizontal plane. The size of the grid cell is $\Delta x = \Delta y = 416.7$ m; this size and the grid orientation has made the intake and discharge outlets to the open water fall in with nodes respectively, and the intake and discharge channels have 45° and 315° orientation respectively. The depth was specified according to sounding chart. There are five nodes in the vertical direction. This gave a total of 16 x 14 x 5 nodes. The coordinate system and grid work are shown in Figure 10. The MAR matrix, bottom elevation matrix and four additional marker matrices are stored in data file AMATN.

Reference Quantities

L: Reference length = ALREF = Maximum Length = 6 km

BH: Horizontal eddy diffusivity = $0.002L^{4/3} = 0.002 \times (600,000)^{4/3} = 100,000 \text{ cm}^2/\text{sec}$

BV: Vertical eddy diffusivity = $0.002H^{4/3}$ (H = maximum depth) = $0.002 \times (360)^{4/3} = 6 \text{ cm}^2 \text{ sec}$

For shallow well-mixed tidal water about three times the calculated value was found suitable. Here, we use $BV = AV = 20 \text{ cm}^2/\text{sec}$, i.e. Turbulent Prandtl No. = 1

RR: Density of water = 1.0

THETA: 0, since the grid system orients along North-South

RWEX: 1.0

ROSSBY: 0.0, that is, based on test run, it was shown that the nonlinear inertia terms can be safely neglected to save computation

TINIT: Initial uniform temperature or reference temperature = 20 deg C

Calculation of Time Step, DT

In order to determine the time step, DT, the stability criterion has to be followed, which is done as follows.

$$DT < \frac{DX}{\sqrt{2gH}} = \frac{41760}{\sqrt{2 \times 980 \times 360}} = 50 \text{ sec}$$


About 1/3 of this value is reasonably safe to use. Here we use DT = 15 sec.

Calculation of Intake and Discharge Velocities

1. Flowrate = 995,000 gpm (from power plant physical data)
= 62.8 m³/sec
= 62.8 x 10⁶ cm³/sec
2. Both intake and discharge canals are at 45° from N, therefore
31.4 x 10⁶ cm³/sec is crossing the Δx and Δy at the point of intake and discharge.
3. The average depth at intake and discharge is approximately 4' or 122 cm, and the width is Δx = Δy = 41760 cm, so the cross-sectional area is 41760 x 122 cm².
4. The average velocity is:

$$U_{ave} = V_{ave} = \frac{31.4 \times 10^6}{41760 \times 122} = 6.163 \text{ cm/sec}$$

5. The velocity profiles are assumed as shown.

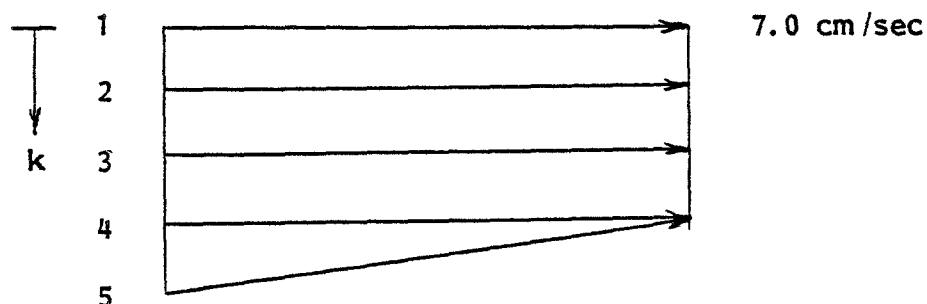

6. To allow for canal storage during tide change we assume the intake and discharge velocities to be sinusoidal, i.e.

$$\text{Intake: } V_3(14, 4, k) = 7 - 3 \times \cos\left[\frac{2\pi}{12.5}(\text{EST} - 7.625)\right]$$

$$U_3(15, 3, k) = V_3(14, 4, k) \quad \text{for } k = 1, 2, 3, 4$$

$$\text{Discharge: } V_3(14, 8, k) = 7 - 3 \times \cos\left[\frac{2\pi}{12.5}(\text{EST} - 7.5)\right]$$

$$U_3(15, 8, k) = -V_3(14, 8, k) \quad \text{for } k = 1, 2, 3, 4$$

where 7.625 and 7.5 are taken to be the phase shift which takes into account the time to travel from the south end of Anclothe Key to the concerned point.

Calculation of Tide on June 20, 1978

Simulated diurnal tide is shown in Figure 11, where

1. Period = 12.5 hr
2. Stage = short term average sea level - MSL = 48 cm
3. Amplitude = $\frac{1}{2}$ short term average tide range = 65 cm
4. Time shift = 7.125 hr

i.e. at 7.125 a.m., June 19, 1978, the tide at the south end of Anclothe Key was zero.

5. W - E lapse = 0.014 hr/DX

Wave propagation speed $C = \sqrt{2gh} = \sqrt{2 \times 980 \times 360} = 850 \text{ cm/sec}$
(H = 360 cm is the maximum depth of the Anchorage.)

The time needed to travel one grid distance is

$$\frac{DX}{C} = \frac{41760}{850} = 50 \text{ sec} = 0.014 \text{ hr.}$$

We use 0.014 hr per DX for phase shift in W - E direction and the imposing tide at the south entrance is

$$\eta_s = 48 + 65 \sin\left[\frac{2\pi}{12.5}(\text{EST} - 7.125 - 0.014(I - 1))\right]$$

I = grid no. in W - E direction.

6. S - N lapse = 0.15 hr.

Distance from south entrance to north entrance is about 543,000 cm.

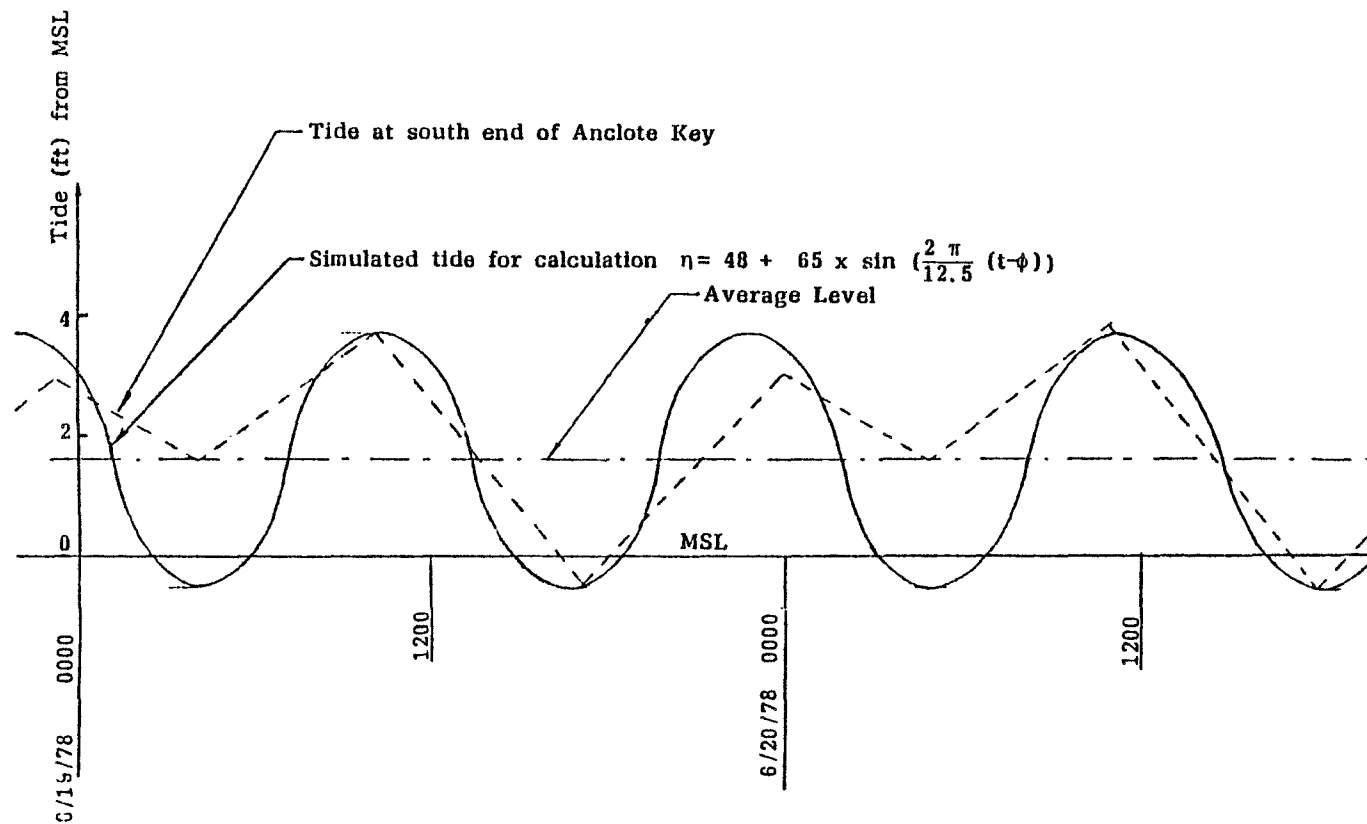


Figure 11. Semidiurnal tide for June 19-20, 1978 at south end of Anclothe Key

Time for wave to travel this distance is $\frac{543000}{850} = 0.18$ hr. We take 0.15 hr as phase difference between the south and the north boundaries; there, the imposing tide at the north entrance is

$$\eta_n = 48 + 65 \sin\left[\frac{2\pi}{12.5}(\text{EST} - 7.125 - 0.15 - 0.014(1 - 1))\right]$$

Calculation of Anclote River Flowrate and Temperature

1. The distance traveled from South Anclote Key to Tarpon Springs is 20 DX. We estimate a time lapse of 0.5 hr to account for the retardation due to buffering effect of river storage and Anclote River's natural outflow.
2. The average current is estimated to be 20 cm/sec, therefore, we take

$$U3(16, 1, k) = 20 \cos\left[\frac{2\pi}{12.5}(\text{EST} - 7.625)\right]$$

$$V3(15, 1, k) = -20 \cos\left[\frac{2\pi}{12.5}(\text{EST} - 7.625)\right]$$

for $k = 1, 2, 3, 4$.

3. The surface elevation at Tarpon Springs is to be calculated.
4. To be in accordance with given velocities at Tarpon Springs, the temperature there is also assigned and its value has a 24 hr period instead of 12.5 hr. This temperature is

$$T3(15, 1, k) = 26.9 + 0.5 \sin\left[\frac{2\pi}{24}(\text{EST} - 12)\right]$$

where the 12 hr shift is to make the peak temperature occur at 1800. Thus, the water in and out at Tarpon Springs has a temperature ranging from 26.4 (before dawn) to 27.4 (late afternoon).

Discharge Temperature and Gulf Water Temperature

1. On June 19-20, 1978, the recorded discharge temperature at daytime is in the range of 29.3-30.3. To account for the further drop of discharge temperature due to cooler ambient temperature at nighttime, we assume a sinusoidal variation of discharge temperature with diurnal period.
2. Discharge temperature is estimated

$$T3(14, 8, k) = 29.4 + 0.4 \sin\left[\frac{2\pi}{24}(\text{EST} - 12)\right]$$

therefore, the highest discharge temperature of 30.3°C occurs at

6 p.m. and the lowest (29.3°C) at 6 a.m.

3. The Gulf water outside the Anclote Anchorage as well as the atmosphere is sink to the heat disposal from the power plant; therefore, the boundary condition on temperature at the north and south entrance is not considered as adiabatic as in normal case of far-field thermal pollution problem. Instead, we specify the outside-anchorage ambient temperatures. Again, they are 24 hr periodic and their values should be in accordance with the measured temperature in the same neighborhood. Here in compliance with measured data, we use

$$T_{ab} = 27.0 + 0.2 \sin\left[\frac{2\pi}{24}(\text{EST} - 12)\right]$$

for both ambient temperature outside the south and the north boundaries.

EXECUTION DECKS FOR CALCULATION AND PLOTTING RUNS

The following execution decks are for use in UNIVAC 1100 computer at the University of Miami. These may have to be modified if a different computer is used. The programs and subroutines used in these runs are all compiled and stored in the file.

Calculation Run

First Run--

1. @ ASC, A FILENAME.
The file 'FILENAME' is assigned for the run.
2. @ ASC, T 8., 16N, TAPENAME1
A tape file names '8' is being assigned. The tape is 9-track, and the reel number is 'TAPENAME1.'
3. @ PRT, S FILENAME.ANCMN
The main program 'ANCMN' is printed.
4. @ PACK FILENAME.
'FILENAME' is packed together, eliminating the space left by deleted elements, and thus, condensing the file.
5. @ PREP FILENAME.
Prepare an entry point table for the 'FILENAME.'
6. @ MAP, S
Combines relocatable elements to form an executable absolute element.
7. IN FILENAME.ANCMN
8. LIB FILENAME.

9. END
10. @ XQT
11. 3
Case number (NCASE).
12. 1
First run (LN).
13. 1
Store the calculation results on to tape 'TAPENAME1' (KSTORE).
14. 1
Calculate velocities (KVEL).
15. 1
Calculate temperatures (KTEMP).
16. 0
Specify numbers of the latest hour of the last run (MBLOCK).
17. 13
Number of hours to be simulated (NCY).
18. 3600.
Print the results at each 3600 seconds (TPRT).
19. 41760., 41760., 0.25
Grid sizes in x-, y- and σ -direction (DX, DY, DS).
20. 15.0, 0., 60., 0.08, 0.005, 12.5, 7.125
Specify time step, the difference of average tidal level and mean water level, amplitude of tide, north-south phase lag, east-west phase lag per DX, period of tide, and time shift (DT, STAGE, AMPLIT, PHASE, DPHASE, PERIOD, TSHIFT).
21. 0.66E-4, 48.8
Coriolis factor and the difference of mean water level and mean sea level (FCOR, STAGE1).
22. 0.
The y-axis coincides with North (THETA).
23. 8.E5, 0.
Horizontal reference length and Rossby number (ALREF, ROSSBY).
24. 1.
Number of hours between climatic data (RWEX).

25. 7.
Simulation run starts at EST 0700 (TZERO).
26. 1.026, 20., 20., 50000.
Specify water density, vertical eddy viscosity, vertical eddy diffusivity, horizontal eddy diffusivity (RR, AV, BV, BH).
27. 27.0
Initial water temperature (TINT).
28. @ ADD FILENAME.AMATN
Input data file 'AMATN' for specifying grid matrices and initial water depth.
29. @ ADD FILENAME.FDATA
Input data file 'FDATA' for initializing temperature distribution.
30. @ ADD FILENAME.C2007
Input data file 'C2007' of climatic data.
31. @ FIN
Terminate this calculation run.

Subsequent Run--

1. @ ASG, A FILENAME.
2. @ ASG, T 7., 16N, TAPENAME1
A tape file named '7' is being assigned; the reel number is 'TAPENAME1.' This tape was used in the first run for storing the hourly calculation results for 13 hours in 13 blocks.
3. @ MOVE 7., 12
Move TAPENAME1 to the 13th block which is the last hour result of the first run and is going to be used as input data for this subsequent run.
4. @ ASG, T 8., 16N, TAPENAME2
A new tape named 'TAPENAME2' is assigned to store the calculation results of this run.
- 5-13. Same as the cards 3-11 of the first run.
14. 2
Continuing run (LN).
- 15-17. Same as the cards 13-15 of the first run.
18. 13
The last hour of the first run is 13.
- 19-29. Same as the cards 17-27 of the first run.

30. Same as the card 20 of the first run. If new tidal data is needed, this card has to be changed.
31. @ ADD FILENAME.FDATA
If different IR temperature distribution is needed, FDATA has to be changed.
32. @ ADD FILENAME.C2007
The data file C2007 has to be changed since the weather condition will be different from the first run.
33. @ FIN

Plotting Run

1. @ ASG, A FILENAME.
2. @ ASG, T 7., 16N, TAPENAME1
A tape file named '7' is being assigned. 'TAPENAME1' stored the results of the calculation run.
3. @ ASG, T 11., 16, TAPENAME2
A tape file named '11' is being assigned. The tape is 7-track, and the reel number is 'TAPENAME2.' This is used for plotting tape.
4. @ PRT, S FILENAME.PLOTMN
5. @ PACK FILENAME.
6. @ PREP FILENAME.
7. @ MAP, S
8. IN FILENAME.PLOTMN
9. LIB FILENAME.
10. LIB UCS*ACALCOMP.
Call 'CALCOMP' plotter library.
11. END
12. @ XQT
13. 1, 1, 1, 1, 6
Plot IR isotherms and computed isotherms; only one IR temperature field is to be plotted. Plot isotherms on the surface level only, and run for 6 simulation hours (IPLOIR, IPLOCM, NIR, KPLOT, NCY).
14. 27.5

- Minimum contour value for IR plot (TL).
15. 30.0
Maximum contour value for IR Plot (TH).
 16. 0.75
Increment of contour value for IR plot (TI).
 17. 27.0
Ambient temperature (TA1).
 18. 13.
EST for caption (Q1).
 19. 358.0
Wind speed in cm/sec for caption (Q2).
 20. 110.
Wind direction for caption (Q3).
 21. 29.4
Air temperature for caption (Q4).
 22. 29.5
Discharge temperature for caption (Q5).
 23. 62.7
Discharge flowrate in cm^3/sec for caption (Q6).
 24. 1, 1, 1, 0, 1
Plot UV, UW, VW velocities and isotherms (IPLOT).
 25. 0, 0, 0, 0, 0, 1
Plot the results at the 6th hour (NPLOUT).
 26. 0, 0, 0, 0, 1, 1
Compare the deviation of computed temperature from IR temperature (NSTAND).
 27. 0.0
Minimum contour value for surface height (ETAL).
 28. 0.0
Maximum contour value for surface height (ETAH).
 29. 0.0
Increment of contour value for surface height (ETAINT).
 30. 6.
6" plot size in x-direction (XL).

31. 42000., 42000.
Grid size (cm) in x- and y-direction (DX, DY).
32. @ ADD FILENAME.APER1
Specify boundary nodes for plotting the boundary.
33. @ ADD FILENAME.EDATA
Input data file 'EDATA;' specify IR temperature distribution at ebb tidal stage.
34. @ FIN
Terminate this plotting run.

The input data file AMATN, FDATA, C2007, APER1 and EDATA are listed in the Appendix B. If these data are not stored in the 'FILENAME,' card decks have to be substituted.

SAMPLE OUTPUT (EST 1300, June 20, 1978)

TAIR	HUMID	D.WTND	WDIR	SRAD	TSURF	29.40	.62	357.60	110.00	.40	27.00					
18015.	39.0	14.7	218.	26.8	40.7	1.1	219.	27.1	40.8	10.7	292.	26.9	41.7	7.7	323.	28.7
18030.	38.9	14.7	218.	26.8	40.6	1.1	221.	27.1	40.7	10.7	292.	26.9	41.7	7.7	323.	28.7
18045.	38.8	14.7	217.	26.8	40.5	1.1	219.	27.1	40.6	10.7	292.	26.9	41.6	7.6	323.	28.7
18060.	38.7	14.8	217.	26.8	40.4	1.1	221.	27.1	40.5	10.7	292.	26.9	41.5	7.6	323.	28.7
18075.	38.6	14.8	217.	26.8	40.4	1.1	220.	27.1	40.4	10.7	292.	26.9	41.4	7.6	323.	28.7
18090.	38.5	14.8	217.	26.8	40.3	1.2	222.	27.1	40.3	10.7	292.	26.9	41.3	7.6	323.	28.7
18105.	38.4	14.8	217.	26.8	40.2	1.2	221.	27.1	40.2	10.7	292.	26.9	41.2	7.5	323.	28.7
18120.	38.3	14.9	217.	26.8	40.1	1.2	223.	27.1	40.1	10.7	292.	26.9	41.1	7.6	323.	28.7
18135.	38.2	14.9	217.	26.8	40.0	1.2	223.	27.1	40.0	10.6	292.	26.9	41.0	7.5	323.	28.7
18150.	38.1	14.9	217.	26.8	39.9	1.2	224.	27.1	39.9	10.7	292.	26.9	40.9	7.5	323.	28.7
18165.	38.0	15.0	217.	26.8	39.8	1.2	224.	27.1	39.9	10.6	292.	26.9	40.9	7.5	324.	28.7
18180.	37.9	15.0	217.	26.8	39.7	1.2	226.	27.1	39.8	10.7	292.	26.9	40.8	7.5	323.	28.7
18195.	37.9	15.0	216.	26.8	39.7	1.2	226.	27.1	39.7	10.6	292.	26.9	40.7	7.5	324.	28.7
18210.	37.7	15.1	216.	26.8	39.6	1.3	227.	27.1	39.6	10.7	292.	26.9	40.6	7.5	324.	28.7
18225.	37.6	15.1	216.	26.8	39.5	1.3	228.	27.1	39.5	10.6	292.	26.9	40.5	7.5	324.	28.7
18240.	37.5	15.1	216.	26.8	39.4	1.3	229.	27.1	39.4	10.7	292.	26.9	40.4	7.6	324.	28.7
18255.	37.4	15.2	216.	26.8	39.3	1.3	229.	27.1	39.3	10.6	292.	26.9	40.3	7.5	324.	28.7
18270.	37.3	15.2	216.	26.8	39.2	1.3	230.	27.1	39.2	10.7	292.	26.9	40.2	7.6	324.	28.7
18285.	37.2	15.2	216.	26.8	39.1	1.3	231.	27.1	39.1	10.7	292.	26.9	40.2	7.6	324.	28.7
18300.	37.1	15.3	216.	26.8	39.0	1.3	232.	27.1	39.0	10.7	292.	26.9	40.1	7.6	324.	28.7
18315.	37.0	15.3	216.	26.8	38.9	1.3	232.	27.1	38.9	10.7	292.	26.9	40.0	7.6	324.	28.7
18330.	36.9	15.3	216.	26.8	38.9	1.4	233.	27.1	38.8	10.7	291.	26.9	39.9	7.6	323.	28.7
18345.	36.8	15.4	216.	26.8	38.8	1.4	233.	27.1	38.7	10.7	291.	26.9	39.8	7.6	323.	28.7
18360.	36.7	15.4	216.	26.8	38.7	1.4	234.	27.1	38.6	10.7	291.	26.9	39.7	7.6	323.	28.7
18375.	36.6	15.4	216.	26.8	38.6	1.4	235.	27.1	38.5	10.7	291.	26.9	39.6	7.6	323.	28.7
18390.	36.5	15.5	216.	26.8	38.5	1.4	236.	27.1	38.4	10.7	291.	26.9	39.6	7.6	323.	28.7
18405.	36.4	15.5	215.	26.8	38.4	1.4	236.	27.1	38.3	10.7	291.	26.9	39.5	7.6	323.	28.7
18420.	36.4	15.5	215.	26.8	38.3	1.5	237.	27.1	38.2	10.7	291.	26.9	39.4	7.6	323.	28.7
18435.	36.3	15.6	215.	26.8	38.2	1.5	237.	27.1	38.1	10.7	291.	26.9	39.3	7.6	323.	28.7
18450.	36.2	15.6	215.	26.8	38.1	1.5	238.	27.1	38.0	10.7	291.	26.9	39.2	7.6	323.	28.7
18465.	36.1	15.6	215.	26.9	38.1	1.5	239.	27.1	37.9	10.7	291.	26.9	39.1	7.6	323.	28.7
18480.	36.0	15.7	215.	26.8	37.9	1.6	239.	27.1	37.9	10.7	291.	26.9	39.0	7.6	323.	28.7
18495.	35.8	15.7	215.	26.8	37.9	1.6	240.	27.1	37.8	10.7	291.	26.9	38.9	7.6	323.	28.7
18510.	35.7	15.7	215.	26.8	37.8	1.6	241.	27.1	37.7	10.8	291.	26.9	38.8	7.7	323.	28.7
18525.	35.6	15.8	215.	26.8	37.7	1.6	241.	27.1	37.6	10.8	291.	26.9	38.8	7.7	323.	28.7
18540.	35.5	15.8	215.	26.8	37.6	1.6	242.	27.1	37.5	10.8	291.	26.9	38.7	7.7	323.	28.7
18555.	35.4	15.8	215.	26.8	37.5	1.7	242.	27.1	37.4	10.8	291.	26.9	38.6	7.7	323.	28.7
18570.	35.3	15.9	215.	26.8	37.4	1.7	242.	27.1	37.3	10.8	291.	26.9	38.5	7.7	323.	28.7
18585.	35.2	15.9	215.	26.8	37.3	1.7	243.	27.1	37.2	10.8	291.	26.9	38.4	7.7	323.	28.7
18600.	35.1	15.9	215.	26.8	37.2	1.7	244.	27.1	37.1	10.8	291.	26.9	38.3	7.7	323.	28.7
18615.	35.0	16.0	215.	26.8	37.1	1.7	244.	27.1	37.0	10.8	291.	26.9	38.2	7.7	323.	28.7
18630.	34.9	16.0	215.	26.8	37.0	1.8	245.	27.1	36.9	10.8	291.	26.9	38.1	7.7	323.	28.7
18645.	34.8	16.0	215.	26.8	37.0	1.8	245.	27.1	36.8	10.8	291.	26.9	38.0	7.7	323.	28.7
18660.	34.7	16.1	215.	26.8	36.8	1.8	246.	27.1	36.7	10.9	291.	26.9	37.9	7.8	323.	28.7
18675.	34.6	16.1	215.	26.8	36.8	1.8	247.	27.1	36.6	10.9	291.	26.9	37.9	7.8	323.	28.7
18690.	34.5	16.2	215.	26.8	36.7	1.9	247.	27.1	36.5	10.9	291.	26.9	37.8	7.8	323.	28.7
18705.	34.4	16.2	215.	26.8	36.6	1.9	248.	27.1	36.4	10.9	291.	26.9	37.7	7.8	323.	28.7
18720.	34.3	16.2	215.	26.8	36.5	1.9	248.	27.1	36.3	10.9	291.	26.9	37.6	7.8	323.	28.7
18735.	34.2	16.3	215.	26.8	36.4	1.9	249.	27.1	36.2	10.9	291.	26.9	37.5	7.8	323.	28.7
18750.	34.1	16.3	215.	26.8	36.3	2.0	249.	27.1	36.1	10.9	291.	26.9	37.4	7.8	323.	28.7
18765.	34.0	16.3	214.	26.8	36.2	2.0	249.	27.1	36.0	10.9	291.	26.9	37.3	7.8	323.	28.7
18780.	33.9	16.4	215.	26.8	36.1	2.0	250.	27.1	35.9	11.0	291.	26.9	37.2	7.8	323.	28.8
18795.	33.8	16.4	214.	26.8	36.0	2.1	250.	27.1	35.8	11.0	291.	26.9	37.1	7.8	323.	28.8
18810.	33.7	16.4	214.	26.8	35.9	2.1	251.	27.1	35.7	11.0	291.	26.9	37.0	7.9	323.	28.8
18825.	33.6	16.5	214.	26.8	35.8	2.1	251.	27.1	35.6	11.0	291.	26.9	36.9	7.9	323.	28.8
18840.	33.5	16.5	214.	26.8	35.7	2.2	252.	27.1	35.5	11.0	291.	26.9	36.8	7.9	323.	28.8
18855.	33.4	16.5	214.	26.8	35.6	2.2	252.	27.1	35.4	11.0	291.	26.9	36.7	7.9	323.	28.8
18870.	33.3	16.6	214.	26.8	35.5	2.2	253.	27.1	35.3	11.1	291.	26.9	36.6	7.9	323.	28.8

18445.	33.2	16.6	214.	26.8	35.5	2.3	253.	27.1	35.2	11.1	291.	26.9	36.5	7.9	323.	28.8
18900.	33.1	16.6	214.	26.8	35.4	2.3	253.	27.1	35.1	11.1	290.	26.9	36.4	7.9	323.	28.8
18915.	33.0	16.7	214.	26.8	35.3	2.3	254.	27.1	35.0	11.1	290.	26.9	36.3	7.9	323.	28.8
18930.	32.9	16.7	214.	26.8	35.2	2.4	254.	27.1	34.9	11.1	290.	26.9	36.2	7.9	322.	28.8
18945.	32.8	16.7	214.	26.8	35.1	2.4	255.	27.1	34.8	11.1	290.	26.9	36.1	7.9	322.	28.8
18960.	32.7	16.8	214.	26.8	35.0	2.4	255.	27.1	34.7	11.2	290.	26.9	36.0	8.0	322.	28.8
18975.	32.5	16.8	214.	26.8	34.9	2.5	255.	27.1	34.6	11.2	290.	26.9	35.9	8.0	322.	28.8
19990.	32.4	16.8	214.	26.8	34.8	2.5	256.	27.1	34.5	11.2	290.	26.9	35.8	8.0	322.	28.8
19335.	32.3	16.8	214.	26.8	34.7	2.5	256.	27.1	34.4	11.2	290.	26.9	35.7	8.0	322.	28.8
19020.	32.2	16.9	214.	26.8	34.6	2.6	256.	27.1	34.3	11.2	290.	26.9	35.6	8.0	322.	28.8
19045.	32.1	16.9	214.	26.8	34.5	2.6	257.	27.1	34.2	11.2	290.	26.9	35.5	8.0	322.	28.8
19060.	32.0	16.9	214.	26.8	34.4	2.6	257.	27.1	34.1	11.2	290.	26.9	35.4	8.0	322.	28.8
19075.	31.9	17.0	214.	26.8	34.3	2.7	257.	27.1	33.9	11.2	290.	26.9	35.3	8.0	322.	28.8
19090.	31.8	17.0	214.	26.8	34.2	2.7	257.	27.1	33.8	11.3	290.	26.9	35.2	8.0	322.	28.8
19095.	31.7	17.0	214.	26.8	34.1	2.7	258.	27.1	33.7	11.3	290.	26.9	35.1	8.1	322.	28.8
19110.	31.6	17.1	214.	26.8	34.0	2.8	258.	27.1	33.6	11.3	290.	26.9	35.0	8.1	322.	28.8
19125.	31.5	17.1	214.	26.8	33.9	2.8	258.	27.1	33.5	11.3	290.	26.9	34.9	8.1	322.	28.8
19140.	31.4	17.1	214.	26.8	33.8	2.8	259.	27.1	33.4	11.3	290.	26.9	34.8	8.1	322.	28.8
19155.	31.3	17.2	214.	26.8	33.7	2.9	259.	27.1	33.3	11.3	290.	26.9	34.7	8.1	322.	28.8
19170.	31.2	17.2	214.	26.8	33.6	2.9	259.	27.1	33.2	11.4	290.	26.9	34.6	8.1	322.	28.8
19185.	31.1	17.2	214.	26.8	33.5	2.9	259.	27.1	33.1	11.4	290.	26.9	34.5	8.1	322.	28.8
19200.	30.9	17.3	214.	26.8	33.4	3.0	260.	27.1	33.0	11.4	290.	26.9	34.4	8.1	322.	28.8
19215.	30.8	17.3	214.	26.8	33.3	3.0	260.	27.1	32.9	11.4	290.	26.9	34.3	8.2	322.	28.8
19230.	30.7	17.3	214.	26.8	33.2	3.1	260.	27.1	32.8	11.4	290.	26.9	34.2	8.2	322.	28.8
19245.	30.6	17.3	214.	26.8	33.1	3.1	260.	27.1	32.7	11.4	290.	27.0	34.1	8.2	322.	28.8
19260.	30.5	17.4	214.	26.8	33.0	3.1	261.	27.1	32.6	11.4	290.	27.0	34.0	8.2	322.	28.8
19275.	30.4	17.4	214.	26.8	32.9	3.2	261.	27.1	32.5	11.4	290.	27.0	33.9	8.2	322.	28.8
19290.	30.3	17.4	214.	26.8	32.8	3.2	261.	27.1	32.4	11.5	290.	27.0	33.8	8.2	322.	28.8
19305.	30.2	17.5	214.	26.8	32.7	3.3	261.	27.1	32.3	11.5	290.	27.0	33.7	8.2	322.	28.8
19320.	30.1	17.5	214.	26.8	32.6	3.3	262.	27.1	32.2	11.5	290.	27.0	33.6	8.2	322.	28.8
19335.	30.0	17.5	214.	26.8	32.5	3.3	262.	27.1	32.1	11.5	290.	27.0	33.5	8.2	322.	28.8
19350.	29.9	17.6	214.	26.8	32.4	3.4	262.	27.1	32.0	11.5	290.	27.0	33.4	8.3	322.	28.8
19365.	29.8	17.6	214.	26.8	32.3	3.4	262.	27.1	31.9	11.5	290.	27.0	33.3	8.3	322.	28.8
19380.	29.6	17.6	214.	26.8	32.2	3.5	263.	27.1	31.7	11.5	290.	27.0	33.1	8.3	322.	28.8
19395.	29.5	17.7	214.	26.8	32.1	3.5	263.	27.1	31.6	11.5	290.	27.0	33.0	8.3	322.	28.8
19410.	29.4	17.7	213.	26.8	32.0	3.5	263.	27.1	31.5	11.6	290.	27.0	32.9	8.3	322.	28.8
19425.	29.3	17.7	213.	26.8	31.9	3.6	263.	27.1	31.4	11.6	290.	27.0	32.8	8.3	322.	28.8
19440.	29.2	17.8	213.	26.8	31.8	3.6	264.	27.1	31.3	11.6	290.	27.0	32.7	8.3	322.	28.8
19455.	29.1	17.8	213.	26.8	31.7	3.7	264.	27.1	31.2	11.6	290.	27.0	32.6	8.3	322.	28.8
19470.	29.0	17.8	213.	26.8	31.6	3.7	264.	27.1	31.1	11.6	290.	27.0	32.5	8.3	322.	28.8
19485.	28.9	17.9	213.	26.8	31.5	3.7	264.	27.1	31.0	11.6	290.	27.0	32.4	8.3	322.	28.8
19500.	28.8	17.9	213.	26.8	31.3	3.8	264.	27.1	30.9	11.6	290.	27.0	32.3	8.4	322.	28.8
19515.	28.7	17.9	213.	26.8	31.3	3.8	265.	27.1	30.8	11.6	290.	27.0	32.2	8.4	322.	28.8
19530.	28.6	18.0	213.	26.8	31.1	3.9	265.	27.1	30.7	11.7	290.	27.0	32.1	8.4	322.	28.8
19545.	28.4	18.0	213.	26.8	31.1	3.9	265.	27.1	30.6	11.7	290.	27.0	32.0	8.4	322.	28.8
19560.	28.3	18.0	213.	26.8	30.9	3.9	265.	27.1	30.5	11.7	290.	27.0	31.9	8.4	322.	28.8
19575.	28.2	18.1	213.	26.8	30.8	4.0	265.	27.1	30.4	11.7	290.	27.0	31.8	8.4	322.	28.8
19590.	28.1	18.1	213.	26.8	30.7	4.0	266.	27.1	30.2	11.7	290.	27.0	31.6	8.4	322.	28.8
19605.	28.0	18.1	213.	26.8	30.6	4.1	266.	27.1	30.1	11.7	290.	27.0	31.5	8.4	322.	28.8
19620.	27.9	18.2	213.	26.8	30.5	4.1	266.	27.1	30.0	11.7	290.	27.0	31.4	8.4	321.	28.8
19635.	27.8	18.2	213.	26.8	30.4	4.2	266.	27.1	29.9	11.7	290.	27.0	31.3	8.4	321.	28.8
19650.	27.7	18.2	213.	26.8	30.3	4.2	266.	27.1	29.8	11.7	290.	27.0	31.2	8.4	321.	28.8
19665.	27.6	18.3	213.	26.8	30.2	4.2	266.	27.1	29.7	11.7	290.	27.0	31.1	8.4	321.	28.8
19680.	27.4	18.3	213.	26.8	30.1	4.3	267.	27.1	29.6	11.8	290.	27.0	31.0	8.4	321.	28.8
19695.	27.3	18.3	213.	26.8	30.0	4.3	267.	27.1	29.5	11.8	290.	27.0	30.9	8.4	321.	28.8
19710.	27.2	18.4	213.	26.8	29.9	4.4	267.	27.1	29.4	11.8	290.	27.0	30.8	8.4	321.	28.8
19725.	27.1	18.4	213.	26.8	29.8	4.4	267.	27.1	29.3	11.8	290.	27.0	30.7	8.4	321.	28.8
19740.	27.0	18.4	213.	26.8	29.7	4.4	267.	27.1	29.2	11.8	290.	27.0	30.6	8.4	321.	28.8
19755.	26.9	18.5	213.	26.8	29.6	4.5	267.	27.1	29.0	11.8	290.	27.0	30.5	8.4	321.	28.8
19770.	26.8	18.5	213.	26.8	29.5	4.5	268.	27.1	28.9	11.8	290.	27.0	30.3	8.4	321.	28.8
19785.	26.7	18.5	213.	26.8	29.4	4.6	268.	27.1	28.8	11.8	290.	27.0	30.2	8.4	321.	28.8
19800.	26.6	18.6	213.	26.8	29.3	4.6	268.	27.1	28.7	11.9	290.	27.0	30.1	8.5	321.	28.8
19815.	26.4	18.6	213.	26.8	29.2	4.6	268.	27.1	28.6	11.9	290.	27.0	30.0	8.5	321.	28.8

19830.	26.3	18.6	213.	26.8	29.1	4.7	268.	27.1	28.5	11.9	290.	27.0	29.9	A.5	321.	28.9
19845.	26.2	18.6	213.	26.8	29.0	4.7	258.	27.1	28.4	11.9	290.	27.0	29.8	A.5	321.	28.9
19860.	26.1	18.7	213.	26.8	28.8	4.8	268.	27.1	28.3	11.9	290.	27.0	29.7	A.5	321.	28.8
19875.	26.0	18.7	213.	26.8	28.8	4.8	269.	27.1	28.2	11.9	290.	27.0	29.6	A.5	321.	28.8
19890.	25.9	18.7	213.	26.8	28.6	4.8	269.	27.1	28.1	11.9	290.	27.0	29.5	A.5	321.	28.8
19905.	25.8	18.8	213.	26.8	28.5	4.9	269.	27.1	27.9	11.9	290.	27.0	29.4	A.5	321.	28.8
19920.	25.6	18.8	213.	26.8	28.4	4.9	269.	27.1	27.8	11.9	290.	27.0	29.3	A.5	321.	28.8
19935.	25.5	18.8	213.	26.8	28.3	5.0	269.	27.1	27.7	11.9	290.	27.0	29.2	A.5	321.	28.8
19950.	25.4	18.9	213.	26.8	28.2	5.0	269.	27.1	27.6	12.0	290.	27.0	29.0	A.5	321.	28.8
19965.	25.3	18.9	213.	26.8	28.1	5.0	269.	27.1	27.5	12.0	290.	27.0	28.9	A.5	321.	28.8
19980.	25.2	18.9	213.	26.8	28.0	5.1	269.	27.1	27.4	12.0	290.	27.0	28.8	A.5	321.	28.8
19995.	25.1	19.0	213.	26.8	27.9	5.1	269.	27.1	27.3	12.0	290.	27.0	28.7	A.5	321.	28.8
20010.	25.0	19.0	213.	26.8	27.8	5.2	270.	27.1	27.2	12.0	290.	27.0	28.6	A.5	321.	28.8
20025.	24.9	19.0	213.	26.8	27.7	5.2	270.	27.1	27.1	12.0	290.	27.0	28.5	A.5	321.	28.8
20040.	24.7	19.1	213.	26.8	27.6	5.2	270.	27.1	26.9	12.0	290.	27.0	28.4	A.5	321.	28.8
20055.	24.6	19.1	212.	26.8	27.5	5.3	270.	27.1	26.8	12.0	290.	27.0	28.3	A.5	321.	28.8
20070.	24.5	19.1	212.	26.8	27.4	5.3	270.	27.1	26.7	12.0	290.	27.0	28.2	A.5	321.	28.8
20085.	24.4	19.1	212.	26.8	27.3	5.3	270.	27.1	26.6	12.0	290.	27.0	28.1	A.5	321.	28.8
20100.	24.3	19.2	212.	26.8	27.2	5.4	270.	27.1	26.5	12.0	290.	27.0	28.0	A.6	321.	28.8
20115.	24.2	19.2	212.	26.8	27.1	5.4	270.	27.1	26.4	12.1	290.	27.0	27.9	A.6	321.	28.8
20130.	24.0	19.2	212.	26.8	26.9	5.5	270.	27.1	26.3	12.1	290.	27.0	27.7	A.6	321.	28.8
20145.	23.9	19.3	212.	26.8	26.8	5.5	270.	27.1	26.2	12.1	291.	27.0	27.6	A.6	321.	28.8
20160.	23.8	19.3	212.	26.8	26.7	5.5	270.	27.1	26.0	12.1	291.	27.0	27.5	A.6	321.	28.8
20175.	23.7	19.3	212.	26.8	26.6	5.6	271.	27.1	25.9	12.1	291.	27.0	27.4	A.6	321.	28.8
20190.	23.6	19.4	212.	26.8	26.5	5.6	271.	27.1	25.8	12.1	291.	27.0	27.3	A.6	321.	28.8
20205.	23.5	19.4	212.	26.8	26.4	5.7	271.	27.1	25.7	12.1	291.	27.0	27.2	A.6	321.	28.8
20220.	23.4	19.4	212.	26.8	26.3	5.7	271.	27.1	25.6	12.1	291.	27.0	27.1	A.6	321.	28.8
20235.	23.2	19.4	212.	26.8	26.2	5.7	271.	27.1	25.5	12.1	291.	27.0	27.0	A.6	321.	28.8
20250.	23.1	19.5	212.	26.8	26.1	5.8	271.	27.1	25.4	12.1	291.	27.0	26.9	A.6	321.	28.8
20265.	23.0	19.5	212.	26.8	26.0	5.8	271.	27.1	25.2	12.2	291.	27.0	26.8	A.6	321.	28.8
20280.	22.9	19.5	212.	26.8	25.9	5.8	271.	27.1	25.1	12.2	291.	27.0	26.7	A.6	321.	28.8
20295.	22.8	19.6	212.	26.8	25.8	5.9	271.	27.1	25.0	12.2	291.	27.0	26.6	A.6	321.	28.8
20310.	22.7	19.6	212.	26.8	25.7	5.7	271.	27.1	24.9	12.2	291.	27.0	26.4	A.6	321.	28.8
20325.	22.5	19.6	212.	26.8	25.6	6.0	271.	27.1	24.8	12.2	291.	27.0	26.3	A.6	321.	28.8
20340.	22.4	19.7	212.	26.8	25.4	6.0	271.	27.1	24.7	12.2	291.	27.0	26.2	A.7	321.	28.8
20355.	22.3	19.7	212.	26.8	25.3	6.1	271.	27.1	24.6	12.2	291.	27.0	26.1	A.7	321.	28.8
20370.	22.2	19.7	212.	26.8	25.2	6.1	271.	27.1	24.4	12.2	291.	27.0	26.0	A.7	321.	28.8
20385.	22.1	19.7	212.	26.8	25.1	6.1	272.	27.1	24.3	12.2	291.	27.0	25.9	A.7	321.	28.8
20400.	22.0	19.8	212.	26.8	25.0	6.1	272.	27.1	24.2	12.3	291.	27.0	25.8	A.7	321.	28.8
20415.	21.8	19.8	212.	26.8	24.9	6.2	272.	27.1	24.1	12.3	291.	27.0	25.7	A.7	321.	28.8
20430.	21.7	19.8	212.	26.8	24.8	6.2	272.	27.1	24.0	12.3	291.	27.0	25.6	A.7	321.	28.8
20445.	21.6	19.8	212.	26.8	24.7	6.2	272.	27.1	23.9	12.3	291.	27.0	25.5	A.7	321.	28.8
20460.	21.5	19.9	212.	26.8	24.6	6.3	272.	27.1	23.8	12.3	291.	27.0	25.3	A.7	321.	28.8
20475.	21.4	19.9	212.	26.8	24.5	6.3	272.	27.1	23.7	12.3	291.	27.0	25.2	A.7	321.	28.8
20490.	21.2	19.9	212.	26.8	24.4	6.3	272.	27.1	23.5	12.3	291.	27.0	25.1	A.7	321.	28.8
20505.	21.1	20.0	212.	26.8	24.3	6.4	272.	27.1	23.4	12.3	291.	27.0	25.0	A.7	321.	28.8
20520.	21.0	20.0	212.	26.8	24.1	6.4	272.	27.1	23.3	12.3	291.	27.0	24.9	A.7	321.	28.8
20535.	20.9	20.0	212.	26.8	24.0	6.5	272.	27.1	23.2	12.3	291.	27.0	24.8	A.7	321.	28.8
20550.	20.8	20.0	212.	26.8	23.9	6.5	272.	27.1	23.1	12.4	291.	27.0	24.7	A.8	321.	28.8
20565.	20.7	20.1	212.	26.8	23.8	6.5	272.	27.1	23.1	12.4	291.	27.0	24.6	A.8	321.	28.8
20580.	20.5	20.1	212.	26.8	23.7	6.5	272.	27.1	22.8	12.4	291.	27.0	24.5	A.8	321.	28.8
20595.	20.4	20.1	212.	26.8	23.6	6.6	272.	27.1	22.7	12.4	291.	27.0	24.3	A.8	321.	28.8
20610.	20.3	20.1	212.	26.8	23.5	6.6	272.	27.1	22.6	12.4	291.	27.0	24.2	A.8	321.	28.8
20625.	20.2	20.2	212.	26.8	23.4	6.7	272.	27.1	22.5	12.4	291.	27.0	24.1	A.8	321.	28.8
20640.	20.1	20.2	212.	26.8	23.3	6.7	272.	27.1	22.4	12.4	291.	27.0	24.0	A.8	321.	28.8
20655.	20.0	20.2	212.	26.8	23.2	6.7	273.	27.1	22.3	12.4	291.	27.0	23.9	A.8	321.	28.8
20670.	19.8	20.2	212.	26.8	23.0	6.8	273.	27.1	22.1	12.4	291.	27.0	23.8	A.8	321.	28.8
20685.	19.7	20.3	212.	26.8	22.9	6.8	273.	27.1	22.0	12.5	291.	27.0	23.7	A.8	321.	28.8
20700.	19.6	20.3	212.	26.8	22.8	6.8	273.	27.1	21.9	12.5	291.	27.0	23.6	A.8	321.	28.8
20715.	19.5	20.3	212.	26.8	22.7	6.9	273.	27.1	21.8	12.5	291.	27.0	23.5	A.8	321.	28.8
20730.	19.4	20.3	212.	26.8	22.6	6.9	273.	27.1	21.7	12.5	291.	27.0	23.3	A.8	321.	28.8
20745.	19.2	20.4	212.	26.8	22.5	6.9	273.	27.1	21.6	12.5	291.	27.0	23.2	A.9	321.	28.8
20760.	19.1	20.4	212.	26.8	22.4	7.0	273.	27.1	21.4	12.5	291.	27.0	23.1	A.9	321.	28.8

20775.	19.0	20.4	212.	26.8	22.3	7.0	273.	27.1	21.3	12.5	291.	27.0	23.0	8.9	321.	28.8
20790.	19.9	20.4	212.	26.8	22.1	7.0	273.	27.1	21.2	12.5	291.	27.0	22.9	8.9	321.	28.8
20805.	18.8	20.5	212.	26.8	22.0	7.1	273.	27.1	21.1	12.5	291.	27.0	22.8	8.9	321.	28.8
20820.	18.6	20.5	212.	26.8	21.9	7.1	273.	27.1	21.0	12.5	291.	27.0	22.7	8.9	321.	28.8
20835.	18.5	20.5	212.	26.8	21.8	7.1	273.	27.1	20.9	12.6	291.	27.0	22.5	8.9	320.	28.8
20850.	19.4	20.5	212.	26.8	21.7	7.2	273.	27.1	20.7	12.6	291.	27.0	22.4	8.9	320.	28.8
20865.	19.3	20.6	212.	26.8	21.6	7.2	273.	27.1	20.6	12.6	291.	27.0	22.3	8.9	320.	28.8
20880.	18.2	20.6	212.	26.8	21.5	7.2	273.	27.1	20.5	12.6	291.	27.0	22.2	8.9	320.	28.8
20895.	18.0	20.6	212.	26.8	21.4	7.3	273.	27.1	20.4	12.6	291.	27.0	22.1	8.9	320.	28.8
20910.	17.9	20.6	212.	26.8	21.2	7.3	273.	27.1	20.3	12.6	291.	27.0	22.0	8.9	320.	28.8
20925.	17.8	20.7	212.	26.8	21.1	7.3	273.	27.1	20.2	12.6	291.	27.0	21.9	9.0	320.	28.8
20940.	17.7	20.7	212.	26.8	21.0	7.2	273.	27.1	20.0	12.6	291.	27.0	21.7	9.0	320.	28.8
20955.	17.6	20.7	212.	26.8	20.9	7.4	273.	27.1	19.9	12.6	291.	27.0	21.6	9.0	320.	28.8
20970.	17.4	20.7	212.	26.8	20.8	7.4	273.	27.2	19.8	12.6	291.	27.0	21.5	9.0	320.	28.8
20985.	17.3	20.7	212.	26.8	20.7	7.4	273.	27.1	19.7	12.7	291.	27.0	21.4	9.0	320.	28.8
21000.	17.2	20.8	212.	26.8	20.6	7.5	273.	27.2	19.6	12.7	291.	27.0	21.3	9.0	320.	28.8
21015.	17.1	20.8	212.	26.8	20.5	7.5	273.	27.2	19.4	12.7	292.	27.0	21.2	9.0	320.	28.8
21030.	17.0	20.8	212.	26.8	20.3	7.5	274.	27.2	19.3	12.7	292.	27.0	21.0	9.0	320.	28.8
21045.	16.8	20.8	212.	26.8	20.2	7.6	274.	27.2	19.2	12.7	292.	27.0	20.9	9.0	320.	28.8
21060.	16.7	20.9	212.	26.8	20.1	7.6	274.	27.2	19.1	12.7	292.	27.0	20.8	9.0	320.	28.8
21075.	16.6	20.9	212.	26.8	20.0	7.6	274.	27.2	19.0	12.7	292.	27.0	20.7	9.0	320.	28.8
21090.	15.5	20.9	212.	26.8	19.9	7.7	274.	27.2	18.3	12.7	292.	27.0	20.6	9.0	320.	28.8
21105.	16.4	20.9	212.	26.8	19.8	7.7	274.	27.2	18.7	12.7	292.	27.0	20.5	9.1	320.	28.8
21120.	16.2	21.0	212.	26.8	19.7	7.7	274.	27.2	18.6	12.7	292.	27.0	20.3	9.1	320.	28.8
21135.	15.1	21.0	212.	26.8	19.6	7.7	274.	27.2	18.5	12.7	292.	27.0	20.2	9.1	320.	28.8
21150.	16.0	21.0	212.	26.8	19.4	7.8	274.	27.2	18.4	12.8	292.	27.0	20.1	9.1	320.	28.8
21165.	15.9	21.0	212.	26.8	19.3	7.8	274.	27.2	18.3	12.8	292.	27.0	20.0	9.1	320.	28.8
21180.	15.8	21.0	211.	26.8	19.2	7.8	274.	27.2	18.1	12.8	292.	27.0	19.9	9.1	320.	28.8
21195.	15.6	21.1	211.	26.8	19.1	7.9	274.	27.2	18.0	12.8	292.	27.0	19.9	9.1	320.	28.8
21210.	15.5	21.1	211.	26.8	19.0	7.9	274.	27.2	17.9	12.8	292.	27.0	19.6	9.1	320.	28.8
21225.	15.4	21.1	211.	26.8	18.9	7.9	274.	27.2	17.8	12.8	292.	27.0	19.5	9.1	320.	28.8
21240.	15.3	21.1	211.	26.8	18.8	8.0	274.	27.2	17.7	12.8	292.	27.0	19.4	9.1	320.	28.8
21255.	15.2	21.1	211.	26.8	18.7	8.0	274.	27.2	17.5	12.8	292.	27.0	19.3	9.1	320.	28.8
21270.	15.0	21.2	211.	26.8	18.5	8.0	274.	27.2	17.4	12.8	292.	27.0	19.2	9.1	320.	28.8
21285.	14.9	21.2	211.	26.8	18.4	8.0	274.	27.2	17.3	12.8	292.	27.0	19.1	9.1	320.	28.8
21300.	14.8	21.2	211.	26.8	18.3	8.1	274.	27.2	17.2	12.8	292.	27.0	18.9	9.1	320.	28.8
21315.	14.7	21.2	211.	26.8	18.2	8.1	274.	27.2	17.1	12.8	292.	27.0	18.8	9.2	320.	28.8
21330.	14.5	21.3	211.	26.8	18.1	8.1	274.	27.2	16.9	12.9	292.	27.0	18.7	9.2	320.	28.8
21345.	14.4	21.3	211.	26.8	18.0	8.2	274.	27.2	16.8	12.9	292.	27.0	18.6	9.2	320.	28.8
21360.	14.3	21.3	211.	26.8	17.9	8.2	274.	27.2	16.7	12.9	292.	27.0	18.5	9.2	320.	28.8
21375.	14.2	21.3	211.	26.8	17.7	8.2	274.	27.2	16.6	12.9	292.	27.0	18.3	9.2	320.	28.8
21390.	14.1	21.3	211.	26.8	17.6	8.3	274.	27.2	16.5	12.9	292.	27.0	18.2	9.2	320.	28.8
21405.	13.9	21.4	211.	26.8	17.5	8.3	274.	27.2	16.3	12.9	292.	27.0	18.1	9.2	320.	28.8
21420.	13.8	21.4	211.	26.8	17.4	8.3	274.	27.2	16.2	12.9	292.	27.0	18.0	9.2	320.	28.8
21435.	13.7	21.4	211.	26.8	17.3	8.3	274.	27.2	16.1	12.9	292.	27.0	17.9	9.2	320.	28.8
21450.	13.6	21.4	211.	26.8	17.2	8.4	274.	27.2	16.0	12.9	292.	27.0	17.8	9.2	320.	28.8
21465.	13.4	21.4	211.	26.8	17.1	8.4	274.	27.2	15.9	12.9	292.	27.0	17.6	9.2	320.	28.8
21480.	13.3	21.5	211.	26.8	16.9	8.4	274.	27.2	15.7	12.9	292.	27.0	17.5	9.2	320.	28.8
21495.	13.2	21.5	211.	26.9	16.8	8.5	275.	27.2	15.6	12.9	292.	27.0	17.4	9.2	320.	28.8
21510.	13.1	21.5	211.	26.9	16.7	8.5	275.	27.2	15.5	12.9	292.	27.0	17.3	9.2	320.	28.8
21525.	13.0	21.5	211.	26.9	16.6	8.5	275.	27.2	15.4	13.0	292.	27.0	17.2	9.2	320.	28.8
21540.	12.8	21.5	211.	26.9	16.5	8.5	275.	27.2	15.2	13.0	292.	27.0	17.0	9.2	320.	28.8
21555.	12.7	21.6	211.	26.9	16.4	8.6	275.	27.2	15.1	13.0	292.	27.0	16.9	9.2	320.	28.8
21570.	12.6	21.6	211.	26.9	16.2	8.6	275.	27.2	15.0	13.0	292.	27.0	16.8	9.3	320.	28.8
21585.	12.5	21.6	211.	26.9	16.1	8.6	275.	27.2	14.9	13.0	292.	27.0	16.7	9.3	320.	28.8
21600.	12.3	21.5	211.	26.9	16.0	8.7	275.	27.2	14.8	13.0	292.	27.0	16.6	9.3	320.	28.8

EST,TAIR,TEQ,TAN,TAS,TAUX,TAUY= 13.00 29.43 25.68 27.05 27.05 -.139770 .050813
 DATA RECORDED ON TAPE, ITOT= 21600, CASE NBR= 3 BLOK NBR= 6
 RESULTANT VELOCITIES AND DIRS, K= 1

I= 1	VRES=	3.1	2.5	2.2	2.3	2.5
I= 2	VRES=	22.8	15.9	11.2	86.7	87.7
I= 3	VRES=	188.4	188.4	184.4	96.4	96.4
I= 4	VRES=	34.4	31.4	25.7	10.6	14.0
I= 5	VRES=	194.4	193.4	198.4	32.4	356.4
I= 6	VRES=	27.9	26.2	24.3	49.4	32.4
I= 7	VRES=	203.4	199.4	194.4	5.6	12.4
I= 8	VRES=	26.7	24.2	21.5	3.4	356.4
I= 9	VRES=	206.4	199.4	197.4	16.0	27.8
I= 10	VRES=	21.5	21.3	19.3	33.6	32.6
I= 11	VRES=	15.6	16.0	15.3	8.9	15.1
I= 12	VRES=	218.4	215.4	221.4	31.4	314.4
I= 13	VRES=	12.1	12.5	14.4	9.8	13.0
I= 14	VRES=	224.4	222.4	236.4	29.5	302.4
I= 15	VRES=	9.4	9.9	13.3	10.5	11.6
I= 16	VRES=	222.4	224.4	237.4	28.6	294.4
I= 17	VRES=	7.6	7.5	9.3	10.5	10.6
I= 18	VRES=	212.4	221.4	236.4	29.5	300.4
I= 19	VRES=	5.7	4.9	5.1	9.6	9.3
I= 20	VRES=	195.4	203.4	214.4	28.6	295.4
I= 21	VRES=	8.7	7.6	1.8	10.6	8.7
I= 22	VRES=	275.4	281.4	264.4	29.1	297.4
I= 23	VRES=	2.8	4.8	2.1	9.6	7.3
I= 24	VRES=	6.1	16.2	14.4	30.3	29.7
I= 25	VRES=	321.4	343.4	9.4	31.3	30.8
I= 26	VRES=	8.3	6.0	9.4	3.1	3.4
I= 27	VRES=	314.4	308.4	321.4	33.5	331.4

RESULTANT VELOCITIES AND DIRS, K= 2

I= 1	VRES=	2.9	2.4	2.1	2.2	2.4
I= 2	VRES=	21.4	14.9	10.6	87.7	97.4
I= 3	VRES=	187.4	187.4	183.4	97.4	97.4
I= 4	VRES=	32.4	29.6	24.2	9.9	13.0
I= 5	VRES=	193.4	192.4	187.4	33.4	357.4
I= 6	VRES=	26.1	24.6	22.9	51.4	33.4
I= 7	VRES=	202.4	198.4	193.4	6.4	11.5
I= 8	VRES=	25.1	22.7	20.2	7.0	14.7
I= 9	VRES=	205.4	198.4	196.4	33.8	33.8
I= 10	VRES=	20.2	20.0	18.1	8.0	13.8
I= 11	VRES=	210.4	204.4	202.4	31.5	315.4
I= 12	VRES=	14.5	14.9	14.3	8.8	11.8
I= 13	VRES=	217.4	214.4	220.4	29.5	303.4
I= 14	VRES=	11.3	11.6	13.7	9.4	10.4
I= 15	VRES=	223.4	221.4	235.4	28.6	294.4
I= 16	VRES=	8.7	9.2	12.3	9.5	9.6
I= 17	VRES=	221.4	223.4	236.4	28.3	292.4
I= 18	VRES=	7.1	7.0	8.6	9.3	9.0
I= 19	VRES=	210.4	219.4	235.4	28.2	291.4
I= 20	VRES=	5.3	4.6	4.7	9.4	8.6
I= 21	VRES=	194.4	202.4	213.4	28.6	296.4
I= 22	VRES=	8.7	7.9	2.4	9.5	7.8
I= 23	VRES=	275.4	280.4	262.4	29.1	298.4
I= 24	VRES=	2.5	4.4	1.9	8.7	6.6
I= 25	VRES=	5.6	15.1	13.7	30.6	29.8
I= 26	VRES=	322.4	343.4	9.4	31.4	30.9
I= 27	VRES=	7.9	5.5	9.4	3.0	3.0
I= 28	VRES=	315.4	304.4	323.4	33.6	332.4

RESULTANT VELOCITIES AND DIRS, K= 3

I= 1	VRES=	*****	2.4	2.0	1.7	*****	1.8	2.0	*****
I= 2	VRES=	17.2 12.0 8.5 101.1 112. 107. 1.6 1.7 2.0 2.0 88. 88. 5.2	17.2	12.0	8.5	101.1	112. 107. 1.6 1.7 2.0 2.0	88. 88. 5.2	*****
I= 3	VRES=	186. 186. 182. 158. 133. 115. 138. 149. 145. 97. 87. 87. 10.3 14.4	186. 186. 182. 158. 133. 115. 138. 149. 145. 97. 87. 87. 10.3 14.4	*****	*****	*****	*****	*****	*****
I= 4	VRES=	192. 191. 186. 189. 175. 164. 161. 154. 120. 52. 34. 357. 149. 25.5	192. 191. 186. 189. 175. 164. 161. 154. 120. 52. 34. 357. 149. 25.5	*****	*****	*****	*****	*****	*****
I= 5	VRES=	201. 197. 191. 194. 191. 183. 182. 185. 125. 8.5 358. 344. 337. 40.3	201. 197. 191. 194. 191. 183. 182. 185. 125. 8.5 358. 344. 337. 40.3	*****	*****	*****	*****	*****	*****
I= 6	VRES=	204. 197. 195. 195. 201. 198. 202. 218. 277. 339. 334. 326. 322. 25.8	204. 197. 195. 195. 201. 198. 202. 218. 277. 339. 334. 326. 322. 25.8	*****	*****	*****	*****	*****	*****
I= 7	VRES=	16.1 16.0 14.5 12.4 11.9 10.6 9.6 5.0 4.4 6.2 316. 315. 299. 264. 13.2	16.1 16.0 14.5 12.4 11.9 10.6 9.6 5.0 4.4 6.2 316. 315. 299. 264. 13.2	*****	*****	*****	*****	*****	*****
I= 8	VRES=	209. 203. 201. 196. 203. 207. 219. 236. 274. 316. 315. 299. 264. 13.2	209. 203. 201. 196. 203. 207. 219. 236. 274. 316. 315. 299. 264. 13.2	*****	*****	*****	*****	*****	*****
I= 9	VRES=	11.6 11.9 11.4 8.5 8.2 8.8 9.2 7.4 6.3 6.8 303. 293. 273. 9.4	11.6 11.9 11.4 8.5 8.2 8.8 9.2 7.4 6.3 6.8 303. 293. 273. 9.4	*****	*****	*****	*****	*****	*****
I= 10	VRES=	9.0 9.3 10.9 8.3 5.4 5.3 7.5 8.5 7.6 7.3 285. 294. 292. 286. 8.2	9.0 9.3 10.9 8.3 5.4 5.3 7.5 8.5 7.6 7.3 285. 294. 292. 286. 8.2	*****	*****	*****	*****	*****	*****
I= 11	VRES=	222. 220. 234. 240. 244. 250. 253. 258. 269. 285. 294. 292. 286. 8.2	222. 220. 234. 240. 244. 250. 253. 258. 269. 285. 294. 292. 286. 8.2	*****	*****	*****	*****	*****	*****
I= 12	VRES=	6.9 7.3 9.8 9.5 5.1 3.8 5.9 8.0 7.9 7.4 283. 292. 295. 296. 7.6	6.9 7.3 9.8 9.5 5.1 3.8 5.9 8.0 7.9 7.4 283. 292. 295. 296. 7.6	*****	*****	*****	*****	*****	*****
I= 13	VRES=	220. 222. 235. 241. 241. 269. 280. 274. 274. 283. 292. 295. 296. 7.6	220. 222. 235. 241. 241. 269. 280. 274. 274. 283. 292. 295. 296. 7.6	*****	*****	*****	*****	*****	*****
I= 14	VRES=	5.6 5.5 6.8 8.1 4.7 3.2 4.7 6.8 7.7 7.3 282. 291. 299. 300. 6.7	5.6 5.5 6.8 8.1 4.7 3.2 4.7 6.8 7.7 7.3 282. 291. 299. 300. 6.7	*****	*****	*****	*****	*****	*****
I= 15	VRES=	4.3 3.7 3.8 7.0 4.2 2.8 4.1 6.1 7.7 7.3 286. 296. 300. 302. 5.7	4.3 3.7 3.8 7.0 4.2 2.8 4.1 6.1 7.7 7.3 286. 296. 300. 302. 5.7	*****	*****	*****	*****	*****	*****
I= 16	VRES=	193. 201. 212. 251. 254. 274. 289. 280. 277. 286. 291. 298. 299. 301. 5.0	193. 201. 212. 251. 254. 274. 289. 280. 277. 286. 291. 298. 299. 301. 5.0	*****	*****	*****	*****	*****	*****
I= 17	VRES=	***** 2.0 3.5 ***** 1.5 8.2 9.9 6.8 5.2 5.2 5.0	***** 2.0 3.5 ***** 1.5 8.2 9.9 6.8 5.2 5.2 5.0	*****	*****	*****	*****	*****	*****
I= 18	VRES=	4.4 12.0 11.8 ***** 10.5 6.7 4.1 4.0 4.0 4.0	4.4 12.0 11.8 ***** 10.5 6.7 4.1 4.0 4.0 4.0	*****	*****	*****	*****	*****	*****
I= 19	VRES=	322. 343. 13. ***** 312. 321. 314. 309. 314. 2.1	322. 343. 13. ***** 312. 321. 314. 309. 314. 2.1	*****	*****	*****	*****	*****	*****
I= 20	VRES=	6.9 4.4 ***** 1.1 2.2 2.4 2.1 2.1	6.9 4.4 ***** 1.1 2.2 2.4 2.1 2.1	*****	*****	*****	*****	*****	*****
I= 21	VRES=	715. 308. ***** 325. 337. 333. 329. 329.	715. 308. ***** 325. 337. 333. 329. 329.	*****	*****	*****	*****	*****	*****

RESULTANT VELOCITIES AND DIRS, K= 4

I= 1	VRES=	*****	1.4	1.2	1.0	*****	1.1	1.2	*****
I= 2	VRES=	10.0 7.0 5.0 101.1 112. 100. 2.2 1.0 1.2 1.2 98. 88. 3.1	10.0 7.0 5.0 101.1 112. 100. 2.2 1.0 1.2 1.2	*****	*****	*****	*****	*****	*****
I= 3	VRES=	185. 185. 181. 157. 132. 115. 137. 149. 145. 97. 87. 87. 6.0 8.4	185. 185. 181. 157. 132. 115. 137. 149. 145. 97. 87. 87. 6.0 8.4	*****	*****	*****	*****	*****	*****
I= 4	VRES=	15.4 14.0 11.5 8.4 6.2 4.7 3.0 2.0 1.3 2.1 4.7 357. 349. 14.9	15.4 14.0 11.5 8.4 6.2 4.7 3.0 2.0 1.3 2.1 4.7 357. 349. 14.9	*****	*****	*****	*****	*****	*****
I= 5	VRES=	191. 190. 185. 188. 173. 163. 160. 152. 119. 53. 35. 357. 349. 14.9	191. 190. 185. 188. 173. 163. 160. 152. 119. 53. 35. 357. 349. 14.9	*****	*****	*****	*****	*****	*****
I= 6	VRES=	12.3 11.6 10.9 9.6 8.5 6.7 4.2 2.2 1.3 2.4 5.3 9.4 14.9	12.3 11.6 10.9 9.6 8.5 6.7 4.2 2.2 1.3 2.4 5.3 9.4 14.9	*****	*****	*****	*****	*****	*****
I= 7	VRES=	200. 196. 190. 193. 190. 181. 180. 182. 123. 9. 359. 344. 337. 23.7	200. 196. 190. 193. 190. 181. 180. 182. 123. 9. 359. 344. 337. 23.7	*****	*****	*****	*****	*****	*****
I= 8	VRES=	11.8 10.7 9.5 8.2 7.6 6.4 4.4 2.6 1.1 3.1 6.7 11.9 23.7	11.8 10.7 9.5 8.2 7.6 6.4 4.4 2.6 1.1 3.1 6.7 11.9 23.7	*****	*****	*****	*****	*****	*****
I= 9	VRES=	203. 196. 194. 194. 199. 196. 200. 215. 275. 340. 334. 326. 322. 15.1	203. 196. 194. 194. 199. 196. 200. 215. 275. 340. 334. 326. 322. 15.1	*****	*****	*****	*****	*****	*****
I= 10	VRES=	9.4 9.4 8.5 7.3 7.0 6.2 5.0 3.5 2.5 3.6 316. 315. 299. 264. 7.6	9.4 9.4 8.5 7.3 7.0 6.2 5.0 3.5 2.5 3.6 316. 315. 299. 264. 7.6	*****	*****	*****	*****	*****	*****
I= 11	VRES=	208. 202. 199. 195. 202. 205. 218. 234. 272. 316. 315. 299. 264. 7.6	208. 202. 199. 195. 202. 205. 218. 234. 272. 316. 315. 299. 264. 7.6	*****	*****	*****	*****	*****	*****
I= 12	VRES=	6.7 6.9 6.6 4.9 4.7 5.1 5.4 4.3 3.6 3.9 303. 293. 273. 5.4	6.7 6.9 6.6 4.9 4.7 5.1 5.4 4.3 3.6 3.9 303. 293. 273. 5.4	*****	*****	*****	*****	*****	*****
I= 13	VRES=	215. 212. 218. 213. 215. 216. 230. 245. 269. 295. 303. 293. 273. 5.4	215. 212. 218. 213. 215. 216. 230. 245. 269. 295. 303. 293. 273. 5.4	*****	*****	*****	*****	*****	*****
I= 14	VRES=	5.2 5.4 6.3 4.8 3.1 3.0 4.3 4.9 4.4 4.2 4.7 5.3 5.4	5.2 5.4 6.3 4.8 3.1 3.0 4.3 4.9 4.4 4.2 4.7 5.3 5.4	*****	*****	*****	*****	*****	*****
I= 15	VRES=	221. 219. 233. 239. 243. 257. 252. 257. 268. 285. 294. 292. 286. 4.7	221. 219. 233. 239. 243. 257. 252. 257. 268. 285. 294. 292. 286. 4.7	*****	*****	*****	*****	*****	*****
I= 16	VRES=	4.0 4.2 5.7 5.5 3.0 2.2 3.4 4.6 4.5 4.2 4.3 4.5 4.4	4.0 4.2 5.7 5.5 3.0 2.2 3.4 4.6 4.5 4.2 4.3 4.5 4.4	*****	*****	*****	*****	*****	*****
I= 17	VRES=	219. 221. 235. 241. 240. 269. 280. 273. 273. 283. 291. 295. 296. 4.4	219. 221. 235. 241. 240. 269. 280. 273. 273. 283. 291. 295. 296. 4.4	*****	*****	*****	*****	*****	*****
I= 18	VRES=	3.3 3.2 3.9 4.7 2.7 1.8 2.7 1.9 4.4 4.2 4.0 4.1 4.4	3.3 3.2 3.9 4.7 2.7 1.8 2.7 1.9 4.4 4.2 4.0 4.1 4.4	*****	*****	*****	*****	*****	*****
I= 19	VRES=	208. 218. 233. 246. 245. 276. 284. 276. 275. 281. 291. 299. 301. 3.9	208. 218. 233. 246. 245. 276. 284. 276. 275. 281. 291. 299. 301. 3.9	*****	*****	*****	*****	*****	*****
I= 20	VRES=	2.5 2.2 2.7 4.0 2.4 1.6 2.4 3.5 4.4 4.2 3.8 3.7 3.9	2.5 2.2 2.7 4.0 2.4 1.6 2.4 3.5 4.4 4.2 3.8 3.7 3.9	*****	*****	*****	*****	*****	*****
I= 21	VRES=	193. 200. 211. 250. 254. 274. 289. 277. 277. 286. 296. 300. 302. 2.8	193. 200. 211. 250. 254. 274. 289. 277. 277. 286. 296. 300. 302. 2.8	*****	*****	*****	*****	*****	*****
I= 22	VRES=	***** 1.2 2.0 ***** 2.5. 2.1. 3.04. 306. 298. 298. 305. 2.3	***** 1.2 2.0 ***** 2.5. 2.1. 3.04. 306. 298. 298. 305. 2.3	*****	*****	*****	*****	*****	*****
I= 23	VRES=	2.6 7.0 4.5 ***** 313. 321. 315. 310. 309. 314. 1.2	2.6 7.0 4.5 ***** 313. 321. 315. 310. 309. 314. 1.2	*****	*****	*****	*****	*****	*****
I= 24	VRES=	5.2 2.5 ***** 1.3 1.4 1.2 1.2	5.2 2.5 ***** 1.3 1.4 1.2 1.2	*****	*****	*****	*****	*****	*****
I= 25	VRES=	315. 308. ***** 326. 337. 333. 330. 330.	315. 308. ***** 326. 337. 333. 330. 330.	*****	*****	*****	*****	*****	*****

W VELOCITIES, CM/SEC, K= 1

1	4	*****	-.0039	-.0038	-.0038	*****	-.0037	-.0037	*****
2	4	-.0044	-.0043	-.0042	-.0041	-.0040	-.0040	-.0039	-.0039
3	4	-.0045	-.0045	-.0043	-.0042	-.0041	-.0040	-.0040	-.0040
4	4	-.0044	-.0044	-.0043	-.0043	-.0041	-.0041	-.0040	-.0040
5	4	-.0044	-.0043	-.0043	-.0041	-.0042	-.0041	-.0040	-.0040
6	4	-.0043	-.0043	-.0042	-.0043	-.0041	-.0041	-.0040	-.0041
7	4	-.0043	-.0043	-.0043	-.0041	-.0042	-.0041	-.0041	-.0040
8	4	-.0042	-.0043	-.0043	-.0042	-.0042	-.0041	-.0040	-.0040
9	4	-.0042	-.0042	-.0043	-.0043	-.0041	-.0041	-.0042	-.0040
10	4	-.0042	-.0042	-.0042	-.0042	-.0041	-.0041	-.0041	-.0041
11	4	-.0041	-.0041	-.0041	-.0042	-.0041	-.0041	-.0041	-.0041
12	4	*****	-.0042	-.0041	-.0041	-.0041	-.0041	-.0041	-.0041
13	4	*****	-.0044	-.0043	-.0041	-.0041	-.0042	-.0042	-.0041
14	4	-.0045	-.0049	-.0049	*****	-.0042	-.0042	-.0041	-.0041
15	4	-.0045	-.0045	*****	*****	-.0041	-.0041	-.0041	-.0041

W VELOCITIES, CM/SEC, K= 2

1	4	*****	-.0026	-.0025	-.0024	*****	-.0020	-.0020	*****
2	4	-.0010	-.0016	-.0034	-.0053	-.0044	-.0042	-.0034	-.0011
3	4	-.0031	-.0015	-.0020	-.0042	-.0049	-.0016	-.0039	-.0030
4	4	-.0075	-.0017	-.0007	-.0018	-.0040	-.0011	-.0028	-.0030
5	4	-.0070	-.0033	-.0016	-.0027	-.0036	-.0022	-.0026	-.0016
6	4	-.0046	-.0042	-.0029	-.0031	-.0038	-.0036	-.0030	-.0021
7	4	-.0050	-.0047	-.0050	-.0044	-.0043	-.0039	-.0034	-.0025
8	4	-.0034	-.0041	-.0053	-.0044	-.0036	-.0035	-.0032	-.0021
9	4	-.0020	-.0032	-.0037	-.0028	-.0019	-.0023	-.0034	-.0035
10	4	-.0021	-.0026	-.0024	-.0025	-.0020	-.0023	-.0034	-.0030
11	4	-.0022	-.0021	-.0019	-.0029	-.0027	-.0026	-.0036	-.0044
12	4	*****	-.0028	-.0023	-.0022	-.0028	-.0028	-.0038	-.0044
13	4	*****	-.0025	-.0026	*****	-.0023	-.0020	-.0042	-.0043
14	4	-.0036	-.0037	-.0079	*****	-.0056	-.0033	-.0032	-.0028
15	4	-.0005	-.0025	*****	*****	-.0024	-.0023	-.0020	-.0019

W VELOCITIES, CM/SEC, K= 3

1	4	*****	-.0014	-.0013	-.0012	*****	-.0005	-.0006	*****
2	4	-.0014	-.0035	-.0025	-.0056	-.0043	-.0039	-.0026	-.0021
3	4	-.0024	-.0006	-.0003	-.0036	-.0047	-.0028	-.0034	-.0023
4	4	-.0000	-.0004	-.0004	-.0004	-.0036	-.0006	-.0016	-.0020
5	4	-.0081	-.0021	-.0005	-.0014	-.0029	-.0006	-.0013	-.0010
6	4	-.0045	-.0037	-.0017	-.0019	-.0031	-.0029	-.0014	-.0005
7	4	-.0050	-.0046	-.0051	-.0042	-.0040	-.0034	-.0026	-.0011
8	4	-.0025	-.0035	-.0055	-.0040	-.0028	-.0028	-.0029	-.0024
9	4	-.0002	-.0021	-.0029	-.0014	-.0001	-.0008	-.0026	-.0027
10	4	-.0004	-.0011	-.0009	-.0011	-.0003	-.0008	-.0026	-.0033
11	4	-.0007	-.0004	-.0000	-.0018	-.0014	-.0013	-.0028	-.0043
12	4	*****	-.0016	-.0008	-.0008	-.0016	-.0033	-.0042	-.0038
13	4	*****	-.0013	*****	*****	-.0008	-.0003	-.0038	-.0040
14	4	-.0025	-.0024	-.0086	*****	-.0015	-.0024	-.0022	-.0017
15	4	-.0036	-.0009	*****	*****	-.0011	-.0009	-.0005	-.0003

W VELOCITIES, CM/SEC, K= 4

1	4	*****	-.0006	-.0004	-.0004	*****	-.0002	-.0002	*****
2	4	-.0017	-.0011	-.0015	-.0041	-.0031	-.0027	-.0016	-.0011
3	4	-.0018	-.0012	-.0004	-.0023	-.0032	-.0017	-.0023	-.0022
4	4	-.0071	-.0011	-.0043	-.0001	-.0025	-.0002	-.0007	-.0010
5	4	-.0064	-.0010	-.0013	-.0005	-.0017	-.0001	-.0005	-.0002
6	4	-.0032	-.0025	-.0009	-.0009	-.0019	-.0017	-.0008	-.0003
7	4	-.0036	-.0032	-.0037	-.0029	-.0028	-.0023	-.0015	-.0002
8	4	-.0014	-.0023	-.0049	-.0027	-.0017	-.0017	-.0019	-.0014
9	4	-.0005	-.0011	-.0018	-.0005	-.0007	-.0001	-.0015	-.0017
10	4	-.0004	-.0002	-.0001	-.0002	-.0005	-.0000	-.0015	-.0022
11	4	-.0001	-.0003	-.0007	-.0008	-.0005	-.0004	-.0018	-.0030
12	4	*****	-.0006	-.0003	-.0000	-.0007	-.0021	-.0030	-.0026
13	4	*****	-.0000	*****	*****	-.0000	-.0025	-.0028	-.0014
14	4	-.0013	-.0011	-.0048	*****	-.0010	-.0014	-.0012	-.0007
15	4	-.0033	-.0000	*****	*****	-.0002	-.0001	-.0002	-.0004

SURFACE ELEVATIONS, ETA, CM

I=	1	ETA=	12.1	12.6	13.2	13.6	14.2	14.5	14.6	14.8	15.1	15.4	15.3	13.5	12.6
I=	2	ETA=	12.1	12.7	13.2	13.6	13.9	14.3	14.5	14.6	14.8	14.8	14.3	13.5	12.6
I=	3	ETA=	12.1	12.7	13.2	13.6	13.9	14.2	14.4	14.5	14.6	14.6	14.1	13.5	12.8
I=	4	ETA=	12.2	12.7	13.2	13.6	13.9	14.2	14.4	14.5	14.6	14.5	14.2	13.8	13.3
I=	5	ETA=	12.3	12.8	13.2	13.6	13.9	14.2	14.4	14.6	14.7	14.6	14.4	14.2	14.1
I=	6	ETA=	12.5	12.9	13.3	13.6	14.0	14.3	14.6	14.7	14.8	14.8	14.6	14.5	14.4
I=	7	ETA=	12.8	13.2	13.7	14.0	14.4	14.6	14.8	14.9	14.9	14.9	14.9	14.8	14.7
I=	8	ETA=	13.1	13.5	14.3	14.6	15.0	15.2	15.1	15.1	15.1	15.1	15.0	15.0	14.9
I=	9	ETA=	13.5	14.0	14.9	15.1	15.3	15.4	15.3	15.3	15.3	15.3	15.2	15.1	15.0
I=	10	ETA=	13.7	14.4	15.3	15.5	15.6	15.7	15.6	15.5	15.5	15.4	15.4	15.3	15.2
I=	11	ETA=	14.4	15.3	16.0	16.6	16.9	17.0	16.8	16.5	16.5	16.2	15.9	15.7	15.5
I=	12	ETA=	15.3	16.0	16.6	17.0	17.1	17.0	16.8	16.5	16.5	16.2	15.9	15.7	15.5
I=	13	ETA=	16.0	16.6	17.0	17.1	17.0	16.8	16.5	16.5	16.2	15.9	15.7	15.5	15.3
I=	14	ETA=	16.6	17.0	17.1	17.0	16.8	16.5	16.5	16.2	15.9	15.7	15.5	15.3	15.1
I=	15	ETA=	17.0	17.1	17.0	16.8	16.5	16.5	16.2	15.9	15.7	15.5	15.3	15.1	14.9

TEMPERATURES, DEG C. K= 1															
I=	1	TEMP=	27.40	27.46	27.37	27.24	27.19	27.22	27.34	27.32	27.22	27.08	27.13	27.15	27.19
I=	2	TEMP=	26.99	27.12	27.20	27.23	27.30	27.19	27.22	27.23	27.19	27.09	27.11	27.06	27.15
I=	3	TEMP=	26.94	26.85	26.89	26.94	27.09	27.05	27.08	27.12	27.16	27.15	27.09	27.08	27.07
I=	4	TEMP=	26.93	26.93	26.90	26.90	26.93	26.94	26.98	27.00	27.05	27.09	27.07	27.03	26.99
I=	5	TEMP=	26.45	26.86	26.86	26.85	26.85	26.84	26.93	26.98	27.02	27.04	27.02	26.97	26.93
I=	6	TEMP=	26.86	26.84	26.85	26.82	26.75	26.78	26.86	26.95	26.97	26.99	26.99	26.97	26.96
I=	7	TEMP=	26.87	26.88	26.91	27.00	26.97	26.92	26.89	26.98	27.01	27.02	27.00	26.99	26.97
I=	8	TEMP=	26.90	26.89	26.89	27.04	27.14	27.18	27.19	27.20	27.18	27.14	27.07	27.01	26.97
I=	9	TEMP=	26.89	26.86	26.86	27.03	27.21	27.42	27.52	27.62	27.57	27.41	27.23	27.07	26.98
I=	10	TEMP=	26.82	26.77	26.76	27.07	27.48	27.83	28.05	28.23	28.15	27.81	27.45	27.14	27.00
I=	11	TEMP=	27.02	27.11	27.16	27.64	28.07	28.41	28.66	28.67	28.67	28.10	27.57	27.17	26.99
I=	12	TEMP=	27.26	27.16	26.11	27.11	27.11	28.26	29.31	29.04	28.84	27.99	27.37	27.04	26.93
I=	13	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93
I=	14	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93
I=	15	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93

TEMPERATURES, DEG C. K= 2															
I=	1	TEMP=	27.40	27.47	27.37	27.24	27.19	27.22	27.34	27.32	27.22	27.08	27.13	27.15	27.19
I=	2	TEMP=	26.99	27.12	27.20	27.23	27.30	27.19	27.22	27.23	27.19	27.09	27.11	27.06	27.15
I=	3	TEMP=	26.94	26.85	26.89	26.94	27.09	27.05	27.08	27.12	27.16	27.15	27.09	27.08	27.07
I=	4	TEMP=	26.93	26.93	26.90	26.90	26.93	26.94	26.97	27.00	27.05	27.09	27.07	27.03	26.99
I=	5	TEMP=	26.95	26.86	26.86	26.85	26.85	26.88	26.93	26.98	27.02	27.04	27.01	26.97	26.93
I=	6	TEMP=	26.86	26.84	26.84	26.82	26.74	26.78	26.86	26.95	26.97	26.99	26.99	26.97	26.96
I=	7	TEMP=	26.89	26.88	26.91	27.00	26.97	26.92	26.89	26.98	27.01	27.02	27.00	26.99	26.97
I=	8	TEMP=	26.90	26.89	26.89	27.04	27.14	27.18	27.19	27.19	27.18	27.13	27.07	27.01	26.97
I=	9	TEMP=	26.89	26.86	26.86	27.03	27.21	27.42	27.52	27.62	27.57	27.41	27.23	27.07	26.98
I=	10	TEMP=	26.82	26.77	26.76	27.07	27.48	27.83	28.05	28.23	28.15	27.81	27.45	27.14	27.00
I=	11	TEMP=	27.02	27.11	27.16	27.64	28.07	28.41	28.66	28.67	28.67	28.10	27.57	27.17	26.99
I=	12	TEMP=	27.26	27.16	26.11	27.11	27.11	28.26	29.31	29.04	28.84	27.99	27.37	27.04	26.93
I=	13	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93
I=	14	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93
I=	15	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93

TEMPERATURES, DEG C. K= 3															
I=	1	TEMP=	27.40	27.47	27.37	27.24	27.19	27.22	27.34	27.32	27.22	27.08	27.13	27.15	27.19
I=	2	TEMP=	26.99	27.12	27.20	27.23	27.30	27.19	27.22	27.23	27.19	27.09	27.11	27.06	27.15
I=	3	TEMP=	26.94	26.85	26.89	26.94	27.09	27.05	27.08	27.12	27.16	27.15	27.09	27.08	27.07
I=	4	TEMP=	26.93	26.93	26.90	26.90	26.93	26.94	26.97	27.00	27.05	27.09	27.07	27.03	26.99
I=	5	TEMP=	26.95	26.86	26.86	26.85	26.85	26.88	26.93	26.98	27.02	27.04	27.01	26.97	26.93
I=	6	TEMP=	26.86	26.84	26.84	26.82	26.74	26.78	26.86	26.95	26.97	26.99	26.99	26.97	26.96
I=	7	TEMP=	26.89	26.88	26.91	27.00	26.97	26.92	26.89	26.98	27.01	27.02	27.00	26.99	26.97
I=	8	TEMP=	26.90	26.89	26.89	27.04	27.14	27.18	27.19	27.19	27.18	27.13	27.07	27.01	26.98
I=	9	TEMP=	26.89	26.86	26.86	27.03	27.21	27.42	27.52	27.62	27.57	27.41	27.23	27.07	26.98
I=	10	TEMP=	26.82	26.77	26.76	27.07	27.48	27.83	28.05	28.23	28.15	27.81	27.45	27.14	27.00
I=	11	TEMP=	27.02	27.11	27.16	27.64	28.07	28.41	28.66	28.67	28.67	28.10	27.57	27.17	26.99
I=	12	TEMP=	27.26	27.16	26.11	27.11	27.11	28.26	29.31	29.04	28.84	27.99	27.37	27.04	26.93
I=	13	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93
I=	14	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93
I=	15	TEMP=	27.03	27.12	27.12	27.12	27.12	28.26	29.32	29.03	28.84	27.99	27.37	27.04	26.93


TEMPERATURES, DEG C. K= 4														
I= 1	TEMP=	27.45	27.50	27.39	27.26	27.19	27.23	27.35	27.33	27.22	27.09	27.13	27.16	27.20
I= 2	TEMP=	26.99	27.13	27.22	27.33	27.34	27.21	27.24	27.25	27.20	27.11	27.07	27.10	27.09
I= 3	TEMP=	26.96	26.87	26.89	26.93	27.11	27.07	27.10	27.14	27.18	27.16	27.10	27.10	27.09
I= 4	TEMP=	26.95	26.95	26.92	26.91	26.95	26.95	26.99	27.01	27.07	27.11	27.08	27.04	27.03
I= 5	TEMP=	26.86	26.87	26.87	26.86	26.87	26.89	26.95	27.00	27.04	27.06	27.03	26.98	26.95
I= 6	TEMP=	26.87	26.84	26.85	26.83	26.75	26.78	26.86	26.96	26.98	27.01	27.00	26.98	26.97
I= 7	TEMP=	26.99	26.89	26.91	27.01	26.97	26.93	26.88	26.98	27.02	27.03	27.01	27.00	26.98
I= 8	TEMP=	26.91	26.89	26.90	27.04	27.14	27.19	27.19	27.18	27.17	27.14	27.08	27.02	26.98
I= 9	TEMP=	26.90	26.86	26.86	27.04	27.28	27.43	27.52	27.50	27.55	27.41	27.24	27.08	26.99
I= 10	TEMP=	26.42	26.78	26.77	27.07	27.48	27.84	28.05	28.22	28.13	27.80	27.45	27.15	27.01
I= 11	TEMP=	27.17	27.64	28.07	28.41	28.66	28.66	28.09	27.57	27.18	26.99	27.55	27.17	26.99
I= 12	TEMP=	27.03	27.11	28.27	29.32	29.03	28.25	27.55	27.38	27.05	26.94	27.56	27.30	26.79
I= 13	TEMP=	27.27	27.19	29.25	29.50	28.84	27.99	27.38	27.05	26.94	26.79	27.56	27.30	26.79
I= 14	TEMP=	27.03	27.13	28.29	28.50	28.84	27.99	27.38	27.05	26.94	26.79	27.56	27.30	26.79
I= 15	TEMP=	27.03	27.13	28.29	28.50	28.84	27.99	27.38	27.05	26.94	26.79	27.56	27.30	26.79

TEMPERATURES, DEG C. K= 5														
I= 1	TEMP=	27.46	27.51	27.40	27.26	27.20	27.23	27.35	27.33	27.22	27.09	27.12	27.16	27.21
I= 2	TEMP=	26.98	27.13	27.22	27.35	27.36	27.22	27.25	27.25	27.20	27.11	27.07	27.10	27.10
I= 3	TEMP=	26.97	26.88	26.89	26.93	27.12	27.07	27.10	27.15	27.19	27.16	27.10	27.10	27.10
I= 4	TEMP=	26.96	26.96	26.92	26.91	26.96	26.96	26.99	27.02	27.08	27.11	27.08	27.04	27.05
I= 5	TEMP=	26.86	26.88	26.88	26.86	26.87	26.90	26.95	27.00	27.05	27.06	27.03	26.99	26.96
I= 6	TEMP=	26.87	26.85	26.85	26.83	26.75	26.78	26.86	26.96	26.99	27.01	27.00	26.98	26.97
I= 7	TEMP=	26.90	26.89	26.92	27.01	26.97	26.93	26.88	26.98	27.02	27.04	27.02	27.00	26.99
I= 8	TEMP=	26.91	26.90	26.90	27.05	27.14	27.19	27.19	27.18	27.17	27.14	27.08	27.02	26.99
I= 9	TEMP=	26.90	26.86	26.86	27.04	27.28	27.43	27.52	27.60	27.55	27.41	27.24	27.08	27.00
I= 10	TEMP=	26.92	26.78	26.77	27.04	27.43	27.84	28.05	28.22	28.13	27.80	27.45	27.15	27.01
I= 11	TEMP=	27.17	27.65	28.07	28.41	28.66	28.66	28.09	27.57	27.18	27.00	27.55	27.17	27.00
I= 12	TEMP=	27.03	27.11	28.27	29.32	29.03	28.25	27.55	27.38	27.05	26.94	27.56	27.30	26.79
I= 13	TEMP=	27.27	27.20	28.29	28.50	28.84	27.99	27.38	27.05	26.94	26.79	27.56	27.30	26.79
I= 14	TEMP=	27.03	27.13	28.29	28.50	28.84	27.99	27.38	27.05	26.94	26.79	27.56	27.30	26.79
I= 15	TEMP=	27.03	27.13	28.29	28.50	28.84	27.99	27.38	27.05	26.94	26.79	27.56	27.30	26.79

WATER DEPTHS, CM														
I= 1	199.0	199.3	199.6	199.5	199.9	199.8	199.2	199.9	199.8	199.8	199.8	199.8	199.8	199.8
I= 2	251.4	221.5	199.2	161.5	124.0	139.5	154.9	139.8	117.2	109.9	109.8	109.8	109.8	109.8
I= 3	158.1	135.7	128.7	121.4	108.4	105.9	101.1	101.1	101.2	101.2	101.2	101.2	101.2	101.2
I= 4	120.0	112.9	108.7	104.8	101.4	101.1	101.1	101.1	101.1	101.1	101.1	101.1	101.1	101.1
I= 5	135.4	113.0	105.8	102.1	101.0	101.0	101.0	101.0	101.0	101.0	101.0	101.0	101.0	101.0
I= 6	105.0	101.8	100.6	100.6	100.6	100.6	100.6	100.6	100.6	100.6	100.6	100.6	100.6	100.6
I= 7	244.2	244.6	245.0	230.1	222.4	246.0	292.0	322.6	315.0	292.2	276.8	284.3	307.1	307.1
I= 8	191.1	191.5	199.7	177.1	159.4	154.3	238.8	307.5	307.6	292.3	277.0	276.9	292.1	292.1
I= 9	163.4	153.9	160.7	177.7	140.0	140.2	208.7	284.9	307.7	292.5	277.2	277.1	292.3	292.3
I= 10	130.3	123.7	147.5	185.8	163.2	148.0	193.6	262.2	292.7	285.0	277.4	277.3	292.4	292.4
I= 11	109.2	101.3	132.6	178.6	163.5	131.1	149.2	216.7	270.0	277.6	269.9	269.8	269.7	269.7
I= 12	157.2	156.9	163.9	163.9	140.9	110.5	110.2	163.7	232.1	254.9	239.6	239.5	239.4	239.4
I= 13	157.2	156.9	163.9	163.9	140.9	110.5	110.2	163.7	232.1	254.9	239.6	239.5	239.4	239.4
I= 14	136.6	158.9	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6
I= 15	144.8	136.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6	172.6

SAMPLE PLOTTING


TIME(JUNE 20, 1978):	13.0
WIND SPEED(CM/SEC):	358.0
WIND DIRECTION(DEG/N):	110.
AIR TEMPERATURE(DEG-C):	29.4
DISCHARGE TEMP(DEG-C):	29.5
DISCH FLOWRATE(CUM/SEC):	62.7
LENGTH SCALE(1CM= X CM):	41339.
VELOCITY SCALE(CM/SEC):	52.49

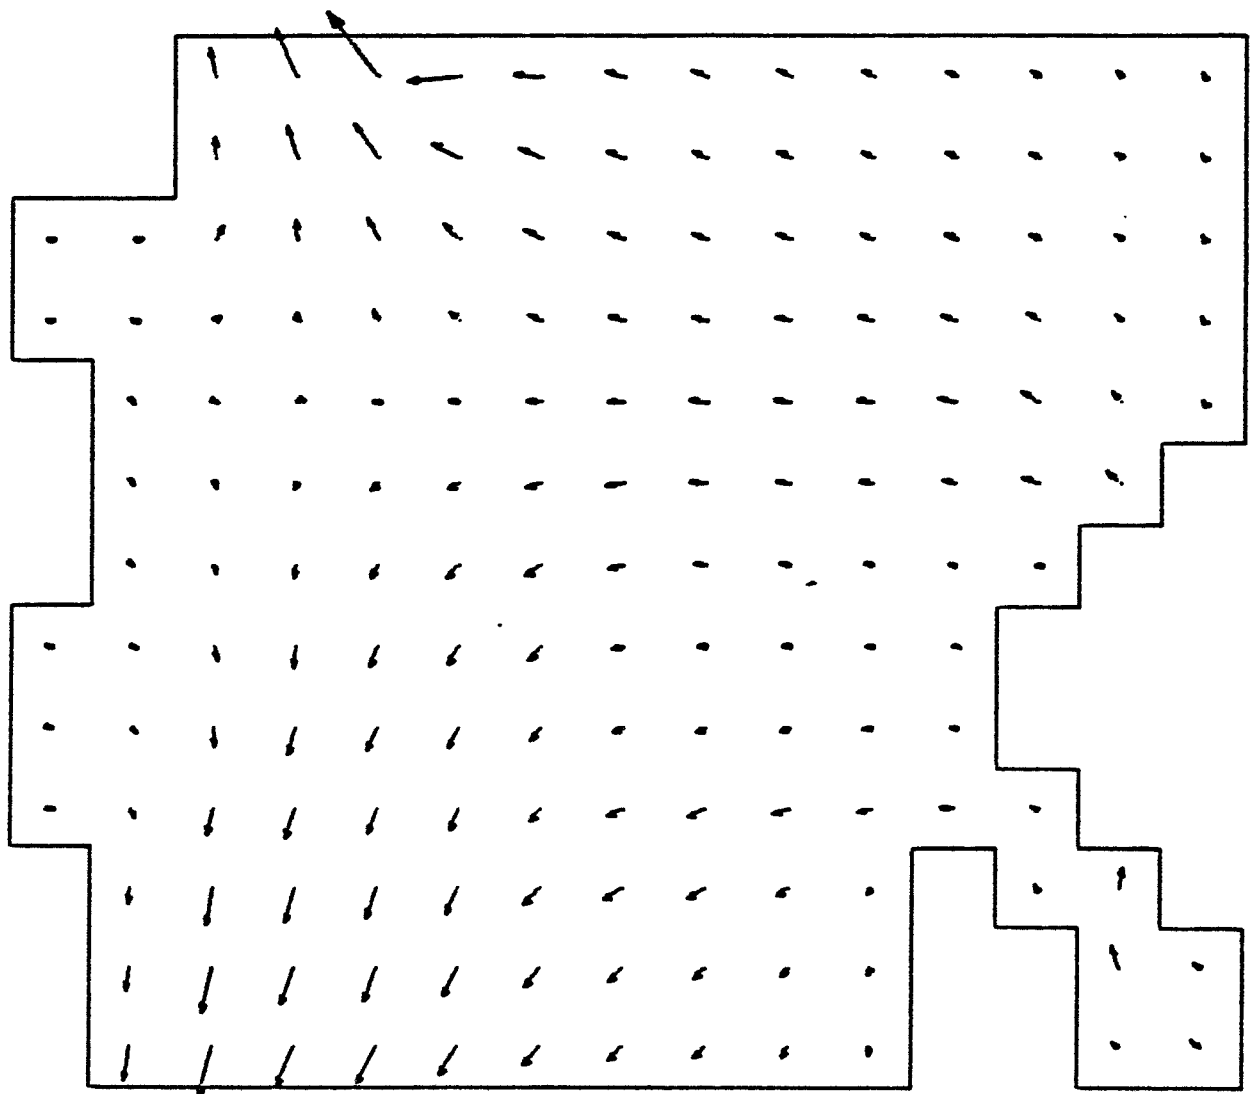

EBB TIDE

Figure 12. Surface velocity, Ancote Anchorage by modeling


TIME(JUNE 20, 1978):	13.0
WIND SPEED(CM/SEC):	358.0
WIND DIRECTION(DEG/N):	110.
AIR TEMPERATURE(DEG-C):	29.4
DISCHARGE TEMP(DEG-C):	29.5
DISCH FLOWRATE(CUM/SEC):	62.7
LENGTH SCALE(1CM= X CM):	41339.
VELOCITY SCALE(CM/SEC):	52.49

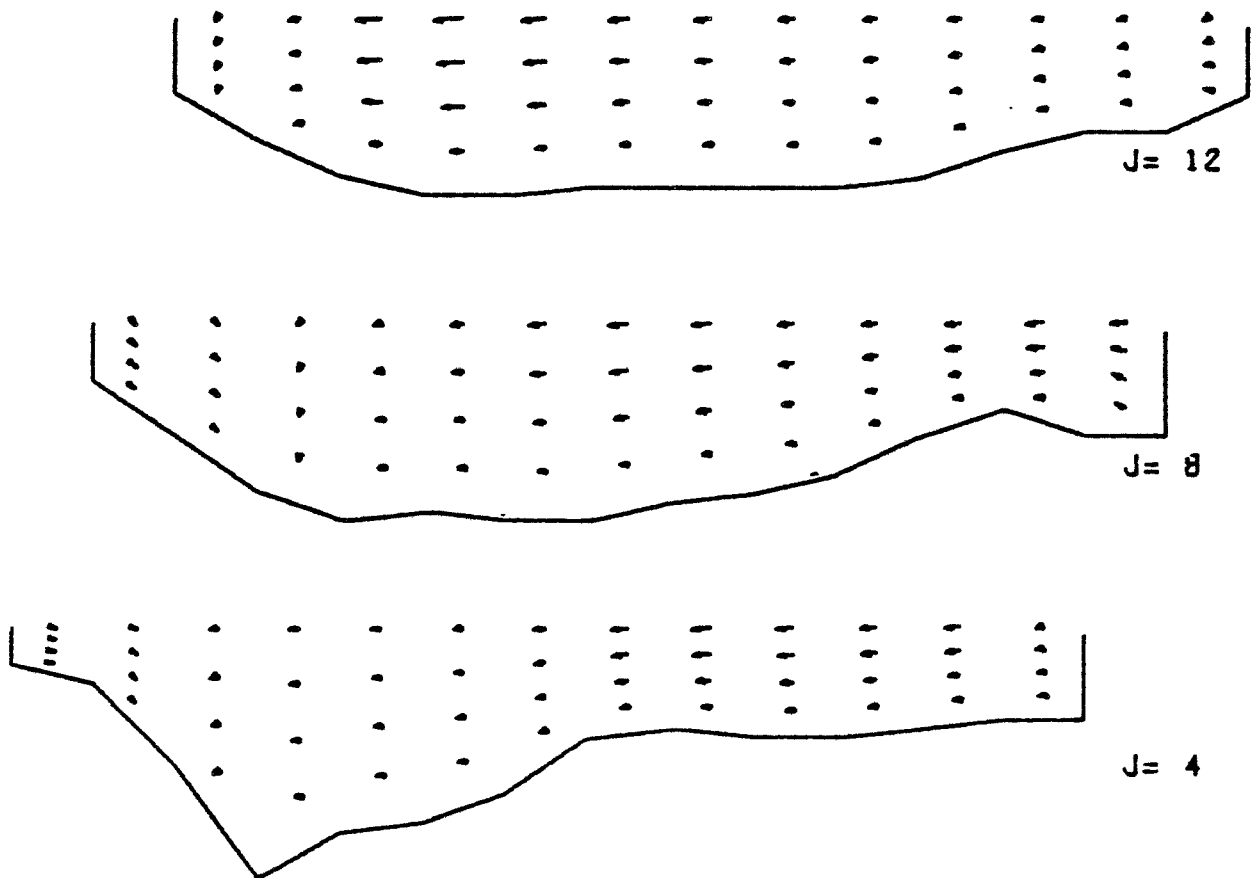

EBB TIDE

Figure 13. UW velocity, Anclole Anchorage by modeling

TIME(JUNE 20, 1978):	13.0
WIND SPEED(CM/SEC):	358.0
WIND DIRECTION(DEG/N):	110.
AIR TEMPERATURE(DEG-C):	29.4
DISCHARGE TEMP(DEG-C):	29.5
DISCH FLOWRATE(CUM/SEC):	62.7
LENGTH SCALE(1CM= X CM):	41339.
VELOCITY SCALE(CM/SEC):	52.49

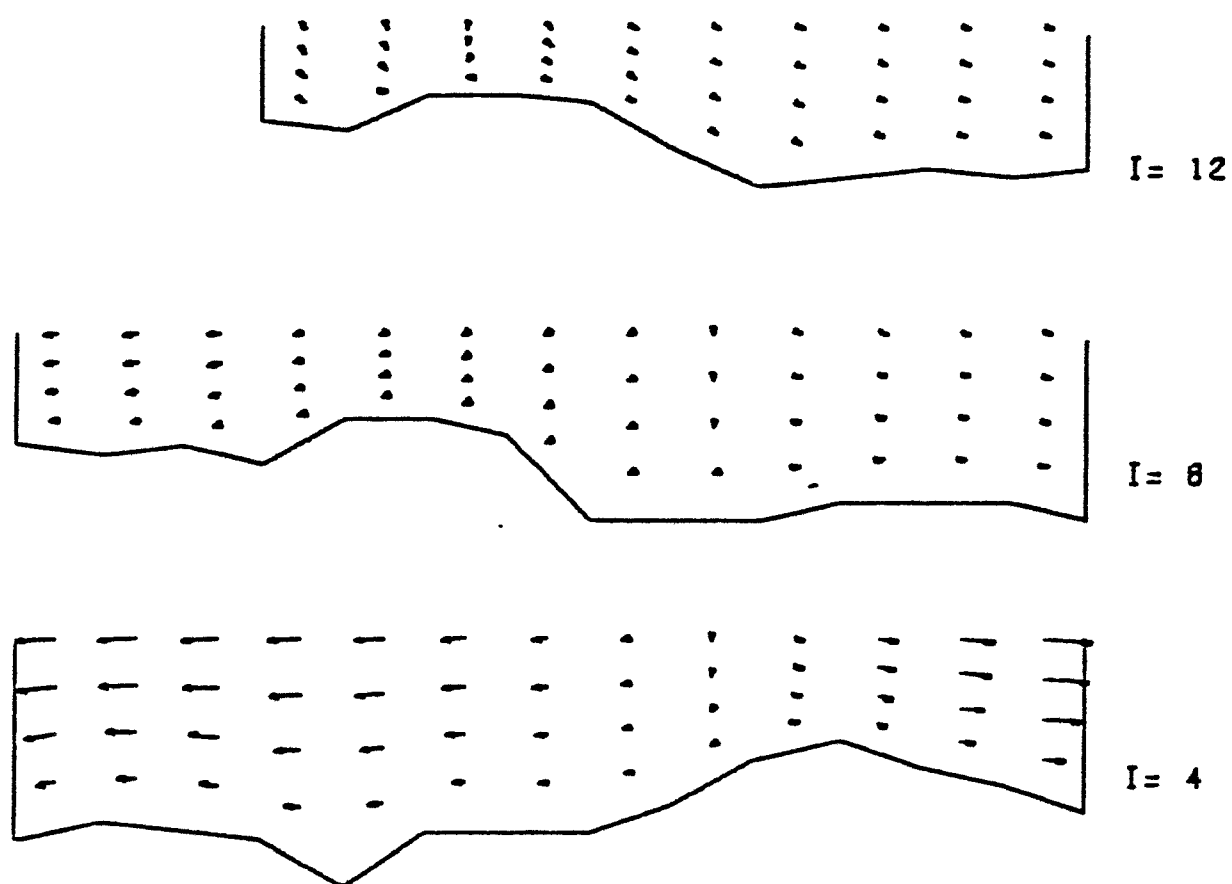

EBB TIDE

Figure 14. VW velocity, Anclothe Anchorage by modeling

TIME(JUNE 20, 1978):	13.0
WIND SPEED(CM/SEC):	358.0
WIND DIRECTION(DEG/N):	110.
AIR TEMPERATURE(DEG-C):	29.4
DISCHARGE TEMP(DEG-C):	29.5
DISCH FLOWRATE(CUM/SEC):	62.7
LENGTH SCALE(1CM= X CM):	41339.
VELOCITY SCALE(CM/SEC):	52.49

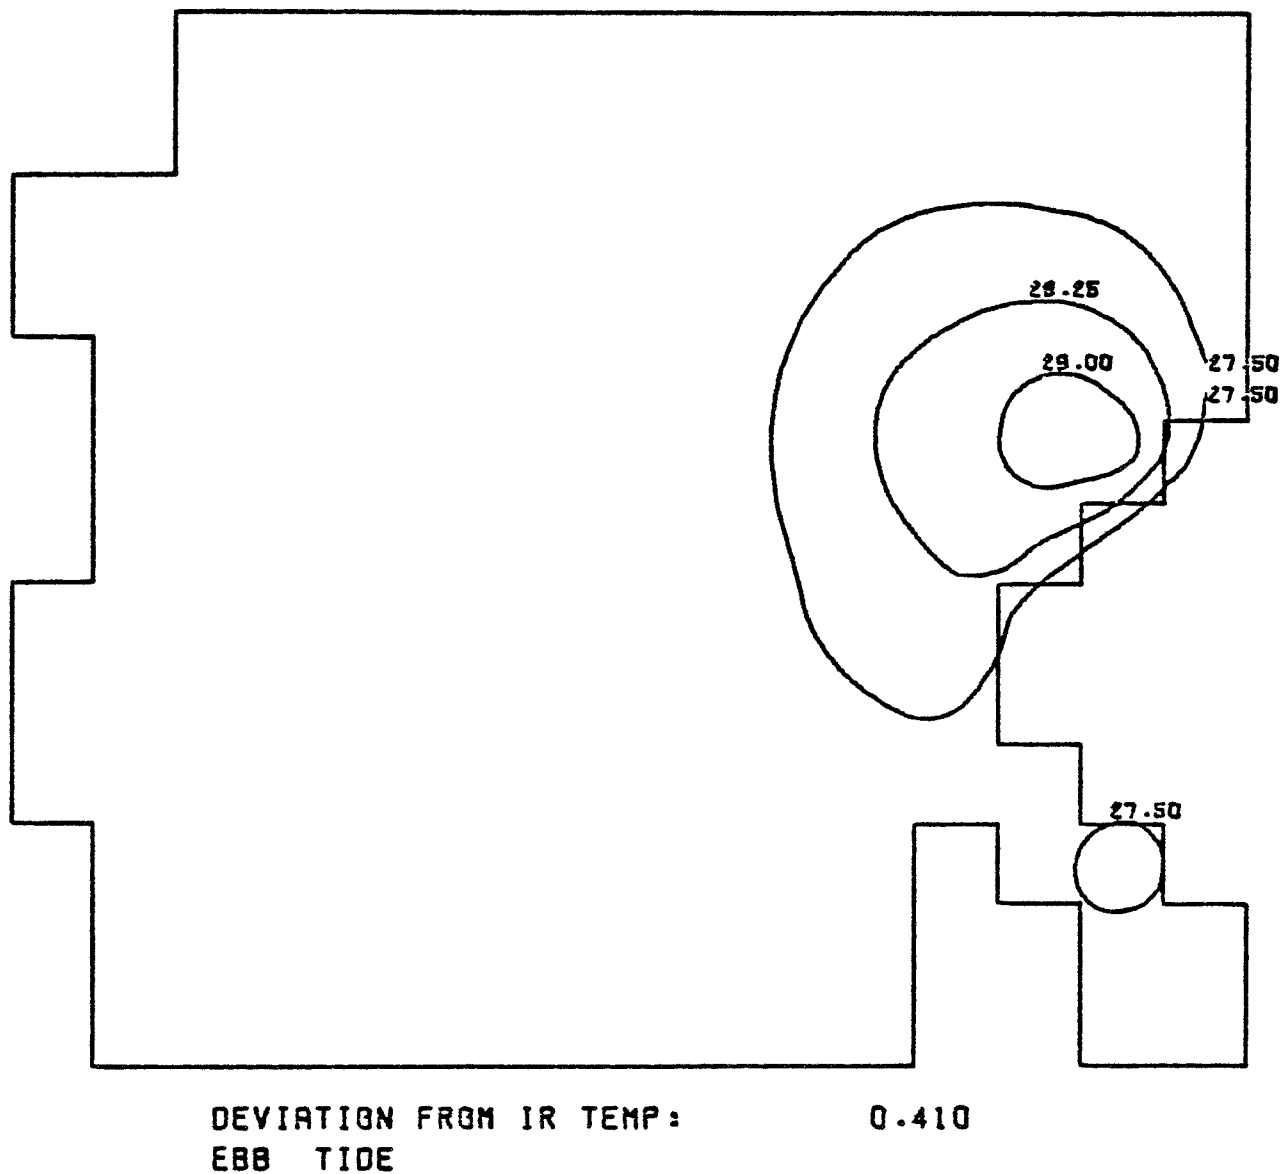


Figure 15. Surface temperature, Ancote Anchorage by modeling

APPENDIX B
FORTRAN SOURCE PROGRAM LISTING

LIST OF SUBROUTINES OF THE MODEL

Calculating Part

1. Main Program

ANCMN

2. Subroutines Called (in order)

BAYBOT: Reads grid matrices and bottom topography

BAYINI: Specifies initial conditions

READT: Reads data from tape for continuing run

IRREAD: Reads IR data as initial temperature distribution

EQTEMP: Calculates equilibrium temperature

BETA: Calculates surface elevation and vertical velocity in
xy σ coordinates

BNRTIA: Calculates inertia terms in momentum eq. at interior points

ABNR3: Calculates inertia terms in momentum eq. on the north and
south boundaries

BVELS: Calculates interior velocities

ASAF3: Calculates north and south boundary velocities

GIVENU: Specifies velocities at discharge point and river mouth

CONV: Calculates convective terms in energy eq.

TCOMPT: Calculates interior temperatures

GIVENT: Specifies temperature at discharge point

WCAL: Converts vertical velocity in $xy\sigma$ coordinates into xyz coordinates

ANCPR: Prints surface height, velocity and temperature at four locations at each time step

TPRLOK: Main printing program

STORET: Stores calculating results onto the tape

ZZI: Finds the current direction

3. Data Files

AMATN: Specifies marker matrices and elevations

APER1: Specifies outline of interest area

C2007: Climates data on June 20, 1978, start at 0700

HDATA: High tide data from IR

EDATA: Ebb tide data from IR

LDATA: Low tide data from IR

FDATA: Flood tide data from IR

Plotting Part

1. Main Program

PLOTMN

2. Subroutines Called (in order)

PLOTUV: Plots U, V velocities on different levels

PLOTUW: Plots U, W velocities at different j sections

PLOTVW: Plots V, W velocities at different i sections

ECHKON: Plots surface isotherms and surface height

ENDER: Subroutine in ECHKON, for labeling

CONLIN: Subroutine in ECHKON, for contouring

CAPT1: Writes captions on the plot

CAPT2: Writes captions on the plot

CAPTN3: Writes captions on the plot

CAPTN4: Writes captions on the plot

CAPTN5: Writes captions on the plot

CAPTN6: Writes captions on the plot

CAPTN7: Writes captions on the plot

CAPTN8: Writes captions on the plot

CAPTN9: Writes captions on the plot

FIT: Fits a parabola to three points

VECT: Establishes the components of a vector

OUTLIN: Draws the outline of interest area

* The plotting subroutines **PLOTS**, **PLOT**, **AROHD**, **NUMBER**, **SYMBOL** are existing in UNIVAC 1100, University of Miami, CALCOMP file.

SUBROUTINE LISTINGS

```

1 *FLOW(1).ANCMN FOR CREATED ON 14 DEC 79 AT 10:41:39
2 C*****
3 C MAIN PROGRAM OF 3-D, FREE-SURFACE, HYDROTHERMAL MODEL. FEATURES:
4 C CTCS & CUFORT-FRANKEL DIFFERENCING; DIFFUSION OF T CONSIDERED;
5 C NONLINEAR TERMS CAN BE INCLUDED; ASSOCIATED WITH PLOT PROGRAM-PLOTMN
6 C*****
7     PARAMETER IN=16,JN=14,KN=5,IM=15,JM=13
8     DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
9     CV2(IN,JN,KN),V3(IN,JN,KN),W(IN,JM,KN),OM(IN,JM,KN),FTAI(IN,JM),
10    CETA(IN,JM),ETA3(IN,JM),PX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
11    CHY(IN,JN),MAR(IN,JN),H(IN,JN),HB(IN,JM),ELEV(IN,JN),
12    CUE(IN,JM,KN),VB(IN,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IN,JM),
13    CHEY(IN,JM)
14    DIMENSION T1(IM,JM,KN),T2(IM,JM,KN),T3(IM,JM,KN),TC(IM,JM,KN)
15    DIMENSION AVR(JM),ANG(JM),DTZ(IM,JM),TE(IM,JM,KN)
16    DIMENSION ETX(IM,JM),TIDE3N(IM),TIDE2N(IM),TIDE1N(IM)
17    DIMENSION WAT(IM,JM),TIDE3S(IM),TIDE2S(IM),TIDE1S(IM)
18    WRITE(6,267)
19
20 C**1**CASE NO UNDERTAKING, FOR LABELLING PURPOSE
21     READ 2, NCASE
22 C
23 C**2**LN=1 FIRST RUN OF PRESENT CASE; >1 SUBSEQUENT RUN
24     READ 2, LN
25 C
26 C**3**KSTORE=0 NO STORE (TEST RUN), =1 STORE ON TAPE
27     READ 2, KSTORE
28 C
29 C**4**KVEL=0 NO V-CALCULATION, =1 DO V-CALCULATION
30     READ 2, KVEL
31 C
32 C**5**KTEMP=0 NO T-CALCULATION, =1 DO T-CALCULATION
33     READ 2, KTEMP
34 C
35 C**6**TO ASSURE MBLOCK CONTINUE, THUS AS COUNTER OF SIMULATION HOUR
36     READ 2, MBLOCK
37 C
38 C**7**THIS RUN WILL DO NCY*TPRT/3600 HOURS OF SIMULATION
39     READ 2, NCY
40 C
41 C**8**FOR HOURLY CYCLE TPRT=3600; OTHERWISE CLIMDATA DO LIKEWISE
42     READ 2, TPRT
43 C
44 C**9**DX,DY GRID SIZE IN CM; DS SPACING IN SIGMA DIRECTION(.25)
45     READ 2, DX,DY,DS
46 C
47 C**10**TIMESTEP,MWL-TEMPOPAL MWL,AMPLIT,N-S PHASE DIFFERENCE,
48 C**10**E-W PHASE DIFF PER DX, TIDEPERIOD, TIDE SHIFT IN HOUR
49     READ 2, DT,STAGE,AMPLIT,PHASE,OPHASE,PERIOD,TSHIFT
50 C
51 C**11**FCOF=CORIOLIS FACTOR,TEMPOPAL MWL-ANNUAL MWL(REF. FOR SOUNDING)
52     READ 2, FCOF,STAGE1
53 C
54 C**12**THE TA=ANGLE BETWEEN NORTH AND GRID Y-AXIS, POSITIVE CLOCKWISE
55     READ 2, THETA
56 C
57 C**13**ALREF=REFERENCE HORIZONTAL LENGTH IN CM, ROSSBY NO(ESTIMATED)
58     READ 2, ALREF,ROSSBY
59 C
60 C**14**RWEX=NO OF HOURS BETWEEN WEATHER OBSERVATIONS(IN GENERAL HOURLY)
61     READ 2, RWEX
62 C
63 C**15**TZERO=EST OF THE DAY WHEN THE SIMULATION RUN STARTS
64     READ 2, TZERO
65 C
66 C**16**DENSITY,VERT EDDY VISCOSITY,VERT & HORI EDDY DIFFUSIVITY
67     READ 2, RR,AV,BV,BH
68 C
69 C**17**INITIAL TEMP FOR THE WHOLE COMPUTATIONAL DOMAIN
70     READ 2, TINIT
71 C
72     WRITE(6,32) NCASE
73     WRITE(6,3) LN
74     IF(KSTORE.EQ.0) WRITE(6,130)
75     IF(KSTORE.GT.0) WRITE(6,131)
76     130 FORMAT(1X,'DATA NOT RECORDED ON TAPE')
77     131 FORMAT(1X,'DATA RECORDED ON TAPE')
78     WRITE(6,4) NCY
79     WRITE(6,5) DX,DY,DS,DT

```

```

79      WRITE(6,34) STAGE,AMPLIT,PHASE,OPHASE,PERIOD,TSHIFT
80      WRITE(6,7) FCOR
81      WRITE(6,101) THETA
82      WRITE(6,15) ALREF
83      15 FORMAT(1X,'ALREF=',F12.0,' CH')
84      WRITE(6,72) TZERO
85      WRITE(6,73) RR,AV,BV,BH
86      WRITE(6,806) RWEX
87      806 FORMAT(1X,'RWEX=',F10.2)
88      WRITE(6,364) TINIT
89      384 FORMAT(1X,'TINIT=',F10.2)
90      72 FORMAT(1X,'TZERO=',F10.2)
91      73 FORMAT(1X,'RR=',F10.2,' AV=',F10.2,' BV=',F10.2,' BH=',F10.2)
92      G=98.0
93      QQ=57.3
94      KZ=KN-1
95      IGO=1
96      THETA=THETA/GO
97      DUMX=2.*DX
98      DUMY=2.*DY
99      DUMS=2.*DS
100     IF(LN.GE.2) GO TO 1
101     EST=TZERO
102     TAUX=0.
103     TAUY=0.
104     TTOT=0.
105     NBLOK=0
106     CALL BAYBOT(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,ETA,ETA3,
107     CRX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
108     CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
109     CSTAGE1)
110
111 C**18**A DECK OF AMATN CARDS OR FILE AMATN IS NEEDED HERE,(ONLY IF LN=1)***
112 C
113     CALL BAYINT(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,ETA,ETA3,
114     CRX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
115     CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
116     CT1,T2,T3,TC,TB,TINIT)
117     DO 501 I=1,IM
118     TIDE1S(I)=0.
119     TIDE2S(I)=0.
120     TIDE3S(I)=0.
121     DO 502 I=1,IM
122     TIDE1N(I)=0.
123     TIDE2N(I)=0.
124     TIDE3N(I)=0.
125     GO TO 222
126 C * * * * *
127 1 CONTINUE
128     CALL READT(IN,JN,KN,IM,JM,U1,U2,V1,V2,W,ETA1,T1,T2,TB,
129     CETA,MX,MY,MAR,H,HB,UB,VB,HU,HV,MEX,MEY,NCASE,NBLOK,TTOT,DT,
130     CTIDE1N,TIDE2N,TIDE3N,TIDE1S,TIDE2S,TIDE3S,STAGE,EST,
131     CAMPLIT,PHASE,OPHASE,PERIOD)
132     IF(NBLOK.NE.MBLOK) GO TO 1000
133
134 C*****IF ANY OF FOLLOWING PARAMETERS NEED TO BE CHANGED, HERE IS CHANCE
135 C**19**CONT BLOCK NO, CONT TOTAL TIME,DT,EST,TIDE DATA.....FOLLOW
136     READ 2,NBLOK,TTOT,DT,EST,AMPLIT,PHASE,OPHASE,PERIOD,TSHIFT
137 C
138     WRITE(6,34) STAGE,AMPLIT,PHASE,OPHASE,PERIOD,TSHIFT,DT
139     WRITE(6,33) EST,NCASE,NBLOK
140
141 C*****IF IR-T IS USED AS INITIAL TEMP, THEN RELIEVE FOLLOWING CALL
142 C*****THEN A DECK OF IR-DATA CARDS IS NEEDED IN IPREAD SUBROUTINE
143     222 CALL IRREAD(IM,JM,KN,T1,T2)
144 C
145 C 222 CONTINUE
146 C*****
147 C*****MAIN LOOP IN HOURLY-STEP, WITH HOURLY CLIMATICAL DATA
148 C*****
149     DO 100 JCTR=1,NCY
150 C
151 C**20**A DECK OF NCY CLIMATICAL DATA CARDS FOLLOWS
152 C**20**EACH CARD RECORDS AIR TEMP,HUMIDITY,W,SPEED,WDIR,SRAD,SURFACE TEMP
153     READ 2,TAIR,HUMID,WIND,WDIR,SRAD,TSURF
154 C
155     WRITE(6,328) TAIR,HUMID,WIND,WDIR,SRAD,TSURF
156     328 FORMAT(1X,'TAIR,HUMID,WIND,WDIR,SRAD,TSURF',6F10.2)
157     CB=2.

```

```

159 EPSLON=(WOIR+180.)/57.3
160 WPR=WIND/100.
161 IF(WIND.LT.100.)CTEN=.00125*(WPR**.2)
162 IF((WIND.GE.100.)AND.(WIND.LT.1500.))CTEN=.0005*SQRT(WPR)
163 IF(WIND.GE.1500.)CTEN=.0026
164 TAU=CTEN*.00123*(WIND**.2)
165 TAU=TAU*SIN(EPSLON-THETA)
166 TAU=TAU*COS(EPSLON-THETA)
167 CALL EQTEMP(TAIR,HUMID,WIND,WOIR,SRAO,TSURF,TDEW,SK,TEQ)
168 QTX=TPRT
169 TZ=0.
170 C *****
171 7C2 CONTINUE
172 TTOT=TTOT+DT
173 T2=T2+DT
174 OHR=CT/3600.
175 EST=EST+OHR
176 C *****NORTH & SOUTH AMBIENT TEMP IS SINE OF 24 HR PERIOD, OR SPECIFIED
177 TABS=27.0+.2*SIN(.2618*(EST-12.0))
178 TABN=27.0+.2*SIN(.2618*(EST-12.0))
179 C
180 IF(KVEL.EQ.0) GO TO 61
181 C
182 CALL RETA(IN,JN,KN,IM,JM,U2,V2,OM,ETA1,ETA,ETA3,
183 CHB,HL,HV,MEX,MEY,CB,DX,DY,DS,DT)
184 IF(RCSSBY.LE.0.) GO TO 41
185 CALL BNRTIA(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,ETA,ETA3,
186 CRX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
187 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,CB)
188 CALL ABNR3(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,EST,
189 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
190 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,CB,
191 CTIDE1S,TIDE2S,TIDE3S,EST,STAGE,AV,TIDE1N,TIDE2N,TIDE3N,
192 CAMPL1T,PHASE,OPHASE,PERIOD,TSHIFT)
193 41 CONTINUE
194 CALL RVELS(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,ETA,ETA3,
195 CRX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,CB,
196 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
197 CAV)
198 CALL ASAF3(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
199 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,CB,
200 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
201 CTIDE1S,TIDE2S,TIDE3S,EST,STAGE,AV,TIDE1N,TIDE2N,TIDE3N,
202 CAMPL1T,PHASE,OPHASE,PERIOD,TSHIFT)
203 CALL GIVENU(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,T1,T2,T3,EST)
204 61 CONTINUE
205 C
206 IF(KTEMP.EQ.0) GO TO 63
207 C
208 CALL CONV(IN,JN,KN,IM,JM,DX,DY,DS,DT,DUMX,DUMY,DUMS,SK,RR,BV,
209 CU2,UF,V2,VB,T2,TC,HR,HU,HV,OM,ETA1,ETA,ETA3,CP,MEX,MEY,W,DTZ,
210 CTEQ)
211 CALL TCOMPT(IN,JN,KN,IM,JM,DX,DY,DS,DT,DUMX,DUMY,DUMS,
212 CHB,TC,T1,T2,T3,MEX,MEY,ETA,CP,TAIR,ETA1,ETA3,DTZ,BV,RH,TARN,TABS)
213 CALL GIVENT(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,T1,T2,T3,EST)
214 63 CONTINUE
215 C
216 DO 2C0 I=1,IM
217 DO 2C0 J=1,JM
218 ETX(I,J)=ETA3(I,J)
219 ETA1(I,J)=ETA(I,J)
220 2C0 ETAI(I,J)=ETA3(I,J)
221 DO 2C1 I=1,IM
222 DO 2C1 J=1,JM
223 DO 2C2 K=1,KZ
224 U1(I,J,K)=U2(I,J,K)
225 U2(I,J,K)=U3(I,J,K)
226 V1(I,J,K)=V2(I,J,K)
227 V2(I,J,K)=V3(I,J,K)
228 2C2 CONTINUE
229 2C1 CONTINUE
230 DO 2C3 I=1,IM
231 DO 2C3 J=1,JM
232 IF(MEX(I,J).EQ.0) GO TO 2C3
233 DO 2C4 K=1,KZ
234 T1(I,J,K)=T2(I,J,K)
235 T2(I,J,K)=T3(I,J,K)
236 UB(I,J,K)=(U2(I,J,K)+U2(I+1,J,K))/2.

```

```

237      VB(I,J,K)=(V2(I,J,K)+V2(I,J+1,K))/2.
238
239      204 CONTINUE
240      203 CONTINUE
C
241      DTX=TPRT-TZ
242      CALL WCAL(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,ETA,ETA3,
243      CRX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
244      CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT)
245      IF(IVE(3,1,1).GE.200.) IGO=0
246      IF(AES(TB(14,2,1)).GE.50.) IGO=0
247      CALL ANCPR(IM,JM,KN,UB,VB,ETX,TTOT,ROSSBY,THETA,TZ)
248
249      700 CONTINUE
250      IF(ICO.NE.3) GO TO 861
251      WRITE(6,703)
252      CALL TPRLOK(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,ETX,ETA3,
253      CRX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,TZ,
254      CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
255      CKVEL,KTEMP,AVR,ANG,THETA)
256      GO TO 1000
257
258      861 CONTINUE
259      IF(TZ.LT.TPRT) GO TO 702
C * * * * *
260      CONTINUE
261      WRITE(6,607) EST,TAIR,TEQ,TABN,TABS,TAUX,TAUY
262      607 FORMAT(1X,'EST,TAIR,TEQ,TAN,TAS,TAUX,TAUY=',5F6.2,2F12.6)
263      DO 343 I=1,IM
264      DO 343 J=1,JM
265      IF(MEX(I,J).EQ.0) GO TO 343
266      DO 344 K=1,KN
267      IF(K.EQ.1) TB(I,J,K)=T2(I,J,K)+((HB(I,J)+ETA(I,J))*DS/2.)*DTZ(I,J)
268      IF(K.EQ.KN) TB(I,J,K)=T2(I,J,K-1)
269      IF((K.NE.1).AND.(K.NE.KN)) TB(I,J,K)=(T2(I,J,K)+T2(I,J,K-1))/2.
270
271      344 CONTINUE
272      343 CONTINUE
273      IF(KSTORE.EQ.0) GO TO 132
274      CALL STORET(IN,JN,KN,IM,JM,U1,U2,V1,V2,W,ETA1,T1,T2,TB,
275      CETA,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,NCASE,NBLOK,TTOT,DT,
276      CTIDE,IN,TIDE2N,TIDE3N,TIDE1S,TIDE2S,TIDE3S,STAGE,EST,
277      CAMPL,IT,PHASE,DPHASE,PERIOD)
278
279      132 CONTINUE
280      CALL TPRLOK(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,ETX,ETA3,
281      CRX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,TB,
282      CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
283      CKVEL,KTEMP,AVR,ANG,THETA)
284      WRITE(6,812)
285      812 FORMAT(1X,'WATER DEPTHS,CM')
286      DO 813 I=1,IM
287      DO 813 J=1,JM
288      WAT(I,J)=1.0**9
289      IF(MEX(I,J).NE.0) WAT(I,J)=HB(I,J)+ETA(I,J)
290
291      813 CONTINUE
292      DO 814 I=1,IM
293      814 WRITE(6,815) I,(WAT(I,J),J=1,JM)
294      815 FORMAT(1X,'I=',14,14F7.1)
295      WRITE(6,267)
296
297      100 CONTINUE
C * * * * *
298      IF(KSTORE.EQ.0) GO TO 134
299      END FILE
300      WRITE(6,308)
301      308 FORMAT(1X,'DOUBLE EOF PLACED ON TAPE')
302
303      134 CONTINUE
304      2 FORMAT( )
305      3 FORMAT(1X,'LN=',I6)
306      4 FORMAT(1X,'NCY=',I10)
307      5 FORMAT(1X,'DX=',F10.0,' CM      DY=',F10.0,' CM      DS=',F10.2,
308      ' TIME STEP=',F10.2,' SEC')
309      6 FORMAT(1X,'FCOR=',E15.7,' PER SEC')
310      7 FORMAT(1X,'NCASE=',I4)
311      32 FORMAT(1X,'START AT EST=',F6.2,' CASE NO.=',I4,' NBLOK=',I4)
312      33 FORMAT(1X,'STAGE,AMP,N-S PHASE,E-W PHASE,PER,TSHIFT',6F7.3)
313      267 FORMAT(1X,'
314      703 FORMAT(1X,'COMPUTATIONS BEING STOPPED BECAUSE OF INSTABILITY')
315      1011 FORMAT(1X,'THETA',F10.1,' DEG')
316      1000 STOP
317      END

```

```

1 *FLOW(1).BAYBOT FOR CREATED ON 4 DEC 79 AT 09:44:24
2 C*****
3 C READS MARKER MATRICES & ELEV MATRIX, DETERMINES MATRICES HR, HU, HV.
4 C*****
5 SUBROUTINE BAYBOT(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
6 CETA,ETA3,RX,RY,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
7 CCUMX,CUMY,CUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
8 C STAGE)
9 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
10 CV2(IN,JN,KN),V3(IN,JN,KN),W(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
11 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
12 CMY(IN,JN),MAR(IN,JN),H(IN,JN),HB(IM,JM),ELEV(IN,JN),
13 CUB(IM,JM,KN),VB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
14 CMEY(IM,JM)
15 AB=1C.**9
16 WRITE(6,51)
17 DO 99 I=1,IN
18 READ 2, (MAR(I,J),J=1,JN)
19 WRITE(6,60) I,(MAR(I,J),J=1,JN)
20 99 CONTINUE
21 WRITE(6,71)
22 71 FORMAT(1X,'BOTTOM ELEVATIONS BELOW MSL, FT*')
23 DO 37 I=1,IN
24 READ 2, (ELEV(I,J),J=1,JN)
25 WRITE(6,30) I,(ELEV(I,J),J=1,JN)
26 37 CONTINUE
27 DO 100 I=1,IN
28 DO 100 J=1,JN
29 IF(MAR(I,J).EQ.0) GO TO 100
30 ELEV(I,J)=-ELEV(I,J)
31 ELEV(I,J)=30.46*ELEV(I,J)
32 H(I,J)=STAGE-ELEV(I,J)
33 H(I,J)=AMAX1(C.,H(I,J))
34 100 CONTINUE
35 WRITE(6,31)
36 DO 29 I=1,IN
37 WRITE(6,30) I,(H(I,J),J=1,JN)
38 29 CONTINUE
39 WRITE(6,52)
40 52 FORMAT(1X,'MEX MATRIX')
41 DO 53 I=1,IM
42 READ 2, (MEX(I,J),J=1,JM)
43 WRITE(6,60) I,(MEX(I,J),J=1,JM)
44 53 CONTINUE
45 WRITE(6,54)
46 54 FORMAT(1X,'MEY MATRIX')
47 DO 55 I=1,IM
48 READ 2, (MEY(I,J),J=1,JM)
49 WRITE(6,60) I,(MEY(I,J),J=1,JM)
50 55 CONTINUE
51 WRITE(6,1)
52 1 FORMAT(1X,'MX MATRIX')
53 DO 826 I=1,IN
54 READ 2, (MX(I,J),J=1,JM)
55 WRITE(6,60) I,(MX(I,J),J=1,JM)
56 826 CONTINUE
57 WRITE(6,3)
58 3 FORMAT(1X,'MY MATRIX')
59 DO 402 I=1,IM
60 READ 2, (MY(I,J),J=1,JN)
61 WRITE(6,60) I,(MY(I,J),J=1,JN)
62 402 CONTINUE
63 DO 101 I=1,IN
64 DO 101 J=1,JM
65 IF(MEX(I,J).EQ.0) GO TO 101
66 HB(I,J)=(H(I,J)+H(I+1,J)+H(I+1,J+1)+H(I,J+1))/4.
67 101 CONTINUE
68 DO 102 I=1,IN
69 DO 102 J=1,JM
70 IF(MX(I,J).EQ.0) GO TO 102
71 HU(I,J)=(H(I,J)+H(I,J+1))/2.
72 102 CONTINUE
73 DO 103 I=1,IM
74 DO 103 J=1,JN
75 IF(MY(I,J).EQ.0) GO TO 103
76 HV(I,J)=(H(I,J)+H(I+1,J))/2.
77 103 CONTINUE
78 WRITE(6,109)
79 109 FORMAT(1X,'HB MATRIX')

```

```

79      DO 110 I=1,IM
80      110 WRITE(6,30) I,(HB(I,J),J=1,JM)
81          WRITE(6,111)
82      111 FORMAT(1X,'HU MATRIX')
83      DO 112 I=1,IN
84      112 WRITE(6,30) I,(HU(I,J),J=1,JM)
85          WRITE(6,113)
86      113 FORMAT(1X,'HV MATRIX')
87      DO 114 I=1,IM
88      114 WRITE(6,30) I,(HV(I,J),J=1,JN)
89          2 FORMAT ( )
90      30 FORMAT(1X,'I=',I4,15F8.1)
91      31 FORMAT(1X,'WATER DEPTHS, CM')
92      40 FORMAT(1X,'I=',I4,15E8.2)
93      41 FORMAT(1X,'BOTTOM SLOPES, CM/CM')
94      51 FORMAT(1X,'MAR MATRIX')
95      60 FORMAT(1X,'I=',I4,10X,15I4)
96      61 FORMAT(1X,'STAGE=',F10.2)
97      250 FORMAT('1')
98      RETURN
99      END

```

```

*FLOW(1).BAYINI FOR CREATED ON 4 DEC 79 AT 09:45:24
1 C*****
2 C INITIALIZES MOST OF THE DEPENDANT VARIABLES
3 C*****
4 SUBROUTINE BAYINI(IM,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
5 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
6 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
7 CT1,T2,T3,TC,TB,TINIT)
8 DIMENSION UI(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
9 CV2(IN,JN,KN),V3(IN,JN,KN),W(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
10 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
11 CMY(IM,JN),MAR(IN,JN),H(IN,JN),HB(IM,JM),ELEV(IN,JN),
12 CUB(IM,JM,KN),VB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
13 CMY(IM,JM),TB(IM,JM,KN)
14 DIMENSION T1(IM,JM,KN),T2(IM,JM,KN),T3(IM,JM,KN),TC(IM,JM,KN)
15 KZ=KN-1
16 DO 100 I=1,IN
17 DO 100 J=1,JN
18 DO 100 K=1,KN
19 UI(I,J,K)=0.
20 U2(I,J,K)=0.
21 U3(I,J,K)=0.
22 V1(I,J,K)=0.
23 V2(I,J,K)=0.
24 V3(I,J,K)=0.
25 RX(I,J,K)=0.
26 RY(I,J,K)=0.
27 100 CONTINUE
28 DO 200 I=1,IM
29 DO 200 J=1,JM
30 ETA1(I,J)=0.
31 CETA(I,J)=0.
32 ETA3(I,J)=0.
33 DO 300 K=1,KN
34 UB(I,J,K)=0.
35 VB(I,J,K)=0.
36 W(I,J,K)=0.
37 OM(I,J,K)=0.
38 T1(I,J,K)=TINIT
39 T2(I,J,K)=TINIT
40 T3(I,J,K)=TINIT
41 TC(I,J,K)=0.
42 TB(I,J,K)=TINIT
43 300 CONTINUE
44 200 CONTINUE
45 ABJ=10.**9
46 DO 400 I=1,IM
47 DO 400 J=1,JM
48 IF(MEX(I,J).NE.0) GO TO 400
49 ETA1(I,J)=ABJ
50 CETA(I,J)=ABJ
51 ETA3(I,J)=ABJ
52 DO 500 K=1,KN
53 TB(I,J,K)=ABJ
54 W(I,J,K)=ABJ
55 500 CONTINUE
56 400 CONTINUE
57 RETURN
58 END

```

```

1 FLOW(1).READT FOR CREATED ON 7 OFC 79 AT 10:08:01
2 C*****
3 C READS IN HOURLY RESULT STORED IN TAPE FOR CONTINUE RUN OR PLOTTING
4 C*****
5 SUBROUTINE REACT(IN,JN,KN,IM,JM,U1,U2,V1,V2,W,ETA1,T1,T2,TB,
6 CETA,PX,MY,MAR,H,HA,UB,VB,HU,HV,MEX,MEY,NCASE,NBLOK,TTOT,DT,
7 CTIDE1N,TIDE2N,TIDE3N,TIDE1S,TIDE2S,TIDE3S,STAGE,EST,
8 CAMPLIT,PHASE,OPHASE,PERIOD)
9 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),V1(IN,JN,KN),V2(IN,JN,KN),
10 CW(IM,JM,KN),ETA1(IM,JM),ETA(IM,JM),PX(IN,JN),MY(IN,JN),MAR(IN,JN),
11 CH(IN,JN),HA(IM,JM),UB(IM,JM,KN),VB(IM,JM,KN),
12 CHU(IN,JM),HV(IN,JM),MEX(IM,JM),MEY(IM,JM),TB(IM,JM,KN)
13 DIMENSION T1(IM,JM,KN),TIDE1N(IM),TIDE2N(IM),TIDE3N(IM)
14 DIMENSION T2(IM,JM,KN),TIDE1S(IM),TIDE2S(IM),TIDE3S(IM)
15 1 CONTINUE
16 READ (7,END=1) NBLOK
17 READ (7) ((U1(I,J,K),K=1,KN),J=1,JN),I=1,IN),
18 C((U2(I,J,K),K=1,KN),J=1,JN),I=1,IN),
19 C((V1(I,J,K),K=1,KN),J=1,JN),I=1,IN),
20 C((V2(I,J,K),K=1,KN),J=1,JN),I=1,IN),
21 C((HA(I,J),J=1,JN),I=1,IN),
22 C((MX(I,J),J=1,JN),I=1,IN),
23 C((MY(I,J),J=1,JN),I=1,IN),
24 C((HU(I,J),J=1,JN),I=1,IN),
25 C((HV(I,J),J=1,JN),I=1,IN),
26 C((H(I,J),J=1,JN),I=1,IN),
27 READ (7) ((W(I,J,K),K=1,KN),J=1,JM),I=1,IM),
28 C((UP(I,J,K),K=1,KN),J=1,JM),I=1,IM),
29 C((VE(I,J,K),K=1,KN),J=1,JM),I=1,IM),
30 C((T1(I,J,K),K=1,KN),J=1,JM),I=1,IM),
31 C((T2(I,J,K),K=1,KN),J=1,JM),I=1,IM),
32 C((TE(I,J,K),K=1,KN),J=1,JM),I=1,IM),
33 C((ET1(I,J),J=1,JM),I=1,IM),
34 C((ET2(I,J),J=1,JM),I=1,IM),
35 C((EX(I,J),J=1,JM),I=1,IM),
36 C((EY(I,J),J=1,JM),I=1,IM),
37 C((HB(I,J),J=1,JM),I=1,IM),
38 C(TIDE1N(I),I=1,IM),
39 C(TIDE2N(I),I=1,IM),
40 C(TIDE3N(I),I=1,IM),
41 C(TIDE1S(I),I=1,IM),
42 C(TIDE2S(I),I=1,IM),
43 C(TIDE3S(I),I=1,IM),
44 READ (7) TTOT,NCASE,DT,STAGE,EST,AMPLIT,PHASE,OPHASE,
45 CPERIOD)
46 READ (7,END=500) AAA
47 WRITE(6,2)
48 2 FORMAT(1X,'NO EOF AT END OF DATA')
49 NBLOK=-100
50 GO TO 1000
51 500 CONTINUE
52 WRITE(6,112) TTOT,NCASE,NBLOK
53 112 FORMAT(1X,'DATA READ FROM TAPE, TTOT=',F10.0,
54 C, 'CASE NBR=',I5,' BLOK NBR=',I5)
55 1000 RETURN
56 END

```

```

*FLOW(1).IRREAD SYP CREATED ON 6 DEC 79 AT 09:47:52
1  C*****
2  C  IN THE CASE OF STARTING FROM GIVEN I-FIELD, READS IN THE IR-TEMP
3  C*****
4      SUBROUTINE IRREAD(IM,JM,KN,T1,T2)
5      DIMENSION T1(IM,JM,KN),T2(IM,JM,KN)
6  C*****DATA READ FROM ONE OF THE (F,H,E,L)DATA BY IR*****
7      DO 550 J=1,JM
8      550  READ 2, (T1(I,J,1),I=1,IM)
9      2    FORMAT( )
10     DO 555 J=1,JM
11     DO 555 I=1,IM
12     DO 553 K=2,KN
13     553  T1(I,J,K)=T1(I,J,1)
14     DO 554 K=1,KN
15     554  T2(I,J,K)=T1(I,J,1)
16     555  CONTINUE
17     RETURN
18     END

```

```

*FLOW(1).EQTEMP SYN CREATFD ON 12 DEC 79 AT 20:36:54
1 C*****
2 C COMPUTES EQUILIBRIUM T AND SURFACE HEAT EXCHANGE COEFFICIENT SK
3 C*****
4 SUBROUTINE EQTEMP(TAIR,HUMID,WIND,WDIR,SRAD,TSURF,TDEW,SK,TEQ)
5   TAIR1=TAIR*9./5.+32.
6   TSURF1=TSURF*9./5.+32.
7   WIND1=WIND/44.7
8   SRAD1=SRAD*1440.
9   TDEW1=((14.55+.114*TAIR1)*(1.-HUMID)
10  TDEW2=((12.5+.007*TAIR1)*(1.-HUMID))**3
11  TDEW=TAIR1-TDEW1-TDEW2
12  TFIL*=(TSURF1+TDEW)/2.
13  BETA=.255-.0085*TFIL+.000294*TFIL**2
14  FCNU=70.+7*WIND1**2
15  SK=15.7+(BETA+.26)*FCNU
16  TEQ=TDEW+SRAD1/SK
17  SK=SK*.00000564
18  TEQ=(TEQ-32.)*5./9.
19  RETURN
20 END

```

```

1 *FLOW(1).BETA FOR (CREATED ON 4 DEC 79 AT 09:46:12
2 C*****
3 C COMPUTES ETA AND OMEGA OF ADVANCE TIME, USES SIMPSON'S RULE FOR INTG
4 C*****
5 SUBROUTINE BETA(IN,JN,KN,IM,JM,U2,V2,OM,ETA1,ETA,ETA3,
6 CHB,HL,HV,MFX,MEY,CB,DX,DY,DS,DT)
7 DIMENSION U2(IN,JN,KN),V2(IN,JN,KN),OM(IM,JM,KN),ETA1(IM,JM),
8 CETA(IM,JM),ETA3(IM,JM),HB(IM,JM),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
9 CMEY(IM,JM)
10 DIMENSION F(5)
11 S25=-.25
12 S50=-.50
13 S75=-.75
14 B=2.
15 ABC=(B*DT
16 KZ=KN-1
17 DO 900 I=1,IM
18 DO 900 J=1,JM
19 IF(MEX(I,J).EQ.0) GO TO 900
20 DR=HL(I+1,J)*(ETA(I+1,J)+ETA(I,J))/2.
21 IF(MEX(I,J).EQ.2) DP=HU(I+1,J)+ETA(I,J)
22 OL=HL(I,J)*(ETA(I-1,J)+ETA(I,J))/2.
23 IF(MEX(I,J).EQ.1) DL=HU(I,J)+ETA(I,J)
24 D2=HV(I,J+1)*(ETA(I,J+1)+ETA(I,J))/2.
25 IF(MEX(I,J).EQ.2) D2=HV(I,J+1)+ETA(I,J)
26 D1=HV(I,J)*(ETA(I,J-1)+ETA(I,J))/2.
27 IF(MEX(I,J).EQ.1) D1=HV(I,J)+ETA(I,J)
28 DO 100 K=1,KZ
29 DHUX=(DR*U2(I+1,J,K)-DL*U2(I,J,K))/DX
30 DHVY=(D2*V2(I,J+1,K)-D1*V2(I,J,K))/DY
31 F(K)=DHUX+DHVY
32 100 CONTINUE
33 SUM=(F(1)+4.*F(2)+2.*F(3)+4.*F(4))/3.
34 DET=-DS*SUM
35 ETA3(I,J)=ETA1(I,J)+ABC*DET
36 AH3=HB(I,J)+ETA3(I,J)
37 IF(AH3.GT.0.) GO TO 200
38 ETA3(I,J)=(10.**(-6))-HB(I,J)
39 DET=(ETA3(I,J)-ETA1(I,J))/ABC
40 200 CONTINUE
41 AH=HB(I,J)+ETA(I,J)
42 OM(I,J,2)=(-S25*DET+DS*(F(1)+F(2))/B)/AH
43 OM(I,J,3)=(-S50*DET+DS*(F(1)/B+F(2)+F(3)/B))/AH
44 OM(I,J,4)=(-S75*DET+DS*(F(1)/B+F(2)+F(3)+F(4)/B))/AH
45 900 CONTINUE
46 RETURN
47 END

```

```

*FLOW(1).BNRTIA FOR CREATED ON 4 DEC 79 AT 09:48:40
1 C*****
2 C COMPUTES NONLINEAR TERMS RX/RX AT INTERIOR HALF-GRID U-/V- POINTS
3 C*****
4 SUBROUTINE BNRTIA(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
5 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
6 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,CB)
7 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
8 V2(IN,JN,KN),V3(IN,JN,KN),W(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
9 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
10 CHY(IA,JN),MAR(IN,JN),H(IN,JN),HB(IM,JM),ELEV(IN,JN),
11 CUB(IM,JM,KN),VB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
12 CMEX(IM,JM)
13 KZ=KN-1
14 ABC=CB*DT
15 ACE=10.**(-6)
16 C*****COMPLETES RX AT INTERIOR U-POINTS*****
17 DO 100 I=2,IM
18 DO 100 J=1,JM
19 IF(MX(I,J).NE.3) GO TO 100
20 AH=HL(I,J)+(ETA(I,J)+ETA(I-1,J))/2.
21 AH=AMAX1(AH,ACE)
22 DET=(ETA3(I,J)-ETA1(I,J)+ETA3(I-1,J)-ETA1(I-1,J))/ABC/2.
23 DO 110 K=1,KZ
24 DZ=HB(I,J)+ETA(I,J)
25 D1=HB(I-1,J)+ETA(I-1,J)
26 UBAR2=(U2(I,J,K)+U2(I+1,J,K))/2.
27 UBAR1=(U2(I,J,K)+U2(I-1,J,K))/2.
28 DHUU=(D2*(UBAR2**2)-D1*(UBAR1**2))/DX
29 IF(MY(I,J).EQ.1) GO TO 104
30 E2=(ETA(I-1,J+1)+ETA(I,J+1)+ETA(I-1,J)+ETA(I,J))/4.
31 E1=(ETA(I,J)+ETA(I,J-1)+ETA(I-1,J-1)+ETA(I-1,J))/4.
32 D2=H(I,J+1)+E2
33 D1=H(I,J)+E1
34 D1=AMAX1(D1,1.)
35 D2=AMAX1(D2,1.)
36 UBAR2=(U2(I,J,K)+U2(I,J+1,K))/2.
37 UBAR1=(U2(I,J,K)+U2(I,J-1,K))/2.
38 VBAR2=(V2(I-1,J+1,K)+V2(I,J+1,K))/2.
39 VBAR1=(V2(I,J,K)+V2(I-1,J,K))/2.
40 DHUV=(D2*UBAR2-VBAR2-D1*UBAR1-VBAR1)/DY
41 GO TO 106
42 104 CONTINUE
43 E2=(ETA(I-1,J+1)+ETA(I,J+1)+ETA(I-1,J)+ETA(I,J))/4.
44 D2=H(I,J+1)+E2
45 D2=AMAX1(D2,1.)
46 UBAR2=(U2(I,J,K)+U2(I,J+1,K))/2.
47 VBAR2=(V2(I-1,J+1,K)+V2(I,J+1,K))/2.
48 DHUV=D2*UBAR2-VBAR2/DY
49 106 CONTINUE
50 IF(K.EQ.1) GO TO 107
51 A3=U2(I,J,K-1)*(OM(I,J,K-1)+OM(I-1,J,K-1))/2.
52 A1=U2(I,J,K+1)*(OM(I,J,K+1)+OM(I-1,J,K+1))/2.
53 DUOMS=(A3-A1)/DUMS
54 DUS=(U2(I,J,K-1)-U2(I,J,K+1))/DUMS
55 GO TO 108
56 107 A3=0.
57 A2=U2(I,J,K+1)*(OM(I,J,K+1)+OM(I-1,J,K+1))/2.
58 A1=U2(I,J,K+2)*(OM(I,J,K+2)+OM(I-1,J,K+2))/2.
59 DUOMS=(3.*A3-4.*A2+A1)/DUMS
60 DUS=(3.*U2(I,J,1)-4.*U2(I,J,2)+U2(I,J,3))/DUMS
61 108 SIG=-DS*FLCAT(K-1)
62 RX(I,J,K)=DHUU+DHUV*AH*DUOMS+(1.+SIG)*DUS*DET
63 110 CONTINUE
64 100 CONTINUE
65 C*****
66 C*****COMPLETES RY AT INTERIOR V-POINTS*****
67 DO 200 I=1,IM
68 DO 200 J=2,JM
69 IF(MY(I,J).NE.3) GO TO 200
70 AH=HV(I,J)+(ETA(I,J)+ETA(I,J-1))/2.
71 AH=AMAX1(AH,ACE)
72 DET=(ETA3(I,J)-ETA1(I,J)+ETA3(I,J-1)-ETA1(I,J-1))/ABC/2.
73 DO 210 K=1,KZ
74 DZ=HB(I,J)+ETA(I,J)
75 D1=HB(I,J-1)+ETA(I,J-1)
76 VBAR2=(V2(I,J,K)+V2(I,J+1,K))/2.
77 VBAR1=(V2(I,J,K)+V2(I,J-1,K))/2.
78 DHVV=(D2*(VBAR2**2)-D1*(VBAR1**2))/DY

```

```

70      IF(M>(I,J).EQ.1) GO TO 204
80      E2=(ETA(I,J)+ETA(I+1,J)+ETA(I+1,J-1)+ETA(I,J-1))/4.
81      E1=(ETA(I,J)+ETA(I,J-1)+ETA(I-1,J-1)+ETA(I-1,J))/4.
82      D2=H(I+1,J)+E2
83      D1=H(I,J)+E1
84      D1=AMAX1(D1,1.)
85      D2=AMAX1(D2,1.)
86      USAR2=(U2(I+1,J,K)+U2(I+1,J-1,K))/2.
87      UBAR1=(U2(I,J,K)+U2(I,J-1,K))/2.
88      VBAR2=(V2(I+1,J,K)+V2(I,J,K))/2.
89      VBAR1=(V2(I-1,J,K)+V2(I,J,K))/2.
90      DHUVX=(D2*UBAR2+VBAR2-D1*UBAR1+VBAR1)/DX.
91      GO TO 206
92
93 204 CONTINUE
94      E2=(ETA(I,J)+ETA(I+1,J)+ETA(I+1,J-1)+ETA(I,J-1))/4.
95      D2=H(I+1,J)+E2
96      D2=AMAX1(D2,1.)
97      UBAR2=(U2(I+1,J,K)+U2(I+1,J-1,K))/2.
98      VBAR2=(V2(I+1,J,K)+V2(I,J,K))/2.
99      DHUVX=D2*UBAR2+VBAR2/DX
100
101 206 CONTINUE
102      IF(K.EQ.1) GO TO 207
103      A3=V2(I,J,K-1)*(OM(I,J,K-1)+OM(I,J-1,K-1))/2.
104      A1=V2(I,J,K+1)*(OM(I,J,K+1)+OM(I,J-1,K+1))/2.
105      DVOMS=(A3-A1)/DUMS
106      DVVS=(V2(I,J,K-1)-V2(I,J,K+1))/DUMS
107      GO TO 208
108
109 207 A3=0.
110      A2=V2(I,J,K+1)*(OM(I,J,K+1)+OM(I,J-1,K+1))/2.
111      A1=V2(I,J,K+2)*(OM(I,J,K+2)+OM(I,J-1,K+2))/2.
112      DVOMS=(3.*A3-4.*A2+A1)/DUMS
113      DVVS=(3.*V2(I,J,1)-4.*V2(I,J,2)+V2(I,J,3))/DUMS
114
115 208 SIG=-OS*FLOAT(K-1)
116      RY(I,J,K)=DHUVX+DHVVY+AH*DVOMS+(1.+SIG)*DVVS*DET
117
118 210 CONTINUE
119 200 CONTINUE
120 C * * * * *
121 RETURN
122 END

```

*FLOW(1).ABNR3 FOR CREATED ON 6 DEC 79 AT 10:20:22

```

1 C*****
2 C AT VELOCITY POINTS ON THE OPEN BOUNDARIES, COMPUTES RX ON Y-
3 C BOUNDARY, COMPUTE RY ON X-BOUNDARY; RX & RY ARE NONLINEAR TERMS.
4 C TIDE HEIGHT JUST OUTSIDE THE OPEN BOUNDARY MUST BE GIVEN
5 C*****
6 SUBROUTINE ABNR3(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,EST,
7 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
8 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,C,NCASE,NBLOK,TTOT,CB,
9 CTIDE1S,TIDE2S,TIDE3S,TIDE1N,TIDE2N,TIDE3N,STAGE,
10 CAMPLIT,PHASE,OPHASE,PERIOD,TSHIFT)
11 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
12 V2(IN,JN,KN),V3(IN,JN,KN),E(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
13 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
14 CMY(IM,JN),MAR(IN,JN),H(IN,JN),HB(IM,JM),ELEV(IN,JN),
15 CUB(IM,JM,KN),VB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
16 CMEX(IM,JM),
17 CTIDE1N(IM),TIDE2N(IM),TIDE3N(IM),
18 CTIDE1S(IM),TIDE2S(IM),TIDE3S(IM)
19 C,SOM(5)
20 KZ=KN-1
21 ABC=CB*DT
22 ACE=10.**(-6)
23 DO 11 I=3,15
24 TIDE1N(I)=STAGE+AMPLIT*SIN(6.283/PERIOD*((EST-TSHIFT)-PHASE
25 C-DPH/SE*(I-1)))
26 11 CONTINUE
27 DO 12 I=2,11
28 TIDE1S(I)=STAGE+AMPLIT*SIN(6.283/PERIOD*((EST-TSHIFT)
29 C-CPHASE*(I-1)))
30 12 CONTINUE
31 C*****COMPLETES RY ON NORTH BOUNDARY OF THE ANCHORAGE*****
32 J=14
33 DO 100 I=3,15
34 AH=MV(I,J)+(TIDE2N(I)+ETA(I,J-1))/2.
35 AH=AMAX1(AH,ACE)
36 DET=(TIDE3N(I)-TIDE1N(I)+ETA3(I,J-1)-ETA1(I,J-1))/ABC/2.
37 DO 500 K=1,KN
38 SIG=-DS*FLOAT(K-1)
39 DET1=(TIDE3N(I)-TIDE1N(I))/ABC
40 AH1=MV(I,J)+TIDE2N(I)
41 SOM(K)=(SIG/AH1)*DET1
42 500 CONTINUE
43 DO 210 K=1,KZ
44 O2=MV(I,J)+TIDE2N(I)
45 O1=MV(I,J-1)+ETA(I,J-1)
46 VBAR2=V2(I,J,K)
47 VBAR1=(V2(I,J,K)+V2(I,J-1,K))/2.
48 DHVVY=(O2*(VBAR2**2)-O1*(VBAR1**2))/DY
49 DHUVX=0.
50 IF(K.EQ.1) GO TO 207
51 A3=V2(I,J,K-1)*(SOM(K-1)+OM(I,J-1,K-1))/2.
52 A1=V2(I,J,K+1)*(SOM(K+1)+OM(I,J-1,K+1))/2.
53 DVOMS=(A3-A1)/DUMS
54 DVS=(V2(I,J,K-1)-V2(I,J,K+1))/DUMS
55 GO TO 208
56 207 CONTINUE
57 A3=0.
58 A2=V2(I,J,K+1)*(SOM(K+1)+OM(I,J-1,K+1))/2.
59 A1=V2(I,J,K+2)*(SOM(K+2)+OM(I,J-1,K+2))/2.
60 DVOMS=(A3-A2-4.*A2+A1)/DUMS
61 DVS=(3.*V2(I,J,1)-4.*V2(I,J,2)+V2(I,J,3))/DUMS
62 208 SIG=-DS*FLOAT(K-1)
63 RY(I,J,K)=DHUVX+DHVVY+AH*DVOMS+(1.*SIG)*DVS*DET
64 210 CONTINUE
65 100 CONTINUE
66 C*****COMPLETES RY ON SOUTH BOUNDARY OF THE ANCHORAGE*****
67 J=1
68 DO 310 I=2,11
69 AH=MV(I,J)+(TIDE2S(I)+ETA(I,J))/2.
70 AH=AMAX1(AH,ACE)
71 DET=(TIDE3S(I)-TIDE1S(I)+ETA3(I,J)-ETA1(I,J))/ABC/2.
72 DO 600 K=1,KN
73 SIG=-DS*FLOAT(K-1)
74 DET1=(TIDE3S(I)-TIDE1S(I))/ABC
75 AH1=MV(I,J)+TIDE2S(I)
76 SOM(K)=(SIG/AH1)*DET1
77 600 CONTINUE
78 DO 317 K=1,KZ

```

```

79      D2=H1(I,J)+TIDE2S(I)
80      D1=HE(I,J)+ETA(I,J)
81      VBAR2=V2(I,J,K)
82      VBAR1=(V2(I,J,K)+V2(I,J+1,K))/2.
83      DHVVY=(D1*(VBAR1**2)-D2*(VBAR2**2))/DY
84      CHUVX=C.
85      IF(K.EQ.1) GO TO 307
86      A3=V2(I,J,K-1)*(SOM(K-1)+OM(I,J,K-1))/2.
87      A1=V2(I,J,K+1)*(SOM(K+1)+OM(I,J,K+1))/2.
88      DVOMS=(A3-A1)/DUMS
89      DVS=(V2(I,J,K-1)-V2(I,J,K+1))/DUMS
90      GO TO 308
91 307   CONTINUE
92      A3=C.
93      A2=V2(I,J,K+1)*(SOM(K+1)+OM(I,J,K+1))/2.
94      A1=V2(I,J,K+2)*(SOM(K+2)+OM(I,J,K+2))/2.
95      DVOMS=(3.*A3-4.*A2+A1)/DUMS
96      DVS=(3.*V2(I,J,1)-4.*V2(I,J,2)+V2(I,J,3))/DUMS
97 308   SIG=-DS*FLOAT(K-1)
98      RY(I,J,K)=CHUVX+DHVVY+AH*DVOMS+(1.*SIG)*DVS*DET
99 310   CONTINUE
100 300   CONTINUE
101      RETURN
102      END

```

```

*FLOW(1).BVELS FOR CREATED ON 4 DEC 79 AT 09:51:16
1 C*****
2 C COMPUTES U3/V3 AT INTERIOR HALF-GRID U-/V- POINTS
3 C*****
4 SUBROUTINE BVELS(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
5 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VP,HU,HV,MEX,MEY,CB,
6 COUMX,COUMY,CUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NRLOK,TTOT,
7 CAV)
8 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
9 CV2(IN,JN,KN),V3(IN,JN,KN),W(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
10 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
11 CMY(IN,JN),MAR(IN,JN),H(IN,JN),HB(IM,JM),ELEV(IN,JN),
12 CUB(IN,JM,KN),VB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
13 CMEX(IM,JM)
14 KZ=K-1
15 ABC=CB*DT
16 ACE=10.**(-6)
17 C*****COMPLTES U3 AT INTERIOR U-POINTS*****
18 DO 100 I=2,IM
19 DO 100 J=1,JM
20 IF(MX(I,J).NE.3) GO TO 100
21 AH=HL(I,J)+(ETA(I,J)+ETA(I-1,J))/2.
22 AH=APAX1(AH,ACE)
23 AH1=H(I,J)+(ETA1(I,J)+ETA1(I-1,J))/2.
24 AH3=H(I,J)+(ETA3(I,J)+ETA3(I-1,J))/2.
25 G1=AH1/AH3
26 G2=AH/AH3
27 DEF=ARC*AV/(DS**2)/AH3/AH
28 A1=1./(1.+DEF)
29 DEX=(ETA(I,J)-ETA(I-1,J))/DX
30 A4=G*DEX
31 DO 101 K=1,KZ
32 A2=FCOR*(V2(I-1,J+1,K)+V2(I,J+1,K)+V2(I,J,K)+V2(I-1,J,K))/4.
33 A5=RY(I,J,K)/AH
34 IF(K.EQ.1) GO TO 102
35 A6=A1*(U2(I,J,K+1)-U1(I,J,K)+U2(I,J,K-1))/(AH*DS)**2
36 U3(I,J,K)=A1*(G1*U1(I,J,K)+G2*ABC*(A2-A4-A5+A6))
37 GO TO 101
38 102 CONTINUE
39 A6=2.*AV*(U2(I,J,K+1)-U1(I,J,K))/2.+AH*TAUX*DS/AV)/(AH*DS)**2
40 U3(I,J,K)=A1*(G1*U1(I,J,K)+G2*ABC*(A2-A4-A5+A6))
41 101 CONTINUE
42 100 CONTINUE
43 C * * * * *
44 C*****COMPLTES V3 AT INTERIOR V-POINTS*****
45 DO 200 I=1,IM
46 DO 200 J=2,JM
47 IF(MY(I,J).NE.3) GO TO 200
48 AH=HV(I,J)+(ETA(I,J)+ETA(I,J-1))/2.
49 AH=APAX1(AH,ACE)
50 AH1=V(I,J)+(ETA1(I,J)+ETA1(I,J-1))/2.
51 AH3=V(I,J)+(ETA3(I,J)+ETA3(I,J-1))/2.
52 G1=AH1/AH3
53 G2=AH/AH3
54 DEF=ARC*AV/(DS**2)/AH3/AH
55 A1=1./(1.+DEF)
56 DEY=(ETA(I,J)-ETA(I,J-1))/DY
57 B4=G*DEY
58 DO 201 K=1,KZ
59 B2=FCOR*(U2(I,J,K)+U2(I+1,J,K)+U2(I+1,J-1,K)+U2(I,J-1,K))/4.
60 B5=RY(I,J,K)/AH
61 IF(K.EQ.1) GO TO 202
62 B6=A1*(V2(I,J,K+1)-V1(I,J,K)+V2(I,J,K-1))/(AH*DS)**2
63 V3(I,J,K)=A1*(G1*V1(I,J,K)+G2*ABC*(B2-B4-B5+B6))
64 GO TO 201
65 202 CONTINUE
66 B6=2.*AV*(V2(I,J,K+1)-V1(I,J,K))/2.+AH*TAUY*DS/AV)/(AH*DS)**2
67 V3(I,J,K)=A1*(G1*V1(I,J,K)+G2*ABC*(B2-B4-B5+B6))
68 201 CONTINUE
69 200 CONTINUE
70 C * * * * *
71 RETURN
72 END

```

```

*FLOW(1).ASAF3 FOR CREATED ON 12 DEC 79 AT 13:47:21
1 C*****
2 C COMPUTES TIDE HEIGHT AT PCINTS JUST OUTSIDE OF OPEN BOUNDARIES, THEN
3 C COMPUTES THE NORMAL VELOCITIES AT BOUNDARY POINTS.
4 C*****
5 SUBROUTINE ASAF3(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
6 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEXY,CB,
7 COUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,TAUX,TAUY,G,NCASE,NBLOK,TTOT,
8 CTIDE1S,TIDE2S,TIDE3S,EST,STAGE,AV,
9 CTIDE1N,TIDE2N,TIDE3N,AMPLIT,PHASE,OPHASE,PERIOD,TSHIFT)
10 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
11 V2(IN,JN,KN),V3(IN,JN,KN),W(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
12 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
13 MY(IN,JN),MAR(IN,JN),H(IN,JN),HB(IN,JM),ELEV(IN,JN),
14 CUB(IN,JM,KN),VB(IN,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
15 MEXY(IM,JM),
16 CTIDE1N(IM),TIDE2N(IM),TIDE3N(IM),
17 CTIDE1S(IM),TIDE2S(IM),TIDE3S(IM)
18 KZ=KN+1
19 ABC=CB*DT
20 DO 1 I=3,15
21 TIDE2N(I)=STAGE+AMPLIT*SIN(6.283/PERIOD*((EST-TSHIFT)-PHASE
22 C-OPHASE*(I-1)))
23 CONTINUE
24 11 DO 1 I=2,11
25 TIDE1S(I)=STAGE+AMPLIT*SIN(6.283/PERIOD*((EST-TSHIFT)
26 C-OPHASE*(I-1)))
27 CONTINUE
28 12 C*****COMPLETES V ON NORTH BOUNDARY*****
29 J=14
30 DO 3 CO I=3,15
31 AH1=FV(I,J)+(TIDE1N(I)+ETA1(I,J-1))/2.
32 AH=HV(I,J)+(TIDE2N(I)+ETA(I,J-1))/2.
33 AH=AMAX1(AH,10.**(-6))
34 AH3=FV(I,J)+(TIDE3N(I)+ETA3(I,J-1))/2.
35 G1=AH1/AH3
36 G2=AH/AH3
37 DEY=(TIDE2N(I)-ETA(I,J-1))/DY
38 DEF=ARC*AV/(DS**2)/AH3/AH
39 A1=1./(1.+DEF)
40 B4=G*DEY
41 DO 3 C1 K=1,KZ
42 B2=0.
43 B5=RY(I,J,K)/AH
44 IF(K.EQ.1) GO TO 3C2
45 B6=AV*(V2(I,J,K+1)-V1(I,J,K)+V2(I,J,K-1))/(AH*DS)**2
46 V3(I,J,K)=A1*(G1*V1(I,J,K)+G2*APC*(B2-B4-B5+B6))
47 GO TO 3C1
48 3C2 CONTINUE
49 B6=2.*AV*(V2(I,J,K+1)-V1(I,J,K)/2.+AH*TAUY*DS/AV)/(AH*DS)**2
50 V2(I,J,K)=A1*(G1*V1(I,J,K)+G2*APC*(B2-B4-B5+B6))
51 3C1 CONTINUE
52 3C3 CONTINUE
53 C*****UPDATES TIDE HEIGHT*****
54 DO 1 I=3,20
55 TIDE1N(I)=TIDE2N(I)
56 TIDE2N(I)=TIDE3N(I)
57 13 C*****COMPLETES V ON SOUTH BOUNDARY*****
58 J=1
59 DO 1 CO I=2,11
60 AH1=FV(I,J)+(TIDE1S(I)+ETA1(I,J))/2.
61 AH=HV(I,J)+(TIDE2S(I)+ETA(I,J))/2.
62 AH=AMAX1(AH,10.**(-6))
63 AH3=FV(I,J)+(TIDE3S(I)+ETA3(I,J))/2.
64 G1=AH1/AH3
65 G2=AH/AH3
66 DEY=(ETA(I,J)-TIDE2S(I))/DY
67 DEF=ARC*AV/(DS**2)/AH3/AH
68 A1=1./(1.+DEF)
69 B4=G*DEY
70 DO 4 C1 K=1,KZ
71 B2=0.
72 B5=RY(I,J,K)/AH
73 IF(K.EQ.1) GO TO 4C2
74 B6=AV*(V2(I,J,K+1)-V1(I,J,K)+V2(I,J,K-1))/(AH*DS)**2
75 V3(I,J,K)=A1*(G1*V1(I,J,K)+G2*APC*(B2-B4-B5+B6))
76 GO TO 4C1
77 4C2 CONTINUE
78 B6=2.*AV*(V2(I,J,K+1)-V1(I,J,K)/2.+AH*TAUY*DS/AV)/(AH*DS)**2

```

```

79      V3(I,J,K)=A1*(G1*V1(I,J,K)+G2*ABC*(P2-B4-P5+B6))
80      CONTINUE
81      100 CONTINUE
82      C*****UPDATES TIDE HEIGHT*****
83      DO 14 I=2,11
84          TIDE1S(I)=TIDE2S(I)
85          TIDE2S(I)=TIDE3S(I)
86      RETURN
87      END

```

```

1 *FLOW(1).GIVENU SYM CREATED ON 14 SEP 79 AT 17:47:43
2 C*****SPECIFY VELOCITY AT DISCHARGE,INTAKE,AND RIVER HEAD*****
3 SUBROUTINE GIVENU(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,T1,T2,T3,
4 CEST)
5 DIMENSION V1(IN,JN,KN),V2(IN,JN,KN),V3(IN,JN,KN),
6 CT1(IM,JM,KN),T2(IM,JM,KN),T3(IM,JM,KN)
7 C,U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN)
8 KZ=KA-1
9 DO 100 K=1,KZ
10 V3(15,1,K)=-10.*COS(6.2832/25.0*(EST-5.0))
11 U3(16,1,K)=10.*COS(6.2832/25.0*(EST-5.0))
12 V3(14,4,K)=5.-2.*COS(6.2832/12.5*(EST-7.625))
13 U3(15,3,K)=5.-2.*COS(6.2832/12.5*(EST-7.625))
14 V3(14,8,K)=5.-2.*COS(6.2832/12.5*(EST-7.5))
15 U3(15,8,K)=-V3(14,8,K)
16 CONTINUE
17 RETURN
18 END

```

```

*FLOW(1).CONV FCR (CREATED ON 14 DEC 79 AT 10:43:57
1 C*****
2 C COMPUTES TC-THE CONVECTIVE TERMS OF T-EQN, AT T-POINTS.
3 C*****
4 SUBPCUTINE CONV(IN,JN,KN,IM,JM,DX,DY,DS,DT,DUMX,DUMY,DUMS,
5 CSK,RF,BV,U2,UB,V2,VB,T2,TC,HB,HU,HV,OM,ETA1,ETA,ETA3,CB,MEX,
6 CHEY,b,DTZ,TEQ)
7 DIMENSION U2(IN,JN,KN),V2(IN,JN,KN),UB(IM,JM,KN),VB(IM,JM,KN),
8 CT2(IM,JM,KN),HB(IM,JM),HU(IN,JN),HV(IN,JN),OM(IM,JM,KN),
9 CETA1(IM,JM),ETA(IM,JM),ETA3(IM,JM),TC(IM,JM,KN),W(IM,JM,KN)
10 DIMENSION MEX(IM,JM),MEY(IM,JM),DTZ(IM,JM)
11 ABC=(R*DT
12 KZ=K)-1
13 HK=SK/(RR*AV)
14 DO 100 I=1,IM
15 DO 100 J=1,JM
16 IF(MEX(I,J).EQ.0) GO TO 100
17 AH=HB(I,J)+ETA(I,J)
18 DET=(ETA3(I,J)-ETA1(I,J))/ABC
19 DR=HL(I+1,J)+(ETA(I+1,J)+ETA(I,J))/2.
20 IF(MEX(I,J).EQ.2) DP=HU(I+1,J)+ETA(I,J)
21 OL=HL(I,J)+(ETA(I-1,J)+ETA(I,J))/2.
22 IF(MEX(I,J).EQ.1) DL=HU(I,J)+ETA(I,J)
23 DZ=HV(I,J+1)+(ETA(I,J+1)+ETA(I,J))/2.
24 IF(MEX(I,J).EQ.2) DZ=HV(I,J+1)+ETA(I,J)
25 D1=HV(I,J)+(ETA(I,J-1)+ETA(I,J))/2.
26 IF(MEX(I,J).EQ.1) D1=HV(I,J)+ETA(I,J)
27 DTZ(I,J)=-HK*(TEQ-T2(I,J,1))
28 DO 100 K=1,KZ
29 UR=(L2(I+1,J,K)+U2(I+1,J,K+1))/2.
30 UL=(L2(I,J,K)+U2(I,J,K+1))/2.
31 TR=T2(I,J,K)
32 IF(MEX(I,J).NE.2) TR=(T2(I,J,K)+T2(I+1,J,K))/2.
33 TL=T2(I,J,K)
34 IF(MEX(I,J).NE.1) TL=(T2(I,J,K)+T2(I-1,J,K))/2.
35 OHUTX=(OR*UR*TR-OL*UL*TL)/OX
36 VR=(V2(I,J+1,K)+V2(I,J+1,K+1))/2.
37 VL=(V2(I,J,K)+V2(I,J,K+1))/2.
38 TR=T2(I,J,K)
39 IF(MEX(I,J).NE.2) TR=(T2(I,J,K)+T2(I,J+1,K))/2.
40 TL=T2(I,J,K)
41 IF(MEX(I,J).NE.1) TL=(T2(I,J,K)+T2(I,J-1,K))/2.
42 DHVTY=(DZ*VP*TR-D1*VL*TL)/DY
43 OMR=CM(I,J,K)
44 OML=CM(I,J,K+1)
45 IF(K.NE.1) TR=(T2(I,J,K)+T2(I,J,K-1))/2.
46 IF(K.EQ.1) TR=T2(I,J,K)+(DS/2.)*DTZ(I,J)
47 IF(K.NE.KZ) TL=(T2(I,J,K)+T2(I,J,K+1))/2.
48 IF(K.EQ.KZ) TL=T2(I,J,K)
49 OTOMS=(OMR*TR-OML*TL)/DS
50 OTS=(TR-TL)/DS
51 SIG=-FLOCAT(K-1)*DS-OS/2.
52 TC(I,J,K)=OHUTX+DHVTY+AH*OTOMS+DET*OTS*(1.+SIG)
53
54 110 CONTINUE
55 100 CONTINUE
56 RETURN
57 END

```

```

*FLOW(1).TCOMPT FOR CREATED ON 1 APR 80 AT 14:29:38
1 C*****
2 C COMPUTES T3 BY CTCS+DUFORT-FRANKEL SCHEME TO INTEGRATE T-EON
3 C*****
4 SUBROUTINE TCOMPT(IN,JN,KN,IM,JM,DX,DY,DS,DT,DUMX,DUMY,DUMS,
5 CHB,TC,T1,T2,T3,PEX,MEY,ETA,CB,TAIR,ETA1,ETA3,DTZ,BV,BH,TABN,TABS)
6 DIMENSION TC(IM,JM,KN),T1(IM,JM,KN),T2(IM,JM,KN),T3(IM,JM,KN),
7 CHB(IM,JM),PEX(IM,JM),ETA(IM,JM),ETA1(IM,JM),ETA3(IM,JM)
8 DIMENSION DTZ(IM,JM),MEY(IM,JM)
9 KZ=KN-1
10 ABC=CT
11 DO 100 I=1,IM
12 DO 100 J=1,JM
13 IF(MEY(I,J).EQ.0) GO TO 100
14 AH=HE(I,J)+ETA(I,J)
15 AH1=B(I,J)+ETA1(I,J)
16 AH3=B(I,J)+ETA3(I,J)
17 AAC=EV/AH/(DS**2)
18 ACC=EH*AH
19 DEF=1./(1.+ABC*BV/AH3/AH/(DS**2))
20 DEG=1./(1.+ABC*BV/2./AH3/AH/(DS**2))
21 DO 200 K=1,KZ
22 IF(MEX(I,J).EQ.3)DTX=(T2(I+1,J,K)+T2(I-1,J,K)-2.*T2(I,J,K))
23 C/(DX**2)
24 IF(MEX(I,J).EQ.1)DTX=(T2(I+1,J,K)-T2(I,J,K))/(DX**2)
25 IF(MEX(I,J).EQ.2)DTX=(T2(I-1,J,K)-T2(I,J,K))/(DX**2)
26 IF(MEY(I,J).EQ.3)D2TY=(T2(I,J+1,K)+T2(I,J-1,K)-2.*T2(I,J,K))
27 C/(DY**2)
28 IF(MEY(I,J).EQ.1)D2TY=(T2(I,J+1,K)+TABS-2.*T2(I,J,K))/(DY**2)
29 IF(MEY(I,J).EQ.2)D2TY=(T2(I,J-1,K)+TABN-2.*T2(I,J,K))/(DY**2)
30 IF(K.EQ.1) GO TO 50
31 IF(K.EQ.KZ) GO TO 51
32 BAR1=T2(I,J,K+1)-T1(I,J,K)+T2(I,J,K-1)
33 BAR2=-TC(I,J,K)+AAC*BAR1+ACC*(DTX+D2TY)
34 T3(I,J,K)=DEF*(AH*T2(I,J,K)+ABC*BAR2)/AH3
35 GO TO 200
36 50 CONTINUE
37 BAR1=T2(I,J,K+1)-T1(I,J,K)/2.+DS*DTZ(I,J)
38 BAR2=-TC(I,J,K)+AAC*BAR1+ACC*(D2TX+D2TY)
39 T3(I,J,K)=DEG*(AH*T2(I,J,K)+ABC*BAR2)/AH3
40 GO TO 200
41 51 CONTINUE
42 BAR1=-T1(I,J,K)/2.+T2(I,J,K-1)
43 BAR2=-TC(I,J,K)+AAC*BAR1+ACC*(D2TX+D2TY)
44 T3(I,J,K)=DEG*(AH*T2(I,J,K)+ABC*BAR2)/AH3
45 200 CONTINUE
46 100 CONTINUE
47 RETURN
48 END

```

```

*FLOW(1).GIVENT SYP CREATED ON 6 DEC 79 AT 10:22:11
1 C*****SPECIFY TEMPERATURE AT DISCHARGE AND RIVER HEAD*****
2 SUBROUTINE GIVENT(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,T1,T2,T3,
3 CEST)
4 DIMENSION V1(IN,JN,KN),V2(IN,JN,KN),V3(IN,JN,KN),
5 CT1(IM,JM,KN),T2(IM,JM,KN),T3(IM,JM,KN)
6 C,U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN)
7 DO 200 K=1,KN
8 T3(14,8,K)=29.4+.4*SIN(.2618*(EST-12.))
9 T3(15,1,K)=26.9+.5*SIN(.2618*(EST-12.))
10 CONTINUE
11 RETURN
12 END

```

```

*FLOW(1).WCAL FOR CREATED ON 4 DEC 79 AT 11:35:41
1 C*****
2 C CALCULATES ACTUAL VERTICAL VELOCITY W
3 C*****
4 SUBROUTINE WCAL(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
5 CETA,ETA3,RX,RY,MX,MY,MAR,H,HB,ELEV,UB,VB,HU,HV,MEX,MEY,
6 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCOR,FAUX,FAUY,G,NCASE,NRLOK,TTOT)
7 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
8 CV2(IN,JN,KN),V3(IN,JN,KN),W(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
9 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
10 CMY(IN,JN),MAR(IN,JN),H(IN,JN),HB(IM,JM),ELEV(IN,JN),
11 CUB(IM,JM,KN),VB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
12 CMY(IM,JM)
13 KZ=KN-1
14 DO 900 I=1,IM
15 DO 900 J=1,JM
16 IF(MEX(I,J).EQ.0) GO TO 900
17 DET=(ETA3(I,J)-ETA1(I,J))/2./DT
18 AH=HB(I,J)+ETA(I,J)
19 IF(MEX(I,J).EQ.3) GO TO 15
20 IF(MEX(I,J).EQ.1) GO TO 1
21 IF(MEX(I,J).EQ.2) GO TO 2
22 15 CONTINUE
23 DEX=(ETA(I+1,J)-ETA(I-1,J))/DUMX
24 DAHX=(HB(I+1,J)+ETA(I+1,J)-HB(I-1,J)-ETA(I-1,J))/DUMX
25 GO TO 3
26 1 DEX=(ETA(I+1,J)-ETA(I,J))/DX
27 E2=(ETA(I+1,J)+ETA(I,J))/2.
28 E1=ETA(I+1,J)-1.5*(ETA(I+1,J)-ETA(I,J))
29 DAHX=(HU(I+1,J)+E2-HU(I,J)-E1)/DX
30 GO TO 3
31 2 DEX=(ETA(I,J)-ETA(I-1,J))/DX
32 E2=ETA(I-1,J)+1.5*(ETA(I,J)-ETA(I-1,J))
33 E1=(ETA(I-1,J)+ETA(I,J))/2.
34 DAHX=(HU(I,J)+E2-HU(I-1,J)-E1)/DX
35 GO TO 3
36 3 CONTINUE
37 IF(MEX(I,J).EQ.3) GO TO 16
38 IF(MEX(I,J).EQ.1) GO TO 4
39 IF(MEX(I,J).EQ.2) GO TO 5
40 16 CONTINUE
41 DEY=(ETA(I,J+1)-ETA(I,J-1))/DUMY
42 DAHY=(HB(I,J+1)+ETA(I,J+1)-HB(I,J)-ETA(I,J))/DUMY
43 GO TO 6
44 4 DEY=(ETA(I,J+1)-ETA(I,J))/DY
45 E2=(ETA(I,J+1)+ETA(I,J))/2.
46 E1=ETA(I,J+1)-1.5*(ETA(I,J+1)-ETA(I,J))
47 DAHY=(HV(I,J+1)+E2-HV(I,J)-E1)/DY
48 GO TO 6
49 5 DEY=(ETA(I,J)-ETA(I,J-1))/DY
50 E2=ETA(I,J-1)+1.5*(ETA(I,J)-ETA(I,J-1))
51 E1=(ETA(I,J-1)+ETA(I,J))/2.
52 DAHY=(HV(I,J)+E2-HV(I,J-1)-E1)/DY
53 GO TO 6
54 6 CONTINUE
55 DO 444 K=1,KZ
56 W(I,...,K)=OM(I,J,K)+AH-FLOAT(K-1)*DS*(DET+UB(I,J,K)+DAHX+VB(I,J,K)+
57 COAHY)+DET+UB(I,J,K)+DEX+VE(I,J,K)+DEY
58 444 CONTINUE
59 900 CONTINUE
60 RETURN
61 END

```

```

1 *FLOW(1).ANCPR FOR CREATED ON 3 DEC 79 AT 20:16:46
2 C*****
3 C PRINTS ETA, RESULTANT VELOCITY, AND T AT 4 FIXED LOCATIONS CONTINU-
4 C OUSLY, THUS SHOWS THE FLOW AND TEMPERATURE DEVELOPMENT AT THESE PTS.
5 C*****
6 SUBROUTINE ANCPR(IM,JM,KN,UB,VB,E,TTOT,R,TH,T2)
7 DIMENSION UB(IM,JM,KN),VB(IM,JM,KN),E(IM,JM),T2(IM,JM,KN)
8 Q=57.3
9 U=UB(6,1,1)
10 V=VB(6,1,1)
11 X1=SQRT(U**2+V**2)
12 CALL ZZ1(U,V,ZED)
13 Z1=Q*(TH+ZED)
14 IF(Z1.LT.0.) Z1=Z1+360.
15 S1=E(6,1)
16 TM1=T2(6,1,1)
17 U=UB(12,4,1)
18 V=VB(12,4,1)
19 X2=SQRT(U**2+V**2)
20 CALL ZZ1(U,V,ZED)
21 Z2=Q*(TH+ZED)
22 IF(Z2.LT.0.) Z2=Z2+360.
23 S2=E(12,4)
24 TM2=T2(12,4,1)
25 U=UB(18,12,1)
26 V=VB(18,12,1)
27 X3=SQRT(U**2+V**2)
28 CALL ZZ1(U,V,ZED)
29 Z3=Q*(TH+ZED)
30 IF(Z3.LT.0.) Z3=Z3+360.
31 S3=E(18,12)
32 TM3=T2(18,12,1)
33 U=UB(14,9,1)
34 V=VB(14,9,1)
35 X4=SQRT(U**2+V**2)
36 CALL ZZ1(U,V,ZED)
37 Z4=Q*(TH+ZED)
38 IF(Z4.LT.0.) Z4=Z4+360.
39 S4=E(14,9)
40 TM4=T2(14,9,1)
41 WRITE(6,1) TTOT,S1,X1,Z1,TH1,S2,X2,Z2,TH2,S3,X3,Z3,TH3,
42 CS4,X4,Z4,TH4
43 1 FORMAT(1X,F7.0,2F6.1,F5.0,3F6.1,F5.0,3F6.1,F5.0,F6.1,
44 2F6.1,F5.0,F6.1)
45 RETURN
46 END

```

*FLOW(1).TPRLOK FOR CREATED ON 4 DEC 79 AT 11:31:18

```

1 C*****
2 C PRINTS CUT HOURLY RESULTS OF HORIZONTAL RESULTANT VEL, W-VEL, AND T
3 C AT 4 LEVELS, AND THE SURFACE ELEVATION ETA
4 C*****
5 SUBROUTINE TPRLOK(IN,JN,KN,IM,JM,U1,U2,U3,V1,V2,V3,W,OM,ETA1,
6 CETA,ETA3,RX,RY,MX,MY,MAR,H,H8,ELEV,UB,VB,HU,HV,MEX,MEY,T2,
7 CDUMX,DUMY,DUMS,DX,DY,DS,DT,FCCR,TAUX,TAUY,G,NCASE,N6LOK,TTOT,
8 CKVEL,KTEMP,VR,ANG,THETA)
9 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),U3(IN,JN,KN),V1(IN,JN,KN),
10 CV2(IN,JN,KN),V3(IN,JN,KN),W(IM,JM,KN),OM(IM,JM,KN),ETA1(IM,JM),
11 CETA(IM,JM),ETA3(IM,JM),RX(IN,JN,KN),RY(IN,JN,KN),MX(IN,JN),
12 CHY(IN,JN),MAP(IN,JN),H(IN,JN),H8(IM,JM),ELEV(IN,JN),
13 CUB(IM,JM,KN),VB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),
14 CMEX(IM,JM)
15 DIMENSION VR(JM),ANG(JM),T2(IM,JM,KN)
16 KUV=C
17 KPROF=0
18 QQ=57.3
19 KZ=KN-1
20 IF(KVEL.EQ.0) GO TO 88
21 IF(KLV.EQ.0) GO TO 200
22 DO 2 K=1,KZ
23 WRITE(6,500) K
24 DO 3 I=1,IM
25 WRITE(6,501) I,(UB(I,J,K),J=1,JM)
26 3 WRITE(6,502) (VR(I,J,K),J=1,JM)
27 2 CONTINUE
28 200 CONTINUE
29 DO 11 K=1,KZ
30 WRITE(6,700) K
31 DO 12 I=1,IM
32 DO 1 J=1,JM
33 VR(J)=10.**9
34 1 ANG(J)=10.**9
35 DO 13 J=1,JM
36 IF(MEX(I,J).EQ.0) GO TO 13
37 U=UB(I,J,K)
38 V=VB(I,J,K)
39 VR(J)=SQRT(U**2+V**2)
40 CALL ZZ1(U,V,ZED)
41 ANG(J)=90*(THETA+ZED)
42 IF(ANG(J).LT.0.) ANG(J)=360.+ANG(J)
43 13 CONTINUE
44 WRITE(6,701) I,(VR(J),J=1,JM)
45 WRITE(6,702) (ANG(J),J=1,JM)
46 12 CONTINUE
47 11 CONTINUE
48 DO 4 K=1,KZ
49 WRITE(6,503) K
50 DO 5 I=1,IM
51 WRITE(6,504) I,(W(I,J,K),J=1,JM)
52 4 CONTINUE
53 WRITE(6,505)
54 DO 6 I=1,IM
55 WRITE(6,506) I,(ETA(I,J),J=1,JM)
56 IF(KPROF.EQ.0) GO TO 100
57 WRITE(6,508)
58 DO 10 J=1,JM
59 WRITE(6,609) J
60 DO 10 K=1,KZ
61 WRITE(6,507) K,(UB(I,J,K),I=1,IM)
62 10 CONTINUE
63 WRITE(6,509)
64 DO 20 I=1,IM
65 WRITE(6,601) I
66 DO 20 K=1,KZ
67 WRITE(6,507) K,(VR(I,J,K),J=1,JM)
68 20 CONTINUE
69 100 CONTINUE
70 CONTINUE
71 IF(KTEMP.EQ.0) GO TO 89
72 DO 31 K=1,KN
73 WRITE(6,550) K
74 550 FORMAT(1X,'TEMPERATURES, DEG C. K=',I4)
75 DO 32 I=1,IM
76 IF(K.EQ.1) WRITE(6,552) I,(T2(I,J,K),J=1,JM)
77 IF(K.GT.1) WRITE(6,551) I,(T2(I,J,K),J=1,JM)
78 32 CONTINUE

```

```

70 552 FORMAT(IX,'I=',I4,'   TEMP=',14F7.2//)
80 551 FORMAT(IX,'I=',I4,'   TEMP=',15F7.2)
81 31 CONTINUE
82 89 CCNTINUE
91 500 FCRMAT(IX,'U,V VELOCITIES, CM/SEC,      K=',I4//)
84 501 FCRMAT(IX,'I=',I4,'   U=',15F7.1)
85 502 FCRMAT(IX,8X,'V=',15F7.1//)
86 503 FCRMAT(IHC,'W VELOCITIES, CM/SEC,      K=',I4//)
87 504 FCRMAT(IX,'I=',I4,'   W=',15F7.4)
88 505 FCRMAT(IX,'SURFACE ELEVATIONS, FTA, CM//)
89 506 FCRMAT(IX,'I=',I4,'   ETA=',14F7.1//)
90 507 FCRMAT(IX,'K=',I4,15F8.1)
91 508 FCRMAT(IX,'VERTICAL PROFILES OF U VELOCITIES')
92 509 FCRMAT(IX,'VERTICAL PROFILES OF V VELOCITIES')
93 600 FCRMAT('1')
94 601 FCRMAT(IHQ,'I=',I4//)
95 609 FCRMAT(IHC,'J=',I4//)
96 700 FCRMAT(IX,'RESULTANT VELOCITIES AND DIRS,      K=',I4//)
97 701 FCRMAT(IX,'I=',I4,'   VRES=',15F7.1)
98 702 FCRMAT(IX,12X,15F7.0//)
99 RETURN
100 END

```

```

*FLOW(1).STORET FOR CREATED ON 4 DEC 79 AT 11:22:36
1 C*****
2 C STORES FOURLY RESULT ONTO TAPE FOR LATER RUN OR PLOTTING
3 C*****
4 SUBROUTINE STORET(IN,JA,KN,IM,JM,U1,U2,V1,V2,W,ETA1,T1,T2,TP,
5 CETA,FX,MY,MAR,H,H9,UB,VP,HU,HV,MEX,MEY,NCASE,NBLOK,TTOT,DT,
6 CTIDE1N,TIDE2N,TIDE3N,TIDE1S,TIDE2S,TIDE3S,STAGE,EST,
7 CAMPLIT,PHASE,DPHASE,PERIOD)
8 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),V1(IN,JN,KN),V2(IN,JN,KN),
9 CH(IM,JM,KN),ETA1(IM,JM),ETA2(IM,JM),MX(IN,JA),MY(IN,JN),MAR(IN,JN),
10 CH(IN,JN),HR(IM,JM),UB(IM,JM,KN),VB(IM,JM,KN),
11 CHU(IN,JN),HV(IN,JN),MEX(IM,JM),MEY(IM,JM),TR(IM,JM,KN)
12 DIMENSION T1(IM,JM,KN),TIDE1N(IM),TIDE2N(IM),TIDE3N(IM)
13 DIMENSION T2(IM,JM,KN),TIDE1S(IM),TIDE2S(IM),TIDE3S(IM)
14 NBLOK=NBLOK+1
15 WRITE(8) NBLOK
16 WRITE(8) ((U1(I,J,K),K=1,KN),J=1,JN),I=1,IN),
17 C((U2(I,J,K),K=1,KN),J=1,JN),I=1,IN),
18 C((V1(I,J,K),K=1,KN),J=1,JN),I=1,IN),
19 C((V2(I,J,K),K=1,KN),J=1,JN),I=1,IN),
20 C((MAR(I,J),J=1,JN),I=1,IN),
21 C((MX(I,J),J=1,JN),I=1,IN),
22 C((MY(I,J),J=1,JN),I=1,IN),
23 C((HU(I,J),J=1,JN),I=1,IN),
24 C((HV(I,J),J=1,JN),I=1,IN),
25 C((H(I,J),J=1,JN),I=1,IN),
26 WRITE(8) ((W(I,J,K),K=1,KN),J=1,JM),I=1,IM),
27 C((UB(I,J,K),K=1,KN),J=1,JM),I=1,IM),
28 C((VE(I,J,K),K=1,KN),J=1,JM),I=1,IM),
29 C((T1(I,J,K),K=1,KN),J=1,JM),I=1,IM),
30 C((T2(I,J,K),K=1,KN),J=1,JM),I=1,IM),
31 C((TR(I,J,K),K=1,KN),J=1,JM),I=1,IM),
32 C((ETA1(I,J),J=1,JM),I=1,IM),
33 C((ETA2(I,J),J=1,JM),I=1,IM),
34 C((MEX(I,J),J=1,JM),I=1,IM),
35 C((MEY(I,J),J=1,JM),I=1,IM),
36 C((HB(I,J),J=1,JM),I=1,IM),
37 C((TIDE1N(I),I=1,IM),
38 C((TIDE2N(I),I=1,IM),
39 C((TIDE3N(I),I=1,IM),
40 C((TIDE1S(I),I=1,IM),
41 C((TIDE2S(I),I=1,IM),
42 C((TIDE3S(I),I=1,IM),
43 WRITE(8) TTOT,NCASE,DT,STAGE,EST,AMPLIT,PHASE,DPHASE,
44 CPERIOD
45 END FILE 8
46 WRITE(6,112) TTOT,NCASE,NBLOK
47 112 FORMAT(IX,'DATA RECORDED ON TAPE', TTOT='F10.0,
48 C' CASE NBP=',I5,' BLOK NBR=',I5)
49 RETURN
50 END

```

```

*FLOW(1).ZZ1 FOR CREATED ON 4 DEC 79 AT 11:39:05
1      C*****DETERMINES THE ANGLE OF RESULTANT VELOCITY *****
2      SUBROUTINE ZZ1(U,V,ZED)
3          IF(ABS(V).LT..0001) GO TO 10
4          ZED=ATAN2(U,V)
5          GO TO 100
6          10 CONTINUE
7          IF(U.GT.0.) ZED=1.571
8          IF(U.LE.0.) ZED=4.713
9          100 RETURN
10     END

```


*FLOW(1).APER1 SYM CREATED ON 19 JUL 79 AT 11:16:24

1	2,1
2	12,1
3	12,4
4	13,4
5	13,3
6	14,3
7	14,1
8	16,1
9	16,3
10	15,3
11	15,4
12	14,4
13	14,5
14	13,5
15	13,7
16	14,7
17	14,8
18	15,8
19	15,9
20	16,9
21	16,14
22	3,14
23	1,12
24	1,12
25	1,10
26	2,10
27	2,7
28	1,7
29	1,4
30	2,4
31	2,1

*FLOW(1).C2007 SYM CREATED ON 20 JUN 80 AT 11:13:26

1	25.0	.82	357.6	90.0	.75	26.6
2	26.1	.78	357.6	90.0	.20	26.7
3	27.2	.74	451.7	110.0	.30	26.8
4	28.8	.70	551.1	110.0	.30	26.9
5	29.8	.66	447.0	110.0	.40	27.0
6	29.4	.62	357.6	110.0	.40	27.0
7	30.0	.59	357.6	90.0	.60	27.0
8	30.6	.58	452.3	90.0	.50	27.0
9	30.6	.57	452.3	110.0	.55	27.0
10	30.0	.57	452.3	100.0	.40	27.1
11	30.0	.56	452.3	100.0	.30	27.2
12	29.4	.55	357.6	110.0	.20	27.1
13	28.8	.53	357.6	90.0	.15	27.0
14	28.0	.50	253.5	90.0	.05	27.0
15	27.2	.49	253.5	90.0	.00	27.0
16	26.8	.48	253.5	90.0	.00	27.0

[illegible]

[illegible]

112


```

*FLOW(1),PLOT'MN FOR CREATED ON 11 DEC 79 AT 18:30:09
1 C*****
2 C MAIN PROGRAM FOR ANALYSING AND PLOTTING THE RESULTS OBTAINED BY ANCMN
3 C*****
4 PARAMETER IN=16,JN=14,KN=5,IM=15,JM=13,NCN=31,MCY=15
5 INTEGER RGRID
6 DIMENSION IRUF(1000),TL(4),TH(4),TI(4),Q1(MCY),Q2(MCY),Q3(MCY),
7 CQ4(MCY),Q5(MCY),TA1(4)
8 DIMENSION IPLOT(5),NPLOUT(MCY),NSTAND(MCY)
9 DIMENSION U1(IN,JN,KN),U2(IN,JN,KN),V1(IN,JN,KN),V2(IN,JN,KN),
10 CW(IM,JM,KN),ETA1(IM,JM),ETA2(IM,JM),MX(IN,JN),MY(IN,JN),
11 CMAR(IN,JN),H(IN,JN),HB(IM,JM),UP(IM,JM,KN),MIDCW(4),
12 CVB(IM,JM,KN),HU(IN,JN),HV(IN,JN),MEX(IM,JM),MEY(IM,JM)
13 DIMENSION T1(IM,JM,KN),T2(IM,JM,KN),T8(IM,JM,KN)
14 DIMENSION TIDE1N(IM),TIDE2N(IM),TIDE3N(IM),TIR(IM,JM,4)
15 DIMENSION TIDE1S(IM),TIDE2S(IM),TIDE3S(IM),RGRID(IM,JM)
16 DIMENSION XX(NCN),YY(NCN),ETAL(MCY),ETAH(MCY),ETAINT(MCY)
17 DATA (MIDCW(I),I=1,4)/'EBB','LOW','FLOOD','HIGH'/
18 READ 2,IPLOIR,IPLOCM,NIR,KPLOT,NCY
19 READ 2,(TL(I),I=1,NIR)
20 READ 2,(TH(I),I=1,NIR)
21 READ 2,(TI(I),I=1,NIR)
22 READ 2,(TA1(I),I=1,NIR)
23 READ 2,(Q1(I),I=1,NIR)
24 READ 2,(Q2(I),I=1,NIR)
25 READ 2,(Q3(I),I=1,NIR)
26 READ 2,(Q4(I),I=1,NIR)
27 READ 2,(Q5(I),I=1,NIR)
28 READ 2,Q6
29 READ 2,(IPLOT(I),I=1,5)
30 READ 2,(NPLOUT(I),I=1,MCY)
31 READ 2,(NSTAND(I),I=1,NCY)
32 READ 2,(ETAL(I),I=1,NIR)
33 READ 2,(ETAH(I),I=1,NIR)
34 READ 2,(ETAINT(I),I=1,NIR)
35 READ 2,XL
36 READ 2,DX,DY
37 DO 9 NC=1,NCN
38 READ 2,I,J
39 XX(NC)=FLOAT(I-1)
40 YY(NC)=FLOAT(J-1)
41 9 CONTINUE
42 2 FORMAT ( )
43 K7=KN-1
44 FACT=1.
45 CALL FACTOR(FACT)
46 AKN=FLOAT(KN-1)
47 DELZ=100.
48 APRIM=.04
49 ARMA=.15
50 DS=.25
51 ALREF=800000.
52 PHI=C.
53 COSF=COS(PHI)
54 SINF=SIN(PHI)
55 XSCALE=XL/DX/FLOAT(IN-1)
56 YSCALE=XSCALE
57 ZSCALE=.002
58 USCALE=.0075
59 VSCALE=USCALE
60 WSCALE=.2
61 XSC=1./2.54/XSCALE
62 YSC=1./2.54/YSCALE
63 ZSC=1./2.54/ZSCALE
64 USC=1./2.54/USCALE
65 VSC=1./2.54/VSCALE
66 WSC=1./2.54/WSCALE
67 WRITE(6,100) XSC,YSC,ZSC
68 100 FORMAT(1X,'XSC=',F12.2,' YSC=',F12.2,' ZSC=',F12.2)
69 WRITE(6,200) USC,VSC,WSC
70 200 FORMAT(1X,'USC=',F12.2,' VSC=',F12.2,' WSC=',F12.2)
71 CALL PLOTS(1BUF,1000,11)
72 NPLT=7
73 CALL PLOT(7,3,-3)
74 C*****
75 C*****PLOTS ISOTHERMS FOR THE IR OBTAINED & MAN INTERPOLATED T-FIELD
76 DO 3 N=1,NIR
77 DO 8 J=1,JM
78 READ 2,(TIR(I,J,N),I=1,IM)

```

```

70      8      CONTINUE
80      IF (IFLOIR.EQ.0) GO TO 7
81      DO 10 N=1,NIR
82      P1=Q1(N)
83      P2=Q2(N)
84      P3=Q3(N)
85      P4=Q4(N)
86      P5=Q5(N)
87      ZLIT=TL(N)
88      ZBIG=TH(N)
89      SAMCON=ZLIT
90      TINT=TI(N)
91      CALL PLOT(10.,0.,-3)
92      DO 11 J=1,JM
93      DO 11 I=1,IM
94      11      ETA(I,J)=TIR(I,J,N)
95      CALL ECHKON(ETA,IM,JM,1,IM,1,JM,4.8,5.6,.04,SAMCON,TINT,
96      CRGRIE,IM,JM,ZLIT,ZBIG,0.,0.,0.,0.,0.,0.,07,1.,NPLT,IN,JN,KN,
97      CNCN,CX,DY,XSCALE,YSCALE,COSF,SINF,XX,YY)
98      CALL CAPTN1(P1,P2,P3,P4,P5,Q6,XSC,USC)
99      CALL CAPTN5(N,MIDEX)
100     12      CALL CAPTN3(N)
101     CALL PLOT(0.,0.,3)
102     10      CONTINUE
103     7      IF (IFLOCM.EQ.0) GO TO 14
104     C*****
105     C*****ANALYZES AND PLOTS THE HOURLY RESULTS OBTAINED FROM CALCULATION
106     C *** READ IN HOURLY RESULT AND MAKES THE CHOICE OF WHICH TO BE PLOTTED
107     DO 100 NCTR=1,NCY
108     CALL READT(IN,JN,KN,IM,JM,U1,U2,V1,V2,W,ETA1,T1,T2,TB,
109     CETA,X,Y,MY,MAR,H,H8,UB,VB,HU,HV,MEX,MEY,NCASE,NBLOK,TTOT,DT,
110     CTIDE1N,TIDE2N,TIDE3N,TIDE1S,TIDE2S,TIDE3S,STAGE,EST,
111     CAMPLT,PHASE,OPHASE,PERIOD)
112     IF ((APLOUT(NCTR).EQ.0).AND.(NSTAND(NCTR).EQ.0)) GO TO 1000
113     N=NSTAND(NCTR)
114     NG=NFLOUT(NCTR)
115     DO 3006 I=1,IM
116     DO 3006 J=1,JM
117     IF (MEX(I,J).EQ.0) TB(I,J,1)=ETA1(N)
118     3006    CONTINUE
119     P1=EST
120     P2=Q2(NG)
121     P3=Q3(NG)
122     P4=Q4(NG)
123     P5=Q5(NG)
124     SUM=C.
125     K=KPLOT
126     DO 995 J=1,JM
127     DO 995 I=1,IM
128     SUM=SUM+(TB(I,J,K)-TIR(I,J,N))*2
129     995    CONTINUE
130     SUM=SUM/(IM*JM)
131     SUM=SQRT(SUM)
132     WRIT(16,992) EST,N,SUM
133     IF (NFLOUT(NCTR).EQ.0) GO TO 1000
134     CALL PLOT(10.,0.,-3)
135     HMAX=C.
136     DO 5 I=1,IM
137     DO 5 J=1,JM
138     IF (MEX(I,J).EQ.0) GO TO 5
139     AH=HE(I,J)+ETA(I,J)
140     HMAX=AMAX1(AH,HMAX)
141     5      CONTINUE
142     KC=1+INT(HMAX/DELZ)
143     C*****PLOTS RESULTANT VEL OF U & V ON NEARLY HORIZONTAL SIGMA PLANE
144     IF (IFLOT(1).EQ.0) GO TO 1001
145     CALL PLOTUV(IN,JN,KN,IM,JM,UP,VR,MEX,MEY,NCN,
146     CXX,Y,AKN,DCLZ,ZPRR,ARMIN,ARMAX,COSF,SINF,KC,HR,UDUM1,
147     CUGUM,XL,UMAX,DX,DY,HMAX,NPLT,KPLOT,
148     CXSCALE,YSCALE,ZSCALE,USCALE,VSCALE,WSCALE,STAGE,ETA)
149     CALL CAPTN1(P1,P2,P3,P4,P5,Q6,XSC,USC)
150     CALL CAPTN5(N,MIDEX)
151     CALL CAPTN2(N)
152     CALL PLOT(0.,0.,3)
153     CALL PLOT(10.,0.,-3)
154     C*****PLOTS RESULTANT VEL OF U & W ON E-W VERTICAL SECTIONS
155     1001  IF (IFLOT(2).EQ.0) GO TO 1002
156     CALL PLOTUW(IN,JN,KN,IM,JM,UP,W,KZ,DX,DY,DS,
157     CPLOT,T,HMAX,UMAX,WMAX,MEX,HU,ARMIN,ARMAX,XL,COSF,SINF,HR,MAP,

```

```

158      CNPLT,XSCALE,YSCALE,ZSCALE,USCALE,VSCALE,WSCALE,STAGE,ETA,MX)
159      CALL CAPTN1(P1,P2,P3,P4,P5,Q6,XSC,USC)
160      CALL CAPTN5(N,MIDEW)
161      CALL CAPTN6(N)
162      CALL PLOT(0.,0.,3)
163      CALL PLOT(10.,0.,-3)
164      C*****PLOTS RESULTANT VEL OF V & W ON N-S VERTICAL SECTIONS
165      1002 IF(I FLOT(3).EQ.0) GO TO 1303
166      CALL PLOTVW(IN,JN,KN,IM,JM,VB,W,KZ,DX,DY,DS,
167      CPLOT,T,HMAX,UMAX,WMAX,MEX,HV,ARMIN,ARMAX,XL,COSF,SINF,HB,MAR,
168      CNPLT,XSCALE,YSCALE,ZSCALE,USCALE,VSCALE,WSCALE,STAGE,ETA,MY)
169      CALL CAPTN1(P1,P2,P3,P4,P5,Q6,XSC,USC)
170      CALL CAPTN5(N,MIDEW)
171      CALL CAPTN7(N)
172      CALL PLOT(0.,0.,3)
173      CALL PLOT(10.,0.,-3)
174      C*****PLOTS SURFACE ELEVATION CONTOUR, CONTOUR VALUES MUST BE GIVEN INDIV
175      1003 IF(I FLOT(4).EQ.0) GO TO 997
176      ZLIT=ETAL(NG)
177      ZFIG=ETAH(NG)
178      SAMC=ZLIT
179      EINT=ETAINT(NG)
180      CALL ECHKON(ETA,IM,JM,1,IM,1,JM,4.8,5.6,.04,SAMCON,EINT,
181      CRGRIC,IM,JM,ZLIT,ZBIG,C.,0.,0.,0.,0.,0.,07,1.,NPLT,IN,JN,KN,
182      CNCN,CX,DY,XSCALE,YSCALE,COSF,SINF,XX,YY)
183      CALL CAPTN1(P1,P2,P3,P4,P5,Q6,XSC,USC)
184      CALL CAPTN5(N,MIDEW)
185      CALL CAPTN8(N)
186      CALL PLOT(0.,0.,3)
187      CALL PLOT(10.,0.,-3)
188      C*****CONTCURS THE ISOOTHERMS OF CALCULATED T-FIELDS, VALUES ARE ASSIGNED
189      997 IF(I FLOT(5).EQ.0) GO TO 1000
190      K=KPLT
191      DO 998 I=1,IM
192      DO 998 J=1,JM
193      998   ETA(I,J)=TB(I,J,K)
194      ZLIT=TL(NG)
195      ZBIG=TH(NG)
196      SAMC=ZLIT
197      TINT=TI(NG)
198      CALL ECHKON(ETA,IM,JM,1,IM,1,JM,4.8,5.6,.04,SAMCON,TINT,
199      CRGRIC,IM,JM,ZLIT,ZBIG,C.,0.,0.,0.,0.,0.,07,1.,NPLT,IN,JN,KN,
200      CNCN,CX,DY,XSCALE,YSCALE,COSF,SINF,XX,YY)
201      CALL CAPTN1(P1,P2,P3,P4,P5,Q6,XSC,USC)
202      CALL CAPTN5(N,MIDEW)
203      CALL CAPTN4(SUM)
204      CALL CAPTN9(N)
205      CALL PLOT(0.,0.,3)
206      CALL PLOT(10.,0.,-3)
207      991   FORMAT(1X,15F8.2)
208      992   FORMAT(1F8.2,' DEVIATION W.R.T. IR TEMP AT',I5,' IS(DEG-C)',F12.5)
209      1000  CONTINUE
210      14    CALL PLOT(0.,0.,999)
211      101   STOP
212      END

```

```

*FLOW(1).PLOTUV FOR CREATED ON 7 DEC 79 AT 10:05:19
1 C*****
2 C TO PLOT RESULTANT OF U & V ON SIGMA PLANE K=KPLOT
3 C*****
4 SUBROUTINE PLOTUV(IM,JN,KN,IM,JM,UB,VB,MEX,MEY,NCN,XX,YY,AKN,
5 COELZ,ZPPR,ARMIN,ARMAX,COSF,SINF,KC,H8,UDUM1,UDUM,XL,UMAX,DX,DY,
6 CHMAX,NPLT,KPLOT,
7 CXSCALE,YSCALE,ZSCALE,USCALE,VSCALE,NSCALE,STAGE,ETA)
8 DIMENSION UP(IM,JM,KN),VB(IM,JM,KN),MEX(IM,JM),MEY(IM,JM),
9 CXX(NCN),YY(NCN),HP(IM,JM),ETA(IM,JM)
10 WRITE(6,32)
11 32 FORMAT(1X,'UV PLOTS')
12 A1=CY*XSCALE/2.
13 M=KPLOT
14 IF(M.GT.1) GO TO 20
15 DEPTH=0.
16 DO 30 I=1,IM
17 DO 30 J=1,JM
18 IF(MEX(I,J).EQ.0) GO TO 30
19 AI=FLOAT(I-1)*DX*XSCALE
20 AJ=FLOAT(J-1)*DY*YSCALE
21 AA1=AI+UB(I,J,M)*USCALE
22 AAJ=AJ+VB(I,J,M)*VSCALE
23 CALL VECT(AI,AA1,AJ,AAJ,ARMIN,ARMAX,COSF,SINF)
24 30 CONTINUE
25 GO TO 8
26 C * * * * *
27 CONTINUE
28 DEPTH=COELZ*FLOAT(M-1)
29 DO 40 I=1,IM
30 DO 40 J=1,JM
31 IF(MEX(I,J).EQ.0) GO TO 40
32 AH=MEX(I,J)*ETA(I,J)
33 IF(DEPTH.GE.AH) GO TO 40
34 DDZ=AH/AKN
35 L1=1+INT(DEPTH/DDZ)
36 298 L2=L1+1
37 L3=L2+1
38 IF(L3.LE.KN) GO TO 299
39 L1=L1-1
40 GO TO 298
41 299 CONTINUE
42 Z1=DDZ*FLOAT(L1-1)
43 Z2=Z1+DDZ
44 Z3=Z2+DDZ
45 E1=UP(I,J,L1)
46 E2=UP(I,J,L2)
47 E3=UP(I,J,L3)
48 CALL FIT(Z1,Z2,Z3,E1,E2,E3,A,B,C)
49 UDEPTH=A*DEPTH**2+B*DEPTH+C
50 E1=VE(I,J,L1)
51 E2=VF(I,J,L2)
52 E3=VF(I,J,L3)
53 CALL FIT(Z1,Z2,Z3,E1,E2,E3,A,B,C)
54 VDEPTH=A*DEPTH**2+B*DEPTH+C
55 AI=FLOAT(I-1)*DX*XSCALE
56 AJ=FLOAT(J-1)*DY*YSCALE
57 AA1=AI+UDEPTH*USCALE
58 AAJ=AJ+VDEPTH*VSCALE
59 CALL VECT(AI,AA1,AJ,AAJ,ARMIN,ARMAX,COSF,SINF)
60 40 CONTINUE
61 8 CONTINUE
62 C*****DRAWS OUTLINE OR BOUNDARY OF THE INTEREST AREA
63 CALL PLOT(-A1,-A1,-3)
64 CALL OUTLIN(IM,JN,KN,NCN,DX,DY,XSCALE,YSCALE,COSF,SINF,XX,YY)
65 CALL PLOT(A1,A1,-3)
66 NPLT=NPLT+1
67 WRITE(6,18) NPLT,DEPTH
68 18 FORMAT(1X,'PLOT NoR=',I6,' COMPLETED. DEPTH=',F10.0,' CM')
69 19 CONTINUE
70 500 CONTINUE
71 2 FORMAT( )
72 RETURN
73 END

```

```

1 *FLOW(1).PLOTUW FOR CREATED ON 19 DEC 79 AT 12:12:46
2 C*****
3 C PLOTS RESULTANT OF U & W ON SELECTED E-W CROSS SECTIONS
4 C*****
5 SUBROUTINE PLOTUW(IN,JN,KN,IM,JM,UB,W,KZ,DX,DY,DS,
6 CPLOT,T,HMAX,UMAX,WMAX,MEX,HU,ARMIN,ARMAX,XL,COSF,SINF,HR,MAR,
7 CNPLT,XSCALE,YSCALE,ZSCALE,USCALE,VSCALE,WSCALE,STAGE,ETA,MX)
8 DIMENSION MAR(IN,JN),HB(IM,JM),ETA(IM,JM),MX(IN,JN)
9 DIMENSION UB(IM,JM,KN),W(IM,JM,KN),MEX(IM,JM),HU(IN,JN)
10 WRITE(6,32)
11 32 FORMAT(IX,'UW PLOTS')
12 KZ=KA-1
13 A1=DX*XSCALE/2.
14 DO 1000 IJ=1,3
15 IF(IJ.EQ.1) J=4
16 IF(IJ.EQ.2) J=6
17 IF(IJ.EQ.3) J=12
18 CALL PLOT(0.,+1.5,-3)
19 DO 705 I=1,IM
20 IF(MEX(I,J).EQ.0) GO TO 705
21 AI=FLOAT(I-1)*DX*XSCALE
22 AH=HE(I,J)+ETA(I,J)
23 DC 705 K=1,KZ
24 AK=(STAGE+ETA(I,J)-FLOAT(K-1)*DS*AH)*ZSCALE
25 AAI=AI+UB(I,J,K)*USCALE
26 AAK=AK+W(I,J,K)*WSCALE
27 YW=.2*SQRT((AAI-AI)**2+(AAK-AK)**2)
28 YW=APX1(ARMIN,AMIN1(YW,ARMAX))
29 CALL AROHD(AI,AK,AAI,AAK,YW,0.0,12)
30 706 CONTINUE
31 705 CONTINUE
32 C*****DRAWS BOUNDARY OR BOTTOM OF THE CROSS SECTION
33 CALL PLOT(-A1,0.,-3)
34 NN=0
35 DO 710 I=1,IN
36 IF(MX(I,J).EQ.0) GO TO 710
37 NN=NN+1
38 IF(NN.GT.1) GO TO 711
39 AI=FLOAT(I-1)*DX*XSCALE
40 AK=(STAGE+ETA(I,J))*ZSCALE
41 CALL PLOT(AI,AK,3)
42 AK=-ZSCALE*(HU(I,J)-STAGE)
43 CALL PLOT(AI,AK,2)
44 GO TO 712
45 711 CONTINUE
46 AI=FLOAT(I-1)*DX*XSCALE
47 AK=-ZSCALE*(HU(I,J)-STAGE)
48 CALL PLOT(AI,AK,2)
49 ID=I
50 AID=AI
51 712 CONTINUE
52 713 CONTINUE
53 IF(I.LT.IN) GO TO 707
54 AK=(STAGE+0.0)*ZSCALE
55 GO TO 708
56 707 AK=(STAGE+ETA(I,J))*ZSCALE
57 708 CALL PLOT(AID,AK,2)
58 WRITE(6,77) J
59 77 FORMAT(IX,'J=',I4)
60 FJ=FLOAT(J)
61 CALL SYMROL(5.4,-0.7,.1,2HJ=,0.,2)
62 CALL NUMBER(5.7,-0.7,.1,FJ,0.,-1)
63 CALL PLOT(A1,0.,-3)
64 1000 CONTINUE
65 CALL PLOT(0.,-4.5,-3)
66 NPLT=NPLT+1
67 WRITE(6,13) NPLT
68 13 FORMAT(IX,'PLOT NBR',I4,' COMPLETED')
69 RETURN
70 END

```

```

1 *FLOW(1).PLOTVW FOR CREATED ON 19 DEC 79 AT 12:10:41
2 C*****
3 C PLOTS RESULTANT OF V & W ON SELECTED N-S CROSS SECTIONS
4 C*****
5 SUBROUTINE PLOTVW(IN,JN,KN,IM,JM,VB,W,KZ,DX,DY,DS,
6 CPLOT,HT,HMAX,UMAX,WMAX,MEX,HV,ARMIN,ARMAX,XL,COSF,SINF,HP,MAR,
7 CNPLT,XSCALE,YSCALE,ZSCALE,USCALE,VSCALE,WSCALE,STAGE,ETA,MY)
8 DIMENSION MAR(IN,JN),HB(IM,JM),ETA(IM,JM),MY(IN,JN)
9 DIMENSION VB(IM,JM,KN),W(IM,JM,KN),MEX(IM,JM),HV(IN,JN)
10 WRITE(6,32)
11 32 FORMAT(1X,'VW PLOTS')
12 KZ=KN-1
13 AI=DY*XSCALE/2.
14 DO 1000 M=1,3
15 IF(M.EQ.1) I=4
16 IF(M.EQ.2) I=8
17 IF(M.EQ.3) I=12
18 CALL PLOT(O.,+1.5,-3)
19 DO 802 J=1,JM
20 IF(MEX(I,J).EQ.0) GO TO 802
21 AJ=FLOAT(J-1)*DY*YSCALE
22 AH=HB(I,J)*ETA(I,J)
23 DO 803 K=1,KZ
24 AK=(STAGE+ETA(I,J)-FLOAT(K-1)*DS*AH)*ZSCALE
25 AA=AJ+VB(I,J,K)*VSCALE
26 AAK=AK+W(I,J,K)*WSCALE
27 YW=.2*SORT((AAJ-AJ)**2+(AAK-AK)**2)
28 YW=APAXI(ARMIN,AMINI(YW,ARMAX))
29 CALL ARCHD(AJ,AK,AAJ,AAK,YW,O.O,12)
30 803 CONTINUE
31 802 CONTINUE
32 C*****DRAWS BOUNDARY OR BOTTOM OF THE CROSS SECTION
33 CALL PLOT(-AI,O.,-3)
34 NN=0
35 DO 810 J=1,JN
36 IF(MY(I,J).EQ.0) GO TO 810
37 NN=NN+1
38 IF(NN.GT.1) GO TO 811
39 AJ=FLOAT(J-1)*DY*YSCALE
40 AK=(STAGE+ETA(I,J))*ZSCALE
41 CALL PLOT(AJ,AK,3)
42 AK=-ZSCALE*(HV(I,J)-STAGE)
43 CALL PLOT(AJ,AK,2)
44 GO TO 812
45 811 CONTINUE
46 AJ=FLOAT(J-1)*DY*YSCALE
47 AK=-ZSCALE*(HV(I,J)-STAGE)
48 CALL PLOT(AJ,AK,2)
49 JD=J
50 AJD=AJ
51 812 CONTINUE
52 810 CONTINUE
53 IF(J.LT.JN) GO TO 807
54 AK=(STAGE+O.O)*ZSCALE
55 GO TO 808
56 807 AK=(STAGE+ETA(I,J))*ZSCALE
57 808 CALL PLOT(AJD,AK,2)
58 WRITE(6,77) I
59 77 FORMAT(1X,'I=',I4)
60 FI=FLOAT(I)
61 CALL SYMBOL(5.4,-0.7,.1,2HI=O.,2)
62 CALL NUMBER(5.7,-0.7,.1,FI,7.,-1)
63 CALL PLOT(AI,O.,-3)
64 1000 CONTINUE
65 CALL PLOT(O.,-4.5,-3)
66 NPLT=NPLT+1
67 WRITE(6,18) NPLT
68 18 FORMAT(1X,'PLOT NBR',I4,' COMPLETED')
69 RETURN
70 END

```

```

*FLOW(1).OUTLIN FOR CREATED ON 10 DEC 79 AT 11:23:23
1 C*****
2 C  DRAWS OUTLINE/BOUNDARY OF THE INTEREST AREA
3 C*****
4     SUBROUTINE OUTLIN(IN,JN,KN,NCN,DX,DY,XSCALE,YSCALE,COSF,
5     CSINF,XX,YY)
6     DIMENSION XX(NCN),YY(NCN)
7     DO 15 NC=1,NCN
8     A=XX(NC)*DX*XSCALE
9     B=YY(NC)*DY*YSCALE
10    KV=2
11    IF(NC.EQ.1) KV=3
12    X=A*COSF+B*SINF
13    Y=-A*SINF+B*COSF
14    15 CALL PLOT(X,Y,KV)
15    RETURN
16    END

```

1 FLOW(1).ECHKON ELT CREATED ON 4 DEC 79 AT 09:59:18
2 SUBROUTINE ECHKON

3 THIS IS ENTRY SUBROUTINE FOR NHC CONTOURING PROGRAM
4 [CALCOMP OR MILGO TYPE PLOTTER]

5 ELBERT HILL, NHC, MIAMI, FLA. FALL, 1970

6 THE COMPLETE PACKAGE CONSISTS OF 3 SUBROUTINES, ECHKON, CONLIN, AND ENDER
7 ALL 3 ARE CATALOGUED TOGETHER IN THE UM 360/65 UNDER MODULE NAME ECHKON,
8 AND DECKS ARE NOT NEEDED.

9 ANY RECTANGULAR GRIDDED SCALAR FIELD CAN BE CONTOURED ON MILGO
10 OR CALCOMP TYPE PLOTTER BY SETTING UP PROPER CALLING ARGUMENTS AND
11 PROCEDURES AS INDICATED BELOW AND THEN CALLING ECHKON.

12 -----CALLING STATEMENT IS AS FOLLOWS-----

13 CALL ECHKON(HH,IN1,IN2,NEX1,NEX2,NEY1,NEY2,HI,WID,PLTINC,SAMCON,
14 2CONINT,RGRID,IN3,IN4,ZLIT,ZBIG,ANORTH,ASOUTH,AEAST,AWEST,NDASHO,
15 3NCASHO,XLABEL,SMOOTH,IRECCY)

16 ---DESCRIPTION OF CALLING ARGUMENTS---

17 HH IS ARRAY CONTAINING GRID DATA TO BE CONTOURED. ITS DIMENSIONS
18 ARE IN1 AND IN2. DIMENSION HHCIN1,IN2]. POINT 1,1 IS LOWER LEFT
19 CORNER OF GRID. IN1 IS DIMENSION IN X DIRECTION AND IN2 IS
20 DIMENSION IN Y DIRECTION.
21 EX INCREASES FROM WEST TO EAST AND Y INCREASES FROM SOUTH TO NORTH]

22 NEX1, NEX2, NEY1, AND NEY2 DETERMINE THE PORTION OF HH GRID TO
23 BE USED. NEX1 AND NEX2 ARE THE FIRSTLEFTMOST] AND LASTRIGHTMOST]
24 COLUMNS TO BE USED. NEY1 AND NEY2 ARE THE FIRSTBOTTOM] AND LASTTOP]
25 ROWS TO BE USED. [THUS ANY SECTION OF HH CAN BE USED]

26 FOR FULL GRID---

27 NEX1 > 1
28 NEX2 > IN1
29 NEY1 > 1
30 NEY2 > IN2

31 HI IS HEIGHT IN INCHES OF CONTOUR MAP BETWEEN LIMITS NEY1 AND NEY2
32 WID IS WIDTH IN INCHES OF CONTOUR MAP BETWEEN LIMITS NEX1 AND NEX2

33 PLTINC IS STRAIGHT LINE PLOT INCREMENT IN INCHES TO BE USED
34 ALONG CONTOUR. GOOD VALUE IS .04, BUT CAN BE VARIED UP OR DOWN.
35 SINCE LARGER VALUES CAUSE PROGRAM TO RUN A LITTLE FASTER, IDEAL VALUE
36 IS LARGEST THAT WILL STILL GIVE SMOOTH LOOKING CURVES.
37 DO SOME EXPERIMENTING WITH IT. START WITH .03 OR .04 AND INCREASE.

38 SAMCON IS ANY SAMPLE CONTOUR VALUE. IT IS USED AS A STARTING POINT
39 FOR COUNTING UP AND DOWN TO GET OTHER CONTOUR VALUES.

40 CONINT IS CONTOUR INTERVAL TO BE USED.

41 RGRID IS AN INTEGER*2 STORAGE ARRAY USED INTERNALLY IN PROGRAM
42 AND NEED NOT BE INITIALIZED. IT IS INCLUDED AS ARGUMENT IN ORDER
43 TO TAKE ADVANTAGE OF VARIABLE DIMENSIONS. DECLARE AS INTEGER*2
44 BEFORE CALLING.

45 IN3 AND IN4 ARE X AND Y DIMENSIONS OF RGRID. DIMENSION RGRIDCIN3,IN4]
46 IN3 MUST BE AT LEAST AS LARGE AS NEX2-NEX1+1
47 IN4 MUST BE AT LEAST AS LARGE AS NEY2-NEY1+1
48 [THUS RGRID MUST BE AS LARGE AS PORTION OF DATA ARRAY HH BEING USED]

49 ZLIT AND ZBIG ARE LOWER AND UPPER CONTOUR CHECK LIMITS. NO CONTOUR
50 WILL BE DRAWN BELOW VALUE OF ZLIT OR ABOVE VALUE OF ZBIG.
51 [USEFUL TO PREVENT DRAWING FOR ANY COMPLETELY WILD DATA]

52 ANORTH, ASOUTH, AEAST, AND AWEST CAN BE USED TO ELIMINATE ANY
53 NUMBER OF INCHES FROM ANY SIDE OF FINAL DRAWING.

54 FOR FULL DRAWING WITH HEIGHT > HI AND WIDTH > WID,
55 INITIALIZE ALL 4 OF ABOVE ARGUMENTS TO ZERO.

56 FOR EACH OF THE ABOVE WITH POSITIVE VALUE, THIS MANY INCHES
57 WILL BE ELIMINATED ON SIDE TO WHICH IT APPLIES.
58 THIS ALLOWS US TO FIT ANY RECTANGULAR GRID TO ANY MERCATOR
59 OR OTHER MAP LIMITS WITHOUT ACTUALLY ADJUSTING THE GRID.

```

79      NCASHD AND NDASHU CONTROL TYPE OF CONTOURS [SOLID OR DASHED LINES]
80      IF EITHER OR BOTH ARE ZERO OR LESS, CONTOURS ARE SOLID LINES.
81
82      IF BOTH ARE POSITIVE, CONTOURS WILL BE DASHED AS FOLLOWS----
83
84      PEN DOWN SECTION LENGTH > NDASHD*PLTINC [PLTINC IS INCREMENT LENGTH:
85      PEN UP SECTION LENGTH > NDASHU*PLTINC
86      [THUS LENGTH OF DASHES AND SKIPS IS FULLY VARIABLE]
87
88      XLABEL CONTROLS LABELING OF CONTOURS. LINES ARE LABELED
89      ONLY IF XLABEL GREATER THAN ZERO. VALUE OF XLABEL
90      IS HEIGHT IN INCHES OF LABEL NUMBERS. LINES ARE LABELED
91      WITH NEAREST WHOLE NUMBER VALUE OF CONTOUR. IF SPECIAL
92      LABELING TO INCLUDE ONLY PART OF NUMBER OR TO INCLUDE
93      DECIMALS IS DESIRED, SUBROUTINE ENDCR MUST BE CHANGED.
94
95      SMOOTH IS A CONTROL FOR VARYING CONTOUR SMOOTHING.
96      INITIALIZE SMOOTH TO SOME VALUE BETWEEN 0.25 AND 7.5
97      [ANY VALUE OUTSIDE THIS RANGE IS SET INTERNALLY TO 1.0]
98      LARGER VALUES GIVE SMOOTHER CHART WITH LESS DETAIL, WHILE
99      SMALLER VALUES GIVE LESS SMOOTHING AND MORE DETAIL.
100     [NORMAL VALUE FOR MOST RUNS SHUD BE ABOUT 1.5]
101     ANYTHING LESS THAN ABOUT 0.40 OR LARGER THAN ABOUT 3. IS
102     PROBABLY NO GOOD. BEGIN WITH 1.5 AND EXPERIMENT UP OR DOWN
103     TO DETERMINE MOST DESIRABLE VALUE FOR YOUR NEEDS.
104     [INPUT GRID DATA VALUES ARE NOT ALTERED IN THIS SMOOTHING]
105
106     IRECCY IS PLOT TAPE RECORD COUNTER. INITIALIZE TO NUMBER
107     OF PLOT RECORDS WRITTEN BEFORE FIRST CALL TO CONTOUR SUBROUTINE.
108
109     ALL OF THE ABOVE ARGUMENTS EXCEPT ARRAY RGRID MUST BE DEFINED.
110     ARGUMENTS ARE NOT ALTERED WITHIN PROGRAM, AND RETURN INTACT.
111
112     PLOTTER BUFFER SPACE MUST BE SET UP AND CALL TO PLOTS
113     MADE BEFORE FIRST CALL TO THIS SUBROUTINE.
114
115     PLOT TAPE MUST BE CLOSED OUT AFTER FINAL CALL.
116
117     ANY NUMBER OF SUCCESSIVE CALLS CAN BE MADE TO CONTOUR
118     SUBROUTINE ECHKON. EACH MAP BECOMES A SEPARATE PLOT RECORD.
119     NO INTERNAL MAP SPACING IS PROVIDED, WITH PEN RETURNING TO
120     ORIGINAL ORIGIN [LOWER LEFT CORNER] AT COMPLETION OF MAP.
121     [THUS IT IS SIMPLE TO PUT MORE THAN ONE SET OF CONTOURS ON SAME MAP]
122     ANY SPECIAL MARKINGS OR LABELS THAT ARE DESIRED MUST BE DONE
123     OUTSIDE THIS SUBROUTINE. THIS SUBROUTINE DRAWS CONTOURS ONLY
124     WITH INCOMING ORIGIN BEING LOWER LEFT CORNER OF CONTOUR CHART.
125
126     -----
127
128     SUBROUTINE ECHKON (HH,IN1,IN2,NEX1,NEX2,NEY1,NEY2,HI,WID,PLTINC,
129     2SAMCON,CONINT,RGRID,IN3,IN4,ZLIT,ZBIG,ANORTH,ASOUTH,AEAST,AWEST,
130     3NDASHD,NDASHU,XLABEL,SMOOTH,IRECCY,IN,JN,KN,
131     CNCN,CX,CY,XSCALE,YSCALE,COSF,SINF,XX,YY)
132
133     SEE ABOVE COMMENTS FOR DESCRIPTION AND USE OF ABOVE ARGUMENTS
134
135     COMMON /STRCON/SMHI,SMET,X,Y,XGRID,YGRID,CUTOF,SCHI,SCWI,THAY,XPP,
136     2YPP,CGIG,U,V,MXUX,JDOO,NUVX,NUVY,YCPTH,SOUTH,EAST,WEST,CLIT,CRIG,
137     3LCLX,LCLY,INCRCS,QINC,CLOSIT,PVAL,PVOL,ENTER,HINUM,NMX1,NMY1,
138     4NXX1,NYY1,MOSINC,VALLIN,HINC,MAXCRO,WHAT,LDASH1,LDASH2,DASHP,
139     5DCLAFS,OUTS
140     COMMON /DENDEC/HIXEN,WCOE,HOGH,XXLAST,YYLAST
141     LOGICAL DASHP,DOLARS,OUTS
142     DIMENSION HH(IN1,IN2),RGRID(IN3,IN4),HEN(4),XX(CNCN),YY(CNCN)
143     INTEGER RGRID
144     DATA THAP/0/
145
146     NHC SUBROUTINE FOR CONTOURING SCALAR FIELD ON CALCOMP OR HILGO TYPE PLOTTE
147     ELPERT HILL ---FALL, 1970--
148
149     I=IMAP+1
150     WRITE(6,10)I
151     10 FORMAT(//,2X,11HCONTOUR MAP,14,1X,26HINCOMING ARGUMENTS FOLLOW.)
152     WRITE(6,12)IN1,IN2,NEX1,NEX2,NEY1,NEY2,HI,WID,PLTINC,SAMCON,CONINT
153     2,IN3,IN4
154     12 FORMAT(//,5X,63HIN1 IN2 NEX1 NEX2 NEY1 NEY2 HI WID PLTINC SAMCON CO
155     2NINT IN3 IN4,//,2X,615,2F10.4,3F12.3,2I10)
156     WRITE(6,14)ZLIT,ZBIG,ANORTH,ASOUTH,AEAST,AWEST,NDASHD,NDASHU,XLABE
157

```

```

159 2L,SMCOTH,IRECCY
160 14 FORMAT(1,5X,7CH7LIT ZBIG ANORTH ASCUTH AEAST AWEST NDASHD NDASHU X
161 2LABEL SMOOTH IRECCY,1,2X,2F12.3,4F10.4,2I6,2F10.3,16,1)
162 MAXCFO=0
163 WHAT=-99.
164 CONINC=CONINT
165 IF(CONINC.NE.0.)GO TO 3
166 WRITE(6,211)
167 2 FORMAT(1,2X,3HMAP,13,14H ZERO INTERVAL)
168 GO TO 120
169 3 IREC1=IRECCY+1
170 LCASH1=NDASHD
171 LDASH1=NDASHU
172 DASHP=.FALSE.
173 IF(LCASH2.GT.0.AND.LDASH1.GT.0)DASHER=.TRUE.
174 HINUM=XLABEL
175 DOLARS=.FALSE.
176 IF(HINUM.GT.0.)DOLARS=.TRUE.
177 IF(CONINC.LT.0.)CONINC=-CONINC
178 PVGL=.005*CONINC
179 MOSIAC=0
180 VALLIN=-989898.989
181 NUVX=NEX2-NEX1+1
182 NUVY=NEY2-NEY1+1
183 IF(NLVX.GT.3.AND.NUVX.LE.IN3.AND.NUVY.GT.3.AND.NUVY.LE.IN4)GO TO 8
184 WRITE(6,7)NEX1,NEX2,NUVX,NEY1,NEY2,NUVY
185 7 FORMAT(1,10X,23HBAD ARRAY LIMITS. SKIP./10X,3I10/10X,3I10)
186 GO TO 120
187 C SKIP IF NUVX OR NUVY LESS THAN 4
188 8 YORTH=HI-ANORTH
189 SOUTH=ASOUTH
190 EAST=WID-AEAST
191 WEST=AWEST
192 IF(WEST.LT.0.)WEST=0.
193 IF(EAST.GT.WID)EAST=WID
194 IF(SOUTH.LT.0.)SOUTH=0.
195 IF(YORTH.GT.HI)YORTH=HI
196 MIXE=HINUM
197 WGOE=EAST-WEST
198 HOGH=YORTH-SOUTH
199 XXLAST=99.
200 YYLAST=99.
201 QINC=PLINC
202 CLIT=QINC/1.99
203 CBIG=QINC/2.
204 TMAX=4.0*(YORTH-SOUTH+EAST-WEST)
205 XCRIT=.5ID/FLOAT(NUVX-1)
206 YGRIT=.5I/FLOAT(NUVY-1)
207 HINC=XGRID
208 IF(YGRID.LT.XGRID)HINC=YGRID
209 X=SMCOTH
210 IF(X.LI..25.OP.Y.GT.7.5)X=1.0
211 HINC=X*HINC
212 CUTOFF=SQRT(XGRID*XGRID+YGRID*YGRID)+.01
213 CLOSIT=.04
214 C CLOSIT IS VALUE FOR CLOSED CONTOUR CHECK
215 NMX1=NEX1
216 NMY1=NEY1
217 NMX11=NMX1-1
218 NMY11=NMY1-1
219 NEX4=NEX1-1
220 NEY4=NEY1-1
221 C
222 C NEXT DETERMINE MAX AND MIN VALUES IN SCALAR FIELD
223 ZMAX=HH(NEX1,NEY1)
224 ZMIN=ZMAX
225 DO 30 I=NEX1,NEX2
226 DO 30 J=NEY1,NEY2
227 IF(HH(I,J).GT.ZMAX)ZMAX=HH(I,J)
228 IF(HH(I,J).LT.ZMIN)ZMIN=HH(I,J)
229 30 CONTINUE
230 IF(ZMAX.GT.ZBIG)ZMAX=ZBIG
231 IF(ZMIN.LT.ZLIT)ZMIN=ZLIT
232 C NEXT DETERMINE BOTTOM STARTING VALUE FOR CONTOUR LOOP
233 PVAL=SAMCON
234 32 IF(PVAL.GT.ZMIN)GO TO 34
235 PVAL=PVAL+CONINC
236 GO TO 32
237 34 IF(PVAL-COININC.LT.ZMIN)GO TO 35

```

```

237 PVAL=PVAL-CONINC
238 GO TO 34
239
240 C
241 35 XPP=C.
242 YPP=C.
243 N1=NLVX-1
244 N2=NLVY-1
245
246 C
247 C
248 C
249 C
250 C
251 C
252 C
253 C
254 C
255 C
256 C
257 C
258 C
259 C
260 C
261 C
262 C
263 C
264 C
265 C
266 C
267 C
268 C
269 C
270 C
271 C
272 C
273 C
274 C
275 C
276 C
277 C
278 C
279 C
280 C
281 C
282 C
283 C
284 C
285 C
286 C
287 C
288 C
289 C
290 C
291 C
292 C
293 C
294 C
295 C
296 C
297 C
298 C
299 C
300 C
301 C
302 C
303 C
304 C
305 C
306 C
307 C
308 C
309 C
310 C
311 C
312 C
313 C
314 C
315 C

```

PVAL=PVAL-CONINC
 GO TO 34

35 XPP=C.
 YPP=C.
 N1=NLVX-1
 N2=NLVY-1

CONTOUR LOOP STARTS BELOW AT STATEMENT 36
 THIS LOOP DETERMINES WHERE TO START A NEW CONTOUR, THEN CALLS
 SUBROUTINE CONLIN TO DRAW EACH CONTOUR. EXIT IS MADE WHEN
 ALL CONTOURS COMPLETED.

THERE ARE 2 SCANS FOR EACH CONTOUR VALUE. FIRST WITH VARIABLE OUTS AS
 FALSE SELECTS ONLY CONTOURS ENTERING GRID FROM OUTSIDE EDGES.
 SECOND SCAN WITH OUTS TRUE SELECTS REMAINING INNER CONTOURS.
 STARTING POINT CLOSEST TO PLOT PEN POSITION IS SELECTED IN EACH CASE.

36 IF (PVAL.GE.ZMAX)GO TO 110
 OUTS=.FALSE.
 DO 37 I=1,N1
 DO 37 J=1,N2
 37 RGRID(I,J)=0
 38 DZ=999999.
 DO 100 I=1,N1
 DO 100 J=1,N2
 IF (OUTS)GO TO 600
 IF (I.EQ.1.OR.J.EQ.1.OR.I.EQ.N1.OR.J.EQ.N2)GO TO 600
 GO TO 100
 600 IF (RGRID(I,J).EQ.1)GO TO 100
 IF (RGRID(I,J).GT.1.AND.OUTS)GO TO 100
 II=NEY4+I
 JJ=NEY4+J
 HEN(1)=HH(II,JJ)
 HEN(2)=HH(II,JJ+1)
 HEN(3)=HH(II+1,JJ+1)
 HEN(4)=HH(II+1,JJ)
 DO 400 K=1,4
 IF (ABS(HEN(K)-PVAL).GE.PVOL)GO TO 400
 IF (HEN(K).GE.PVAL)HEN(K)=PVAL+PVOL
 IF (HEN(K).LT.PVAL)HEN(K)=PVAL-PVOL
 400 CONTINUE
 IF (OUTS)GO TO 250
 NENN=1
 IF (I.EQ.1.AND.HEN(1).GT.PVAL.AND.HEN(2).LT.PVAL)GO TO 601
 NENN=2
 IF (I.EQ.N1.AND.HEN(3).GT.PVAL.AND.HEN(4).LT.PVAL)GO TO 601
 NENN=4
 IF (J.EQ.1.AND.HEN(4).GT.PVAL.AND.HEN(1).LT.PVAL)GO TO 601
 NENN=2
 IF (J.EQ.N2.AND.HEN(2).GT.PVAL.AND.HEN(3).LT.PVAL)GO TO 601
 GO TO 602
 250 DO 410 K=1,4
 I1=K
 I2=K+1
 IF (K.EQ.4)I2=1
 IF (HEN(I1).GT.PVAL.AND.HEN(I2).LT.PVAL)GO TO 408
 410 CONTINUE
 GO TO 602
 408 NENN=K
 601 IF (RGRID(I,J).EQ.0.OR.OUTS)GO TO 640
 I1=RGRID(I,J)/10
 I2=RGRID(I,J)-10*I1
 IF (I1.EQ.NENN.OR.I2.EQ.NENN)GO TO 100
 640 GO TO (340,342,344,346),NENN
 602 IF (RGRID(I,J).EQ.0)RGRID(I,J)=1
 GO TO 100
 340 Y=YGRID*(FLOAT(J-1)+(PVAL-HEN(1))/(HEN(2)-HEN(1)))
 X=XGRID*(FLOAT(I-1)+(PVAL-HEN(1))/(HEN(2)-HEN(1)))
 GO TO 45
 342 X=XGRID*(FLOAT(I-1)+(PVAL-HEN(2))/(HEN(3)-HEN(2)))
 Y=YGRID*(FLOAT(J)+(PVAL-HEN(2))/(HEN(3)-HEN(2)))
 GO TO 45
 344 Y=YGRID*(FLOAT(J-1)+(PVAL-HEN(4))/(HEN(3)-HEN(4)))
 X=XGRID*(FLOAT(I)+(PVAL-HEN(4))/(HEN(3)-HEN(4)))
 GO TO 45
 346 X=XGRID*(FLOAT(I-1)+(PVAL-HEN(1))/(HEN(4)-HEN(1)))
 Y=YGRID*(FLOAT(J-1)+(PVAL-HEN(1))/(HEN(4)-HEN(1)))

```

316 45 D=(X-XPP)*(X-XPP)+(Y-YPP)*(Y-YPP)
317 IF(D.GE.DZ)GO TO 100
318 DZ=D
319 NENTER=NENN
320 LCLX=I
321 LCLY=J
322 XTT=X
323 YTT=Y
324 100 CONTINUE
325 IF(DZ.GE.999990.)GO TO 105
326 IF(RGRID(LCLX,LCLY).EQ.0)RGRID(LCLX,LCLY)=1
327 X=XTT
328 Y=YTT
329 C
330 WRITE(6,101)PVAL,DOLABS,OUTS
331 101 FORMAT(1X,E13.5,2L13)
332 C
333 NEXT CALL SUBROUTINE CONLIN TO ACTUALLY DRAW CONTOUR WITH VALUE PVAL
334 C
335 CALL CONLIN(HH,IN1,IN2,RGRID,IN3,IN4)
336 C
337 NOW GO BACK TO INNER LOOP TO SEE IF THERE ARE OTHER PVAL CONTOURS
338 C
339 TO BE DRAWN.
340 C
341 GO TO 38
342 105 IF(OLYS)GO TO 612
343 OUTS=.TRUE.
344 GO TO 38
345 612 PVAL=PVAL+CONINC
346 C
347 INCREMENT CONTOUR AND GO TO TOP OF LOOP FOR NEXT CONTOUR
348 C
349 GO TO 36
350 110 CALL PLOT(Q.,0.,-3)
351 C
352 NOW TO DRAW THE OUTLINE OF INTEREST AREA BY CALLING OUTLIN
353 C
354 A1=DX*XSCALE/2.
355 CALL PLOT(-A1,-A1,-3)
356 CALL OUTLIN(IN,JN,KN,NCN,DX,DY,XSCALE,YSCALE,
357 C
358 CCOSF,SINF,XX,YY)
359 CALL PLOT(A1,A1,-3)
360 IMAP=IMAP+1
361 IRECCY=IRECCY+1
362 WRITE(6,115)IMAP,IREC1,IRECCY
363 115 FORMAT(1/,10X,11HCONTOUR MAP,I3,24H BEGINS WITH PLOT RECORD,I3,14H
364 2AND ENDS WITH,I3)
365 WRITE(6,116)MOSINC,VALLIN,MAXCRD,WHAT
366 116 FORMAT(12X,21HMOST LINE INCREMENTS ,I5,12H ON CONTOUR ,F10.2,/,12X
367 2,12HMOST SQUARES,I4,12H ON CONTOUR ,F10.2,/)
368 120 RETURN
369 END

```

```

1  *FLOW(1).CONLIN ELT CREATED ON 27 AUG 79 AT 21:35:08
2  SUBROUTINE CONLIN(HH,IN1,IN2,PGPID,IN3,IN4)
3  COMMON /STRCON/SMHI,SMHI,X,Y,XGRID,YGRID,CUTOFF,SQHI,SQHI,THAX,XPP,
4  2YPP,CGIG,U,V,NXUX,JPOO,NUVX,NUVY,YORTH,SOUTH,EAST,WEST,CLIT,CBIG,
5  3LCLY,LCLY,INCROS,INC,CLOSIT,PVAL,PVAL,NENTER,HINUM,NMX1,NMY1,
6  4NMX11,NMY11,MOSINC,VALLIN,HINC,MAXCRD,WHAT,LDASH1,LDASH2,DASHER,
7  5DOLARS,OUTS
8  DIMENSION HH(IN1,IN2),CIDE(4,2),XXPLOT(275,2),HAX(4),LEXE(4),
9  2CORD(400,2),HIPPS(400)
10 INTEGER RGRID(IN3,IN4)
11 LOGICAL INCS,DOLARS,DASHER,CLOS,OUTS,DASHIX
12
13 C
14 C THIS SUBROUTINE IS CALLED TO DRAW EACH INDIVIDUAL CONTOUR
15 C
16 C IF DOLARS ENTERS AS TRUE, LABEL CONTOURS WITH HEIGHT HINUM
17 C
18 DASHIX=DASHER
19 LABELIT=9
20 IF(DOLARS)LABELIT=0
21 INCS=.FALSE.
22 YMAX=-9.
23 XMAX=-9.
24 NENS=NENTER
25 IOPLCT=2
26 NHARC=LDASH1
27 NSOF=LDASH2
28 NUGG=0
29 XX=X
30 YY=Y
31 XRIG=XX
32 YRIG=YY
33 LZX=LCLX
34 LZY=LCLY
35 IPER=2
36 XD=0.
37 YD=0.
38 TOT=C.
39 HYPCT=0.
40 NCORD=C.
41 CLOS=.FALSE.
42 GO TO 400
43
44 C
45 C END SETUP. BEGIN LOOP THAT PICKS EXACT STRAIGHT LINE SEGMENTED TRAVERSE
46 C
47 250 IF(NCORD.LT.400)GO TO 252
48 WRITE(6,251)NCORD,PVAL
49 251 FORMAT(1,2X,15,14H SQUARES LINE ,F10.5,2X,7HSHUTOFF)
50 SHUT OFF MESSAGE HERE INDICATES THAT THIS CONTOUR CROSSES MORE
51 THAN 400 GRID SQUARES. ARRAYS CORD AND HIPPS ARE TOO SMALL. CONTOUR
52 WILL BE CUT OFF AT SQUARE 400. CURE IS TO ENLARGE ARRAYS
53 AND ASSOCIATED CUTOFF CHECK STATEMENT ABOVE.
54
55 GO TO 730
56 NCORD=NCORD+1
57 HYPCT=HYPCT+HYPE
58 HIPPS(NCORD)=HYPE
59 CORD(NCORD,1)=XXSQ
60 CORD(NCORD,2)=YYSQ
61 XD=XD+XXSQ
62 YD=YD+YYSQ
63 IF(NEXET.EQ.1)LZX=LZX-1
64 IF(NEXET.EQ.3)LZX=LZX+1
65 IF(NEXET.EQ.2)LZY=LZY+1
66 IF(NEXET.EQ.4)LZY=LZY-1
67 IF(LZX.LT.1.OR.LZX.GE.NUVX)GO TO 730
68 IF(LZY.LT.1.OR.LZY.GE.NUVY)GO TO 730
69 IF(LZX.EQ.LCLX.AND.LZY.EQ.LCLY.AND.SQRT(XD*XD+YD*YD).LE.CLOSIT.AND
70 2. OUTS.AND.NCORD.GT.3)GO TO 701
71 GO TO 700
72 CLOS=.TRUE.
73 IF(LABELIT.EQ.0)LABELIT=-1
74 GO TO 730
75 NENTER=NEXET+2
76 IF(NEXET.GT.2)NENTER=NEXET-2
77 XRIG=XIND
78 YRIG=YIND
79 400 NUMOLT=0
80 OX1=XRIG-XGRID*FLOAT(LZX-1)
81 IF(OX1.LT.0)OX1=0.
82 IF(OX1.GT.XGRID)OX1=XGRID
83 OY1=YRIG-YGRID*FLOAT(LZY-1)

```

```

79      IF(OY1.LT.0.)OY1=0.
80      IF(OY1.GT.YGRID)OY1=YGRID
81      I=LZX+NMXI1
82      J=LZY+NMJI1
83
84      CCC
85      START EXIT POINT LOOP
86
87      HAX(1)=HH(I,J)
88      HAX(2)=HH(I,J+1)
89      HAX(3)=HH(I+1,J+1)
90      HAX(4)=HH(I+1,J)
91      DO 401 I1=1,4
92      IF(AES(HAX(I1)-PVAL).GE.PVAL)GO TO 401
93      IF(HAX(I1).GE.PVAL)HAX(I1)=PVAL+PVAL
94      IF(HAX(I1).LT.PVAL)HAX(I1)=PVAL-PVAL
95      401 CONTINUE
96      NEXE1=0
97      DO 435 I11=1,4
98      CIDE(I11,1)=-1.
99      CIDE(I11,2)=-1.
100     I1=I11
101     I2=I1+1
102     IF(I11.EQ.4)I2=1
103
104     CCC
105     STATEMENT BELOW SELECTS SIDES THAT HAVE EXIT POINTS
106
107     IF(HAX(I1).LT.PVAL.AND.HAX(I2).GT.PVAL)GO TO 420
108     GO TO 435
109     420 NUMOUT=NUMOUT+1
110     IF(NUMOUT.EQ.1)NN1=I11
111     IF(NUMOUT.EQ.2)NN2=I11
112     GO TO(422,424,426,428),I11
113     422 OY2=((PVAL-HAX(I1))/(HAX(I2)-HAX(I1)))*YGRID
114     OX2=C.
115     GO TO 430
116     424 OX2=((PVAL-HAX(I2))/(HAX(I3)-HAX(I2)))*XGRID
117     OY2=YGRID
118     GO TO 430
119     426 OY2=((PVAL-HAX(I4))/(HAX(I3)-HAX(I4)))*YGRID
120     OX2=XGRID
121     GO TO 430
122     428 OX2=((PVAL-HAX(I1))/(HAX(I4)-HAX(I1)))*XGRID
123     OY2=C.
124     430 CIDE(I11,1)=OX2
125     CIDE(I11,2)=OY2
126     435 CONTINUE
127     C UNLESS WE HAVE NULL POINT SQUARE, NUMOUT SHUD BE 1 WITH OUT AT OX2, OY2
128     IF(NUMOUT.NE.1)GO TO 432
129     NEXE1=NN1
130     GO TO 445
131     432 IF(NUMOUT.EQ.2)GO TO 438
132     431 WRITE(6,436)LZX,LZY,NUMOUT,PVAL,XBIG,YBIG
133     436 FORMAT(/,2X,10HNO WAY OUT,5X,3I10,3F10.2,/)
134     GO TO 500
135
136     CCC
137     BEGIN SECTION THAT DETERMINES PROPER PATH THRU GRID SQUARE
138     CONTAINING HYPERBOLIC CONFIGURATION. (2 ENTRY AND 2 EXIT SIDES)
139
140     438 IF(PEPID(LZX,LZY).GT.1)GO TO 442
141     XID=CIDE(NN1,1)-OX1
142     YID=CIDE(NN1,2)-OY1
143     DAA=SQRT(XID*XID+YID*YID)
144     XID=CIDE(NN2,1)-OX1
145     YID=CIDE(NN2,2)-OY1
146     DAB=SQRT(XID*XID+YID*YID)
147     IF(DAB.LT.DAA)GO TO 440
148     439 OX2=CIDE(NN1,1)
149     OY2=CIDE(NN1,2)
150     NEXE1=NN1
151     GO TO 414
152     440 OX2=CIDE(NN2,1)
153     OY2=CIDE(NN2,2)
154     NEXE1=NN2
155     414 RGRID(LZX,LZY)=10*NENTER*NEXE1
156     GO TO 445
157     442 I1=RPID(LZX,LZY)/10
158     I2=RPID(LZX,LZY)-10*I1
159     RGRID(LZX,LZY)=1
160     IF(I1.GT.0.AND.I2.GT.0.AND.I1.NE.I2.AND.NENTER.GT.0)GO TO 417

```

```

158 415 WRITE(6,416) LZX,LZY,I1,I2,NENTER
159 416 FORMAT(/,2X,12HHEAD COL EXIT,2X,5I12)
160 GO TO 500
161 417 LEXE(1)=0
162 LEXE(2)=0
163 LEXE(3)=0
164 LEXE(4)=0
165 LEXE(I1)=1
166 LEXE(I2)=1
167 DO 418 I=1,4
168 IF(LEXE(I)).EQ.0.AND.II.NE.NENTER.AND.CIDE(II,1).GT.(-.5).AND.CIDE
169 2(II,2).GT.(-.5))GO TO 419
170 418 CONTINUE
171 GO TO 415
172 419 NEXE=I1
173 OX2=CIDE(II,1)
174 OY2=CIDE(II,2)
175 C END HYPERBOLIC GRID SQUARE SECTION
176 445 XIND=OX2*XGRID*FLOAT(LZX-1)
177 YIND=OY2*YGRID*FLOAT(LZY-1)
178 IF(IRGRID(LZX,LZY).EQ.0)RGRID(LZX,LZY)=1
179 XXSQ=XIND-XRIG
180 YYSQ=YIND-YRIG
181 HYPE=SQRT(XXSQ*XXSQ+YYSQ*YYSQ)
182 IF(HYPE.GE..0001.AND.HYPE.LE.CUTOF)GO TO 396
183 WRITE(6,397)LZX,LZY,NENTER,NEXE,XBIG,YBIG,XIND,YIND,OX1,OY1,OX2,
184 2OY2,XXSQ,YYSQ,HYPE,NENST,LCLX,LCLY,NCORD,XX,YY
185 397 FORMAT(/,2X,4HWHERE,4I1C,/,2X,11F10.5,/,2X,4I10,5X,2F12.6,/)
186 GO TO 500
187 396 GO TO 250
188 C
189 C LINE SEGMENTED CONTOUR TRAVERSE NOW COMPLETE. NEXT, DIVIDE THIS
190 C TRAVERSE INTO NRINC EQUAL SEGMENTS. THIS NUMBER IS FUNCTION NOT
191 C ONLY OF LENGTH OF TRAVERSE, BUT OF INCOMING ARGUMENT SMOOTH, WHICH
192 C CONTROLS DEGREE OF SMOOTHING DESIRED.
193 C
194 730 IF(NCORD.LE.MAXCRD)GO TO 732
195 MAXCRD=NCORD
196 WHAT=PVAL
197 732 NPINC=HYPTOT/HINC+1.
198 HANC=HYPTOT/FLOAT(NPINC)
199 IF(.NOT.CLOS.AND.NCORD.GT.1.AND.NPINC.GT.1)GO TO 734
200 IF(CLOS.AND.NCORD.GT.3.AND.NPINC.GT.2)GO TO 734
201 GO TO 502
202 C
203 C NEXT, SET UP ENTRY AND EXIT SLOPE DATA FOR FIRST SEGMENT BEFORE
204 C ENTERING MAIN CURVILINEAR INTERPOLATE AND PLOT LOOP.
205 C
206 734 XREG=XX
207 YBEG=YY
208 IF(NPINC*HANC.LT..75)DASHIX=.FALSE.
209 H=0.
210 XEND=XX
211 YEND=YY
212 DO 740 I=1,NCORD
213 IF(H+HIPPS(I).GE.HANC)GO TO 742
214 H=H+HIPPS(I)
215 XEND=XEND+CORD(I,1)
216 YEND=YEND+CORD(I,2)
217 CO TO 745
218 742 X=(HANC-H)/HIPPS(I)
219 XEND=XEND+X*CORD(I,1)
220 YEND=YEND+X*CORD(I,2)
221 745 XXSQ=XEND-XREG
222 YYSQ=YEND-YBEG
223 HYPE=SQRT(XXSQ*XXSQ+YYSQ*YYSQ)
224 IF(HYPE.GE..0001)GO TO 750
225 WRITE(6,748)XREG,YBEG,PVAL,HYPE
226 748 FORMAT(/,2X,14HHYPE TOO SMALL,2X,4F12.6)
227 GO TO 500
228 750 CANG=XXSQ/HYPE
229 SANG=YYSQ/HYPE
230 HYPH=HYPE
231 IF(CLOS)GO TO 751
232 COSR/C=CANG
233 SINR/C=SANG
234 GO TO 759
235 751 XB=XX
236 YB=YY

```

```

217 H=0.
218 DO 753 I=1,NCORD
219 J=NCORD-I+1
220 IF(H+HIPPS(J).GE.HANC)GO TO 755
221 H=H+HIPPS(J)
222 XP=XE-CORD(J,1)
223 753 YP=YF-CORD(J,2)
224 GO TC 757
225 755 X=(H/NC-H)/HIPPS(J)
226 XB=XB-X*CORD(J,1)
227 YB=YB-X*CORD(J,2)
228 757 XXSQ=XBEG-XB
229 YYSQ=YBEG-YB
230 HYPE=SQRT(XXSQ*XXSQ+YYSQ*YYSQ)
231 IF(HYPE.LT..0001)GO TO 747
232 SINBAC=YYSQ/HYPE
233 COSBAC=XXSQ/HYPE
234 759 A=.5*ATAN2(SANG*COSBAC-CANG*SINBAC,CANG*COSBAC+SANG*SINBAC)
235 SA=SIN(A)
236 CA=CCS(A)
237 SENT=SINBAC*CA+COSBAC*SA
238 CENT=COSBAC*CA-SINBAC*SA
239 ENTIF=ATAN2(SENT,CENT)
240 SSENT=SENT
241 CCENT=CENT
242
243 C
244 C
245 C
246 C
247 C
248 C
249 C
250 C
251 C
252 C
253 C
254 C
255 C
256 C
257 C
258 C
259 C
260 C
261 C
262 C
263 C
264 C
265 C
266 C
267 C
268 C
269 C
270 C
271 C
272 C
273 C
274 C
275 C
276 C
277 C
278 C
279 C
280 C
281 C
282 C
283 C
284 C
285 C
286 C
287 C
288 C
289 C
290 C
291 C
292 C
293 C
294 C
295 C
296 C
297 C
298 C
299 C
300 C
301 C
302 C
303 C
304 C
305 C
306 C
307 C
308 C
309 C
310 C
311 C
312 C
313 C
314 C
315 C

```

```

316 C      ENTIR AND EXET ARE TRUE ENTRY AND EXIT DIRECTIONS AT ENDS OF SEGMENT
317 C      CSNAKE LIKE INTERPOLATION IS MADE FOR FIT BETWEEN 2 END DIRECTIONS
318 C      SENT AND CENT ARE SINE AND COSINE OF TRUE ENTRY ANGLE
319 C      SCUT AND COUT ARE SINE AND COSINE OF TRUE EXIT ANGLE
320 C
321 C      SANG AND CANG ARE SINE AND COSINE OF STRAIGHT LINE ENTRY/EXIT CONNECTOR
322 C
323 C      BEGIN SECTION THAT INTERPOLATES AND PLOTS THRU SEGMENT
324 C
325 C
326 C
327 C
328 C
329 C
330 C
331 C
332 C
333 C
334 C
335 C
336 C
337 C
338 C
339 C
340 C
341 C
342 C
343 C
344 C
345 C
346 C
347 C
348 C
349 C
350 C
351 C
352 C
353 C
354 C
355 C
356 C
357 C
358 C
359 C
360 C
361 C
362 C
363 C
364 C
365 C
366 C
367 C
368 C
369 C
370 C
371 C
372 C
373 C
374 C
375 C
376 C
377 C
378 C
379 C
380 C
381 C
382 C
383 C
384 C
385 C
386 C
387 C
388 C
389 C
390 C
391 C
392 C
393 C
394 C
395 C
396 C
397 C
398 C
399 C
400 C
401 C
402 C
403 C
404 C
405 C
406 C
407 C
408 C
409 C
410 C
411 C
412 C
413 C
414 C
415 C
416 C
417 C
418 C
419 C
420 C
421 C
422 C
423 C
424 C
425 C
426 C
427 C
428 C
429 C
430 C
431 C
432 C
433 C
434 C
435 C
436 C
437 C
438 C
439 C
440 C
441 C
442 C
443 C
444 C
445 C
446 C
447 C
448 C
449 S=SENT*CANG-CENT*SANG
450 C=CENT*CANG+SENT*SANG
451 C1=(2.*ATAN2(S,C))/HYP
452 SING=SANG*C-CANG*S
453 CING=CANG*C+SANG*S
454 S=SOLT*TING-COUT*SING
455 C=COLT*TING+SOUT*SING
456 C2=(2.*ATAN2(S,C))/HYP
457 TX=XEEG
458 TY=YEEG
459 NINC=C
460 TYP=-CBIG
461 HYPMAX=HYP-CLIT
462 H25=.25*HYP
463 TYP=TYP+QINC
464 D1=TYP
465 IF(D1.GT.H25)D1=H25
466 D2=TYP-H25
467 IF(D2.LT.C.)D2=0.
468 SING=ENTIR-C1*TYP+C2*(D2-D1)
469 TX=TX+QINC*COS(SING)
470 TY=TY+QINC*SIN(SING)
471 C
472 C
473 C
474 C
475 C
476 C
477 C
478 C
479 C
480 C
481 C
482 C
483 C
484 C
485 C
486 C
487 C
488 C
489 C
490 C
491 C
492 C
493 C
494 C
495 C
496 C
497 C
498 C
499 C
500 C
501 C
502 C
503 C
504 C
505 C
506 C
507 C
508 C
509 C
510 C
511 C
512 C
513 C
514 C
515 C
516 C
517 C
518 C
519 C
520 C
521 C
522 C
523 C
524 C
525 C
526 C
527 C
528 C
529 C
530 C
531 C
532 C
533 C
534 C
535 C
536 C
537 C
538 C
539 C
540 C
541 C
542 C
543 C
544 C
545 C
546 C
547 C
548 C
549 C
550 C
551 C
552 C
553 C
554 C
555 C
556 C
557 C
558 C
559 C
560 C
561 C
562 C
563 C
564 C
565 C
566 C
567 C
568 C
569 C
570 C
571 C
572 C
573 C
574 C
575 C
576 C
577 C
578 C
579 C
580 C
581 C
582 C
583 C
584 C
585 C
586 C
587 C
588 C
589 C
590 C
591 C
592 C
593 C
594 C
595 C
596 C
597 C
598 C
599 C
600 C
601 C
602 C
603 C
604 C
605 C
606 C
607 C
608 C
609 C
610 C
611 C
612 C
613 C
614 C
615 C
616 C
617 C
618 C
619 C
620 C
621 C
622 C
623 C
624 C
625 C
626 C
627 C
628 C
629 C
630 C
631 C
632 C
633 C
634 C
635 C
636 C
637 C
638 C
639 C
640 C
641 C
642 C
643 C
644 C
645 C
646 C
647 C
648 C
649 C
650 C
651 C
652 C
653 C
654 C
655 C
656 C
657 C
658 C
659 C
660 C
661 C
662 C
663 C
664 C
665 C
666 C
667 C
668 C
669 C
670 C
671 C
672 C
673 C
674 C
675 C
676 C
677 C
678 C
679 C
680 C
681 C
682 C
683 C
684 C
685 C
686 C
687 C
688 C
689 C
690 C
691 C
692 C
693 C
694 C
695 C
696 C
697 C
698 C
699 C
700 C
701 C
702 C
703 C
704 C
705 C
706 C
707 C
708 C
709 C
710 C
711 C
712 C
713 C
714 C
715 C
716 C
717 C
718 C
719 C
720 C
721 C
722 C
723 C
724 C
725 C
726 C
727 C
728 C
729 C
730 C
731 C
732 C
733 C
734 C
735 C
736 C
737 C
738 C
739 C
740 C
741 C
742 C
743 C
744 C
745 C
746 C
747 C
748 C
749 C
750 C
751 C
752 C
753 C
754 C
755 C
756 C
757 C
758 C
759 C
760 C
761 C
762 C
763 C
764 C
765 C
766 C
767 C
768 C
769 C
770 C
771 C
772 C
773 C
774 C
775 C
776 C
777 C
778 C
779 C
780 C
781 C
782 C
783 C
784 C
785 C
786 C
787 C
788 C
789 C
790 C
791 C
792 C
793 C
794 C
795 C
796 C
797 C
798 C
799 C
800 C
801 C
802 C
803 C
804 C
805 C
806 C
807 C
808 C
809 C
810 C
811 C
812 C
813 C
814 C
815 C
816 C
817 C
818 C
819 C
820 C
821 C
822 C
823 C
824 C
825 C
826 C
827 C
828 C
829 C
830 C
831 C
832 C
833 C
834 C
835 C
836 C
837 C
838 C
839 C
840 C
841 C
842 C
843 C
844 C
845 C
846 C
847 C
848 C
849 C
850 C
851 C
852 C
853 C
854 C
855 C
856 C
857 C
858 C
859 C
860 C
861 C
862 C
863 C
864 C
865 C
866 C
867 C
868 C
869 C
870 C
871 C
872 C
873 C
874 C
875 C
876 C
877 C
878 C
879 C
880 C
881 C
882 C
883 C
884 C
885 C
886 C
887 C
888 C
889 C
890 C
891 C
892 C
893 C
894 C
895 C
896 C
897 C
898 C
899 C
900 C
901 C
902 C
903 C
904 C
905 C
906 C
907 C
908 C
909 C
910 C
911 C
912 C
913 C
914 C
915 C
916 C
917 C
918 C
919 C
920 C
921 C
922 C
923 C
924 C
925 C
926 C
927 C
928 C
929 C
930 C
931 C
932 C
933 C
934 C
935 C
936 C
937 C
938 C
939 C
940 C
941 C
942 C
943 C
944 C
945 C
946 C
947 C
948 C
949 C
950 C
951 C
952 C
953 C
954 C
955 C
956 C
957 C
958 C
959 C
960 C
961 C
962 C
963 C
964 C
965 C
966 C
967 C
968 C
969 C
970 C
971 C
972 C
973 C
974 C
975 C
976 C
977 C
978 C
979 C
980 C
981 C
982 C
983 C
984 C
985 C
986 C
987 C
988 C
989 C
990 C
991 C
992 C
993 C
994 C
995 C
996 C
997 C
998 C
999 C

```

```

395      IF(ICPLOT.EQ.3)GO TO 630
396      NHARC=NHARD-1
397      IF(NHARD.GT.0)GO TO 609
398      ICPLCT=3
399      NHARC=LDASH1
400      GO TC 609
401      630 NSOFT=NSOFT-1
402      IF(NSOFT.GT.0)GO TO 609
403      ICPLCT=2
404      NSOFT=LDASH2
405      609 IPER=2
406      NUNC=NUNC+1
407      IF(.NOT.DOLABS.OR.YUY.LE.YMAX)GO TO 610
408      YMAX=YUY
409      XMAX=XUX
410      GO TC 610
411      608 IPER=3
412      IF(LABIT.NE.1)GO TO 610
413      CALL ENDER(X-WEST,Y-SOUTH,PVAL,1)
414      LABIT=0
415      610 CONTINUE
416      C
417      C      END ADJUST AND PLOT SECTION
418      C
419      NUGG=NUGG+NUNC
420      TOT=TOT+QINC*FLOAT(NUNC)
421      IF(ITCT.LT.TMAX)GO TO 790
422      WRITE(6,462)PVAL,TMAX
423      462 FORMAT(17,2X,16HREACHED TMAX ON ,2F12.4)
424      GO TC 500
425      790 IF(ILPE.EQ.NRINC)GO TO 800
426      HYPM=HYPFOR
427      SENT=SOUT
428      CENT=COUT
429      ENTIR=EXET
430      SANG=SINFOR
431      CANG=COSFOR
432      XREG=XEND
433      YBEG=YEND
434      XEND=XIND
435      YEND=YIND
436      800 CONTINUE
437      C
438      C      END MAIN CURVILINEAR INTERPOLATE AND PLOT LOOP
439      C
440      500 IF(.NOT.CLOS.OR..NOT.DOLABS.OR.YMAX.LT..01)GO TO 501
441      XPP=XMAX+WEST
442      YPP=YMAX+SOUTH
443      CALL ENDER(XMAX,YMAX,PVAL,2)
444      501 IF(.NOT.CLOS.AND.LABIT.EQ.1)CALL ENDER(XUX,YUY,PVAL,1)
445      IF(NLGG.LE.MOSINC)GO TO 502
446      MOSINC=NUGG
447      VALLIN=PVAL
448      502 RETURN
449      END

```

```

*FLOW(1).ENDER  ELT CREATED ON 8 MAY 79 AT 10:17:51
1  SUBROUTINE ENDER(X,Y,PVAL,ICO)
2  COMMON /CENDEO/HONUM,WCODE,HOGH,XLAS,YLAS
3  DIMENSION D(3)
4
5  C
6  C      THIS SUBROUTINE IS CALLED TO LABEL CONTOURS
7  C
8  DM=SQRT((X-XLAS)*(X-XLAS)+(Y-YLAS)*(Y-YLAS))
9  IF(DP.LT.2.*HONUM.OR.HONUM.LE.0.)GO TO 25
10 IF(ICO.EQ.2)GO TO 14
11 D(1)=ABS(Y-HOGH)
12 D(2)=ABS(X-WCODE)
13 D(3)=ABS(Y)
14 K=1
15 DM=ABS(X)
16 DO 10 I=1,3
17 IF(D(I).GE.DM)GO TO 10
18 DM=D(I)
19 K=I+1
20 CONTINUE
21 GO TO(12,14,16,18),K
22 YAD=-HONUM/2.
23 I=1
24 GO TO 100
25 YAD=.02
26 I=2
27 GO TO 100
28 XAD=.02
29 YAD=-HONUM/2.
30 GO TO 20
31 YAD=-HONUM-.02
32 I=2
33 GO TO 100
34 XAD=X+XAD
35 YAD=Y+YAD
36 CALL NUMBER(XAD,YAD,HONUM,PVAL,0.,+2)
37 CALL PLOT(X,Y,3)
38 XLAS=X
39 YLAS=Y
40 RETURN
41 25 XAD=-.75*HONUM
42 IF(PVAL.GE.9.5.OR.PVAL.LE.(-.5))XAD=XAD-HONUM
43 IF(PVAL.GE.99.5.OR.PVAL.LE.(-9.5))XAD=XAD-HONUM
44 IF(PVAL.GE.999.5.OR.PVAL.LE.(-99.5))XAD=XAD-HONUM
45 IF(I.EQ.2)XAD=.5*XAD
46 GO TO 20
47 END

```

```

*FLOW(1).FIT FOR CFEATED ON 4 DEC 79 AT 10:02:34
1 C*****
2 C FITS A PARABOLA TO THREE POINTS, USED IN MAKING PLOT.
3 C*****
4 SUBROUTINE FIT(Z1,Z2,Z3,E1,E2,E3,A,B,C)
5 D=((Z1**2)*(Z2-Z3)-Z1*(Z2**2-Z3**2)+Z3*(Z2**2)-Z2*(Z3**2)
6 A=(E1*(Z2-Z3)-Z1*(E2-E3)+E2*Z3-E3*Z2)/D
7 B=((Z1**2)*(E2-E3)-E1*(Z2**2-Z3**2)+E3*(Z2**2)-E2*(Z3**2))/D
8 C=((Z1**2)*(Z2*E3-Z3*E2)-Z1*(E3*(Z2**2)-E2*(Z3**2))+E1*(Z3*(Z2**2)
9 -Z2*(Z3**2)))/D
10 RETURN
11 END

```

```

*FLOW(1).VECT FOR CREATED ON 4 DEC 79 AT 11:33:19
1      C*****TO DPAW VELOCITY VECTOR BY CALLING CALCOMP SUBROUTINE AROHD*****
2      SUBROUTINE VECT(AT,AAI,AJ,AAJ,APMIN,ARMAX,COSF,SINF)
3      YW=.2*SQRT((AAI-AAI)**2+(AAJ-AAJ)**2)
4      YW=APAX1(ARMIN,AMINI(ARMAX,YW))
5      BI=AAI*COSF+AJ*SINF
6      BJ=-AI*SINF+AJ*COSF
7      BBI=AAI*COSF+AAJ*SINF
8      BBJ=-AAI*SINF+AAJ*COSF
9      CALL AROHD(BI,BJ,BBI,BBJ,YW,C.,12)
10     RETURN
11     END

```

```

1 *FLOW(1).CAPTN1 EL1 CREATED ON 14 SEP 79 AT 10:29:24
2   SUBROUTINE CAPTN1(P1,P2,P3,P4,P5,P6,Q7,Q8)
3   C*****WRITE COMMON HEADING FOR EACH PLOT WHETHER TEMP OR VELOCITY*****
4   C*****[ MONTH DAY, YEAR]] NEEDS RESET*****
5   CALL SYMBOL(0.8,6.70,0.10,25,TIME(JUNE 20, 1978):      ,0.0,25)
6   CALL NUMBER(4.0,6.70,0.10,P1,0.0,+1)
7   CALL SYMBOL(0.8,6.50,0.10,25,WIND SPEED(CM/SEC):      ,0.0,25)
8   CALL NUMBER(4.0,6.50,0.10,P2,0.0,+1)
9   CALL SYMBOL(0.8,6.30,0.10,25,WIND DIRECTION(DEG/N):    ,0.0,25)
10  CALL NUMBER(4.0,6.30,0.10,P3,0.0,+0)
11  CALL SYMBOL(0.8,6.10,0.10,25,AIR TEMPERATURE(DEG-C):   ,0.0,25)
12  CALL NUMBER(4.0,6.10,0.10,P4,0.0,+1)
13  CALL SYMBOL(0.8,5.90,0.10,25,DISCHARGE TEMP(DEG-C):    ,0.0,25)
14  CALL NUMBER(4.0,5.90,0.10,P5,0.0,+1)
15  CALL SYMBOL(0.8,5.70,0.10,25,DISCH FLOWRATE(CUM/SEC):  ,0.0,25)
16  CALL NUMBER(4.0,5.70,0.10,P6,0.0,+1)
17  CALL SYMBOL(0.8,5.50,0.10,25,LENGTH SCALE(1CM= X CM): ,0.0,25)
18  CALL NUMBER(4.0,5.50,0.10,Q7,0.0,+0)
19  CALL SYMBOL(0.8,5.30,0.10,25,VELOCITY SCALE(CM/SEC):   ,0.0,25)
20  CALL NUMBER(4.0,5.30,0.10,Q8,0.0,+2)
21  RETURN
22  END

```

```

*FLOW(1).CAPTN2 SYM CREATED ON 11 SEP 79 AT 22:29:52
1  SUBROUTINE CAPTN2(N)
2  C*****WRITE PLOT TITLE ON BOTTOM OF DIAGRAM FOR CALCULATED UV****
3  CALL SYMBOL(1.0,-1.8,.14,24HFIG SURFACE VELOCITY,.0,24)
4  CALL SYMBOL(1.0,-2.2,.14,29HANCLOTE ANCHORAGE BY MODELING,.0,29)
5  CALL PLOT(-1.0,-2.5,3)
6  CALL PLOT(-1.0,+7.5,2)
7  CALL PLOT(+6.5,+7.5,2)
8  CALL PLOT(+6.5,-2.5,2)
9  CALL PLOT(-1.0,-2.5,2)
10 RETURN
11 END

```

```

*FLOW(1).CAPTN3 SYM CREATED ON 11 SEP 79 AT 22:31:55
1      SUBROUTINE CAPTN3(N)
2      C****WRITE PLOT TITLE ON BOTTOM OF DIAGRAM AND BLOCK IT****
3      CALL SYMBOL(1.0,-2.0,.14,29HFIG      TEMPEPATURE FROM IR,0.0,29)
4      CALL PLOT(-1.0,-2.5,3)
5      CALL PLOT(-1.0,+7.5,2)
6      CALL PLOT(+6.5,+7.5,2)
7      CALL PLOT(+6.5,-2.5,2)
8      CALL PLOT(-1.0,-2.5,2)
9      RETURN
10     END

```

```

*FLOW(1).CAPTN4 SYP CREATED ON 11 SEP 79 AT 22:36:39
1      SUBRCUTINE CAPTN4(SUM)
2      C**** WRITE DEVIATION VALUE(FROM IR) ON ISOTHERM PLOT *****
3      CALL SYMBOL (0.8,-0.5,.10,23HDEVIATION FROM IR TEMP:,0.,23)
4      CALL NUMBER(4.C,-0.5,.10,SUM,0.,+3)
5      RETURN
6      END

```

```

*FLOW(1).CAPTNS SYN CREATED ON 11 SEP 79 AT 22:39:49
1      SUBROUTINE CAPTNS(N,MIDEW)
2      C*****WRITE TIDAL STAGE AT THAT TIME*****
3      DIMENSION MIDEW(4)
4      IBCD=MIDEW(N)
5      CALL SYMBOL(0.8,-.7,0.10,IBCD,0.,4)
6      CALL SYMBOL(1.3,-.7,0.10,4HTIDE,0.,4)
7      RETURN
8      END

```

```

*FLOW(1).CAPTN6 SYP CREATED ON 11 SEP 79 AT 22:41:51
1      SUBROUTINE CAPTN6(N)
2      C*****WRITE PLOT TITLE ON BOTTOM OF DIAGRAM FOR CALCULATED UW****
3          CALL SYMBOL(1.0,-1.8,.14,19HFIG      UW VELOCITY,.0,19)
4          CALL SYMBOL(1.0,-2.2,.14,29HANCLOTE ANCHORAGE BY MODELING,.0,29)
5          CALL PLOT(-1.0,-2.5,3)
6          CALL PLOT(-1.0,+7.5,2)
7          CALL PLOT(+6.5,+7.5,2)
8          CALL PLOT(+6.5,-2.5,2)
9          CALL PLOT(-1.0,-2.5,2)
10      RETURN
11      END

```

```

*FLOW(1).CAPTN7 SYM CREATED ON 11 SEP 79 AT 22:43:36
1  SUBROUTINE CAPTN7(N)
2  C*****WRITE PLOT TITLE ON BOTTOM OF DIAGRAM FOR CALCULATED VW****
3  CALL SYMBOL(1.0,-1.8,.14,19HFIG VW VELOCITY,.0,19)
4  CALL SYMBOL(1.0,-2.2,.14,29HANCLOTE ANCHORAGE BY MODELING,.0,29)
5  CALL PLOT(-1.0,-2.5,3)
6  CALL PLOT(-1.0,+7.5,2)
7  CALL PLOT(+6.5,+7.5,2)
8  CALL PLOT(+6.5,-2.5,2)
9  CALL PLOT(-1.0,-2.5,2)
10 RETURN
11 END

```

```

*FLOW(1).CAPTN8 SYM CREATED ON 11 SEP 79 AT 22:45:43
1      SUBRCUTINE CAPTN8(N)
2      C*****WRITE PLOT TITLE ON BOTTOM OF DIAGRAM FOR CALCULATED ELEVATION****
3      CALL SYMBOL(1.0,-1.0,.14,25HFIG SURFACE ELEVATION,.0,25)
4      CALL SYMBOL(1.0,-2.2,.14,29HANCLOTE ANCHORAGE BY MODELING,.0,29)
5      CALL PLOT(-1.0,-2.5,3)
6      CALL PLOT(-1.0,+7.5,2)
7      CALL PLOT(+6.5,+7.5,2)
8      CALL PLOT(+6.5,-2.5,2)
9      CALL PLOT(-1.0,-2.5,2)
10     RETURN
11     END

```

```

*FLOW(1),CAPTN9 SYM CREATED ON 11 SEP 79 AT 22:52:41
1  SUBROUTINE CAPTN9(N)
2  C*****WRITE PLOT TITLE ON BOTTOM OF DIAGRAM FOR CALCULATED TEMPERATURE****
3  CALL SYMBOL(1.0,-1.0,.14,27)FIG SURFACE TEMPERATURE,.0,27)
4  CALL SYMBOL(1.0,-2.2,.14,29)HANCLOTE ANCHORAGE BY MODELING,.0,29)
5  CALL PLOT(-1.0,-2.5,2)
6  CALL PLOT(-1.0,+7.5,2)
7  CALL PLOT(+6.5,+7.5,2)
8  CALL PLOT(+6.5,-2.5,2)
9  CALL PLOT(-1.0,-2.5,2)
10 RETURN
11 END

```

TECHNICAL REPORT DATA <i>(Please read instructions on the reverse before completing)</i>		
1. REPORT NO. EPA-600/7-82-037b	2.	3. RECIPIENT'S ACCESSION NO.
4. TITLE AND SUBTITLE Verification and Transfer of Thermal Pollution Model; Volume II. User's Manual for Three-dimensional Free-surface Model		5. REPORT DATE May 1982
		6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S) S.S.Lee, S.Sengupta, S.Y.Tuann, and C.R.Lee		8. PERFORMING ORGANIZATION REPORT NO.
9. PERFORMING ORGANIZATION NAME AND ADDRESS The University of Miami Department of Mechanical Engineering P.O. Box 248294 Coral Gables, Florida 33124		10. PROGRAM ELEMENT NO.
		11. CONTRACT/GRANT NO. EPA IAG-78-DX-0166*
12. SPONSORING AGENCY NAME AND ADDRESS EPA, Office of Research and Development Industrial Environmental Research Laboratory Research Triangle Park, NC 27711		13. TYPE OF REPORT AND PERIOD COVERED Final; 3/78-9/80
		14. SPONSORING AGENCY CODE EPA/600/13
15. SUPPLEMENTARY NOTES IERL-RTP project officer is Theodore G.Brna, Mail Drop 61, 919/541-2683. (*) IAG with NASA, Kennedy Space Center, FL 32899, subcontracted to U. of Miami under NASA Contract NAS 10-9410.		
16. ABSTRACT The six-volume report: describes the theory of a three-dimensional (3-D) mathematical thermal discharge model and a related one-dimensional (1-D) model, includes model verification at two sites, and provides a separate user's manual for each model. The 3-D model has two forms: free surface and rigid lid. The former, verified at Anclote Anchorage (FL), allows a free air/water interface and is suited for significant surface wave heights compared to mean water depth; e.g., estuaries and coastal regions. The latter, verified at Lake Keowee (SC), is suited for small surface wave heights compared to depth (e.g., natural or man-made inland lakes) because surface elevation has been removed as a parameter. These models allow computation of time-dependent velocity and temperature fields for given initial conditions and time-varying boundary conditions. The free-surface model also provides surface height variations with time. The 1-D model is considerably more economical to run but does not provide the detailed prediction of thermal plume behavior of the 3-D models. The 1-D model assumes horizontal homogeneity, but includes area-change and several surface-mechanism effects.		
17. KEY WORDS AND DOCUMENT ANALYSIS		
a. DESCRIPTORS	b. IDENTIFIERS/OPEN ENDED TERMS	c. COSATI Field/Group
Pollution Thermal Diffusivity Mathematical Models Estuaries Lakes Plumes	Pollution Control Stationary Sources	13B 20M 12A 08H, 08J 21B
18. DISTRIBUTION STATEMENT	19. SECURITY CLASS (This Report) Unclassified	21. NO. OF PAGES 152
Release to Public	20. SECURITY CLASS (This page) Unclassified	22. PRICE