





# **The RETC Code for Quantifying the Hydraulic Functions of Unsaturated Soils**

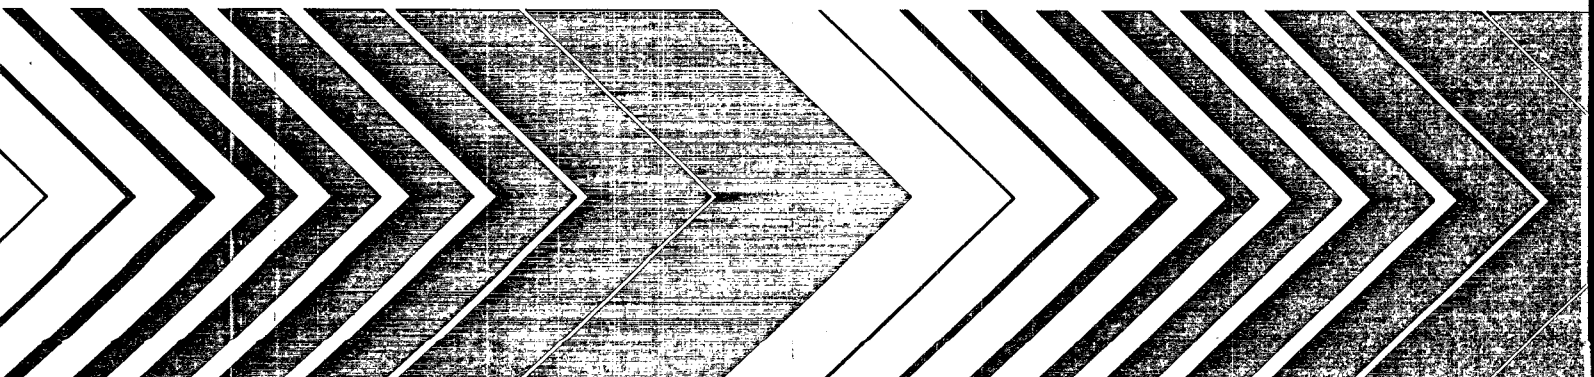

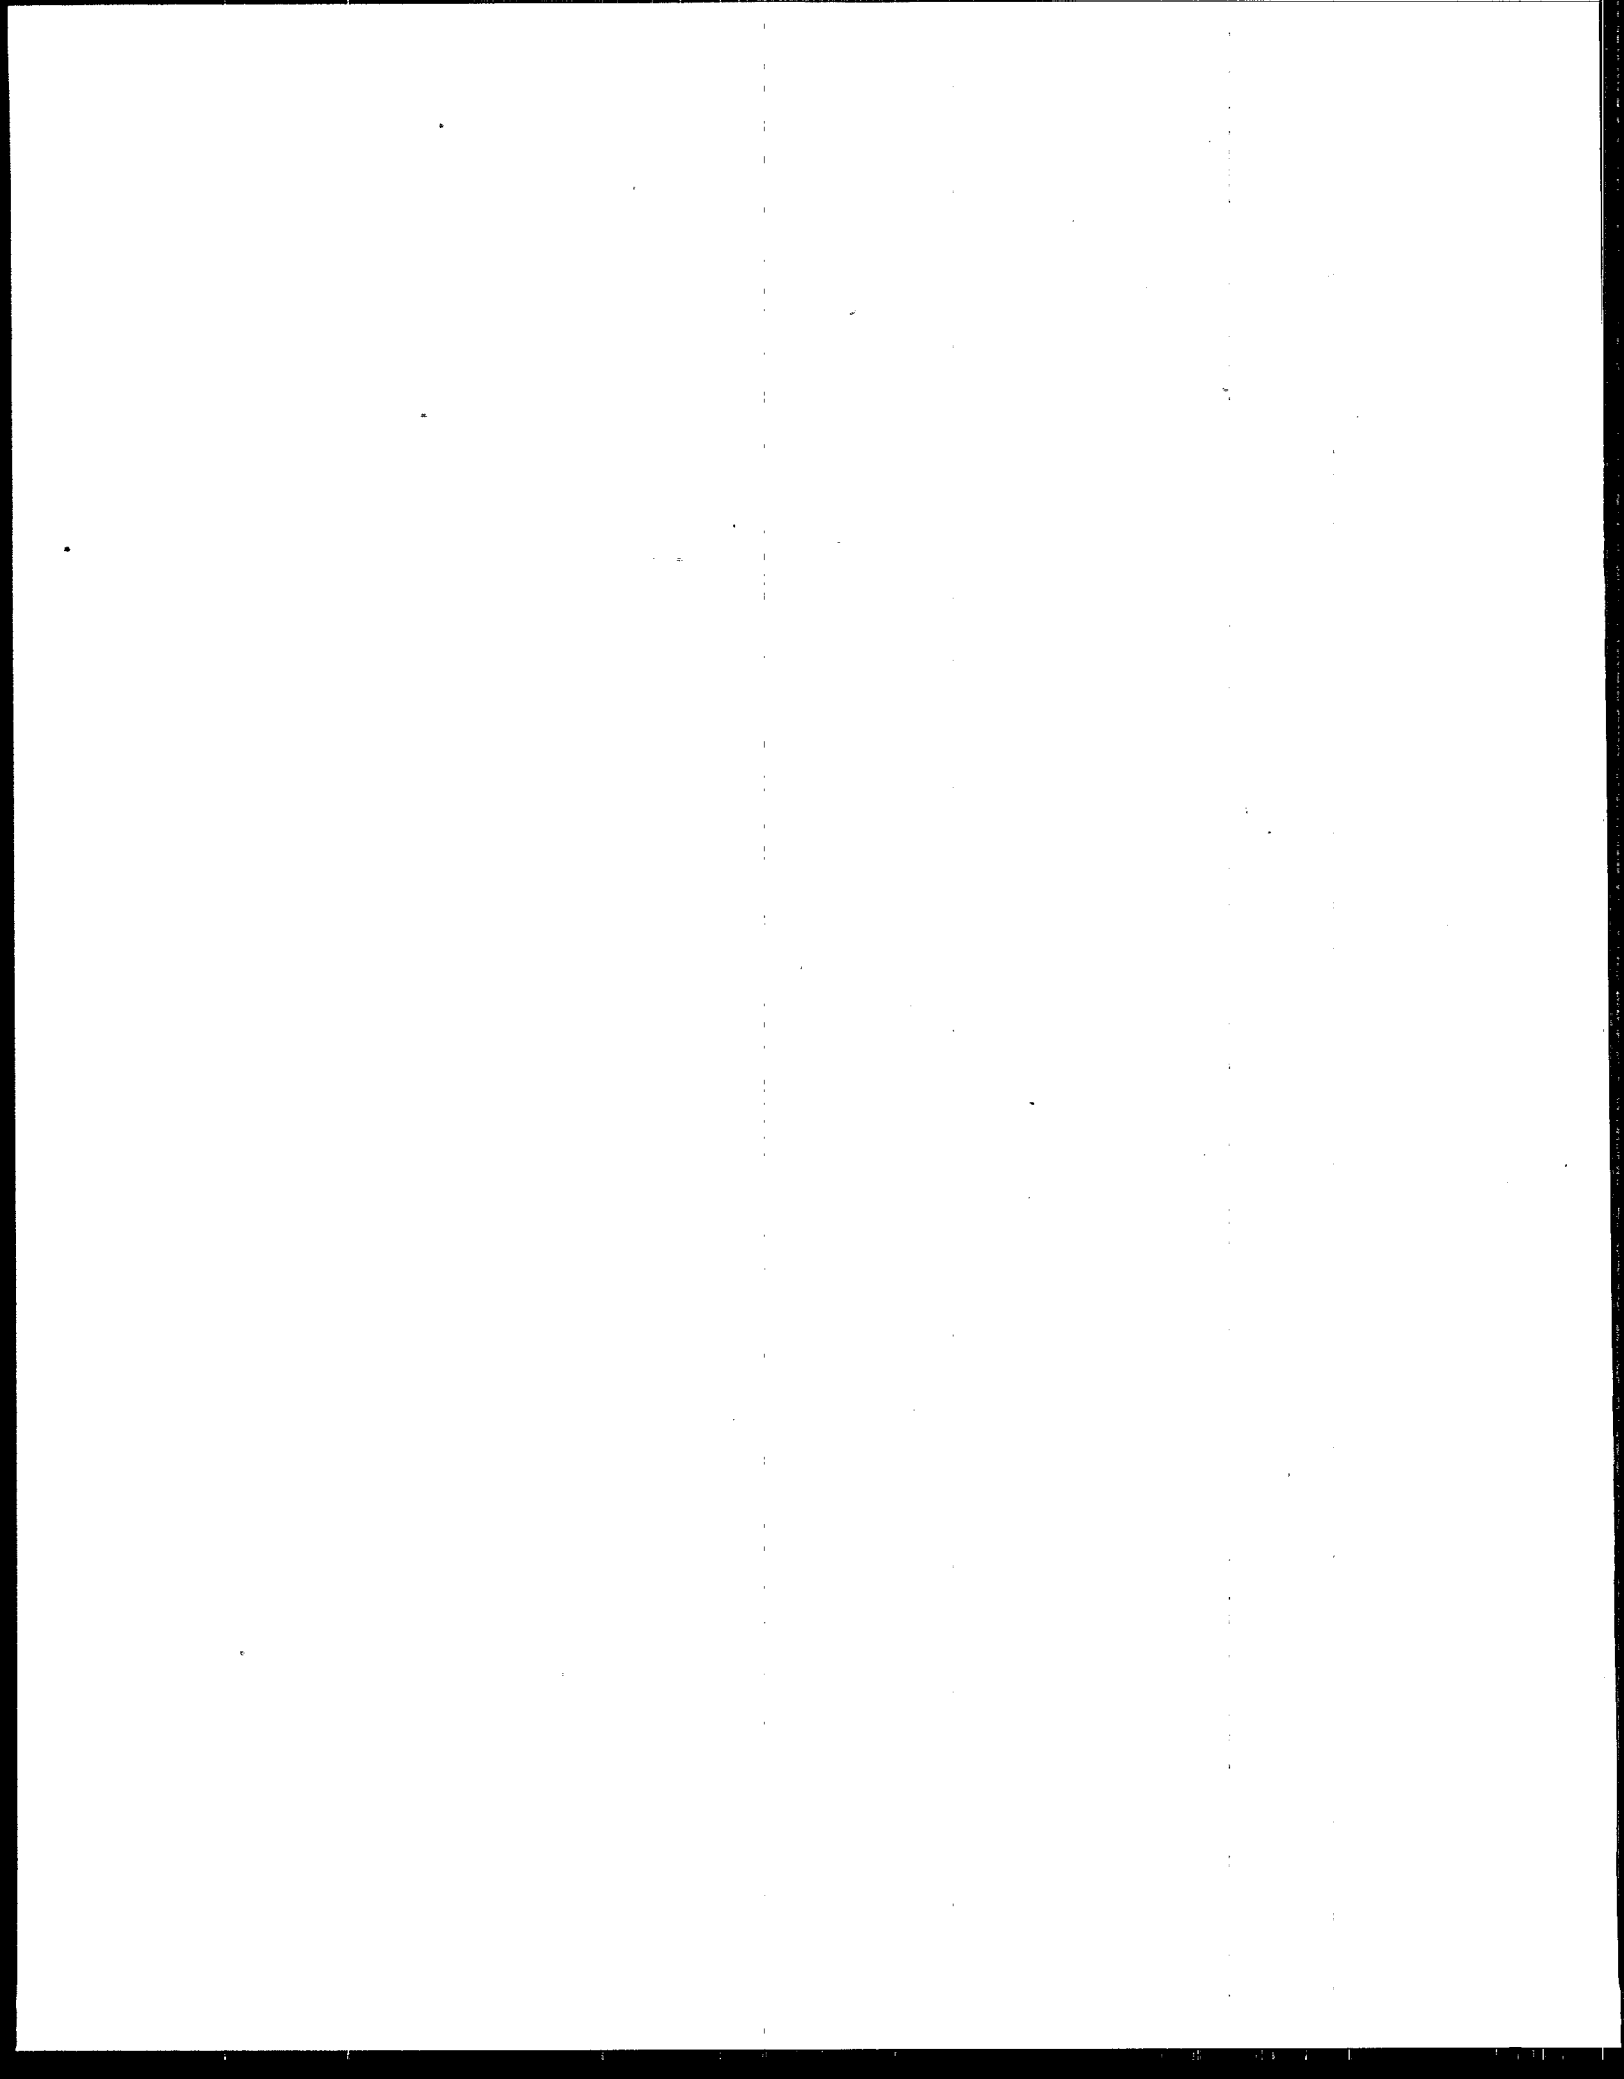

*The RETC Code for Quantifying the Hydraulic Functions  
of Unsaturated Soils*

by

M. Th. van Genuchten, F. J. Leij and S. R. Yates

U.S. Salinity Laboratory  
U.S. Department of Agriculture, Agricultural Research Service  
Riverside, California 92501

IAG-DW12933934

Project Officer

Joseph R. Williams

Extramural Activities and Assistance Division  
Robert S. Kerr Environmental Research Laboratory  
Ada, Oklahoma 74820

ROBERT S. KERR ENVIRONMENTAL RESEARCH LABORATORY  
OFFICE OF RESEARCH AND DEVELOPMENT  
U. S. ENVIRONMENTAL PROTECTION AGENCY  
ADA, OKLAHOMA 74820



Printed on Recycled Paper

## DISCLAIMERS

The information in this document has been funded in part by the United States Environmental Protection Agency under IAG-DW12933934 to the Agricultural Research Service, U. S. Department of Agriculture. It has been subjected to the Agency's peer and administrative review, and it has been approved for publication as an EPA document. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

This report documents the RETC computer program for analyzing or predicting the unsaturated soil hydraulic properties. RETC is a public domain code and may be used and copied freely. The code has been tested against a large number of soil hydraulic data sets, and was found to work correctly. However, no warranty is given that the program is completely error-free. If you do encounter problems with the code, find errors, or have suggestions for improvement, please contact

M. Th. van Genuchten or F. J. Leij  
U. S. Salinity Laboratory  
4500 Glenwood Drive  
Riverside, CA 92501

Tel. 714-369-4846  
Fax. 714-369-4818

## ABSTRACT

This report describes the RETC computer code for analyzing the soil water retention and hydraulic conductivity functions of unsaturated soils. These hydraulic properties are key parameters in any quantitative description of water flow into and through the unsaturated zone of soils. The program uses the parametric models of Brooks-Corey and van Genuchten to represent the soil water retention curve, and the theoretical pore-size distribution models of Mualem and Burdine to predict the unsaturated hydraulic conductivity function from observed soil water retention data. The report gives a detailed discussion of the different analytical expressions used for quantifying the soil water retention and hydraulic conductivity functions. A brief review is also given of the nonlinear least-squares parameter optimization method used for estimating the unknown coefficients in the hydraulic models. Several examples are presented to illustrate a variety of program options. The program may be used to predict the hydraulic conductivity from observed soil water retention data assuming that one observed conductivity value (not necessarily at saturation) is available. The program also permits one to fit analytical functions simultaneously to observed water retention and hydraulic conductivity data. The report serves as both a user manual and reference document. Detailed information is given on the computer program along with instructions for data input preparation and sample input and output files. A listing of the source code is also provided.

## ACKNOWLEDGMENTS


The authors wish to thank the many individuals who have contributed in small or large parts to improve the RETC program over the past several years. In particular, we thank Walter Russell and Renduo Zhang of the U. S. Salinity Laboratory, and Fereidoun Kaveh of Chamran University (Ahwaz, Iran), for their help in running the code for a large number of data sets, and for providing various plotting routines to graphically evaluate the computer output. We also thank Joseph Williams of the Robert S. Kerr Environmental Research Laboratory (U. S. Environmental Protection Agency, Ada, Oklahoma) for his many helpful suggestions, and his critical review of this report.

## FOREWORD

EPA is charged by Congress to protect the Nation's land, air and water systems. Under a mandate of national environmental laws focused on air and water quality, solid waste management and the control of toxic substances, pesticides, noise and radiation, the Agency strives to formulate and implement actions which lead to a compatible balance between human activities and the ability of natural systems to support and nurture life.

The Robert S. Kerr Environmental Research Laboratory is the Agency's center of expertise for investigation of the soil and subsurface environment. Personnel at the Laboratory are responsible for management of research programs to: (a) determine the fate, transport, and transformation rates of pollutants in the soil, and the unsaturated and saturated zones of the subsurface environment; (b) define the processes to be used in characterizing the soil and subsurface environment as a receptor of pollutants; (c) develop techniques for predicting the effect of pollutants on ground water, soil and indigenous organisms; and (d) define and demonstrate the applicability and limitations of using natural processes, indigenous to the soil and the subsurface environment, for the protection of this resource.

The EPA uses numerous mathematical models to predict and analyze the movement of water and dissolved contaminants in the saturated and unsaturated zones of the subsurface environment. The usefulness of these models, and the accuracy with which model predictions can be made, depends greatly on the ability to reliably characterize the hydraulic properties of the unsaturated zone. This report discusses several theoretical models which may be used to quantify the unsaturated soil hydraulic properties involving the soil water retention and hydraulic conductivity functions. The report includes a computer program which predicts, among other things, the unsaturated hydraulic conductivity from independently measured soil water retention data. Several examples illustrate the applicability of the model to different types of hydraulic data. The information in this report should be of interest to all those concerned with the development of improved methods for predicting or managing water and contaminant transport in partly saturated soils.



Clinton W. Hall

Director

Robert S. Kerr Environmental  
Research Laboratory





## CONTENTS

	<u>Page</u>
DISCLAIMERS .....	ii
ABSTRACT .....	iii
ACKNOWLEDGMENTS .....	iv
FOREWORD .....	v
FIGURES .....	viii
TABLES .....	x
1. INTRODUCTION .....	1
2. PARAMETRIC MODELS FOR THE SOIL HYDRAULIC FUNCTIONS .....	4
2.1. <i>Soil Water Retention Models</i> .....	4
2.2. <i>Mualem's Hydraulic Conductivity Model</i> .....	13
2.3. <i>Burdine's Hydraulic Conductivity Model</i> .....	30
2.4. <i>Parameter Estimation</i> .....	32
3. THE RETC USER GUIDE .....	42
3.1. <i>Program Options</i> .....	42
3.2. <i>Code Structure and Program Preparation</i> .....	44
4. SUMMARY AND CONCLUSIONS .....	51
REFERENCES .....	52
APPENDICES	
A. Listings of the Control, Input and Output Files for Five Examples .....	56
B. Listing of RETC.FOR .....	68

## FIGURES

<u>Number</u>	<u>Page</u>
1. Soil water retention curves based on (7) for various values of $n$ assuming $m=0.1$ (a) and $m=1.0$ (b) .....	7
2. Semi-logarithmic (a) and regular (b) plots of soil water retention curves based on (7) with $mn=0.4$ . ....	8
3. Observed and fitted retention curves for Weld silty clay loam .....	11
4. Observed and fitted retention curves for Touchet silt loam .....	11
5. Observed and fitted retention curves for G.E. No. 2 sand .....	12
6. Observed and fitted retention curves for Sarpy loam .....	12
7. Calculated curves for the relative hydraulic conductivity versus reduced pressure head (a) and reduced water content (b) as predicted from the retention curves in Figure 2 using Mualem's model (Eq. 17) with $\ell=0.5$ . ....	18
8. Dimensionless semilogarithmic plot of the relative hydraulic conductivity, $K_r$ , versus reduced water content, $S_e$ , for various values of $m$ . The curves were predicted from (7) using Mualem's model with $\ell=0.5$ and assuming $m=1-1/n$ .....	20
9. Observed and predicted relative hydraulic conductivity curves for Weld silty clay loam (Mualem's model with $\ell=0.5$ ). ....	21
10. Predicted relative hydraulic conductivity curves for Touchet silt loam (Mualem's model with $\ell=0.5$ ) .....	21

11.	Observed and predicted relative hydraulic conductivity curves for G.E. No. 2 sand (Mualem's model with $\ell=0.5$ ) .....	22
12.	Predicted relative hydraulic conductivity curves versus pressure head (a) and volumetric water content (b) for Sarpy loam (Mualem's model with $\ell=0.5$ ) .....	23
13.	Observed and predicted soil water diffusivity curves for Sarpy loam. The predicted curve were obtained by (a) using the measured $K_s$ -value in Mualem's model (Eq. 8 with $\ell=0.5$ ), and (b) directly matching the curves at an experimental data point as shown .....	25
14.	Observed and fitted unsaturated soil hydraulic functions for crushed Bandelier tuff. The calculated retention (a) and hydraulic conductivity (b) curves were based on (7) and (31), respectively, assuming $m=1-1/n$ .....	28
15.	Calculated curves for the relatively hydraulic conductivity versus reduced pressure head (a) and reduced water content (b) as predicted from the retention curves in Figure 2 using Burdine's model (Eq. 46) with $\ell=2$ . .....	33
16.	Dimensionless semilogarithmic plot of the relatively hydraulic conductivity, $K_r$ , versus reduced water content, $S_e$ , for various values of $m$ . The curves were predicted from (7) using Burdine's model with $\ell=2$ and assuming $m=1-2/n$ .....	34

# TABLES

<u>Number</u>		<u>Page</u>
1.	Fitted soil hydraulic parameters for the retention curves plotted in Figures 3 through 6 .....	10
2.	Fitted soil hydraulic parameters for crushed Bandelier Tuff .....	29
3.	Average values for selected soil water retention and hydraulic conductivity parameters for 11 major soil textural groups according to <i>Rawls et al.</i> [1982] .....	40
4.	Average values for selected soil water retention and hydraulic conductivity parameters for 12 major soil textural groups according to <i>Carsel and Parrish</i> [1988] .....	41
5.	Type of retention and conductivity models implemented in RETC as a function of the input variable MTYPE .....	44
6.	Possible options for analyzing observed conductivity or diffusivity data as determined by the input variable METHOD .....	44
7.	Outline of the control file RETC.CTL .....	46
8.	Schematic of the output generated with RETC .....	48
9.	Miscellaneous key variables in RETC .....	50

## 1. INTRODUCTION

Interest in the unsaturated (vadose) zone has dramatically increased in recent years because of growing evidence and public concern that the quality of the subsurface environment is being adversely affected by industrial, municipal and agricultural activities. Computer models are now routinely used in research and management to predict the movement of water and chemicals into and through the unsaturated zone of soils. Such models can be used successfully only if reliable estimates of the flow and transport properties of the medium are available. Current technology of developing sophisticated numerical models for water and solute movement in the subsurface seems to be well ahead of our ability to accurately estimate the increasing number of parameters which appear in those models. This is especially true for the unsaturated soil hydraulic properties which by far are the most important parameters affecting the rate at which water and dissolved chemicals move through the vadose zone. While a large number of laboratory and field methods have been developed over the years to measure the soil hydraulic functions [Klute, 1986], most methods are relatively costly and difficult to implement. Accurate in situ measurement of the unsaturated hydraulic conductivity has remained especially cumbersome and time-consuming. Thus, cheaper and more expedient methods for estimating the hydraulic properties are needed if we are to implement improved practices for managing water and chemicals in the unsaturated zone.

One alternative to direct measurement of the unsaturated hydraulic conductivity is to use theoretical methods which predict the conductivity from more easily measured soil water retention data. Such theoretical methods are generally based on statistical pore-size distribution models which assume water flow through cylindrical pores and incorporate the equations of Darcy and Poiseuille. A large number of models of this type have appeared in the soil science and petroleum engineering literature during the past several decades. These include the models by *Gates and Lietz* [1950], *Childs and Collis-George* [1950], *Burdine* [1953], *Millington and Quirk* [1961], and *Mualem* [1976a], among others. An excellent review of previously published pore-size distribution models was given recently by *Mualem* [1986]. Implementation of these predictive conductivity models still requires independently measured soil water retention data. Measured input retention data may be given either in tabular form, or by means of closed-form analytical expressions which contain parameters that are fitted to the observed data. While a large number of analytical soil water retention functions have been proposed, only a few functions can be easily incorporated into the

predictive pore-size distribution models to yield relatively simple analytical expressions for the unsaturated hydraulic conductivity function.

The use of analytical functions in soil water flow studies has several advantages. For example, they allow for a more efficient representation and comparison of the hydraulic properties of different soils and soil horizons. They are also more easily used in scaling procedures for characterizing the spatial variability of soil hydraulic properties across the landscape. And, if shown to be physically realistic over a wide range of water contents, analytical expressions provide a method for interpolating or extrapolating to parts of the retention or hydraulic conductivity curves for which little or no data are available. Analytical functions also permit more efficient data handling in unsaturated flow models, particularly for multidimensional simulations involving layered soil profiles.

Because of their simplicity and ease of use, predictive models for the hydraulic conductivity have become very popular in numerical studies of unsaturated flow. Results thus far suggest that predictive models work reasonably well for many coarse-textured soils and other porous media having relatively narrow pore-size distributions, but that predictions for many fine-textured and structured field soils remain inaccurate. Because of the time-consuming nature of direct field measurement of the hydraulic conductivity, and in view of the field-scale spatial variability problem, it nevertheless seems likely that predictive models (including those that predict the hydraulic properties from soil texture and related data) provide the only viable means of characterizing the hydraulic properties of large areas of land, whereas direct measurement may prove to be cost-effective only for site-specific problems [Wösten and van Genuchten, 1988].

The purpose of this report is to document the RETC (RETention Curve) computer program for describing the hydraulic properties of unsaturated soils. The program may be used to fit several analytical models to observed water retention and/or unsaturated hydraulic conductivity data. The RETC code is a descendent of the SOHYP code previously documented by van Genuchten [1978]. As before, soil water retention data are described with the equations of Brooks and Corey [1964] and van Genuchten [1980], whereas the pore-size distribution models of Burdine [1953] and Mualem [1976a] are used to predict the unsaturated hydraulic conductivity function. New features in RETC include (1) a direct evaluation of the hydraulic functions when the model parameters are known,

(2) a more flexible choice of hydraulic parameters to be included in the parameter optimization process, and (3) the possibility of evaluating the model parameters from observed conductivity data rather than only from retention data, or simultaneously from measured retention and hydraulic conductivity data. Although the models used in RETC are intended to describe the unsaturated soil hydraulic properties for monotonic drying or wetting in homogeneous soils, the code can be easily modified to account for more complicated flow processes such as hysteretic two-phase flow [Lenhard *et al.*, 1991] or preferential flow [Germann, 1990].

## 2. PARAMETRIC MODELS FOR THE SOIL HYDRAULIC FUNCTIONS

Water flow in unsaturated or partly saturated soils is traditionally described with the Richards equation [Richards, 1931] as follows

$$C \frac{\partial h}{\partial t} = \frac{\partial}{\partial z} \left( K \frac{\partial h}{\partial z} - K \right) \quad (1)$$

where  $h$  is the soil water pressure head (with dimension L),  $t$  is time (T),  $z$  is soil depth (L),  $K$  is the hydraulic conductivity ( $LT^{-1}$ ), and  $C$  is the soil water capacity ( $L^{-1}$ ) approximated by the slope ( $d\theta/dh$ ) of the soil water retention curve,  $\theta(h)$ , in which  $\theta$  is the volumetric water content ( $L^3 L^{-3}$ ). Equation (1) may also be expressed in terms of the water content if the soil profile is homogeneous and unsaturated ( $h \leq 0$ ):

$$\frac{\partial \theta}{\partial t} = \frac{\partial}{\partial z} \left( D \frac{\partial \theta}{\partial z} - K \right) \quad (2)$$

where  $D$  is the soil water diffusivity ( $L^2 T^{-1}$ ), defined as

$$D = K \frac{dh}{d\theta} \quad (3)$$

The unsaturated soil hydraulic functions in the above equations are the soil water retention curve  $\theta(h)$ , the hydraulic conductivity function  $K(h)$  or  $K(\theta)$ , and the soil water diffusivity function  $D(\theta)$ . Parametric models of these functions are reviewed in detail below.

### 2.1. Soil Water Retention Models

Several functions have been proposed to empirically describe the soil water retention curve. One of the most popular functions has been the equation of Brooks and Corey [1964], further referred to as the BC-equation:

$$\theta = \begin{cases} \theta_r + (\theta_s - \theta_r) (\alpha h)^{-\lambda} & (\alpha h > 1) \\ \theta_s & (\alpha h \leq 1) \end{cases} \quad (4)$$



where  $\theta_r$  and  $\theta_s$  are the residual and saturated water contents, respectively;  $\alpha$  is an empirical parameter ( $L^{-1}$ ) whose inverse is often referred to as the air entry value or bubbling pressure, and  $\lambda$  is a pore-size distribution parameter affecting the slope of the retention function. For notational convenience,  $h$  and  $\alpha$  for the remainder of this report are taken positive for unsaturated soils (i.e.,  $h$  denotes suction).

The residual water content,  $\theta_r$ , in (4) specifies the maximum amount of water in a soil that will not contribute to liquid flow because of blockage from the flow paths or strong adsorption onto the solid phase [Luckner *et al.*, 1989]. Formally,  $\theta_r$  may be defined as the water content at which both  $d\theta/dh$  and  $K$  go to zero when  $h$  becomes large. The residual water content is an extrapolated parameter, and hence may not necessarily represent the smallest possible water content in a soil. This is especially true for arid regions where vapor phase transport may dry out soils to water contents to well below  $\theta_r$ . The saturated water content,  $\theta_s$ , sometimes also referred to as the satiated water content, denotes the maximum volumetric water content of a soil. The saturated water content should not be equated to the porosity of soils;  $\theta_s$  of field soils is generally about 5 to 10% smaller than the porosity because of entrapped or dissolved air. Following van Genuchten and Nielsen [1985] and Luckner *et al.* [1989],  $\theta_r$  and  $\theta_s$  in this study are viewed as being essentially empirical constants in soil water retention functions of the type given by (4), and hence without much physical meaning.

Equation (4) may be written in a dimensionless form as follows

$$S_e = \begin{cases} (\alpha h)^{-\lambda} & (\alpha h > 1) \\ 1 & (\alpha h \leq 1) \end{cases} \quad (5)$$

where  $S_e$  is the effective degree of saturation, also called the reduced water content ( $0 \leq S_e \leq 1$ ):

$$S_e = \frac{\theta - \theta_r}{\theta_s - \theta_r} \quad (6)$$

On a logarithmic plot, (5) generates two straight lines which intersect at the air entry value,  $h_a = 1/\alpha$ . Because of their simple form, (4) and (5) have been used in numerous unsaturated flow studies. The BC-equation has been shown to produce relatively accurate results for many coarse-

textured soils characterized by relatively narrow pore- or particle-size distributions (large  $\lambda$ -values). Results have generally been less accurate for many fine-textured and undisturbed field soils because of the absence of a well-defined air-entry value for these soils.

Several continuously differentiable (smooth) equations have been proposed to improve the description of soil water retention near saturation. These include functions introduced by *King* [1965], *Visser* [1968], *Laliberte* [1969], *Su and Brooks* [1975] and *Clapp and Hornberger* [1978]. While these functions were able to reproduce observed soil water retention data more accurately, most are too complicated mathematically to be easily incorporated into predictive pore-size distribution models for the hydraulic conductivity (to be discussed later), or possess other features (notably the lack of a simple inverse relationship) which make them less attractive in soil water studies [*van Genuchten and Nielsen*, 1985]. A related smooth function with attractive properties is the equation of *van Genuchten* [1980], further referred to as the VG-equation:

$$S_e = \frac{1}{[1 + (\alpha h)^n]^m} \quad (7)$$

where  $\alpha$ ,  $n$  and  $m$  are empirical constants affecting the shape of the retention curve. Equation (7) with  $m=1$  was used earlier by *Ahuja and Swartzendruber* [1972], *Endelman et al.* [1974] and *Varallyay and Mironenko* [1979], among others.

Figures 1 and 2 show calculated retention curves based on (7) for various values of  $m$  and  $n$ . Plots are given in terms of the reduced pressure head,  $\alpha h$ . Actual values for  $h$  may be obtained by shifting the logarithmic scale in Figures 1 and 2a by  $\log(\alpha)$ , or by multiplying the horizontal scale in Figure 2b by  $1/\alpha$ . The curves in Figure 1 are for two values of  $m$ , whereas in Figure 2 the product  $mn$  was kept constant at an arbitrary value of 0.4. This last feature causes all curves to approach a limiting curve at low values of the relative saturation,  $S_e$ . This limiting curve follows from (7) by removing the factor 1 from the denominator, and is equivalent to the Brooks and Corey equation with  $\lambda = mn$ . The same limiting curve also appears when  $n$  in (7) is allowed to go to infinity, while simultaneously decreasing  $m$  such that the product,  $mn$ , remains the same at 0.4. As shown in Figure 2, the limiting BC equation exhibits a sharp break in the curve at the air entry value  $h_a = 1/\alpha$ . For finite values of  $n$  (i.e.,  $n < \infty$ ), the curves remain smooth and more or less sigmoidally-shaped on a semi-logarithmic plot (Figure 2a).

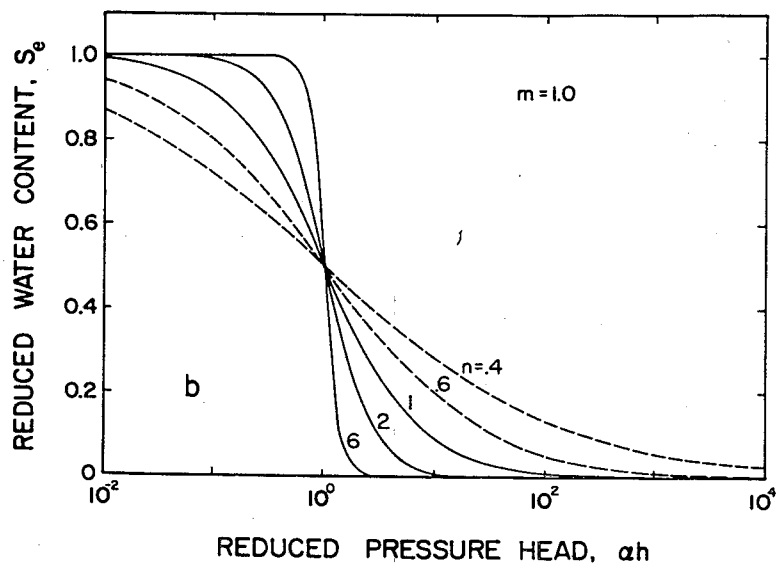
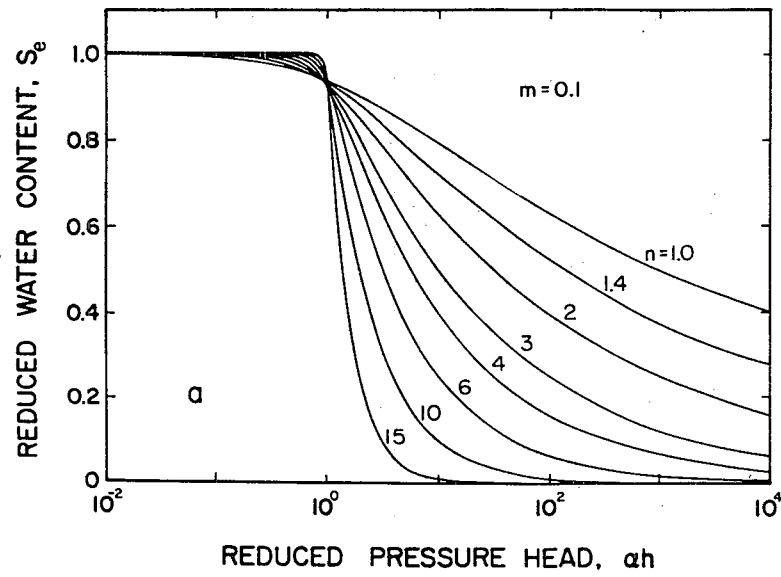


Figure 1. Soil water retention curves based on (7) for various values of  $n$  assuming  $m=0.1$  (a) and  $m=1.0$  (b).

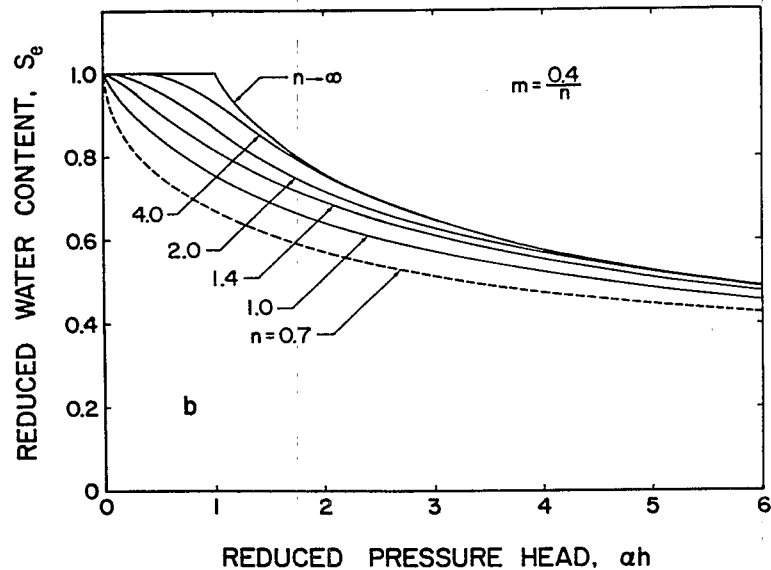
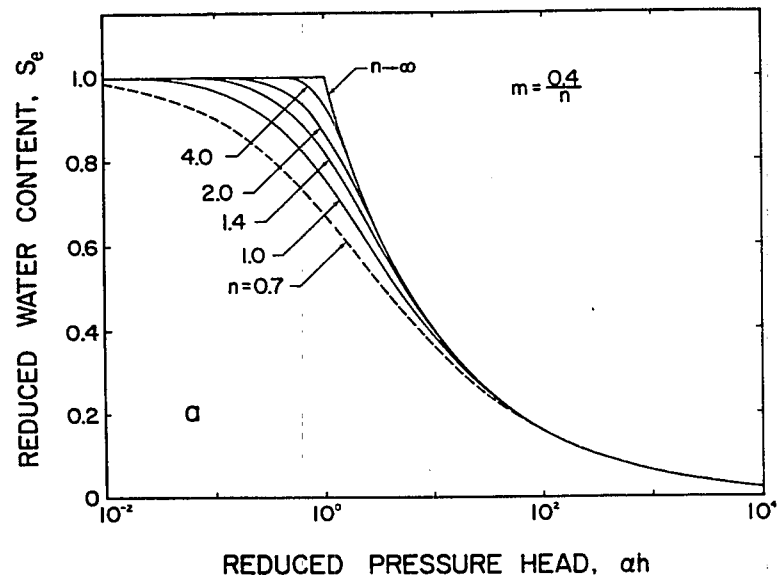


Figure 2. Semi-logarithmic (a) and regular (b) plots of soil water retention curves based on (7) with  $mn = 0.4$ .

Note, however, that the curves become markedly nonsigmoidal on the regular  $\theta(h)$  plot (Figure 2b), especially when  $n$  is relatively small.

Figure 2 also demonstrates the effect of imposing various restrictions on the permissible values of  $m$  and  $n$ . Again, when  $n \rightarrow \infty$  (while keeping the product  $mn$  constant, in this case 0.4), the limiting curve of Brooks and Corey with a well-defined air entry value appears (Figure 2a,b). When  $m = 1-1/n$ , as suggested by *van Genuchten* [1980] for the Mualem-based conductivity prediction, and keeping  $mn$  at 0.4, the retention function is given by the curve designated  $n = 1.4$  in Figure 2. Similarly, when  $m = 1-2/n$  for the Burdine-based conductivity equation, the retention function is given by the curve  $n = 2.4$  in Figure 2. As discussed further in sections 2.2 and 2.3, the restrictions  $m = 1-1/n$  and  $m = 1-2/n$  lead to relatively simple expressions for the hydraulic conductivity function when (7) is combined with the theoretical pore-size distribution models of *Mualem* [1976a] and *Burdine* [1953], respectively. In contrast, the variable  $m,n$  case leads to mathematical expressions for  $K$  and  $D$  which may be too complicated for routine use in soil water flow studies. Imposing one of the three restrictions (including the restriction that  $n \rightarrow \infty$ ) will, for a given value of  $mn$ , fix the shape of the retention curve at the wet end when  $S_e$  approaches saturation. Of course, the same is true when the restriction  $m = 1$  of *Ahuja and Swartzendruber* [1972] is imposed on the soil water retention curve.

Figures 3 through 6 compare observed and fitted retention curves for four soils. The examples were previously discussed by *van Genuchten and Nielsen* [1985]. Fitted parameter values for the soils are listed in Table 1. The table also gives the calculated sum of squares, SSQ, of the fitted versus observed water contents (see also sections 2.4 and 3.2). The SSQ values reflect the relative accuracy of the retention models in describing the observed data.

Figure 3 shows the results for Weld silty clay loam [*Jensen and Hanks*, 1967]. The BC-equation in this example matches the data equally well as the variable  $m,n$  case, whereas the VG-curves associated with the restrictions  $m = 1-1/n$  and  $m = 1-2/n$  produced relatively poor results. This situation is different for Touchet silt loam [*King*, 1965], results of which are shown in Figure 4. The BC-equation in this example produces an unacceptable fit, whereas the VG-equation with restricted  $m,n$  values produces results which are essentially identical to those for the general case when  $m$  and  $n$  are independent. Figure 5 shows similar results for G.E. No. 2 sand [*King*, 1965]; significant

Table 1. Fitted soil hydraulic parameters for the retention curves plotted in Figures 3 through 6

Type of curve	$\theta_r$ (cm <sup>3</sup> /cm <sup>3</sup> )	$\theta_s$ (cm <sup>3</sup> /cm <sup>3</sup> )	$\alpha$ (1/cm)	$n$ (-)	$\lambda, m^\dagger$ (-)	SSQ (10 <sup>-5</sup> )
<i>Weld silty clay loam</i>						
variable $m, n$	0.116	0.469	0.0173	61.54	$m=0.0308$	18
$m=1-1/n$	0.159	0.496	0.0136	5.45	( $m=0.816$ )	487
$m=1-2/n$	0.155	0.495	0.0143	5.87	( $m=0.659$ )	425
$n \rightarrow \infty$	0.116	0.465	0.0172	-	$\lambda=1.896$	21
<i>Touchet silt loam</i>						
variable $m, n$	0.081	0.524	0.0313	3.98	$m=0.493$	14
$m=1-1/n$	0.102	0.526	0.0278	3.59	( $m=0.721$ )	17
$m=1-2/n$	0.082	0.524	0.0312	3.98	( $m=0.497$ )	14
$n \rightarrow \infty$	0.018	0.499	0.0377	-	$\lambda=1.146$	367
<i>G. E. No. 2 sand</i>						
variable $m, n$	0.091	0.369	0.0227	4.11	$m=4.80$	24
$m=1-1/n$	0.057	0.367	0.0364	5.05	( $m=0.802$ )	34
$m=1-2/n$	0.0	0.370	0.0382	4.51	( $m=0.557$ )	56
$n \rightarrow \infty$	0.0	0.352	0.0462	-	$\lambda=1.757$	354
<i>Sarpy loam</i>						
variable $m, n$	0.051	0.410	0.0127	1.11	$m=0.886$	60
$m=1-1/n$	0.032	0.400	0.0279	1.60	( $m=0.374$ )	99
$m=1-2/n$	0.012	0.393	0.0393	2.45	( $m=0.185$ )	199
$n \rightarrow \infty$	0.0	0.380	0.0444	-	$\lambda=0.387$	539

<sup>†</sup>Values for  $m$  in parenthesis were calculated from the fitted  $n$ -values.

differences between the three smooth curves are in this case apparent only at the lower water contents. Finally, Figure 6 shows a case with visible differences between all four curves based on (7). Data for this example were taken from *Hanks and Bowers* [1962]. In this case there is a progressively better fit to the data going from the BC limiting curve via the restricted cases  $m=1-2/n$  and  $m=1-1/n$ , to the more general case of variable  $m, n$ .

From the results in Figures 3 through 6, and many other examples not further discussed here, we conclude that (7) with variable  $m, n$  gives an excellent fit to observed retention data for most soils [van Genuchten *et al.*, 1991]. The only exceptions are certain structured or aggregated soils characterized by very distinct bimodal pore-size distributions. Of the three cases with restricted  $m$ ,

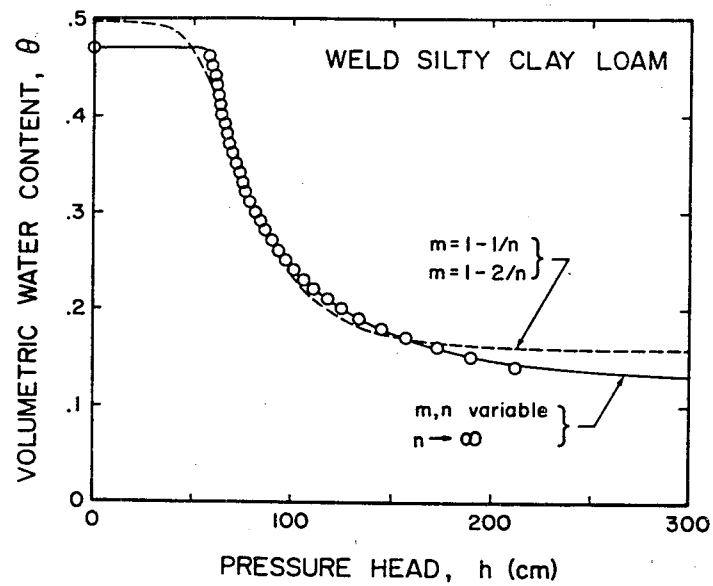


Figure 3. Observed and fitted retention curves for Weld silty clay loam.

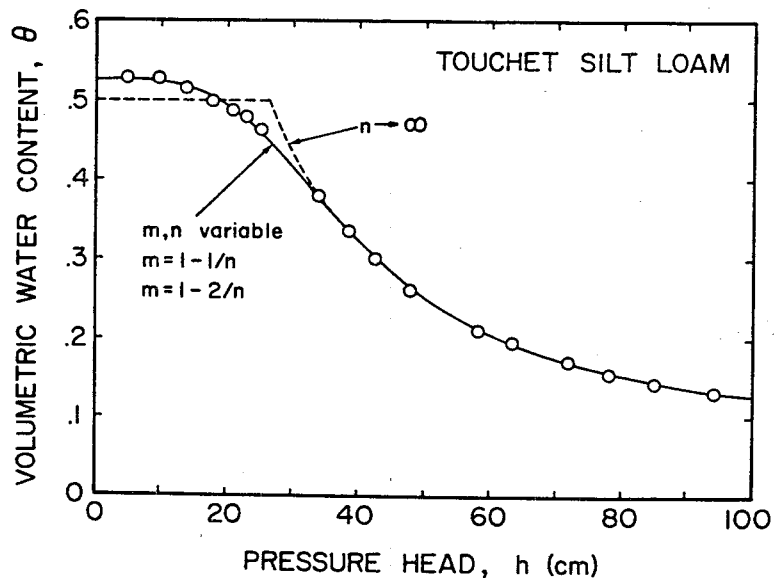


Figure 4. Observed and fitted retention curves for Touchet silt loam.

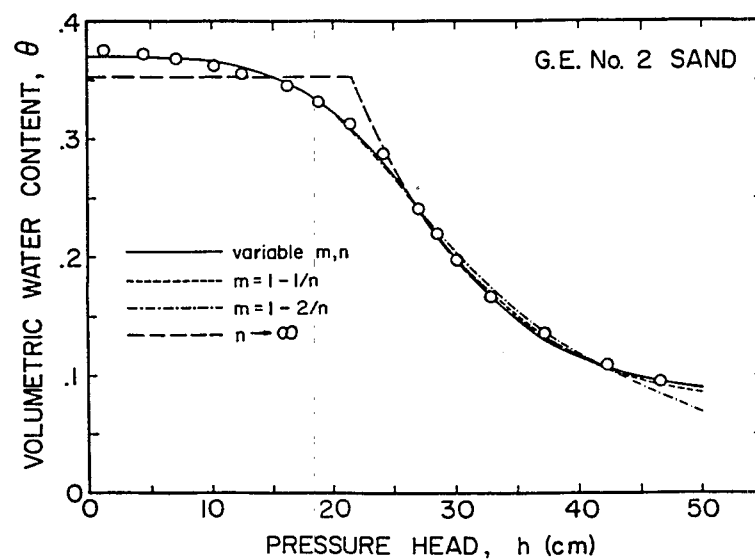


Figure 5. Observed and fitted retention curves for G. E. No. 2 sand.

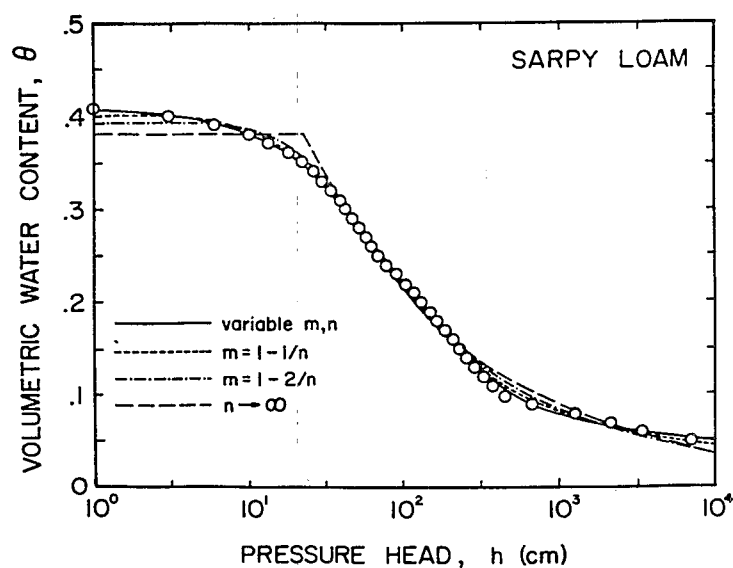


Figure 6. Observed and fitted retention curves for Sarpy loam.



$m=1-1/n$  seems to perform best for many but not all soils, while the BC-equation generally performs best for selected coarse-textured and/or repacked, sieved soils with relatively narrow pore-size distributions. While the variable  $m,n$  case produced always superior results, its use is not necessarily recommended for all observed retention data sets. In many situations, especially when observed field data sets are involved, only a limited range of retention values (usually in the wet range) is available. Unless augmented with laboratory measurements at relatively low water contents, such data sets may not lead to an accurate definition of the retention curve in the dry range. Keeping  $m$  and  $n$  variable in those cases often leads to uniqueness problems in the parameter estimation process. Typically,  $m$  and  $n$  will then become strongly correlated, leading to poor convergence and ill-defined parameter values with large confidence intervals. More stable results are generally obtained when the restrictions  $m=1-1/n$  or  $m=1-2/n$  are implemented for these incomplete data sets. The same is also true for the BC-equation. Another, more pragmatic consideration for selecting one of the restricted  $m,n$  cases is the rather complicated form of the predictive equation for the unsaturated hydraulic conductivity when the variable  $m,n$  case is combined with one of the statistical pore-size distribution models. This problem is discussed further in sections 2.2 and 2.3.

## 2.2. *Mualem's Hydraulic Conductivity Model*

The model of *Mualem* [1976a] for predicting the relative hydraulic conductivity,  $K$ , may be written in the form

$$K(S_e) = K_s S_e' \left[ \frac{f(S_e)}{f(1)} \right]^2 \quad (8)$$

where

$$f(S_e) = \int_0^{S_e} \frac{1}{h(x)} dx \quad (9)$$

in which  $S_e$  is given by (6),  $K_s$  is the hydraulic conductivity at saturation, and  $\ell$  is a pore-connectivity parameter estimated by *Mualem* [1976a] to be about 0.5 as an average for many soils. To facilitate the integration in (9), we first take the inverse of (7) as follows

$$h = \frac{1}{\alpha} (S_e^{-1/m} - 1)^{1/n} \quad (10)$$

Substituting (10) into (9) and using the substitution  $x=y^n$  gives

$$f(S_e) = \alpha m \int_0^{S_e^{1/m}} y^{m-1+1/n} (1-y)^{-1/n} dy \quad (11)$$

Several approaches can now be followed to derive  $K$  from (8) and (11). We first proceed with the most general case of variable  $m$  and  $n$ . The transformations

$$\zeta = S_e^{1/m} = \frac{1}{1+(\alpha h)^n} \quad (12)$$

and

$$p = m+1/n \quad q = 1-1/n \quad (13)$$

allow (11) to be rewritten in the form

$$f(S_e) = \alpha m I_\zeta(p, q) B(p, q) \quad (14)$$

where  $B(p, q)$  is the Complete Beta function given by

$$B(p, q) = \int_0^1 y^{p-1} (1-y)^{q-1} dy \quad (15)$$

and  $I_\zeta(p, q)$  is the Incomplete Beta function (e.g., *Zelen and Severo*, 1965, page 944):

$$I_\zeta(p, q) = \frac{1}{B(p, q)} \int_0^\zeta y^{p-1} (1-y)^{q-1} dy \quad (16)$$

Because  $I_1(p, q) = 1$  we have  $f(1) = \alpha m B(p, q)$ , which results in the following general expression for  $K$  assuming independent  $m$  and  $n$  parameters:

$$K(S_e) = K_s S_e^t [I_\zeta(p, q)]^2 \quad (17)$$

A corresponding expression for the soil water diffusivity may be derived from (3). Substituting (17) into (3) and using (6) and (7) leads to

$$D(h) = \frac{K_s [1 + (\alpha h)^n]^{m-mt+1}}{\alpha mn (\theta_s - \theta_r) (\alpha h)^{n-1}} [I_\zeta(p, q)]^2 \quad (18)$$

or in terms of the water content:

$$D(S_e) = \frac{K_s S_e^{-1+t-1/mn}}{\alpha mn (\theta_s - \theta_r) (1 - S_e)^{1-1/n}} [I_\zeta(p, q)]^2 \quad (19)$$

The above equations for the hydraulic conductivity and soil water diffusivity contain the Complete and Incomplete Beta functions,  $B(p, q)$  and  $I_\zeta(p, q)$ , respectively.  $B(p, q)$  is evaluated in RETC with the expression

$$B(p, q) = \frac{\Gamma(p) \Gamma(q)}{\Gamma(p+q)} \quad (20)$$

where  $\Gamma$  denotes the Gamma function. The Incomplete Beta function,  $I_\zeta(p, q)$ , is more difficult to evaluate. For most combinations of  $S_e$ ,  $m$  and  $n$ , the function may be approximated accurately using continued fractions [Zelen and Severo, 1965; Press et al., 1986] as follows

$$I_\zeta(p, q) = \frac{\zeta^p (1 - \zeta)^q}{p B(p, q)} \left[ \frac{1}{1 +} \frac{d_1}{1 +} \frac{d_2}{1 +} \dots \right] \quad (21)$$

where

$$d_{2m+1} = - \frac{(p+m)(p+q+m)}{(p+2m)(p+2m+1)} \zeta \quad (22)$$

and

$$d_{2m} = - \frac{m(q-m)}{(p+2m-1)(p+2m)} \zeta \quad (23)$$

The symmetry relation

$$I_\zeta(p, q) = 1 - I_{1-\zeta}(q, p) \quad (24)$$

was used whenever

$$S_e > \max\left[\frac{2}{2+m}, 0.2\right] \quad (25)$$

to increase the rate of convergence of the continued fraction approximation. Generally, only five terms of (21) are needed to obtain an accuracy of at least four significant digits. A few more terms are recommended when  $m$  exceeds 2.

For relatively small values of  $\zeta = S_e^{1/m}$  one may greatly simplify the above equations by approximating (10) with the following expression

$$h = \frac{1}{\alpha S_e^{1/mn}} \quad (26)$$

Substituting (26) into (9) leads to

$$f(S_e) = \frac{\alpha mn}{mn+1} S_e^{1+1/mn} \quad (S_e < 1) \quad (27)$$

Incorporating (27) into (8) and using the property that  $f(1) = \alpha m B(p, q)$  leads then to the simpler equation

$$K(S_e) = \frac{K_s n^2 S_e^{t+2+2/mn}}{[(mn+1)B(p, q)]^2} \quad (28)$$

or in terms of the pressure head

$$K(h) = \frac{K_s n^2}{[(mn+1)B(p, q)]^2 (\alpha h)^{2+mn(t+2)}} \quad (29)$$

The soil water diffusivity function for small  $\zeta$  becomes similarly

$$D(S_e) = \frac{K_s n^2 S_e^{t+1+1/mn}}{\alpha mn(\theta_s - \theta_r)[(mn+1)B(p, q)]^2} \quad (30)$$

The above derivations hold for the general case of independent  $m$  and  $n$  in (7). Simpler expressions for  $K$  may be obtained when the permissible values for  $m$  and  $n$  are restricted such that  $k = m-1+1/n$  becomes an integer [van Genuchten, 1980]. The simplest case arises when  $k=0$ , which leads to the restriction  $m=1-1/n$ . Equation (11) can now be readily integrated to yield

$$K(S_e) = K_s S_e^t [1 - (1 - S_e^{1/m})^m]^2 \quad (m = 1 - 1/n) \quad (31)$$

or in terms of the pressure head:

$$K(h) = \frac{K_s \{1 - (\alpha h)^{mn} [1 + (\alpha h)^n]^{-m}\}^2}{[1 + (\alpha h)^n]^{mt}} \quad (m = 1 - 1/n) \quad (32)$$

The soil water diffusivity function,  $D$ , corresponding to (31) is

$$D(S_e) = \frac{(1-m)K_s S_e^{t-1/m}}{\alpha m(\theta_s - \theta_r)} \left[ (1 - S_e^{1/m})^{-m} + (1 - S_e^{1/m})^m - 2 \right] \quad (m = 1 - 1/n) \quad (33)$$

When the BC retention function (Eq. 5), i.e.,

$$h = \frac{1}{\alpha S_e^{1/\lambda}} \quad (34)$$

rather than (10), is substituted into (9), the hydraulic conductivity function becomes

$$K(S_e) = K_s S_e^{t+2+2/\lambda} \quad (35)$$

or as a function of the pressure head ( $\alpha h > 1$ )

$$K(h) = \frac{K_s}{(\alpha h)^{\lambda(t+2)+2}} \quad (36)$$

The soil water diffusivity function becomes in this case

$$D(S_e) = \frac{K_s S_e^{t+1+1/\lambda}}{\alpha \lambda (\theta_s - \theta_r)} \quad (37)$$

Equations (34) through (37) also represent the limiting equations for the VG-model with variable  $m, n$  when  $n \rightarrow \infty$  while keeping the product  $\lambda = mn$  finite.

Figure 7 shows calculated curves for the relative hydraulic conductivity,  $K_r = K/K_s$ , as a function of the reduced pressure head,  $\alpha h$ , and the reduced water content,  $S_e$ . The curves were calculated with (17) for the variable  $m, n$  case using the same parameter values as those for Figure 2, i.e., with the product  $mn$  fixed at 0.4. As for the retention curves, the conductivity curves in Figure 7a remain smooth, except for the limiting case when  $n \rightarrow \infty$  as given by (35) and (36).

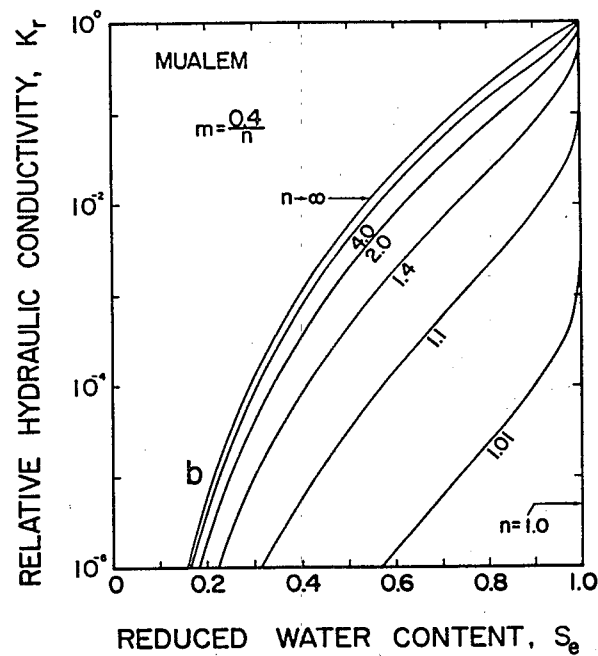
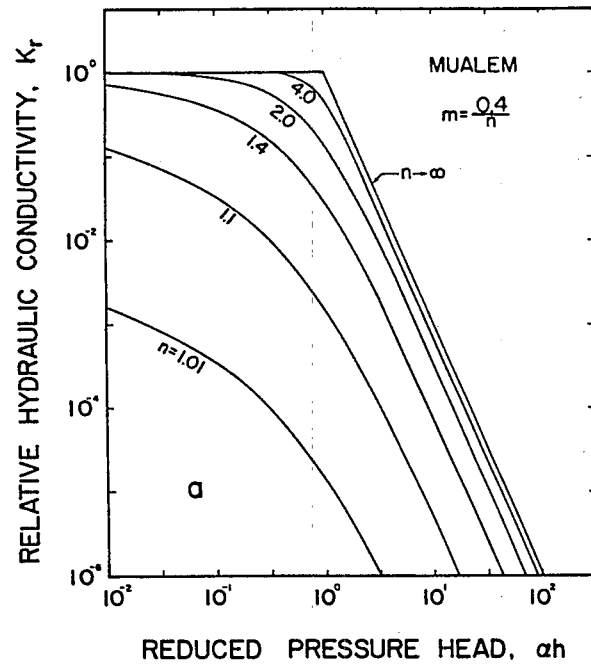


Figure 7. Calculated curves for the relative hydraulic conductivity versus reduced pressure head (a) and reduced water content (b) as predicted from the retention curves in Figure 2 using Mualem's model (17) with  $\ell=0.5$ .

Figures 7a and 7b show that the hydraulic conductivity decreases when  $n$  becomes smaller, and that  $K_r$  becomes identical to zero when  $n=1$ . This feature is a result of the fact that the Complete Beta function  $B(p,q)$  in (16) decreases with smaller  $n$ , and becomes zero when  $n \rightarrow 1$ . No solution for the predicted hydraulic conductivity function exists when  $n < 1$ . This property is an important limitation of the variable  $m,n$  case. As shown previously [van Genuchten and Nielsen, 1985], water retention data sets often yield values for  $n$  which are less than unity when  $m$  and  $n$  are allowed to remain independent, thus making it impossible to use the predictive equation for  $K$  assuming variable  $m,n$ . This situation is typical for structured and/or coarse-textured soils whose retention curves often exhibit a gradual approach to saturation (see curves in Figure 2 with  $n < 1.4$ ). For such soils it is necessary to invoke one of the restrictions on the permissible  $m,n$  values. Consequently, we recommend using the variable  $m,n$  case only for well-defined soil water retention data sets, and to use the restriction  $m=1-1/n$  for all other data sets. The restriction  $m=1-1/n$  always leads to  $n > 1$  when fitting observed retention data, and hence always yields well-defined hydraulic conductivity curves. Figure 8 shows a general dimensionless plot of  $K_r(S_e)$  when the restriction  $m=1-1/n$  is implemented. The curves in this figure are based on (31) for selected values of  $m$ , and were obtained using a value of 0.5 for the pore-connectivity parameter  $l$  as suggested by Mualem [1976a]. Notice that  $m$  is always bounded by  $0 < m \leq 1$ , which follows from the fact that  $n > 1$  when  $m=1-1/n$ .

One drawback of imposing the restriction  $m=1-1/n$  is that the shape and curvature of the retention curve near saturation is now forced to have a unique relation with the shape and slope of the curve in the dry range when  $ah > 1$ . Similarly, the position and slope of the  $K_r$ -curve near saturation will be fixed for a given slope of the curve at the dry end of the conductivity curve. While the restriction  $m=1-1/n$  has been shown to limit the flexibility of (7) in describing a large number of observed retention data sets, its effect on the hydraulic conductivity curve is still not clear. One alternative approach is to initially impose the restriction  $m=1-1/n$  when calculating the hydraulic conductivity curve,  $K_r(h)$ , and then to refit the retention curve with variable  $m,n$ . This approach effectively decouples the retention and hydraulic conductivity functions by allowing some of the hydraulic parameters to be different for the two functions.

To further illustrate the effects of restricting the permissible values of  $m$  and  $n$ , Figures 9 through 12 show predicted conductivity curves for the retention functions plotted in Figures 3

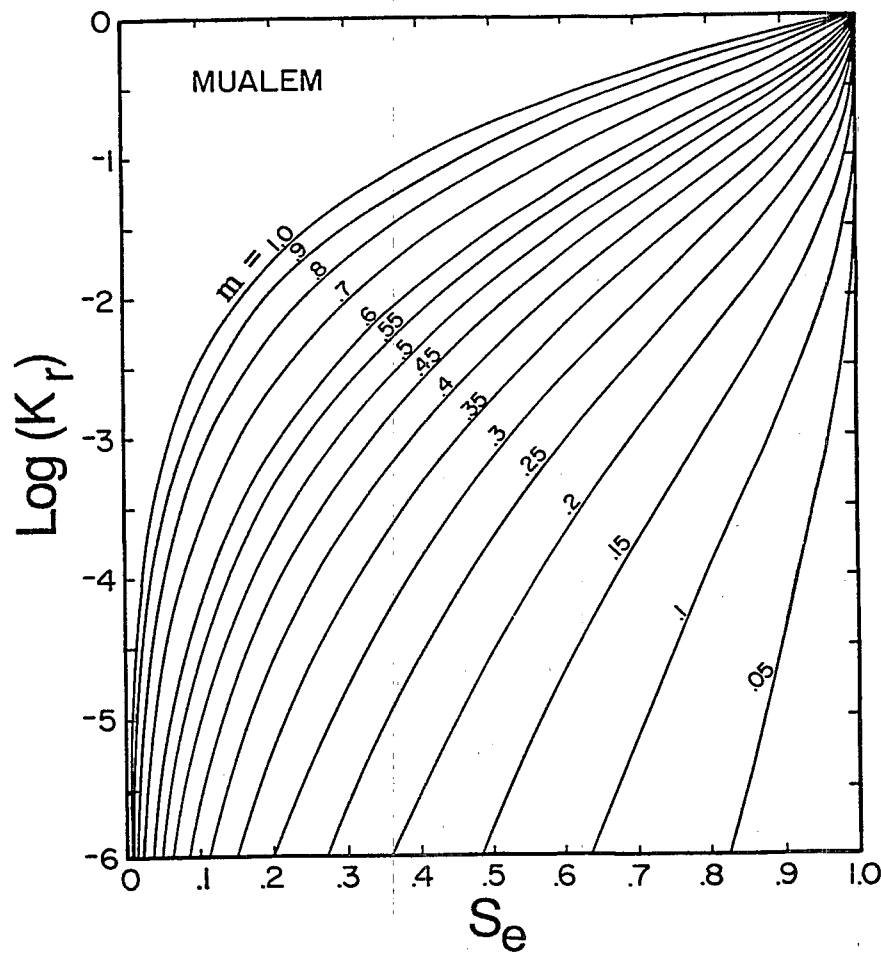


Figure 8. Dimensionless semilogarithmic plot of the relative hydraulic conductivity,  $K_r$ , versus reduced water content,  $S_e$ , for various values of  $m$ . The curves were predicted from (7) using Mualem's model with  $\ell=0.5$  and assuming  $m=1-1/n$ .

through 6. Results are given as a function of the volumetric water content,  $\theta$ , or the pressure head,  $h$ . The pore-connectivity parameter  $\ell$  in all cases was assumed to be 0.5. Differences between the calculated curves in Figures 9 through 12 parallel those found for the fitted retention curves for the same soils (Figures 3 through 6). For example, the predicted curve for Weld silty clay loam (Figure 9) assuming variable  $m, n$  was found to be essentially the same as the limiting curve when  $n \rightarrow \infty$ , but deviated somewhat from the predicted curve using the restriction  $m = 1 - 1/n$ . For Touchet silt loam (Figure 10) and G. E. No. 2 sand (Figure 11), the calculated conductivity curves for  $m = 1 - 1/n$  and variable  $m, n$  were not as close as the fitted retention curves (see Figures 4 and 5, respectively). However, notice that for these last two soils the limiting curve  $n \rightarrow \infty$  leads to much higher  $K_r$ -values



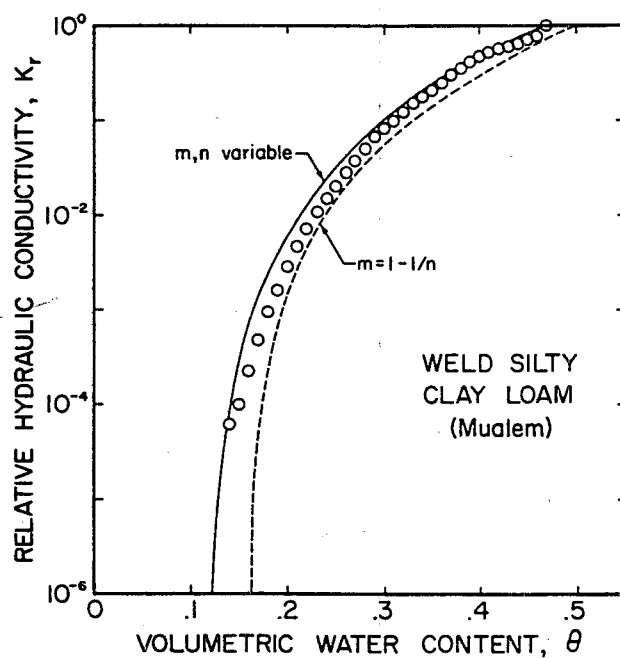


Figure 9. Observed and predicted relative hydraulic conductivity curves for Weld silty clay loam (Mualem's model with  $\ell=0.5$ ).

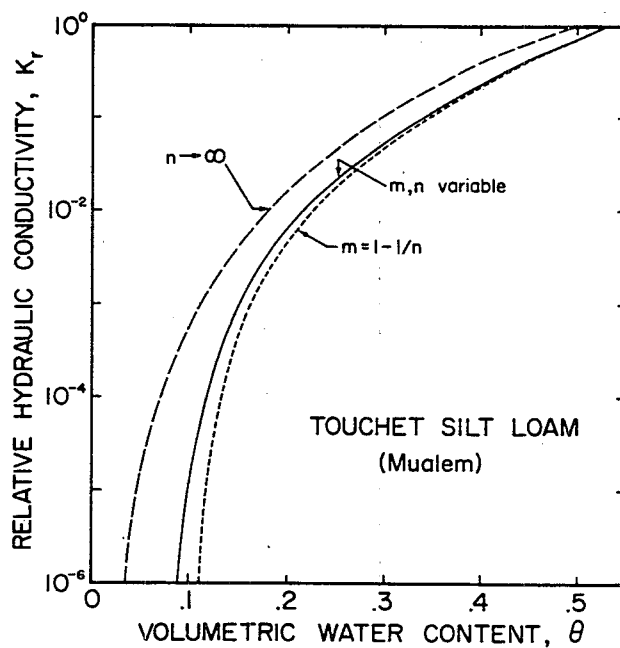


Figure 10. Predicted relative hydraulic conductivity curves for Touchet silt loam (Mualem's model with  $\ell = 0.5$ ).

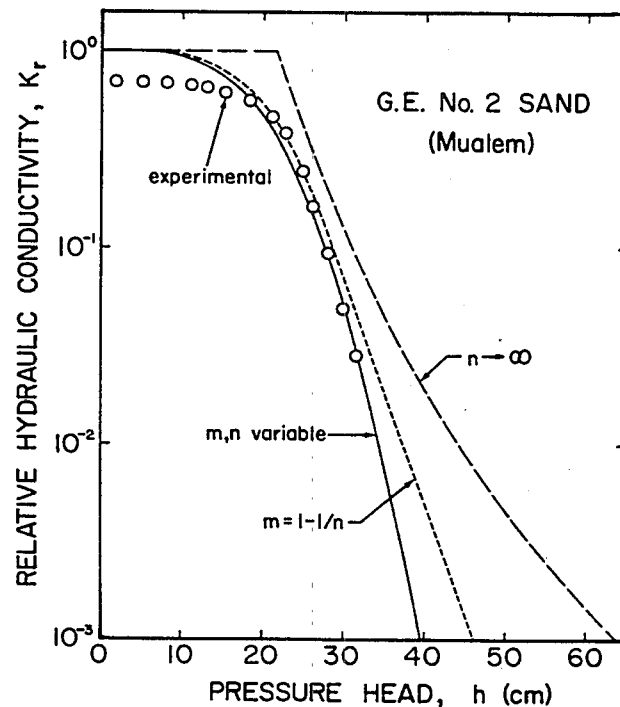


Figure 11. Observed and predicted relative hydraulic conductivity curves for G.E. No. 2 sand (Mualem's model with  $\ell=0.5$ ).

than the two other curves. Figures 9 and 11 also include the experimental conductivity data as listed by *Mualem* [1976b]. The variable  $m, n$  case in both figures appears to provide the best match with the experimental data.

Figure 12 presents calculated curves for Sarpy loam which exhibited relatively large differences near saturation between all four fitted retention curves (Figure 6). Although the differences in Figure 6 may appear to be relatively minor, they do lead to significant deviations between the three predicted conductivity curves in Figure 12a,b. The extreme sensitivity of the predicted curve to small changes in the location and slope of the fitted retention curve near saturation is a direct consequence of the relatively small  $n$ -value obtained for Sarpy loam (Table 1);  $n$  equals 1.114 for the variable  $m, n$  case which, as shown by the curves in Figures 7 and 8, leads to a steep conductivity curve close to saturation.

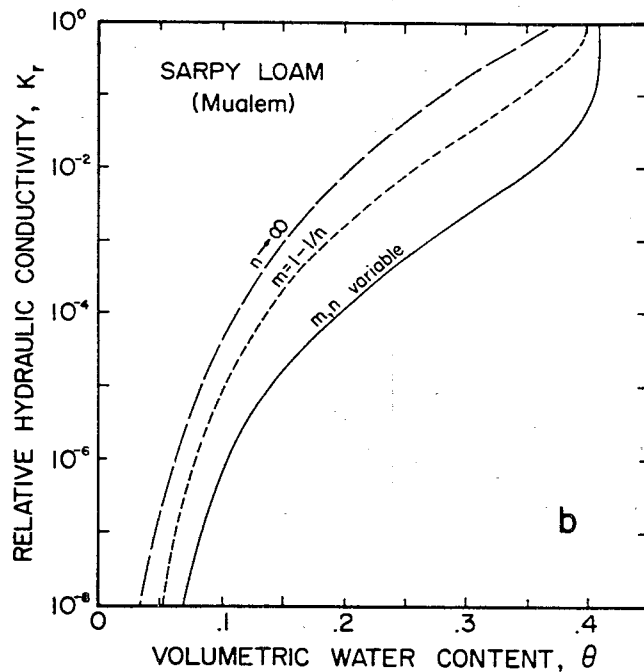
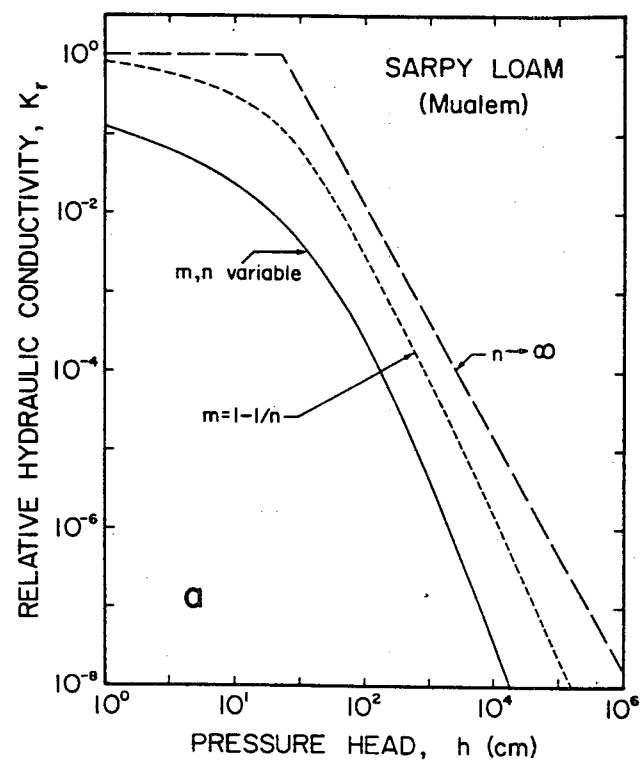


Figure 12. Predicted relative hydraulic conductivity curves versus pressure head (a) and volumetric water content (b) for Sarpy loam (Mualem's model with  $\ell = 0.5$ ).

The curves in Figures 6 and 12 indicate that a relatively small change in the retention curve near saturation can lead to a significant change in the location and shape of the predicted conductivity curve over the entire range of conductivity values. *Stephens and Rehfeldt* [1985] observed a similar sensitivity of the predicted conductivity function to small changes in the retention curve near saturation. For Sarpy loam, this sensitivity is further demonstrated in Figure 13a where, for the same retention curves as in Figure 6, the predicted curves for the soil water diffusivity,  $D$ , are compared with the experimental data of *Hanks and Bowers* [1962]. The predicted equations for  $D$  are given by (19) for the variable  $m,n$  case, (33) for the restricted case when  $m=1-1/n$ , and (37) for the limiting case when  $n \rightarrow \infty$ . The saturated hydraulic conductivity,  $K_s$ , in these equations was taken to be 0.0015 cm/s [*Hanks and Ashcroft*, 1980]. Figure (13a) shows that the variable  $m,n$  case severely underpredicts the observed data. The two restricted curves both describe the data reasonably well, with the restricted case  $m=1-1/n$  leading to a somewhat more realistic shape of the diffusivity curve near saturation (i.e.,  $D \rightarrow \infty$  as  $\theta \rightarrow \theta_s$ ).

The curves in Figure 13a were obtained by assuming that  $K_s$  is known, thus forcing the theoretical and experimental conductivity functions (but not the diffusivity functions) to be matched at saturation. Unfortunately, as will be discussed further below, the value of  $K_s$  is frequently ill-defined or difficult to measure accurately. In that case it is more appropriate to match the  $K(h)$  and  $D(\theta)$  curves at some point other than saturation. In Figure 13b the measured and predicted curves were matched at the point  $(\theta_o, D_o) = (0.33, 0.0792 \text{ cm}^2/\text{s})$ . The three calculated curves now match the data very well, except perhaps near saturation where the limiting diffusivity curve  $n \rightarrow \infty$  underpredicts the observed values. Notice that this limiting curve (Eq. 37) always remains finite at saturation, whereas the other two curves become infinite when  $\theta \rightarrow \theta_s$ .

The predictive equations for  $K$  and  $D$  used thus far assume that  $K_s$  is a well-defined and easily measured soil hydraulic parameter. These assumptions are probably correct for many repacked, coarse-textured and other soils (such as the Weld silty clay loam) characterized by relatively narrow pore-size distributions. However, direct field measurement of  $K_s$  is generally very difficult for undisturbed and especially structured field soils. Inspection of Figures 7 and 8 shows that  $K$ , and hence also  $D$ , can change several orders of magnitude with a small change in the saturated water content. This indicates that very small measurement errors in the water content near saturation can lead to unacceptably large errors in the estimated saturated hydraulic conductivity. Also, the

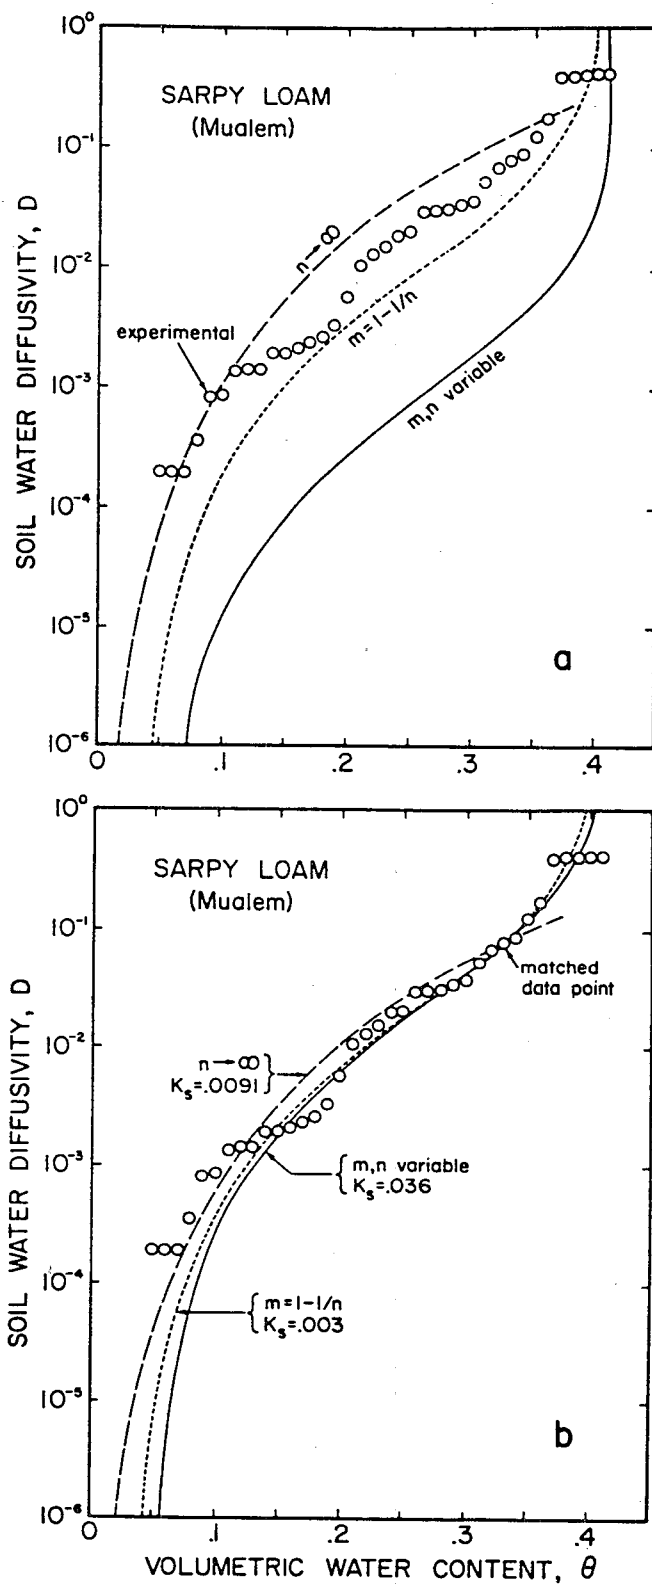


Figure 13. Observed and predicted soil water diffusivity curves for Sarpy loam. The predicted curves were obtained by (a) using the measured  $K_s$ -value in Mualem's model (Eq. 8 with  $\ell=0.5$ ), and (b) directly matching the predicted curves at an experimental data point as shown.

hydraulic conductivity near saturation is determined primarily by soil structural properties which are known to be subject to considerable spatial variability in the field. This is in contrast to soil textural properties which generally are less variable and have a more dominant effect on  $K$  in the dry range. Notwithstanding the theoretical basis of Figure 7, the rapid decrease of the hydraulic conductivity near saturation when  $n$  is relatively small is intuitively realistic. It suggests that  $K$  near saturation is determined by only a very few large macropores or cracks which may have little relation to the overall pore-size distribution that determines the general shape of the predicted conductivity curve at intermediate water contents. Thus, both theoretical and experimental considerations suggest that  $K_s$  should not be used as a matching point for the hydraulic conductivity models, as was done previously by *Jackson et al.* [1965] and *Green and Corey* [1971], among others. Instead, it seems more accurate to match the predicted and observed unsaturated hydraulic conductivity functions at a water content somewhat less than saturation [*Roulier et al.*, 1972; *Carvallo et al.*, 1976], but still in the relatively wet range. Having the matching point in the wet range still enables one to rather quickly execute field or laboratory experiments, while at the same time avoiding the experimental and theoretical complications near saturation as discussed above. The same is true for the saturated water content,  $\theta_s$ , which is best regarded as an empirical parameter to be used in the context of a specific water retention model, and hence must be fitted to observed unsaturated soil water retention data points.

If we take the matching point for the hydraulic conductivity at some arbitrary water content,  $\theta_o$ , and associated hydraulic conductivity,  $K_o$ , then Mualem's model (Eq. 8) may be redefined as follows

$$K(S_e) = K(S_{e_o}) \left[ \frac{S_e}{S_{e_o}} \right]^n \left[ \frac{f(S_e)}{f(S_{e_o})} \right]^2 \quad (38)$$

where  $S_e$  is given by (6), and

$$S_{e_o} = S_e(\theta_o) = \frac{\theta_o - \theta_r}{\theta_s - \theta_r} \quad (39)$$

For the restricted case  $m = 1 - 1/n$ , (38) simplifies to [*Luckner et al.*, 1989]

$$K(S_e) = K(S_{e_o}) \left[ \frac{S_e}{S_{e_o}} \right]^t \left[ \frac{1 - (1 - S_e^{1/m})^m}{1 - (1 - S_{e_o}^{1/m})^m} \right]^2 \quad (40)$$

Similar expressions can be readily derived for the other predictive hydraulic conductivity and diffusivity equations.

All examples thus far involve cases in which the calculated and observed hydraulic functions are matched using only one observed  $K$  or  $D$  data point, either at saturation or some other point on the curve. If more  $K$  or  $D$  data are available, the RETC program permits one to include these additional data directly in the hydraulic parameter estimation process. In that case the program also allows one to estimate the parameters  $\ell$  and  $K_s$  (see section 3.2. for details). The parameter estimation analysis of the retention and hydraulic conductivity/diffusivity data may be carried out consecutively or simultaneously. A consecutive fit results when first some or all of the parameters  $\theta_r$ ,  $\theta_s$ ,  $\alpha$ ,  $n$ , and  $m$  are fitted to available retention data, followed by a fit of  $\ell$  and/or  $K_s$  to the observed  $K$  or  $D$  data. Alternatively, some or all of the hydraulic parameters can be fitted simultaneously to observed retention and conductivity or diffusivity data. Such a simultaneous fit may involve up to 7 unknown parameters, i.e.,  $\theta_r$ ,  $\theta_s$ ,  $\alpha$ ,  $n$ ,  $m$ ,  $\ell$ , and  $K_s$ . An important advantage of the simultaneous fit is that observed hydraulic conductivity or diffusivity data, if available, can be used to better define soil water retention parameters (and vice-versa).

Figure 14 shows one application in which RETC was used to simultaneously fit 6 hydraulic parameters to observed retention and conductivity data. The observed hydraulic data were obtained by *Abeele* [1984] by means of an instantaneous profile type drainage experiment involving an initially saturated 6-m deep, 3-m diameter caisson (lysimeter) filled with crushed Bandelier Tuff. To obtain a better resolution of the hydraulic functions in the dry range, the caisson data were augmented with independently derived laboratory data as reported by *Abeele* [1979]. Values for the fitted hydraulic parameters are listed in Table 2. Two different methods were used to analyze the data. In Method 1 all six unknown hydraulic parameters  $\theta_r$ ,  $\theta_s$ ,  $\alpha$ ,  $n$ ,  $\ell$ , and  $K_s$  in (7) and (31), with  $m = 1 - 1/n$ , were fitted to the data. In Method 2 the saturated water content,  $\theta_s$ , and the saturated conductivity,  $K_s$ , were fixed at their measured values as given in Table 2. Figure 14 shows an excellent match between the observed and fitted  $\theta(h)$  and  $K(h)$  curves using Method 1. The estimated curves for

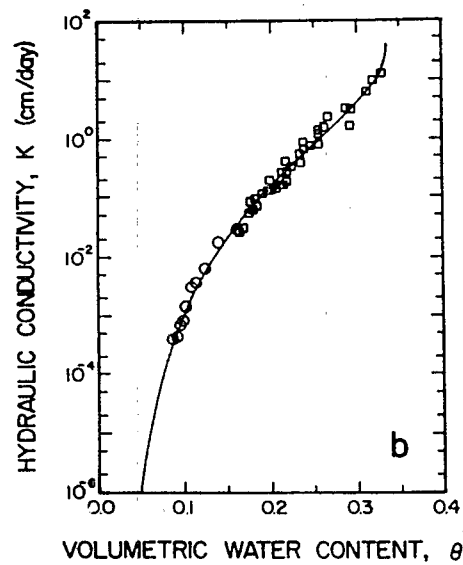
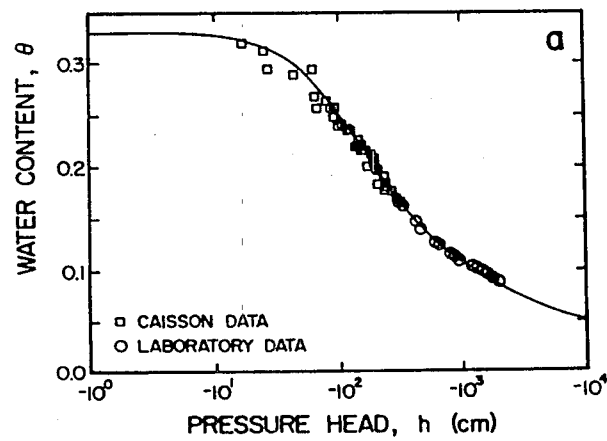


Figure 14. Observed and fitted unsaturated soil hydraulic functions for crushed Bandelier Tuff. The calculated retention (a) and hydraulic conductivity (b) curves were based on (7) and (31), respectively, assuming  $m = 1 - 1/n$ .



Table 2. Fitted soil hydraulic parameters for crushed Bandelier Tuff<sup>†</sup>

Parameters	Method 1	Method 2
$\theta_r$	0.0255 ( $\pm 0.0185$ )	0.0451 ( $\pm 0.0066$ )
$\theta_s$	0.3320 ( $\pm 0.0059$ )	0.3308 <sup>*</sup>
$\alpha$	0.0154 ( $\pm 0.0022$ )	0.0134 ( $\pm 0.0090$ )
$n$	1.474 ( $\pm 0.744$ )	1.636 ( $\pm 0.0438$ )
$\ell$	0.495 ( $\pm 0.371$ )	-1.129 ( $\pm 0.2575$ )
$K_s$	33.7 ( $\pm 16.9$ )	12.4 <sup>*</sup>

<sup>†</sup>Values in parenthesis denote 95% confidence limits.

<sup>\*</sup>Parameter fixed at measured value.

Method 2 (not shown here) nearly duplicated those for Method 1, even though some of the fitted parameter values were quite different (notably  $K_s$ ). Table 2 also includes the estimated 95% confidence interval obtained with RETC for this data set. Notice that the confidence intervals are relatively wide for  $\ell$  and  $K_s$ , which indicates poor identifiability of these two parameters.

The pore-connectivity parameter,  $\ell$ , in (8) was also considered to be an unknown in the above Bandelier Tuff parameter estimation problem. The parameter  $\ell$  was estimated by *Mualem* [1976a] to be 0.5 as an average for some 45 soils. *Mualem's* database consisted primarily of repacked soils, many of them being relatively coarse-textured [*Mualem*, 1976b]. However, while the average was 0.5, fitted  $\ell$  values for different soils ranged from about -5 to +5. *Wösten and van Genuchten* [1988], in an analysis of some 200 soil hydraulic data sets, found  $\ell$  to vary between -16 and more than 2. Fixing  $\ell$  at 0.5 in their study produced acceptable results for most coarse-textured soils, but not for many medium- and fine-textured soils. These results suggest that keeping  $\ell$  variable in the parameters optimization process will likely improve the analysis of individual soil hydraulic conductivity data sets, provided enough measured data points are available for the estimation process.

### 2.3. Burdine's Hydraulic Conductivity Model

The model of *Burdine* [1953] can be written in a general form as follows

$$K(S_e) = K_s S_e^t \frac{g(S_e)}{g(1)} \quad (41)$$

in which

$$g(S_e) = \int_0^{S_e} \frac{1}{[h(x)]^2} dx \quad (42)$$

where, as in (8), the pore-connectivity parameter  $t$  accounts for the presence of a tortuous flow path. *Burdine* [1953] assumed  $t$  to be 2, whereas *Gates and Lietz* [1950] had previously used a value of 0.

Results analogous to those for Mualem's model can be derived also for Burdine's model. Since the derivations for both models are very similar we give here only a brief synopsis. Substituting the inverse  $h(S_e)$  of (7) (see Eq. 10) into (42) and using  $x=y^m$  gives

$$g(S_e) = \alpha^2 m \int_0^{S_e^{1/m}} y^{m-1+2/n} (1-y)^{-2/n} dy \quad (43)$$

We also make use of the transformations  $\zeta = S_e^{1/m}$  (Eq. 12), and

$$r = m+2/n \quad s = 1-2/n \quad (44)$$

Equation (43) may now be rewritten in the form

$$g(S_e) = \alpha^2 m I_\zeta(r, s) B(r, s) \quad (45)$$

which yields the following expression for the hydraulic conductivity function assuming independent  $m$  and  $n$ :

$$K(S_e) = K_s S_e^t I_\zeta(r, s) \quad (46)$$

The soil water diffusivity function becomes now

$$D(h) = \frac{K_s [1 + (\alpha h)^n]^{m-mt+1}}{\alpha m n (\theta_s - \theta_r) (\alpha h)^{n-1}} I_\zeta(r, s) \quad (47)$$

or in terms of the water content:

$$D(S_e) = \frac{K_s S_e^{-1+t-1/mn}}{\alpha mn (\theta_s - \theta_r) (1 - S_e^{1/m})^{1-1/n}} I_\zeta(r, s) \quad (48)$$

The following simplified expressions for  $K$  and  $D$  may be derived when  $\zeta = S_e^{1/m}$  is small:

$$K(S_e) = \frac{K_s n S_e^{t+1+2/mn}}{(mn+2) B(r, s)} \quad (49)$$

and

$$D(S_e) = \frac{K_s S_e^{t+1/mn}}{\alpha n (mn+2) (\theta_s - \theta_r) B(p, q)} \quad (50)$$

The above expressions for variable  $m, n$  may again be simplified by imposing restrictions on the permissible values on  $m$  and  $n$ . The restriction  $m = 1 - 2/n$  forces the exponent of  $y$  in (43) to become zero, in which case  $g(S_e)$  reduces to

$$g(S_e) = \alpha^2 [1 - (1 - S_e^{1/m})^m] \quad (51)$$

The hydraulic conductivity becomes now [van Genuchten, 1980]:

$$K(S_e) = K_s S_e^t [1 - (1 - S_e^{1/m})^m] \quad (m = 1 - 2/n) \quad (52)$$

or as a function of the pressure head

$$K(h) = \frac{1 - (\alpha h)^{n-2} [1 + (\alpha h)^n]^{-m}}{[1 + (\alpha h)^n]^{mt}} \quad (53)$$

The diffusivity function now reduces to

$$D(S_e) = \frac{(1-m) K_s S_e^{t-(m+1)/2m}}{2\alpha n (\theta_s - \theta_r)} \left[ (1 - S_e^{1/m})^{-(m+1)/2} - (1 - S_e^{1/m})^{(m-1)/2} \right] \quad (54)$$

For completeness we also give the conductivity and diffusivity expressions when the BC limiting curve (Eq. 4) (i.e., for  $n \rightarrow \infty$  with the product  $\lambda = mn$  again remaining finite) is used in conjunction with Burdine's model. The hydraulic conductivity function is then given by the expression

$$K(S_e) = K_s S_e^{\ell+1+2/\lambda} \quad (55)$$

or in pressure head form ( $\alpha h > 1$ )

$$K(h) = \frac{K_s}{(\alpha h)^{\lambda(\ell+1)+2}} \quad (56)$$

and the diffusivity function

$$D(S_e) = \frac{K_s S_e^{\ell+1/\lambda}}{\alpha \lambda (\theta_s - \theta_r)} \quad (57)$$

Equations (55) through (57) are the classical equations of *Brooks and Corey* [1964, 1966].

Figure 15 shows calculated curves for the relative hydraulic conductivity,  $K_r$ , as a function of the reduced pressure head,  $\alpha h$ , and the reduced water content,  $S_e$ , as given by (46) for the variable  $m, n$  case. Notice that, similarly as in Figure 7a for Mualem's model, the Burdine-based expressions remain smooth functions of the pressure head as long as  $n$  is finite. One important difference between Figure 7 and 15 is that the Burdine-based equations hold only for  $n > 2$ , while the Mualem-based formulations are valid for all  $n > 1$ . Since many soils have  $n$ -values which are less than 2 (including Sarpy loam, see Table 1), the Burdine-based models for  $K$  and  $D$  have less applicability than the Mualem-based expressions given in this report. Finally, Figure 16 gives a dimensionless plot of the Burdine-based conductivity function,  $K_r(S_e)$ , assuming  $\ell=2$  and  $m=1-2/n$ . As in Figure 8, the value of  $m$  is bounded by  $0 < m < 1$ , which in this case follows from the requirement that  $n > 2$  and the restriction that  $m=1-2/n$ .

#### 2.4. Parameter Estimation

Inspection of (6) and (7) shows that the soil water retention curve,  $\theta(h)$ , contains 5 parameters, i.e., the residual water content,  $\theta_r$ , the saturated water content,  $\theta_s$ , and the shape factors  $\alpha$ ,  $n$  and  $m$ . The predictive equations for  $K$  and  $D$  introduce two additional unknowns: the pore connectivity parameter,  $\ell$ , and the saturated hydraulic conductivity,  $K_s$ . Hence, the soil hydraulic functions contain a maximum of 7 independent parameters. The model parameters are represented here schematically by the parameter vector  $\mathbf{b} = (\theta_r, \theta_s, \alpha, n, m, \ell, K_s)$ . The RETC code may be used to fit any one, several, or all of these parameters simultaneously to observed data.

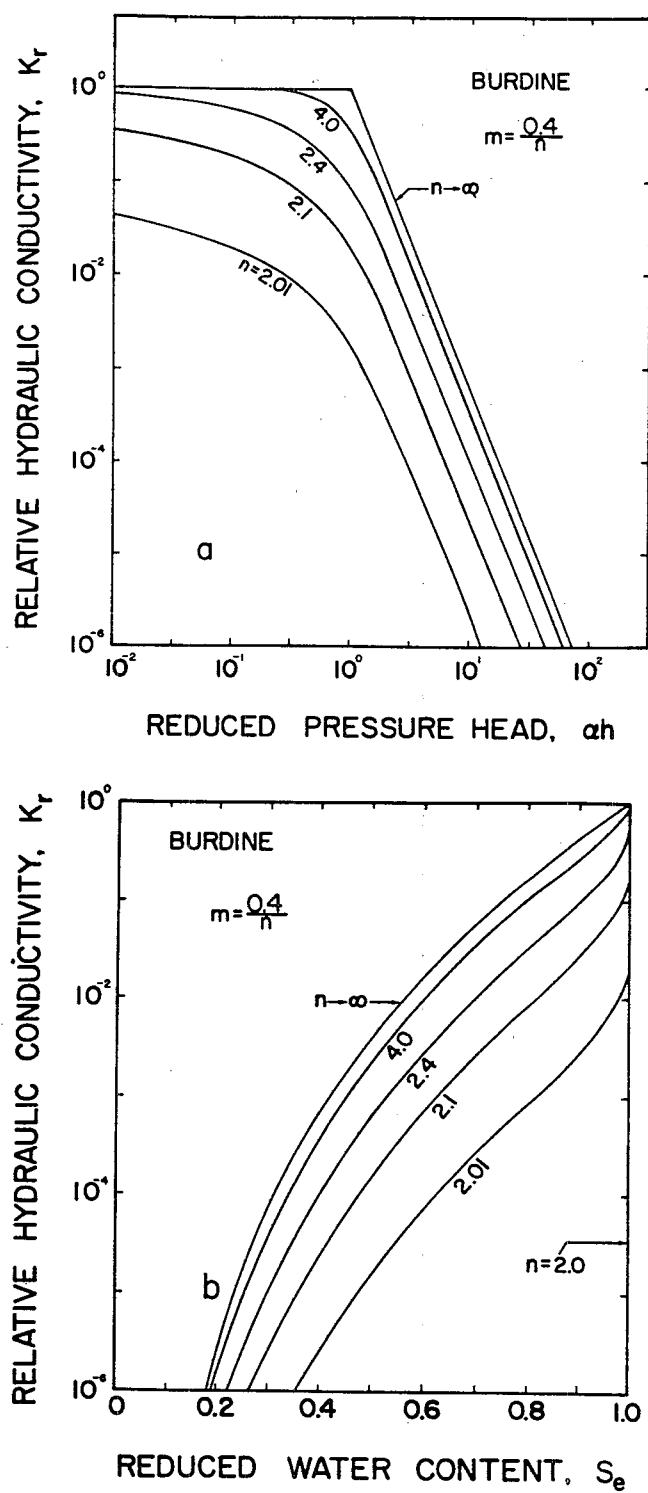


Figure 15. Calculated curves for the relative hydraulic conductivity versus reduced pressure head (a) and reduced water content (b) as predicted from the retention curves in Figure 2 using Burdine's model (Eq. 46) with  $\ell=2$ .

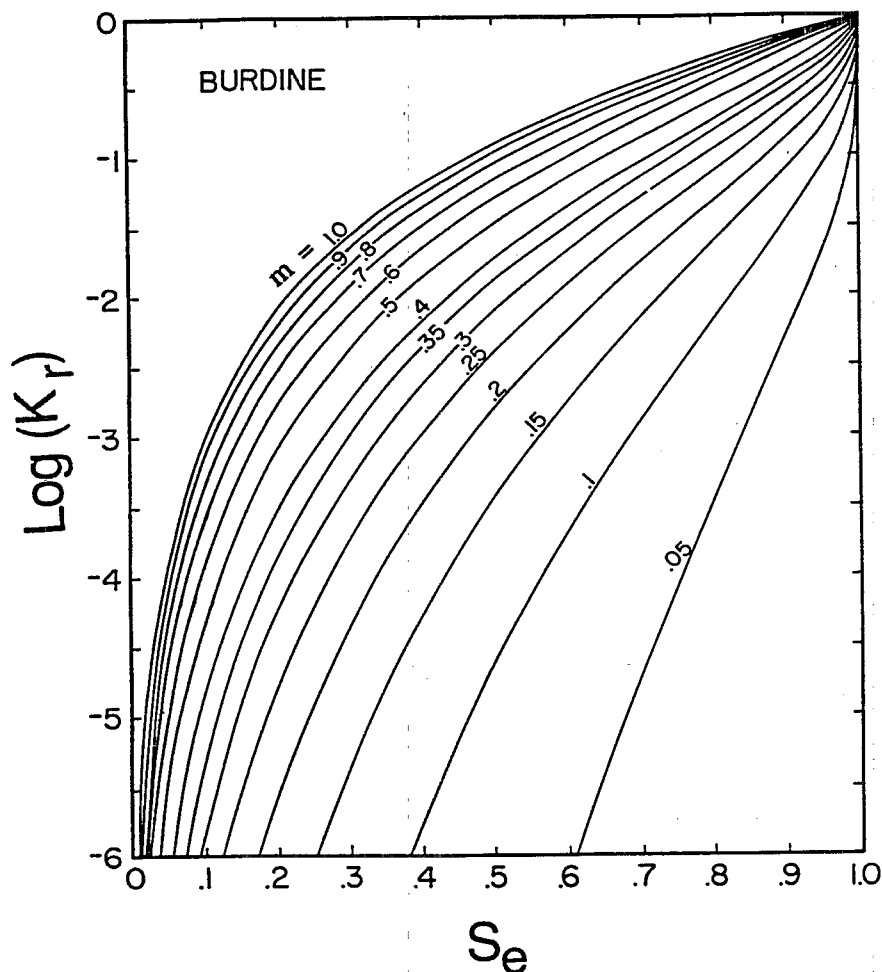


Figure 16. Dimensionless semilogarithmic plot of the relative hydraulic conductivity,  $K_r$ , versus reduced water content,  $S_e$ , for various values of  $m$ . The curves were predicted from (7) using Burdine's model with  $\ell=2$  and assuming  $m=1-2/n$ .

The most general formulation arises when the parameters  $m$  and  $n$  are assumed to be independent. The hydraulic conductivity and soil water diffusivity functions are then given by (17) and (19), respectively, when the predictive model of *Mualem* [1976a] is used, and by (46) and (48) when the model of *Burdine* [1953] is employed. The restrictions  $n \rightarrow \infty$  (i.e., the BC restriction),  $m = 1-1/n$  and  $m = 1-2/n$  will reduce the maximum number of independent parameters from 7 to 6. In addition to imposing restrictions on  $m$  and  $n$ , the RETC user can keep any one or more of the other coefficients (e.g.,  $\theta_s$ ,  $\ell$  or  $K_s$ ) constant during the parameter optimization process, provided that an estimate of those coefficients is available. For example, the model parameter vector reduces

to  $\mathbf{b} = (\theta_r, \theta_s, \alpha, n)$  when the Mualem restriction  $m = 1 - 1/n$  is implemented and only retention data are used in the optimization.

RETC uses a nonlinear least-squares optimization approach to estimate the unknown model parameters from observed retention and/or conductivity or diffusivity data. A helpful text with background information on fitting equations to experimental data using this method is given by *Daniel and Wood* [1971]. The approach is based on the partitioning of the total sum of squares of the observed values into a part described by the fitted equation and a residual part of observed values around those predicted with the model. The aim of the curve fitting process is to find an equation that maximizes the sum of squares associated with the model, while minimizing the residual sum of squares, SSQ. The residual sum of squares reflects the degree of bias (lack of fit) and the contribution of random errors. SSQ will be referred to as the objective function  $O(\mathbf{b})$  in which  $\mathbf{b}$  represents the unknown parameter vector. RETC minimizes  $O(\mathbf{b})$  iteratively by means of a weighted least-squares approach based on Marquardt's maximum neighborhood method [Marquardt, 1963]. During each iteration step, the elements  $b_j$  of the parameter vector  $\mathbf{b}$  are updated sequentially, and the model results are compared with those obtained for the current and previous iteration levels. RETC offers the option to print, among other information,  $O(\mathbf{b})$  for each iteration.

When only retention data are used, the objective function is given by

$$O(\mathbf{b}) = \sum_{i=1}^N \{w_i [\theta_i - \hat{\theta}_i(\mathbf{b})]\}^2 \quad (58)$$

where  $\theta_i$  and  $\hat{\theta}_i$  are the observed and fitted water contents, respectively, and  $N$  is the number of retention data points. The weighting coefficients,  $w_i$ , in (58) may be used to assign more or less weight to a single data point depending upon *a priori* information. The  $w_i$ 's reflect the reliability of the measured data points, and ideally should be set equal to the inverse of the observation errors (i.e., the standard deviation) which account for sampling and experimental errors. It can be shown that for the correct weights, the variances of all elements  $b_j$  of  $\mathbf{b}$  are minimized simultaneously [Daniel and Wood, 1971]. Unfortunately, reliable estimates of the observation errors of individual measurements are generally lacking. Because of this the  $w_i$  are often set to unity. If all observation errors are normally distributed, possess a constant variance, and are uncorrelated,  $w_i = 1$  for all  $i$  and the optimization method reduces to the ordinary least-squares method [Kool et al., 1987].

The optimization procedure becomes more complicated when the unknown parameter vector  $\mathbf{b}$  is fitted simultaneously to observed retention and hydraulic conductivity or soil water diffusivity data. The objective function to be minimized in RETC is then of the general form

$$O(\mathbf{b}) = \sum_{i=1}^N \{w_i[\theta_i - \hat{\theta}_i(\mathbf{b})]\}^2 + \sum_{i=N+1}^M \{w_i W_1 W_2 [Y_i - \hat{Y}_i(\mathbf{b})]\}^2 \quad (59)$$

where  $Y_i$  and  $\hat{Y}_i$  are the observed and fitted conductivity or diffusivity data,  $W_1$  and  $W_2$  are weighting factors as explained below, and  $M$  is the total number of observed retention and conductivity or diffusivity data points.

The parameter  $W_2$  is introduced to ensure that proportional weight is given to the two different types of data in (59), i.e.,  $W_2$  corrects for the difference in number of data points and also eliminates, to some extent, the effect of having different units for  $\theta$  and  $K$  or  $D$ . The value for  $W_2$  is calculated internally in the program according to

$$W_2 = \frac{(M-N) \sum_{i=1}^N w_i \theta_i}{N \sum_{i=N+1}^M w_i |Y_i|} \quad (60)$$

The effect of (60) is to prevent one data type in (59) (usually the  $K$  or  $D$  data) from dominating the other data (usually the  $\theta$  data) solely because of its larger numerical values.

The weighting factor  $W_1$  is included in (59) to add extra flexibility to the parameter optimization process.  $W_1$  allows one to place more or less weight on the hydraulic conductivity data in their entirety, relative to the soil water retention data. Because conductivity data usually show considerably more scatter than water content data, and generally are also less precise, it is often beneficial to assign relatively less weight to the conductivity data in (60). This may be accomplished by using a value of less than 1 for  $W_1$ . Recent studies with RETC [Wösten and van Genuchten, 1988; Sisson and van Genuchten, 1991; Yates et al., 1991] have successfully used values between 0.1 and 1.0 for  $W_1$ .



Assigning  $w_i = 1$  to all data points assumes that the observation errors for a particular variable are all very similar and independent of the magnitude of the measured data. This is clearly not true for most hydraulic conductivity and diffusivity data sets where the largest and smallest observations can easily differ several orders of magnitude. The resulting errors can be kept to a minimum by applying a logarithmic transformation to the  $K$  or  $D$  data prior to the parameter estimation process. RETC has the option of implementing a logarithmic transformation of  $K/D$  by using  $Y_i = \log(K_i)$  or  $Y_i = \log(D_i)$  in (59) before carrying out the parameter estimation process. We recommend the use of a logarithmic transformation unless special accuracy of the conductivity or diffusivity function in the wet range is required. In that case one may decide to use the untransformed data since these put relatively more weight on the higher  $K$  and  $D$  values.

The unsaturated soil hydraulic functions contain up to 7 unknown independent parameters. Except for well-defined data sets covering a wide range of  $\theta$  and/or  $K/D$  data, it is important to limit as much as possible the number of parameters to be included in the parameter optimization process. Limiting the number of fitting parameters is especially important for in situ field data sets which often are poorly defined and may contain relatively large observation errors. Unbalanced data sets with many poorly defined (scattered) data over a limited range of water contents (or conductivities/diffusivities) inevitably lead to parameter uniqueness problems, exemplified by poor convergence and large confidence intervals for the parameter estimates. By comparison, a few (e.g., 6 to 10) well-placed retention data covering a wide range in water contents may lead to rapid convergence and relatively narrow confidence intervals. Several suggestions for limiting the number of parameters are given below. We refer to the text by *Daniel and Wood* [1971] for a more detailed general discussion of disposition of data points.

The RETC output always includes a matrix which specifies degree of correlation between the fitted coefficients in the different hydraulic models. The correlation matrix quantifies the change in model predictions obtained with a new estimate for a particular parameter relative to similar changes as a result of new estimates for the other parameters. The matrix reflects the nonorthogonality between two parameter values. A value of  $\pm 1$  suggests a perfect linear correlation whereas 0 indicates no correlation at all. We suggest to always perform a "backward" type of regression, i.e., by initially fitting all parameters and then fixing certain parameters one by one if these parameters exhibit high correlations. Hence, for well-defined data sets it is usually best to

first keep all 6 (for restricted  $m$  and  $n$ ) or 7 (for variable  $m, n$ ) parameters as unknowns when a simultaneous fit is carried out. The correlation matrix may be used to select which parameters, if any, are best kept constant in the parameter estimation process because of high correlation. The most frequent cases of correlation occur between  $m, n$  and  $\ell$  if no restrictions are placed on  $m$  and  $n$ , and between  $n$  and  $\ell$  if one of the restrictions on  $m$  and  $n$  is imposed. If the correlation between  $n$  and  $\ell$  exceeds 0.98 or 0.99, we suggest to fix the exponent  $\ell$  at some convenient value, preferably at 0.5 for Mualem's model and 2.0 for Burdine's model, unless the previously fitted value deviates significantly from these averages.

Another important measure of the goodness of fit is the  $r^2$  value for regression of the observed,  $\hat{y}_i$ , versus fitted,  $y_i(\mathbf{b})$ , values:

$$r^2 = \frac{\left[ \sum w_i \hat{y}_i y_i - \frac{\sum \hat{y}_i \sum y_i}{\sum w_i} \right]^2}{\left[ \sum w_i \hat{y}_i^2 - \frac{(\sum \hat{y}_i)^2}{\sum w_i} \right] \left[ \sum y_i^2 - \frac{(\sum y_i)^2}{\sum w_i} \right]} \quad (61)$$

The  $r^2$  value is a measure of the relative magnitude of the total sum of squares associated with the fitted equation; a value of 1 indicates a perfect correlation between the fitted and observed values.

RETC provides additional statistical information about the fitted parameters such as mean, standard error, T-value, and lower and upper confidence limits. The standard error,  $s(b_j)$ , is estimated from knowledge of the objective function, the number of observations, the number of unknown parameters to be fitted, and an inverse matrix [Daniel and Wood, 1971]. The T-value is obtained from the mean and standard error using the equation:

$$T = \frac{b_j}{s(b_j)} \quad (62)$$

The values for  $T$  and  $s(b_j)$  provide absolute and relative measures of the deviations around the mean. RETC also specifies the upper and lower bounds of the 95% confidence level around each fitted parameter  $b_j$ . It is desirable that the real value of the target parameter always be located in a narrow interval around the estimated mean as obtained with the optimization program. Large

confidence limits indicate that the results are not very sensitive to the value of a particular parameter.

We also recommend the use of the restrictions on  $m$  and  $n$ , unless the observed data show little scatter and cover a wide range of pressure head and/or hydraulic conductivity data. As discussed before, the restriction  $m = 1 - 1/n$  for Mualem's conductivity model is least likely to compromise the accuracy of the fit when field soils are analyzed [see also *van Genuchten and Nielsen*, 1985]. Alternatively, or additionally, it is also possible to fix the residual water content at zero, or some other value, while keeping  $m$  and  $n$  independent [*Greminger et al.*, 1985], or assuming  $m = 1 - 1/n$  [*Wösten and van Genuchten*, 1988]. Fixing  $\theta_r$  is especially appropriate when few data at relatively low water contents or pressure heads are available.

In view of the discussions in sections 2.2 and 2.3, we do not recommend the use of the saturated hydraulic conductivity,  $K_s$ , as a matching point, unless a good estimate for  $K_s$  is available. Sometimes an accurate estimate for  $K$  (or  $D$ ) is available at a point less than saturation. If judged to be more accurate than others, that data point could be given more weight in the estimation process by increasing the value of the weighing coefficient  $w_i$  for that point. That same data point could also be used as a matching value for the predictive hydraulic conductivity models using (38) as was done by *Luckner et al.* [1989]. Again,  $K_s$  and  $\theta_r$  are very susceptible to experimental errors, as well as to uncertainties arising from soil heterogeneity and soil structure. In situ water retention data sets from undisturbed field soils are often best analyzed without fixing  $\theta_r$  at the measured "saturated" water content. In some cases the results may even improve when the measured "saturated" water contents are deleted entirely from the parameter optimization analysis.

Finally, because of possible problems related to convergence and parameter uniqueness we recommend routinely rerunning the program with different initial parameter estimates to make sure that the program converges to the same global minimum in the objective function. This is especially important for field data sets which exhibit considerable scatter in the measurements or cover only a narrow range of soil water contents or pressure heads. Although RETC will not accept initial estimates that are out of range, it is ultimately the user's responsibility to select meaningful initial estimates. During the execution of RETC,  $\theta_r$  will be automatically set to zero if  $\theta_r$  becomes smaller than 0.001. The initial estimate for  $\theta_r$  should be positive; if the iterated value during program

execution approaches zero, the program will generate a new initial estimate of -0.2. If the iterated (negative) value again approaches zero, the program sets  $\ell$  equal to zero and leaves this value unaltered during the remainder of the optimization process.

Tables 3 and 4 give average parameter values for soil textural groups according to the USDA classification [Soil Conservation Service, 1975] as estimated by *Rawls et al.* [1982] and *Carsel and Parrish* [1988], respectively, from analyses of a large number of soils. These tables may serve as guides for making initial parameter estimates. The remaining parameters may be estimated, as needed, using the relationships  $\lambda=n-1$  (for the BC model),  $m=1-1/n$  and  $\ell=0.5$  for Mualem's conductivity model; or  $\lambda=n-2$ ,  $m=1-2/n$  and  $\ell=2$  when Burdine's conductivity model is used.

The values in Table 3 are adapted from Table 4 in *Rawls et al.* [1982] by assuming  $\alpha=1/h_a$ ,  $n=\lambda+1$ , and using  $\theta_s$  for the effective porosity. The geometric means of  $\alpha$  and  $n$  were calculated assuming lognormal distributions for these two parameters. The results from *Carsel and Parrish* [1988] in Table 4 also include those for silt.

Table 3. Average values for selected soil water retention and hydraulic conductivity parameters for 11 major soil textural groups according to *Rawls et al.* [1982]

Texture	$\theta_r$	$\theta_s$	$\alpha$ 1/cm	$n$	$K_s$ cm/d
Sand	0.020	0.417	0.138	1.592	504.0
Loamy sand	0.035	0.401	0.115	1.474	146.6
Sandy loam	0.041	0.412	0.068	1.322	62.16
Loam	0.027	0.434	0.090	1.220	16.32
Silt loam	0.015	0.486	0.048	1.211	31.68
Sandy clay loam	0.068	0.330	0.036	1.250	10.32
Clay loam	0.075	0.390	0.039	1.194	5.52
Silty clay loam	0.040	0.432	0.031	1.151	3.60
Sandy clay	0.109	0.321	0.034	1.168	2.88
Silty clay	0.056	0.423	0.029	1.127	2.16
Clay	0.090	0.385	0.027	1.131	1.44

Table 4. Average values for selected soil water retention and hydraulic conductivity parameters for 12 major soil textural groups according to *Carsel and Parrish* [1988]

Texture	$\theta_r$	$\theta_s$	$\alpha$ 1/cm	$n$	$K_s$ cm/d
Sand	0.045	0.43	0.145	2.68	712.8
Loamy Sand	0.057	0.41	0.124	2.28	350.2
Sandy Loam	0.065	0.41	0.075	1.89	106.1
Loam	0.078	0.43	0.036	1.56	24.96
Silt	0.034	0.46	0.016	1.37	6.00
Silt Loam	0.067	0.45	0.020	1.41	10.80
Sandy Clay Loam	0.100	0.39	0.059	1.48	31.44
Clay Loam	0.095	0.41	0.019	1.31	6.24
Silty Clay Loam	0.089	0.43	0.010	1.23	1.68
Sandy Clay	0.100	0.38	0.027	1.23	2.88
Silty Clay	0.070	0.36	0.005	1.09	0.48
Clay	0.068	0.38	0.008	1.09	4.80

### 3. THE RETC USER GUIDE

This section provides additional information on how to use the RETC parameter optimization program. After reviewing various program options, the structure of the code is presented. The program itself is listed in Appendix A, whereas example input, control and output files are given in Appendix B.

#### 3.1. Program Options

The RETC code provides several options for describing or predicting the hydraulic properties of unsaturated soils. These properties involve the soil water retention curve,  $\theta(h)$ , the hydraulic conductivity function,  $K(h)$  or  $K(\theta)$ , and the soil water diffusivity function,  $D(\theta)$ . The soil water retention function is given by (7) which contains 5 independent parameters, i.e., the residual water content  $\theta_r$ , the saturated water content  $\theta_s$ , and the shape factors  $\alpha$ ,  $n$  and  $m$ . As discussed in section 2.1, the BC-function (Eq. 4) may be viewed as a limiting case of (7) by allowing  $n$  to go to infinity (while keeping the product  $\lambda = mn$  constant and finite). The predictive equations for  $K$  and  $D$  add two additional unknowns: the pore connectivity parameter,  $\ell$ , and the saturated hydraulic conductivity,  $K_s$ . Hence, the unsaturated soil hydraulic functions contain up to 7 potentially unknown parameters. The restrictions  $n \rightarrow \infty$  (i.e., the BC restriction),  $m = 1 - 1/n$  and  $m = 1 - 2/n$  will reduce the maximum number of independent parameters from 7 to 6. The RETC code may be used to fit any one, several, or all of the 6 or 7 unknown parameters simultaneously to observed data.

RETC can be applied to four broad classes of problems as outlined below.

A. *The direct (or forward) problem.* RETC may be used to calculate the unsaturated soil hydraulic functions if the model parameter vector  $\mathbf{b} = (\theta_r, \theta_s, \alpha, n, m, \ell, K_s)$  is specified by the user. Values for  $\ell$  and  $K_s$  are not needed when only the retention function is being calculated. Also, the restrictions  $n \rightarrow \infty$ ,  $m = 1 - 1/n$ , and  $m = 1 - 2/n$  may be imposed by properly specifying the input variable MTYPE as explained later. The direct problem, which bypasses the optimization part of RETC, is being executed whenever the input variable MIT is set to 0 or KWATER to 3. RETC will also

execute the direct problem when no data are specified in the input file. Obviously, no comparison between observed and predicted hydraulic functions is possible in that case.

B. *Predicting  $K/D$  from observed  $\theta(h)$  data.* This option permits one to fit the unknown retention parameters (with or without restricted  $m,n$  values) to observed soil water retention data. The fitted retention parameters are subsequently used to predict the hydraulic conductivity and diffusivity functions by making use of the models of Mualem or Burdine. This case assumes that the initial estimates for  $\ell$  and  $K_s$  remain unaltered during the parameter optimization process. This particular option is followed when the input variable KWATER is set to 1.

C. *Predicting  $\theta(h)$  from observed  $K/D$  data.* In some instances experimental conductivity data may be available but no observed retention data. Such situations sometimes arise for certain coarse-textured or gravelly soils when tensiometers fail to operate correctly. RETC may then be used to fit the unknown hydraulic coefficients to observed conductivity data using one of the available predictive conductivity or diffusivity models. Once the unknown coefficients are determined, the retention function may be calculated. This option is also needed when a consecutive fitting procedure is followed for the retention and hydraulic conductivity data, i.e., when some of the hydraulic parameters are first fitted to observed soil water retention data, followed by a fit of  $\ell$  and/or  $K_s$  to observed conductivity or diffusivity data. This option is observed when KWATER=2.

D. *Simultaneous fit of retention and  $K/D$  data.* This option results in a simultaneous fit of the model parameters to observed water retention and hydraulic conductivity or diffusivity data. The input variable KWATER is set to 0 for this option.

RETC allows one to keep the parameters  $m$  and  $n$  in (7) independent of each other, or dependent through the restrictions  $m=1-1/n$  or  $m=1-2/n$  for the Mualem- and Burdine-based formulations, respectively. The input variable MTYPE determines which predictive conductivity model will be used (Mualem or Burdine) and if a restriction is being applied to  $m$  and  $n$ . Table 5 defines possible choices for MTYPE.

Table 5. Type of retention and conductivity models implemented in RETC as a function of the input variable MTYPE

MTYPE	Retention Model	Conductivity Model
1	Eq. (7) with variable $m, n$	Mualem's model (Eq. 8)
2	Eq. (7) with variable $m, n$	Burdine's model (Eq. 41)
3	Eq. (7) with $m = 1-1/n$	Mualem's model (Eq. 8)
4	Eq. (7) with $m = 1-2/n$	Burdine's model (Eq. 41)
5	Eq. (7) with $n \rightarrow \infty^{\dagger}$	Mualem's model (Eq. 8)
6	Eq. (7) with $n \rightarrow \infty^{\dagger}$	Burdine's model (Eq. 41)

<sup>†</sup>Equivalent to the Brooks-Corey retention model with  $\lambda = mn$

The input variable METHOD may be used to specify the type of conductivity or diffusivity data used in the optimization process, i.e.,  $K(\theta)$ ,  $K(h)$  or  $D(\theta)$ , and also specifies whether or not a log-transformation is applied to the conductivity/diffusivity data before the fitting routine is applied. Table 6 shows the different options as determined by the input variable METHOD.

Table 6. Possible options for analyzing observed conductivity or diffusivity data as determined by the input variable METHOD

METHOD	1	2	3	4	5	6
Type of $K/D$ data	$K(\theta)$	$\log K(\theta)$	$K(h)$	$\log K(h)$	$D(\theta)$	$\log D(\theta)$

Tables 5 and 6 are given here only for completeness. Because of the implementation of several interface subroutines, no detailed knowledge of the input variables, including MTYPE and METHOD, is required for running RETC.

### 3.2. Code Structure and Program Preparation

RETC consists of a main program, three subroutines (MODEL, MATINV, and PRINT), and two functions (GAMMA and BINC). Most mathematical manipulations associated with the least-squares calculations are carried out in MAIN. Of the two functions, GAMMA evaluates the



Gamma ( $\Gamma$ ) function, and BINC the Incomplete Beta Function (Eq. 21). Of the three subroutines, MATINV performs matrix inversions needed for the least-squares analysis [Daniel and Wood, 1971], while subroutine MODEL calculates the soil water retention and/or hydraulic conductivity/diffusivity functions as determined by the input variables METHOD and MTYPE. Subroutine PRINT provides an optional listing of the calculated hydraulic properties at the end of the optimization.

In addition to the above subroutines and functions, the code contains several interface subroutines that display control settings. The program is written in Fortran 77 and can be run on any IBM-PC compatible machine. While not required, a numeric coprocessor is recommended for increased accuracy and speed. The control file RETC.CTL, and example data input and output files are given in Appendix B. The examples correspond to the four types of problems (A through D) summarized in section 3.1.

The control variables in RETC.CTL determine the operation of RETC. These variables can be changed interactively; a listing of variable options and current settings are displayed on the screen prior to execution of a problem. An option menu is also given to select an operation. The user must specify the names of input, output, and plotting files. Although there is likely no reason for users to enter RETC.CTL directly in order to make changes, a summary description of the file is given in Table 7. Experimental data are specified in the file named in line 1 of RETC.CTL. If no file with such name exists, a warning will be given and the program can not be executed. The data should not be log-transformed before input. The logarithmic transformation will be automatically carried out internally as dictated by the value of METHOD (Table 6). Setting KIN equal to 1 causes the input data to be printed before the optimization; this permits one to check the input data. The data input file can be created with a text editor, it should contain the independent and dependent variable with the accompanying  $w_i$  on each line. If both retention and conductivity/diffusivity data are specified, the two types of data should be separated by a line containing three negative numbers (flag). RETC counts the number of retention points (NWC) and conductivity/diffusivity points (NOB - NWC) while reading the input file and using the flags. NOB is the total number of observations. No flag is needed if only one type of data is specified. Thus, the input file contains the following information:

Table 7. Outline of the control file RETC.CTL

Line	Format	Variable	Description
1	A12	INF	Name of the data input file. If this file does not exist, a message "missing" will be given and the program will not run.
2	A12	OTF	Name of the output file. If this name already exists, the default name RETC.OUT will be used.
3	A12	RETPLT	Name of file for plotting the retention curve.
4	A12	CONPLT	Name of file for plotting the conductivity/diffusivity curve.
5	A60	TITLE	
6	9I5	MTYPE	Type of model to be fitted to the data (see Table 5).
		METHOD	Type of conductivity/diffusivity data to be entered, i.e., $K(\theta)$ , $K(h)$ or $D(\theta)$ ; if METHOD = 2, 4 or 6, the $K$ or $D$ data are internally transformed into $\log(K)$ or $\log(D)$ (see Table 6).
		KWATER	Input code. If KWATER=0, a simultaneous fit of the $\theta(h)$ and $K/D$ data is carried out. If KWATER=1 or 2, only the retention or conductivity data are analyzed, while for KWATER=3 the curves are predicted based on the initial estimates and no fitting is done.
		KIN	Code that determines if the observed data are printed (KIN=1) before the least-squares analysis, or are omitted from the output file (KIN=0).
		KOUT	Code that determines if, after completion of the least-squares analysis, all soil-hydraulic properties ( $\theta, h, K, D$ ) are to be printed (KOUT=1) or omitted from the output file (KOUT=0).
		KITER	Improved estimates for the unknown coefficients are printed during the first KITER iterations of the least-squares analysis. This input parameter eliminates excessively long output files if many iterations are needed before convergence is reached. Results for the last iteration are always printed.
		MIT	Maximum number of iterations. Use a large number (e.g., 30) for the simultaneous fit. If MIT=0, the optimization part is by-passed and the soil hydraulic properties are calculated from the inputted parameter values according to the specified method.
7	7A5	AB(I)	Parameter names; the user can choose alternative names.
8	7F10.5	B(I)	Initial estimates for the model parameters. If NOB=0, MIT=0, or KWATER=3, these initial estimates are also the final prescribed values for the forward problem (no optimization). Note that always the same order of initial estimates should be used as specified in this manual, i.e., $\mathbf{b} = (\theta_r, \theta_s, \alpha, n, m, \ell, K_r)$ .
9	7I5	INDEX(I)	Indices for the coefficients B(I), indicating whether the I-th coefficient is an unknown and must be fitted to the data (INDEX(I)=1), or whether that coefficient is assumed to be known independently (INDEX(I)=0).
10	F10.5	W1	Weighting coefficient $W_1$ in the objective function.
	I5	NW	Number of points for which hydraulic properties need to be predicted (to be used only in the subroutine PRINT).

Line 1 : Title  
Lines 2....NOB+2 : X(I), Y(I), W(I) (Free format)

The input file consists of NOB+2 lines. The first line identifies the data file. The next NWC lines are for retention data (use one line per observation), followed by one line with three negative values to separate the retention and conductivity or diffusivity data, and subsequently NOB-NWC lines for the K/D data. Table 8 gives detailed definitions of the variables X(I), Y(I) and W(I) for the various program options.

The type of the output generated with RETC depends on the variables MIT, KIN, KWATER, METHOD, MTYPE, KOUT, KITER, and NW. All results are written to the output file named in line 2 of RETC.CTL. The NW predicted retention and conductivity/diffusivity data points are also written to the two files named in lines 3 and 4 of RETC.CTL, respectively, for possible plotting of the retention and conductivity/diffusivity curves, or for other applications. If a file name is already in use, a message will be given before program execution; the default names RETC.OUT, RETPLT.OUT, and CONPLT.OUT are then used for the output and two plotting files. For completeness, Table 8 summarizes the water retention and hydraulic conductivity/diffusivity variables which appear in the output file (see also Appendix B).

The modeled soil water retention and/or hydraulic conductivity/diffusivity data are written to separate plot files containing only a dependent and independent variable to facilitate plotting. The number of predicted data points is governed by the variable NW specified in the control file. Experimental data points are most conveniently obtained from the input file.

Finally, Table 9 lists some remaining key variables used in the optimization program RETC.FOR (see also Appendix A)

Table 8. Schematic of the output generated with RETC

---

Output Segment: Program Variables  
Comments

---

Heading: TITLE, MTYPE, METHOD

Explanation of the type of data to be fitted, models used for the retention and conductivity functions, and possible log-transformation being applied to the K or D data.

Initial Values of the Coefficients: I, AB(I+7), B(I+7), INDEX(I)

Number, name, initial value, and index. The programs sets INDEX=0 if NOB=0.

Observed Data: These are printed if NOB $\neq$ 0 and KIN=1.

If KWATER=0:

I, X(I), Y(I), W(I)  
(Observation number,  $h$ ,  $\theta$ ,  $w_i$ )

J, X(J), Y(J), W(J)  
(Obs. No and:  $\theta$ ,  $K$ ,  $w_i$  if METHOD=1;  $\theta$ , log  $K$ ,  $w_i$  if METHOD=2;  $h$ ,  $K$ ,  $w_i$  if METHOD=3;  
 $h$ , log  $K$ ,  $w_i$  if METHOD=4;  $\theta$ ,  $D$ ,  $w_i$  if METHOD=5;  $\theta$ , log  $D$ ,  $w_i$  if METHOD=6)

If KWATER=1:

I, X(I), Y(I), W(I)  
(Obs. No,  $h$ ,  $\theta$ ,  $w_i$ )

If KWATER=2:

J, X(J), Y(J), W(J)  
(Obs. No and:  $\theta$ ,  $K$ ,  $w_i$  if METHOD=1;  $\theta$ , log  $K$ ,  $w_i$  if METHOD=2;  $h$ ,  $K$ ,  $w_i$  if METHOD=3;  
 $h$ , log  $K$ ,  $w_i$  if METHOD=4;  $\theta$ ,  $D$ ,  $w_i$  if METHOD=5;  $\theta$ , log  $D$ ,  $w_i$  if METHOD=6)

Weighting Coefficients: W1, W2, W12

Iteration Results: NIT, SUMB, TH(I)

Number of iterations, sum of squares (objective function), coefficient values. The program prints results for  $0 \leq \text{NIT} \leq \text{KITER}$ ; the final iteration results are also printed. Only coefficients for which INDEX=1 are given. Messages are printed if during the iteration  $0 < \theta, < 0.001$  or  $-0.001 < \theta < 0$ , in which case  $\theta$ , or  $\ell$  are set to zero.

Correlation Matrix: I, AB(I), A(J,I)

R-squared for Regression of Observed vs Fitted Values: RSQ

Nonlinear Least-Squares Analysis: Final Iteration Results: AB(I), TH(I), SECOEF, TVALUE, TMCOE, TPCOE  
Variable name, value, Standard Error, T-value, and lower and upper confidence levels (95% level)

Observed and Fitted Data/Calculated Values:

If KWATER=0: I, X(I), XLOG, Y(I), F(I), R(I)  
(Obs. No,  $h$ , log  $h$ ,  $\theta_{\text{obs}}$ ,  $\theta_{\text{fit}}$ ,  $\theta_{\text{dev}}$ )

---

Table 8 (Continued)

---

**Output Segment: Program Variables**  
**Comments**

---

If METHOD=1 or 5: I, X(I), Y(I), F(I), R(I), RLY, RLF  
 (Obs. No,  $\theta$ ,  $K_{obs}$ ,  $K_{fit}$ ,  $K_{dev}$ ,  $\log K_{obs}$ ,  $\log K_{fit}$  if METHOD=1)  
 (Obs. No,  $\theta$ ,  $D_{obs}$ ,  $D_{fit}$ ,  $D_{dev}$ ,  $\log D_{obs}$ ,  $\log D_{fit}$  if METHOD=5)

If METHOD=2 or 6: I, X(I), Y(I), F(I), R(I), RPZ, RPF  
 (Obs. No,  $\theta$ ,  $\log K_{obs}$ ,  $\log K_{fit}$ ,  $\log K_{dev}$ ,  $K_{obs}$ ,  $K_{fit}$  if METHOD=2)  
 (Obs. No,  $\theta$ ,  $\log D_{obs}$ ,  $\log D_{fit}$ ,  $\log D_{dev}$ ,  $D_{obs}$ ,  $D_{fit}$  if METHOD=6)

If METHOD=3: I, X(I), RLX, Y(I), F(I), R(I), RLY  
 (Obs. No,  $h$ ,  $\log h$ ,  $K_{obs}$ ,  $K_{fit}$ ,  $K_{dev}$ ,  $\log K_{obs}$ )

If METHOD=4: I, X(I), RLX, Y(I), F(I), R(I), RPZ  
 (Obs. No,  $h$ ,  $\log h$ ,  $\log K_{obs}$ ,  $\log K_{fit}$ ,  $\log K_{dev}$ ,  $K_{obs}$ )

If KWATER=1: I, X(I), XLOG, Y(I), F(I), R(I)  
 (Obs. No,  $h$ ,  $\log h$ ,  $\theta_{obs}$ ,  $\theta_{fit}$ ,  $\theta_{dev}$ )

If KWATER=2:

If METHOD=1 or 5: I, X(I), Y(I), F(I), R(I), RLY, RLF  
 (Obs. No,  $\theta$ ,  $K_{obs}$ ,  $K_{fit}$ ,  $K_{dev}$ ,  $\log K_{obs}$ ,  $\log K_{fit}$  if METHOD=1)  
 (Obs. No,  $\theta$ ,  $D_{obs}$ ,  $D_{fit}$ ,  $D_{dev}$ ,  $\log D_{obs}$ ,  $\log D_{fit}$  if METHOD=5)

If METHOD=2 or 6: I, X(I), Y(I), F(I), R(I), RPZ, RPF  
 (Obs. No,  $\theta$ ,  $\log K_{obs}$ ,  $\log K_{fit}$ ,  $\log K_{dev}$ ,  $K_{obs}$ ,  $K_{fit}$  if METHOD=2)  
 (Obs. No,  $\theta$ ,  $\log D_{obs}$ ,  $\log D_{fit}$ ,  $\log D_{dev}$ ,  $D_{obs}$ ,  $D_{fit}$  if METHOD=6)

If METHOD=3: I, X(I), RLX, Y(I), F(I), R(I), RLY  
 (Obs. No,  $h$ ,  $\log h$ ,  $K_{obs}$ ,  $K_{fit}$ ,  $K_{dev}$ ,  $\log K_{obs}$ )

If METHOD=4: I, X(I), RLX, Y(I), F(I), R(I), RPZ  
 (Obs. No,  $h$ ,  $\log h$ ,  $\log K_{obs}$ ,  $\log K_{fit}$ ,  $\log K_{dev}$ ,  $K_{obs}$ )

**Sum of Squares of Observed versus Fitted Values:** SSQ1, SSQW1, SSQ2, SSQW2, SSQ, SSQW

Gives unweighted and weighted sum of squares for  $\theta$ ,  $K/D$ , and all data.

**Soil Hydraulic Properties:** These are printed if KOUT=1; results are based on models specified with MTYPE for increments in  $\theta$  as determined by the input parameter NW.

for all MTYPE:

WC, PP, DLGP, COND, DLGC, DIF, DLGD  
 ( $\theta$ ,  $h$ ,  $\log h$ ,  $K$ ,  $\log K$ ,  $D$ ,  $\log D$ )

---

Table 8 (Continued)

---

**Output Segment: Program Variables**  
**Comments**

---

at saturation if  $MTYPE \leq 4$ :

WCS, PP, CONDS, DLG4

$(\theta_r, h=0, K_r, \log K_r)$

at saturation if  $MTYPE > 4$ :

WCS, PP, DLGP, CONDS, DLG4, DIF, DLGD

$(\theta_r, h_a=1/\alpha, \log h_a, K_r, \log K_r, D, \log D)$

---

Table 9. Miscellaneous key variables in RETC

Name	Description
ALPHA	Coefficient $\alpha$ used in the retention models given by (4) and (7).
COND	Hydraulic conductivity $K$ .
CONDS	Saturated hydraulic conductivity, $K_s$ .
DIF	Soil water diffusivity $D$ .
DWC	Interval in $\theta$ for the printed output (when $KOUT=1$ ) as determined by the input parameter NW, i.e., $DWC = 1/(NW-2)$ , with some exceptions at the dry and wet ends of the retention curve (see subroutine PRINT).
EXPO	Coefficient $l$ (see Eqs. 8 and 41).
KLOG	Code that determines whether or not $K/D$ is being log-transformed before the parameter optimization process ( $KLOG=1$ )
NP	Number of model parameters
NT	Number of terms used for evaluating the Incomplete Beta Function. This function is needed for unrestricted $m$ and $n$ . NT is best kept at a very conservative value of 10.
NW	Number of $\theta$ points at which the hydraulic functions are printed (if $KOUT=1$ ) after the least-squares analysis (subroutine PRINT)
RN	Coefficient $n$ (Eqs. 4 and 7)
RM	Coefficient $m$ (Eq. 7)
RWC	Reduced water content $S_e$ (Eq. 6)
STOPCR	Stop criterion. The iterative analysis currently terminates when the relative change in the ratio of any two coefficients is less than the value for STOPCR
WCR	Residual water content $\theta_r$ (Eqs. 4 and 7)
WCS	Saturated water content $\theta_s$ (Eqs. 4 and 7)

---

#### 4. SUMMARY AND CONCLUSIONS

This report describes the RETC computer program for evaluating the hydraulic properties of unsaturated soils. The soil water retention curve,  $\theta(h)$ , in the program can be represented by the equations of Brooks-Corey or van Genuchten, while the unsaturated hydraulic conductivity,  $K(h)$  or  $K(\theta)$ , and diffusivity,  $D(\theta)$ , functions are formulated in terms of the statistical pore-size distribution models of Mualem and Burdine. The report includes a description of the nonlinear least-squares parameter estimation method used for obtaining estimates of the unknown coefficients in the different soil hydraulic expressions. The RETC code is shown to be useful for a variety of applications including (a) predicting the unsaturated hydraulic properties from previously estimated soil hydraulic parameters (the forward problem), (b) predicting the unsaturated hydraulic conductivity or diffusivity functions from observed retention data, and (c) quantifying the hydraulic properties by simultaneous analysis of a limited number of soil water retention and hydraulic conductivity data points.

The report serves as both a user manual and reference document. Detailed information is given about the computer program, along with instructions for data input preparation. A large part of the report consists of listings of the sources code, sample input and output files, and several illustrative examples. The accompanying software should lead to a more accurate and convenient method of analyzing the unsaturated soil hydraulic properties. The information appears especially useful for theoretical and applied scientists, engineers, and others, concerned with the movement of water and chemicals into and through the unsaturated (vadose) zone.

## REFERENCES

- Abeelee, W. V. 1979. Determination of hydraulic conductivity in crushed Bandelier Tuff. Report No. LA-8147-MS, Los Alamos National Laboratory, Los Alamos, New Mexico.
- Abeelee, W. V. 1984. Hydraulic testing of crushed Bandelier Tuff. Report No. LA-10037-MS, Los Alamos National Laboratory, Los Alamos, New Mexico. 21 pp.
- Ahuja, L. R., and D. Swartzendruber. 1972. An improved form of the soil-water diffusivity function. *Soil Sci. Soc. Am. Proc.* 36:9-14.
- Brooks, R. H., and A. T. Corey. 1964. Hydraulic properties of porous media. Hydrology Paper No. 3, Colorado State Univ., Fort Collins, Colorado. 27 pp.
- Brooks, R. H., and A. T. Corey. 1966. Properties of porous media affecting fluid flow. *J. Irrig. Div., Am. Soc. Civ. Eng.* 92(IR2):61-88.
- Burdine, N. T. 1953. Relative permeability calculations from pore-size distribution data. *Petrol. Trans., Am. Inst. Min. Eng.* 198:71-77.
- Carsel, R. F., and R. S. Parrish. 1988. Developing joint probability distributions of soil water retention characteristics. *Water Resour. Res.* 24:755-769.
- Carvalho, H. O., D. K. Cassel, J. Hammond, and A. Bauer. 1976. Spatial variability of in situ unsaturated hydraulic conductivity of Maddock sandy loam. *Soil Sci.* 121:1-8.
- Childs, E. C., and N. Collis-George. 1950. The permeability of porous materials. *Proc. Roy. Soc. London, Ser. A.* 201:392-405.
- Clapp, R. B., and G. M. Hornberger. 1978. Empirical equations for some soil hydraulic properties. *Water Resour. Res.* 14:601-604.
- Daniel, C., and F. S. Wood. 1971. *Fitting Equations to Data.* Wiley-Interscience, New York.
- Endelman, F. J., G. E. P. Box, J. R. Boyle, R. R. Hughes, D. R. Keeney, M. L. Northrup, P. G. Saffigna. 1974. The mathematical modeling of soil water-nitrogen phenomena. Report No. EDFB-IBP-74-8, Oak Ridge National Laboratory, Oak Ridge, Tennessee.
- Gates, J. I., and W. T. Lietz. 1950. Relative permeabilities of California cores by the capillary-pressure method. Drilling and production practice. *Am. Petrol. Inst. Q.* 285-298.
- Germann, P. F. 1990. Preferential flow and the generation of runoff. 1. Boundary Layer Flow Theory. *Water Resour. Res.* 26:3055-3063.
- Green, R. E., and J. C. Corey. 1971. Calculation of hydraulic conductivity: A further evaluation of some predictive methods. *Soil Sci. Soc. Am. Proc.* 35:3-8.



- Greminger, P. J., Y. K. Sud, and D. R. Nielsen. 1985. Spatial variability of field-measured soil-water characteristics. *Soil Sci. Soc. Am. J.* 49:1075-1082.
- Hanks, R. J., and G. L. Ashcroft. 1980. *Applied Soil Physics*. Springer Verlag.
- Hanks, R. J., and S. A. Bowers. 1962. Numerical solution of the moisture flow equation for infiltration into layered soils. *Soil Sci. Soc. Am. Proc.* 26:530-534.
- Jackson, R. D., R. J. Reginato, and C. H. M. van Bavel. 1965. Comparison of measured and calculated hydraulic conductivities of unsaturated soils. *Water Resour. Res.* 1:375-380.
- Jensen, M. E., and R. J. Hanks. 1967. Nonsteady-state drainage from porous media. *J. Irrig. Drain. Div., Am. Soc. Civ. Eng.* 93(IR3):209-231.
- King, L. G. 1965. Description of soil characteristics for partially saturated flow. *Soil Sci. Soc. Amer. Proc.* 29:359-362.
- Klute, A. (Ed.) 1986. Methods of soil analysis, part 1, Physical and mineralogical methods, Agronomy 9(1), 2nd Ed., American Society of Agronomy, Madison, Wis.
- Kool, J. B., J. C. Parker, and M. Th. van Genuchten. 1987. Parameter estimation for unsaturated flow and transport models - A review. *J. Hydrol.* 91:255-293.
- Laliberte, G. E. 1969. A mathematical function for describing capillary pressure-desaturation data. *Bull. Int. Ass. Sci. Hydrol.* 14:131-149.
- Lenhard, R. J., J. C. Parker, and J. J. Kaluarachchi. 1991. Comparing simulated and experimental hysteretic two-phase transient fluid flow phenomena. *Water Resour. Res.* 27:2113-2124.
- Luckner, L., M. Th. van Genuchten, and D. R. Nielsen. 1989. A consistent set of parametric models for the two-phase flow of immiscible fluids in the subsurface. *Water Resour. Res.* 25:2187-2193.
- Marquardt, D. W. 1963. An algorithm for least-squares estimation of nonlinear parameters. *J. Soc. Ind. Appl. Math.* 11:431-441.
- Millington, R. J., and J. P. Quirk. 1961. Permeability of porous solids. *Faraday Soc. Trans.* 57:1200-1206.
- Mualem, Y. 1976a. A new model for predicting the hydraulic conductivity of unsaturated porous media. *Water Resour. Res.* 12:513-522.
- Mualem, Y. 1976b. A catalogue of the hydraulic properties of unsaturated soils. Research Project Report No. 442, Technion, Israel Institute of Technology, Haifa.

- Mualem, Y. 1986. Hydraulic conductivity of unsaturated soils: Prediction and formulas. In A. Klute (ed.). *Methods of Soil Analysis. Part 1. Physical and Mineralogical Methods.* Agron. Monogr. 9 (2nd ed.). American Society of Agronomy, Madison, Wisconsin. p. 799-823
- Press, W. H., B. P. Flannery, S. A. Teukolsky, W. T. Vetterling. 1986. *Numerical Recipes.* Cambridge Univ. Press, New York.
- Rawls, W. J., D. L. Brakensiek, and K. E. Saxton. 1982. Estimating soil water properties. *Transactions, ASAE*, 25(5):1316-1320 and 1328.
- Richards, L. A. 1931. Capillary conduction of liquids through porous mediums. *Physics* 1:318-333.
- Roulier, M. H., L. H. Stolzy, J. Letey, and L. V. Weeks. 1972. Approximation of field hydraulic conductivity by laboratory procedures on intact cores. *Soil Sci. Soc. Am. Proc.* 36:387-393.
- Sisson, J. B., and M. Th. van Genuchten. 1991. An improved analysis of gravity drainage experiments for estimating the unsaturated soil hydraulic functions. *Water Resour. Res.* 27:569-575.
- Soil Conservation Service. 1975. *Soil Taxonomy.* Soil Survey Staff, USDA Agricultural Handbook No. 436.
- Stephens, D. B., and K. R. Rehfeldt. 1985. Evaluation of closed-form analytical models to calculate conductivity in a fine sand. *Soil Sci. Soc. Am. J.* 49:12-19.
- Su, C., and R. H. Brooks. 1975. Soil Hydraulic properties from infiltration tests. Watershed Management Proceedings, Irrigation and Drainage Div., ASCE, Logan, Utah, August 11-13, pp. 516-542.
- van Genuchten, M. Th. 1978. Calculating the unsaturated hydraulic conductivity with a new closed-form analytical model. Research Report 78-WR-08. Dept. of Civil Engineering, Princeton Univ., Princeton, New Jersey. 63 pp.
- van Genuchten, M. Th. 1980. A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Sci. Soc. Am. J.* 44:892-898.
- van Genuchten, M. Th., and D. R. Nielsen. 1985. On describing and predicting the hydraulic properties of unsaturated soils. *Ann. Geophys.* 3:615-628.
- van Genuchten, M. Th., F. J. Leij, and L. J. Lund (eds.). 1991. *Proc. Int. Workshop, Indirect Methods for Estimating the Hydraulic Properties of Unsaturated Soils.* Univ. California, Riverside (in press).

- Varallyay, G., and E. V. Mironenko. 1979. Soil-water relationships in saline and alkali conditions. *In* V. A. Kovda and I. Szabolcs (ed.) *Modelling of Salinization and Alkalization. Agrokemia es Talatjan*. Vol. 28 (Suppl.):33-82.
- Visser, W. C. 1968. An empirical expression for the desorption curve. *In* P. E. Rijtema and H. Wassink (eds.). *Water in the unsaturated zone*, Proc. Wageningen Symposium, IASH/AIHS, Unesco, Paris, Vol I, 329-335.
- Wösten, J. H. M., and M. Th. van Genuchten. 1988. Using texture and other soil properties to predict the unsaturated soil hydraulic functions. *Soil Sci. Soc. Am. J.* 52:1762-1770.
- Yates, S. R., M. Th. van Genuchten, A. R. Warrick, and F. J. Leij. 1991. Analysis of predicted and estimated hydraulic conductivities using RETC. *Soil Sci. Soc. Am. J.* (submitted).
- Zelen, M., and N. C. Severo. 1965. Probability functions. *In*: M. Abramowitz and I. Stegun (ed.) *Handbook of Mathematical Functions*. pp. 925-995. Dover, New York.

## APPENDIX A. Listings of the Control, Input, and Output Files for Five Examples

### A.1. Example 1: Forward Problem

#### A.1.1. Control File: RETC.CTL

```

RETC.IN
RETC.OUT
  1      0
    EXAMPLE 1: CALCULATE CURVE WITH KNOWN PARAMETER VALUES
  0      0      3      2      0      0      0      8      30
WCR  WCSALPHA  N      M      L      KS
  1.0000      .50000      .00500      2.00000      .50000      .50000      1.00000
  1      1      1      1      0      1
  1.00000
(3F10.2)

```

#### A.1.2. Input File: (No input file required for the direct problem)

#### A.1.3. Output File: DIRECT.OUT

```

*****
*
*      ANALYSIS OF SOIL HYDRAULIC PROPERTIES
*
*      EXAMPLE 1: CALCULATE CURVE WITH KNOWN PARAMETER VALUES
*
*      MUALEM-BASED RESTRICTION, M=1-1/N
*      MTYPE= 3      METHOD= 2
*
*****

```

#### INITIAL VALUES OF THE COEFFICIENTS

NO	NAME	INITIAL VALUE	INDEX
1	WCR	.1000	0
2	WCS	.5000	0
3	ALPHA	.0050	0
4	N	2.0000	0
5	M	.5000	0
6	EXPO	.5000	0
7	CONDS	1.0000	0

#### SOIL HYDRAULIC PROPERTIES (MTYPE = 3)

WC	P	LOGP	COND	LOGK	DIF	LOGD
.1025	.3200D+05	4.505	.3016D-10	-10.521	.3860D-03	-3.413
.1050	.1600D+05	4.204	.6824D-09	-9.166	.2184D-02	-2.661
.1100	.7997D+04	3.903	.1545D-07	-7.811	.1236D-01	-1.908
.1200	.3995D+04	3.602	.3498D-06	-6.456	.7005D-01	-1.155
.1300	.2659D+04	3.425	.2172D-05	-5.663	.1936D+00	-.713
.1400	.1990D+04	3.299	.7945D-05	-5.100	.3993D+00	-.399

.1500	.1587D+04	3.201	.2175D-04	-4.663	.7015D+00	-.154
.1600	.1318D+04	3.120	.4958D-04	-4.305	.1114D+01	.047
.1700	.1125D+04	3.051	.9962D-04	-4.002	.1652D+01	.218
.1800	.9798D+03	2.991	.1826D-03	-3.739	.2329D+01	.367
.1900	.8661D+03	2.938	.3119D-03	-3.506	.3161D+01	.500
.2000	.7746D+03	2.889	.5042D-03	-3.297	.4166D+01	.620
.2100	.6992D+03	2.845	.7796D-03	-3.108	.5361D+01	.729
.2200	.6360D+03	2.803	.1162D-02	-2.935	.6768D+01	.830
.2300	.5820D+03	2.765	.1680D-02	-2.775	.8409D+01	.925
.2400	.5353D+03	2.729	.2367D-02	-2.626	.1031D+02	1.013
.2500	.4944D+03	2.694	.3261D-02	-2.487	.1251D+02	1.097
.2600	.4583D+03	2.661	.4408D-02	-2.356	.1503D+02	1.177
.2700	.4260D+03	2.629	.5860D-02	-2.232	.1792D+02	1.253
.2800	.3969D+03	2.599	.7676D-02	-2.115	.2122D+02	1.327
.2900	.3705D+03	2.569	.9927D-02	-2.003	.2500D+02	1.398
.3000	.3464D+03	2.540	.1269D-01	-1.896	.2931D+02	1.467
.3100	.3242D+03	2.511	.1606D-01	-1.794	.3424D+02	1.535
.3200	.3037D+03	2.482	.2015D-01	-1.696	.3988D+02	1.601
.3300	.2846D+03	2.454	.2508D-01	-1.601	.4635D+02	1.666
.3400	.2667D+03	2.426	.3098D-01	-1.509	.5379D+02	1.731
.3500	.2498D+03	2.398	.3805D-01	-1.420	.6239D+02	1.795
.3600	.2338D+03	2.369	.4646D-01	-1.333	.7236D+02	1.859
.3700	.2186D+03	2.340	.5648D-01	-1.248	.8400D+02	1.924
.3800	.2040D+03	2.310	.6837D-01	-1.165	.9769D+02	1.990
.3900	.1900D+03	2.279	.8249D-01	-1.084	.1139D+03	2.057
.4000	.1764D+03	2.246	.9927D-01	-1.003	.1334D+03	2.125
.4100	.1631D+03	2.212	.1192D+00	-.924	.1571D+03	2.196
.4200	.1500D+03	2.176	.1431D+00	-.844	.1863D+03	2.270
.4300	.1370D+03	2.137	.1718D+00	-.765	.2233D+03	2.349
.4400	.1239D+03	2.093	.2065D+00	-.685	.2712D+03	2.433
.4500	.1107D+03	2.044	.2489D+00	-.604	.3358D+03	2.526
.4600	.9686D+02	1.986	.3019D+00	-.520	.4275D+03	2.631
.4700	.8216D+02	1.915	.3697D+00	-.432	.5686D+03	2.755
.4800	.6574D+02	1.818	.4610D+00	-.336	.8180D+03	2.913
.4900	.4558D+02	1.659	.5974D+00	-.224	.1414D+04	3.150
.4950	.3192D+02	1.504	.7052D+00	-.152	.2294D+04	3.361
.5000	.0000D+00		.1000D+01	.000		

END OF PROBLEM

## A.2. Example 2: Fit to Retention Data of Example 1

### A.2.1. Control File: RETC.CTL

RETC.IN  
RETC.OUT

```

1      0
EXAMPLE 2: FIT TO RETENTION DATA OF EXAMPLE 1
12  12  3    2    1    0    0    8    30
WCR  WCSALPHA  N    M    L    KS
.08000 .50000 .01000 3.00000 .50000 .50000 1.00000
1      1      1      1      0      1
1.00000
(3F10.2)

```

### A.2.2. Input File: RETENT.IN

0.00	.50
45.58	.49
96.90	.46
150.00	.42
204.00	.38
266.70	.34
346.40	.30
458.30	.26
635.90	.22
979.80	.18
1990.00	.14
7998.00	.11

### A.2.3. Output file: RETENT.OUT

```
*****
*
*   ANALYSIS OF SOIL HYDRAULIC PROPERTIES
*
*   EXAMPLE 2: FIT TO RETENTION DATA OF EXAMPLE 1
*
*   MUALEM-BASED RESTRICTION, M=1-1/N
*   ANALYSIS OF RETENTION DATA ONLY
*   MTYPE= 3      METHOD= 2
*
*****
```

#### INITIAL VALUES OF THE COEFFICIENTS

NO	NAME	INITIAL VALUE	INDEX
1	WCR	.0800	1
2	WCS	.5000	1
3	ALPHA	.0100	1
4	N	3.0000	1
5	M	.6667	0
6	EXPO	.5000	0
7	CONDS	1.0000	0

NIT	SSQ	WCR	WCS	ALPHA	N
0	.21932	.0800	.5000	.0100	3.0000
1	.01830	.1128	.5093	.0096	1.8273
2	.01214	.0866	.4970	.0040	1.7914
3	.00034	.1033	.5012	.0052	1.9238
4	.00000	.1003	.4999	.0050	1.9997
5	.00000	.1000	.5000	.0050	2.0000
6	.00000	.1000	.5000	.0050	2.0000

#### CORRELATION MATRIX

	1	2	3	4
1	1.0000			
2	-.2578	1.0000		
3	-.3122	.7364	1.0000	
4	.7850	-.4623	-.7376	1.0000

RSQUARED FOR REGRESSION OF OBSERVED VS FITTED VALUES - .99999999

# NONLINEAR LEAST-SQUARES ANALYSIS: FINAL RESULTS

VARIABLE	VALUE	S.E. COEFF.	T-VALUE	95% CONFIDENCE LIMITS	
				LOWER	UPPER
WCR	.10000	.00002	5349.10	.1000	.1000
WCS	.50000	.00001	41956.60	.5000	.5000
ALPHA	.00500	.00000	7995.47	.0050	.0050
N	2.00001	.00018	11023.85	1.9996	2.0004

## OBSERVED AND FITTED DATA

NO	P	LOG-P	WC-OBS	WC-FIT	WC-DIF
1	.1000D-04	-5.0000	.5000	.5000	.0000
2	.4558D+02	1.6588	.4900	.4900	.0000
3	.9690D+02	1.9863	.4600	.4600	.0000
4	.1500D+03	2.1761	.4200	.4200	.0000
5	.2040D+03	2.3096	.3800	.3800	.0000
6	.2667D+03	2.4260	.3400	.3400	.0000
7	.3464D+03	2.5396	.3000	.3000	.0000
8	.4583D+03	2.6611	.2600	.2600	.0000
9	.6359D+03	2.8034	.2200	.2200	.0000
10	.9798D+03	2.9911	.1800	.1800	.0000
11	.1990D+04	3.2989	.1400	.1400	.0000
12	.7998D+04	3.9030	.1100	.1100	.0000

## SUM OF SQUARES OF OBSERVED VERSUS FITTED VALUES

	UNWEIGHTED	WEIGHTED
RETENTION DATA	.00000	.00000
COND/DIFF DATA	.00000	.00000
ALL DATA	.00000	.00000

END OF PROBLEM

### A.3. Example 3: Simultaneous Fit to Retention and Conductivity Data

#### A.3.1. Control File: RETC.CTL

```

RETC.IN
RETC.OUT
1      0
  EXAMPLE 3: FIT TO ALL DATA OF EXAMPLE 1
12  24  3  2  0  0  0  8  30
WCR  WCSALPHA  N  M  L  KS
.08000 .50000 .01000 3.00000 .50000 .50000 1.00000
1      1      1      1      0      1
1.00000
(3F10.2)

```

### A.3.2. Input File: RETCON.IN

0.00	.50
45.58	.49
96.90	.46
150.00	.42
204.00	.38
266.70	.34
346.40	.30
458.30	.26
635.90	.22
979.80	.18
1990.00	.14
7998.00	.11
.50	1.0000
.49	.5970
.46	.3020
.42	.1430
.38	.0684
.34	.0310
.30	.0127
.26	.00441
.22	.00116
.18	.000183
.14	.00000794
.11	.0000000155

### A.3.3. Output File: RETCON.OUT

```

*****
*
*   ANALYSIS OF SOIL HYDRAULIC PROPERTIES
*
*   EXAMPLE 3: FIT TO ALL DATA OF EXAMPLE 1
*
*   MUALEM-BASED RESTRICTION, M=1-1/N
*   SIMULTANEOUS FIT OF RETENTION AND CONDUCTIVITY DATA
*   FIT ON LOG-TRANSFORMED K/D DATA
*   MTYPE= 3      METHOD= 2
*
*****

```

#### INITIAL VALUES OF THE COEFFICIENTS

NO	NAME	INITIAL VALUE	INDEX
1	WCR	.0800	1
2	WCS	.5000	1
3	ALPHA	.0100	1
4	N	3.0000	1
5	M	.6667	0
6	EXPO	.5000	0
7	CONDS	1.0000	1

#### WEIGHTING COEFFICIENTS

W1=	1.00000	W2=	.13525	W12=	.13525
-----	---------	-----	--------	------	--------



NIT	SSQ	WCR	WCS	ALPHA	N	CONDS
0	.56855	.0800	.5000	.0100	3.0000	1.0000
1	.04392	.1024	.5018	.0086	2.0918	1.0687
2	.00443	.0995	.5000	.0045	1.9136	1.1645
3	.00005	.0999	.4999	.0050	1.9901	.9948
4	.00000	.1000	.4999	.0050	2.0002	.9978
5	.00000	.1000	.4999	.0050	2.0002	.9978

#### CORRELATION MATRIX

	1	2	3	4	5
1	1.0000				
2	-.3719	1.0000			
3	-.5828	.5142	1.0000		
4	.8489	-.5295	-.7258	1.0000	
5	-.5948	.7095	.6679	-.8458	1.0000

RSQUARED FOR REGRESSION OF OBSERVED VS FITTED VALUES - .99999997

#### NONLINEAR LEAST-SQUARES ANALYSIS: FINAL RESULTS

VARIABLE	VALUE	S.E. COEFF.	T-VALUE	95% CONFIDENCE LIMITS	
				LOWER	UPPER
WCR	.09999	.00001	17143.88	.1000	.1000
WCS	.49989	.00001	40682.17	.4999	.4999
ALPHA	.00500	.00000	3149.09	.0050	.0050
N	2.00021	.00032	6217.77	1.9995	2.0009
CONDS	.99780	.00092	1080.97	.9959	.9997

#### OBSERVED AND FITTED DATA

NO	P	LOG-P	WC-OBS	WC-FIT	WC-DIF	
1	.1000D-04	-5.0000	.5000	.4999	.0001	
2	.4558D+02	1.6588	.4900	.4899	.0001	
3	.9690D+02	1.9863	.4600	.4599	.0001	
4	.1500D+03	2.1761	.4200	.4200	.0000	
5	.2040D+03	2.3096	.3800	.3800	.0000	
6	.2667D+03	2.4260	.3400	.3400	.0000	
7	.3464D+03	2.5396	.3000	.3000	.0000	
8	.4583D+03	2.6611	.2600	.2600	.0000	
9	.6359D+03	2.8034	.2200	.2200	.0000	
10	.9798D+03	2.9911	.1800	.1800	.0000	
11	.1990D+04	3.2989	.1400	.1400	.0000	
12	.7998D+04	3.9030	.1100	.1100	.0000	
	WC	LOGK-OBS	LOGK-FIT	LOGK-DEV	K-OBS	K-FIT
13	.5000	.0000	-.0010	.0010	.1000D+01	.9978D+00
14	.4900	-.2240	-.2232	-.0008	.5970D+00	.5981D+00
15	.4600	-.5200	-.5201	.0001	.3020D+00	.3019D+00
16	.4200	-.8447	-.8444	-.0002	.1430D+00	.1431D+00
17	.3800	-1.1649	-1.1653	.0003	.6840D-01	.6835D-01
18	.3400	-1.5086	-1.5090	.0004	.3100D-01	.3097D-01
19	.3000	-1.8962	-1.8966	.0004	.1270D-01	.1269D-01
20	.2600	-2.3556	-2.3558	.0003	.4410D-02	.4407D-02
21	.2200	-2.9355	-2.9348	-.0008	.1160D-02	.1162D-02
22	.1800	-3.7375	-3.7385	.0010	.1830D-03	.1826D-03

23	.1400	-5.1002	-5.0995	-.0006	.7940D-05	.7952D-05
24	.1100	-7.8097	-7.8099	.0002	.1550D-07	.1549D-07

#### SUM OF SQUARES OF OBSERVED VERSUS FITTED VALUES

	UNWEIGHTED	WEIGHTED
RETENTION DATA	.00000	.00000
COND/DIFF DATA	.00000	.00000
ALL DATA	.00000	.00000

END OF PROBLEM

### A.4. Example 4: Fit to the Conductivity Data of Example 1

#### A.4.1. Control File: RETC.CTL

```

RETC.IN
RETC.OUT
1 0
EXAMPLE 4: FIT TO THE CONDUCTIVITY DATA OF EXAMPLE 1

```

12	24	3	2	2	0	0	8	30
WCR	WCSALPHA	N	M	L	KS			
.08000	.50000	.01000	3.00000	.50000	.50000	1.00000		
1	1	1	1	0	1			
1.00000								

(3F10.2)

#### A.4.2. Input File: CONDOC.IN

0.00	.50
45.58	.49
96.90	.46
150.00	.42
204.00	.38
266.70	.34
346.40	.30
458.30	.26
635.90	.22
979.80	.18
1990.00	.14
7998.00	.11
.50	1.0000
.49	.5970
.46	.3020
.42	.1430
.38	.0684
.34	.0310
.30	.0127
.26	.00441
.22	.00116
.18	.000183
.14	.00000794
.11	.0000000155

### A.4.3. Output File: CONDOC.OUT

```
*****
*
* ANALYSIS OF SOIL HYDRAULIC PROPERTIES
*
* EXAMPLE 4: FIT TO THE CONDUCTIVITY DATA OF EXAMPLE 1
*
* MUALEM-BASED RESTRICTION, M=1-1/N
* ANALYSIS OF CONDUCTIVITY DATA ONLY
* FIT ON LOG-TRANSFORMED K/D DATA
* MTYPE= 3 METHOD= 2
*
*****
```

#### INITIAL VALUES OF THE COEFFICIENTS

NO	NAME	INITIAL VALUE	INDEX
1	WCR	.0800	1
2	WCS	.5000	1
3	ALPHA	.0100	0
4	N	3.0000	1
5	M	.6667	0
6	EXPO	.5000	0
7	CONDS	1.0000	1

#### WEIGHTING COEFFICIENTS

W1= 1.00000 W2= 1.00000 W12= 1.00000

NIT	SSQ	WCR	WCS	N	CONDS
0	19.09280	.0800	.5000	3.0000	1.0000
1	.67057	.1039	.4976	2.3724	.8669
2	.52400	.1009	.5007	1.9149	.9657
3	.00314	.1001	.4989	1.9967	.9756
4	.00005	.1000	.5000	2.0000	1.0000
5	.00000	.1000	.4999	2.0003	.9976
6	.00000	.1000	.4999	2.0003	.9976

#### CORRELATION MATRIX

	1	2	3	4
1	1.0000			
2	-.4457	1.0000		
3	.8870	-.5770	1.0000	
4	-.6904	.7344	-.8846	1.0000

RSQUARED FOR REGRESSION OF OBSERVED VS FITTED VALUES = .99999993

#### NONLINEAR LEAST-SQUARES ANALYSIS: FINAL RESULTS

VARIABLE	VALUE	S.E.COEFF.	T-VALUE	95% CONFIDENCE LIMITS	
				LOWER	UPPER
WCR	.10000	.00001	11242.97	.1000	.1000

WCS	.49988	.00002	28575.89	.4998	.4999
N	2.00029	.00052	3856.62	1.9991	2.0015
CONDS	.99756	.00142	704.22	.9943	1.0008

#### OBSERVED AND FITTED DATA

	WC	LOGK-OBS	LOGK-FIT	LOGK-DEV	K-OBS	K-FIT
1	.5000	.0000	-.0011	.0011	.1000D+01	.9976D+00
2	.4900	-.2240	-.2232	-.0008	.5970D+00	.5981D+00
3	.4600	-.5200	-.5201	.0001	.3020D+00	.3019D+00
4	.4200	-.8447	-.8444	-.0002	.1430D+00	.1431D+00
5	.3800	-1.1649	-1.1653	.0003	.6840D-01	.6835D-01
6	.3400	-1.5086	-1.5090	.0003	.3100D-01	.3098D-01
7	.3000	-1.8962	-1.8966	.0004	.1270D-01	.1269D-01
8	.2600	-2.3556	-2.3558	.0002	.4410D-02	.4408D-02
9	.2200	-2.9355	-2.9347	-.0008	.1160D-02	.1162D-02
10	.1800	-3.7375	-3.7384	.0009	.1830D-03	.1826D-03
11	.1400	-5.1002	-5.0994	-.0007	.7940D-05	.7953D-05
12	.1100	-7.8097	-7.8098	.0001	.1550D-07	.1550D-07

#### SUM OF SQUARES OF OBSERVED VERSUS FITTED VALUES

	UNWEIGHTED	WEIGHTED
RETENTION DATA	.00000	.00000
COND/DIFF DATA	.00000	.00000
ALL DATA	.00000	.00000

END OF PROBLEM

#### A.5. Example 5: Simultaneous Fit to Retention and Conductivity Data (Silt Loam GE 3)

##### A.5.1. Control File: RETC.CTL

```

RETC.IN
RETC.OUT
1      0
3310 SILT LOAM GE 3
14 27 3 4 0 0 1 8 30
WCR WCSALPHA N M L KS
.18000 .39600 .01000 3.00000 .50000 .50000 1.00000
1 1 1 1 1 1 1
0.00000
(3F10.2)

```

##### A.5.2. Input File: RETC.IN

0.000	0.396
10.0	0.396
20.0	0.394
43.0	0.390

60.0	0.3855
80.0	0.3790
111.0	0.3700
190.0	0.3400
285.0	0.3000
400.0	0.2600
600.0	0.2200
800.0	0.2000
900.0	0.1940
1000.0	0.1900
0.001	1.0000
11.5	1.0000
16.5	0.9500
19.6	0.9000
30.0	0.7650
50.0	0.5950
70.0	0.4800
100.0	0.3380
138.0	0.2000
186.0	0.1000
200.0	0.0740
257.0	0.0300
339.0	0.0100

### A.5.3. Output File: RETC.OUT

```

*****
*
* ANALYSIS OF SOIL HYDRAULIC PROPERTIES
*
* EXAMPLE 5: SILT LOAM GE 3
*
* MUALEM-BASED RESTRICTION, M-1-1/N
* SIMULTANEOUS FIT OF RETENTION AND CONDUCTIVITY DATA
* FIT ON LOG-TRANSFORMED K/D DATA
* MTYPE= 3 METHOD= 4
*
*****

```

#### INITIAL VALUES OF THE COEFFICIENTS

NO	NAME	INITIAL VALUE	INDEX
1	WCR	.1800	1
2	WCS	.3960	1
3	ALPHA	.0100	1
4	N	3.0000	1
5	M	.6667	0
6	EXPO	.5000	1
7	CONDS	1.0000	1

#### WEIGHTING COEFFICIENTS

W1= 1.00000 W2= .54277 W12= .54277

NIT	SSQ	WCR	WCS	ALPHA	N	EXPO	CONDS
0	3.69360	.1800	.3960	.0100	3.0000	.5000	1.0000
1	.21344	.2063	.3969	.0069	2.1640	.3222	1.0314
2	.11652	.1418	.3942	.0035	1.8842	1.7642	1.0750

3	.00505	.1316	.3945	.0042	2.0348	2.4043	1.0309
4	.00148	.1210	.3944	.0041	2.0042	2.5358	1.0404
5	.00148	.1215	.3945	.0041	2.0082	2.4964	1.0396
6	.00148	.1214	.3945	.0041	2.0079	2.4999	1.0396
7	.00148	.1214	.3945	.0041	2.0079	2.4996	1.0396
8	.00148	.1214	.3945	.0041	2.0079	2.4996	1.0396

# CORRELATION MATRIX

	1	2	3	4	5	6
1	1.0000					
2	.1491	1.0000				
3	.9081	.3144	1.0000			
4	.9067	.2633	.9044	1.0000		
5	-.9118	-.3108	-.9950	-.9175	1.0000	
6	-.5453	-.1037	-.4425	-.7062	.5000	1.0000

RSQUARED FOR REGRESSION OF OBSERVED VS FITTED VALUES - .99959845

# NONLINEAR LEAST-SQUARES ANALYSIS: FINAL RESULTS

VARIABLE	VALUE	S.E. COEFF.	T-VALUE	95% CONFIDENCE LIMITS	
				LOWER	UPPER
WCR	.12139	.01569	7.74	.0888	.1540
WCS	.39449	.00329	119.84	.3876	.4013
ALPHA	.00407	.00027	15.05	.0035	.0046
N	2.00791	.05629	35.67	1.8908	2.1250
EXPO	2.49965	.65852	3.80	1.1301	3.8692
CONDS	1.03962	.02422	42.93	.9893	1.0900

# OBSERVED AND FITTED DATA

NO	P	LOG-P	WC-OBS	WC-FIT	WC-DIF
1	.1000D-04	-5.0000	.3960	.3945	.0015
2	.1000D+02	1.0000	.3960	.3943	.0017
3	.2000D+02	1.3010	.3940	.3936	.0004
4	.4300D+02	1.6335	.3900	.3904	-.0004
5	.6000D+02	1.7782	.3855	.3867	-.0012
6	.8000D+02	1.9031	.3790	.3811	-.0021
7	.1110D+03	2.0453	.3700	.3703	-.0003
8	.1900D+03	2.2788	.3400	.3373	.0027
9	.2850D+03	2.4548	.3000	.2993	.0007
10	.4000D+03	2.6021	.2600	.2637	-.0037
11	.6000D+03	2.7782	.2200	.2241	-.0041
12	.8000D+03	2.9031	.2000	.2008	-.0008
13	.9000D+03	2.9542	.1940	.1926	.0014
14	.1000D+04	3.0000	.1900	.1858	.0042

	P	LOG-P	LOGK-OBS	LOGK-FIT	LOGK-DEV	K-OBS
15	.1000D-02	-3.0000	.0000	.0169	-.0169	.1000D+01
16	.1150D+02	1.0607	.0000	-.0249	.0249	.1000D+01
17	.1650D+02	1.2175	-.0223	-.0445	.0222	.9500D+00
18	.1960D+02	1.2923	-.0458	-.0570	.0113	.9000D+00
19	.3000D+02	1.4771	-.1163	-.1014	-.0150	.7650D+00
20	.5000D+02	1.6990	-.2255	-.1956	-.0299	.5950D+00
21	.7000D+02	1.8451	-.3188	-.3004	-.0183	.4800D+00
22	.1000D+03	2.0000	-.4711	-.4738	.0027	.3380D+00
23	.1380D+03	2.1399	-.6990	-.7130	.0140	.2000D+00
24	.1860D+03	2.2695	-1.0000	-1.0304	.0304	.1000D+00

25	.2000D+03	2.3010	-1.1308	-1.1238	-.0070	.7400D-01
26	.2570D+03	2.4099	-1.5229	-1.4987	-.0242	.3000D-01
27	.3390D+03	2.5302	-2.0000	-2.0057	.0057	.1000D-01

# SUM OF SQUARES OF OBSERVED VERSUS FITTED VALUES

	UNWEIGHTED	WEIGHTED
RETENTION DATA	.00007	.00007
COND/DIFF DATA	.00477	.00141
ALL DATA	.00484	.00148

# SOIL HYDRAULIC PROPERTIES (MTYPE = 3)

WC	P	LOGP	COND	LOGK	DIF	LOGD
.1231	.3776D+05	4.577	.1339D-14	-14.873	.2939D-07	-7.532
.1248	.1898D+05	4.278	.1199D-12	-12.921	.6613D-06	-6.180
.1282	.9539D+04	3.980	.1073D-10	-10.969	.1489D-04	-4.827
.1350	.4791D+04	3.680	.9615D-09	-9.017	.3356D-03	-3.474
.1419	.3199D+04	3.505	.1335D-07	-7.875	.2080D-02	-2.682
.1487	.2399D+04	3.380	.8639D-07	-7.064	.7608D-02	-2.119
.1555	.1917D+04	3.283	.3682D-06	-6.434	.2085D-01	-1.681
.1624	.1594D+04	3.203	.1205D-05	-5.919	.4763D-01	-1.322
.1692	.1363D+04	3.134	.3288D-05	-5.483	.9598D-01	-1.018
.1760	.1188D+04	3.075	.7853D-05	-5.105	.1766D+00	-.753
.1828	.1051D+04	3.022	.1695D-04	-4.771	.3031D+00	-.518
.1897	.9406D+03	2.973	.3377D-04	-4.471	.4927D+00	-.307
.1965	.8497D+03	2.929	.6308D-04	-4.200	.7666D+00	-.115
.2033	.7733D+03	2.888	.1118D-03	-3.952	.1151D+01	.061
.2101	.7081D+03	2.850	.1894D-03	-3.723	.1678D+01	.225
.2170	.6516D+03	2.814	.3091D-03	-3.510	.2385D+01	.377
.2238	.6022D+03	2.780	.4883D-03	-3.311	.3319D+01	.521
.2306	.5584D+03	2.747	.7502D-03	-3.125	.4536D+01	.657
.2375	.5193D+03	2.715	.1125D-02	-2.949	.6103D+01	.786
.2443	.4841D+03	2.685	.1650D-02	-2.782	.8100D+01	.909
.2511	.4521D+03	2.655	.2376D-02	-2.624	.1063D+02	1.026
.2579	.4229D+03	2.626	.3363D-02	-2.473	.1380D+02	1.140
.2648	.3960D+03	2.598	.4689D-02	-2.329	.1777D+02	1.250
.2716	.3710D+03	2.569	.6450D-02	-2.190	.2271D+02	1.356
.2784	.3478D+03	2.541	.8766D-02	-2.057	.2884D+02	1.460
.2852	.3260D+03	2.513	.1179D-01	-1.929	.3644D+02	1.562
.2921	.3055D+03	2.485	.1569D-01	-1.804	.4584D+02	1.661
.2989	.2861D+03	2.456	.2071D-01	-1.684	.5749D+02	1.760
.3057	.2676D+03	2.427	.2713D-01	-1.567	.7196D+02	1.857
.3126	.2498D+03	2.398	.3530D-01	-1.452	.8998D+02	1.954
.3194	.2327D+03	2.367	.4566D-01	-1.341	.1125D+03	2.051
.3262	.2161D+03	2.335	.5876D-01	-1.231	.1410D+03	2.149
.3330	.1999D+03	2.301	.7532D-01	-1.123	.1773D+03	2.249
.3399	.1839D+03	2.265	.9625D-01	-1.017	.2240D+03	2.350
.3467	.1681D+03	2.225	.1228D+00	-.911	.2854D+03	2.455
.3535	.1521D+03	2.182	.1565D+00	-.805	.3680D+03	2.566
.3604	.1359D+03	2.133	.1999D+00	-.699	.4827D+03	2.684
.3672	.1190D+03	2.076	.2562D+00	-.591	.6501D+03	2.813
.3740	.1010D+03	2.004	.3312D+00	-.480	.9133D+03	2.961
.3808	.8090D+02	1.908	.4351D+00	-.361	.1386D+04	3.142
.3877	.5618D+02	1.750	.5930D+00	-.227	.2524D+04	3.402
.3911	.3940D+02	1.596	.7173D+00	-.144	.4202D+04	3.623
.3945	.0000D+00		.1040D+01	.017		

END OF PROBLEM

# APPENDIX B. Listing of RETC.FOR

```

C *****
C *
C *      ANALYSIS OF SOIL HYDRAULIC PROPERTIES      RETC.FOR
C *
C *      FOR MORE INFORMATION, CONTACT:
C *
C *      RIEN VAN GENUCHTEN OR FEIKE LEIJ
C *      U.S. SALINITY LABORATORY
C *      USDA-ARS
C *      4500 GLENWOOD DRIVE
C *      RIVERSIDE, CA 92501
C *
C *      TELEPHONE (714) 369-4846
C *      FAX      (714) 369-4818
C *
C *      VERSION OF JUNE, 1991
C *
C *****
C
C      IMPLICIT REAL*8 (A-H,O-Z)
C      DIMENSION X(200),Y(200),R(200),F(200),DELZ(100,7),W(200),B(14),
C      *E(7),P(7),PHI(7),Q(7),TB(14),A(7,7),D(7,7),INDEX(7),TH(14)
C      CHARACTER AB(14)*5,TITLE*60,HEAD*60,PRNS*1
C      CHARACTER*12 INF,OTF,RETPLT,CONPLT
C      DATA STOPCR/.00010/
999 CALL USR_IN(INF,OTF,RETPLT,CONPLT,TITLE,MTYPE,
C      *METHOD,KWATER,KIN,KOUT,KITER,MIT,AB,B,INDEX,W1,NW)
C      KP=7
C
C      ----- OPEN I/O FILES -----
C      OPEN(5,FILE=INF,STATUS = 'OLD')
C      CALL CLR
C      WRITE(0,998)
998 FORMAT(10(/),14X,'SEND OUTPUT TO PRINTER AND/OR OUTPUT FILE'
C      */14X,'P - To printer only'
C      */14X,'B - To both printer and output file'
C      */14X,'F - To output file only (or just hit Enter)'
C      */14X,'SELECT:',\ )
C      READ(0,'(A)') PRNS
C      IF((PRNS.EQ.'P').OR.(PRNS.EQ.'p')) OPEN(7,FILE='PRN')
C      IF((PRNS.EQ.'B').OR.(PRNS.EQ.'b')) THEN
C      OPEN(7,FILE='PRN')
C      OPEN(8,FILE=OTF,STATUS='UNKNOWN')
C      KP=8
C      ENDIF
C      IF((PRNS.EQ.'F').OR.(PRNS.EQ.'f')) THEN
C      OPEN(7,FILE=OTF,STATUS='UNKNOWN')
C      ENDIF
C      IF((PRNS.EQ.' ').OR.(PRNS.EQ.' ')) THEN
C      OPEN(7,FILE=OTF,STATUS='UNKNOWN')
C      ENDIF
C
C      ----- READ EXPERIMENTAL DATA -----
C      READ(5,'(A60)') HEAD
C      NWC=0
C      NOB=0
C      DO 997 I=1, 10000
C      READ(5,*,END=996) XX,YY,WW

```



```

IF (XX .GE. 0) THEN
NOB=NOB+1
X(NOB)=XX
Y(NOB)=YY
W(NOB)=WW
ELSE
NWC=NOB
ENDIF
997 CONTINUE
996 IF (NWC.EQ.0) NWC=NOB

```

```

C
C
C ----- READ INPUT PARAMETERS -----
IF (KWATER.EQ.3) MIT=0
IF (NOB.EQ.0) MIT=0
IF (NOB.EQ.0) KOUT=1
IF (NWC.EQ.0) KWATER=2
IF (MTYPE.LT.1.OR.MTYPE.GT.6) MTYPE=3

```

```

C
C
C ----- READ INITIAL ESTIMATES -----
IF (KWATER.EQ.1) INDEX(6)=0
IF (KWATER.EQ.1) INDEX(7)=0
IF (KWATER.EQ.2.AND.METHOD.LE.2) INDEX(3)=0
IF (KWATER.EQ.2.AND.METHOD.GE.5) INDEX(3)=0

```

```

C
WRITE(KP,1008) TITLE
IF (KP.EQ.8) WRITE(7,1008) TITLE
GO TO (5,5,1,2,3,3) MTYPE
1 B(11)=DMAX1(1.05D0,B(11))
B(12)=1.-1./B(11)
GO TO 4
2 B(11)=DMAX1(2.05D0,B(11))
B(12)=1.-2./B(11)
GO TO 4
3 B(12)=1.0
4 INDEX(5)=0
5 CONTINUE
IF (MTYPE.EQ.1) WRITE(KP,1010)
IF (MTYPE.EQ.2) WRITE(KP,1011)
IF (MTYPE.EQ.3) WRITE(KP,1012)
IF (MTYPE.EQ.4) WRITE(KP,1014)
IF (MTYPE.EQ.5) WRITE(KP,1015)
IF (MTYPE.EQ.6) WRITE(KP,1016)
IF (KP.EQ.8) THEN
IF (MTYPE.EQ.1) WRITE(7,1010)
IF (MTYPE.EQ.2) WRITE(7,1011)
IF (MTYPE.EQ.3) WRITE(7,1012)
IF (MTYPE.EQ.4) WRITE(7,1014)
IF (MTYPE.EQ.5) WRITE(7,1015)
IF (MTYPE.EQ.6) WRITE(7,1016)
ENDIF
KLOG=0
IF (2*(METHOD/2).EQ.METHOD) KLOG=1
IF (KWATER.EQ.1) KLOG=0
IF (MIT.EQ.0) GO TO 6
IF (KWATER.EQ.1) WRITE(KP,1017)
IF (KWATER.EQ.0.AND.METHOD.LE.4) WRITE(KP,1018)
IF (KWATER.EQ.0.AND.METHOD.GT.4) WRITE(KP,1019)
IF (KWATER.EQ.2.AND.METHOD.LE.4) WRITE(KP,1020)
IF (KWATER.EQ.2.AND.METHOD.GT.4) WRITE(KP,1021)
IF (KLOG.EQ.1) WRITE(KP,1022)
IF (KP.EQ.8) THEN
IF (KWATER.EQ.1) WRITE(7,1017)

```

```

IF(KWATER.EQ.0.AND.METHOD.LE.4) WRITE(7,1018)
IF(KWATER.EQ.0.AND.METHOD.GT.4) WRITE(7,1019)
IF(KWATER.EQ.2.AND.METHOD.LE.4) WRITE(7,1020)
IF(KWATER.EQ.2.AND.METHOD.GT.4) WRITE(7,1021)
IF(KLOG.EQ.1) WRITE(7,1022)
ENDIF
IF(KWATER.NE.2) GO TO 6
IF(METHOD.LE.2.OR.METHOD.GT.4) GO TO 6
INDEX(1)=0
INDEX(2)=0
6 WRITE(KP,1023) MTYPE,METHOD
NP=0
IF(NOBS.GT.0) WRITE(KP,1024) (I,AB(I+7),B(I+7),INDEX(I),I-1,7)
IF(NOBS.EQ.0) WRITE(KP,1024) (I,AB(I+7),B(I+7),NP,I-1,7)
IF(KP.EQ.8) THEN
IF(KP.EQ.8) WRITE(7,1023) MTYPE,METHOD
IF(NOBS.GT.0) WRITE(7,1024) (I,AB(I+7),B(I+7),INDEX(I),I-1,7)
IF(NOBS.EQ.0) WRITE(7,1024) (I,AB(I+7),B(I+7),NP,I-1,7)
ENDIF
IF(NOBS.EQ.0) GO TO 14

C
C
----- WRITE EXPERIMENTAL DATA -----
IF(KIN.EQ.1) WRITE(KP,1025)
IF((KP.EQ.8).AND.(KIN.EQ.1)) WRITE(7,1025)
WA=0.
IF(KWATER.EQ.2) GO TO 8
IF(KIN.EQ.1) WRITE(KP,1027)
IF((KP.EQ.8).AND.(KIN.EQ.1)) WRITE(7,1027)
DO 7 I=1,NWC
X(I)=DMAX1(X(I),1.D-5)
IF(W(I).LT.1.D-3) W(I)=1.0
WA=WA+DABS(W(I)*Y(I))
IF(KIN.EQ.0) GO TO 7
WRITE(KP,1029) I,X(I),Y(I),W(I)
IF(KP.EQ.8) WRITE(7,1029) I,X(I),Y(I),W(I)
7 CONTINUE
WA=WA/FLOAT(NWC)
IF(KWATER.EQ.1) GO TO 14
8 IF(KIN.EQ.0) GO TO 9
IF(METHOD.EQ.1) WRITE(KP,1031)
IF(METHOD.EQ.2) WRITE(KP,1032)
IF(METHOD.EQ.3) WRITE(KP,1033)
IF(METHOD.EQ.4) WRITE(KP,1034)
IF(METHOD.EQ.5) WRITE(KP,1035)
IF(METHOD.EQ.6) WRITE(KP,1036)
IF(KP.EQ.8) THEN
IF(METHOD.EQ.1) WRITE(7,1031)
IF(METHOD.EQ.2) WRITE(7,1032)
IF(METHOD.EQ.3) WRITE(7,1033)
IF(METHOD.EQ.4) WRITE(7,1034)
IF(METHOD.EQ.5) WRITE(7,1035)
IF(METHOD.EQ.6) WRITE(7,1036)
ENDIF
9 WB=0.0
IF(KWATER.EQ.2.AND.NWC.EQ.NOBS) NWC=0
NWC1=NWC+1
DO 10 I=NWC1,NOBS
J=I
IF(KWATER.EQ.2) J=I-NWC
X(J)=X(I)
IF(METHOD.EQ.3.OR.METHOD.EQ.4) X(J)=DMAX1(X(J),1.D-5)
Y(J)=Y(I)

```

```

IF(KLOG.EQ.1) Y(J)=DLOG10(Y(J))
W(J)=W(I)
IF(W(J).LT.1.D-3) W(J)=1.0
WB=WB+DABS(W(J)*Y(J))
IF(KIN.EQ.0) GO TO 10
IF(KLOG.EQ.0) WRITE(KP,1037) J,X(J),Y(J),W(J)
IF(KLOG.EQ.1) WRITE(KP,1038) J,X(J),Y(J),W(J)
IF(KP.EQ.8) THEN
IF(KLOG.EQ.0) WRITE(7,1037) J,X(J),Y(J),W(J)
IF(KLOG.EQ.1) WRITE(7,1038) J,X(J),Y(J),W(J)
ENDIF
10 CONTINUE
IF(KWATER.LT.2) GO TO 11
NOB=NOB-NWC
NWC=0
NWC1=1
11 IF(MIT.EQ.0) GO TO 14
IF(W1.LT.1.D-3) W1=1.0
WB=WB/FLOAT(NOB-NWC)
W2=WA/WB
IF(KWATER.EQ.2) W2=1.0
W12=W1*W2
WRITE(KP,1040) W1,W2,W12
IF(KP.EQ.8) WRITE(7,1040) W1,W2,W12
DO 12 I=NWC1,NOB
12 W(I)=W12*W(I)
C
C ----- INITIALIZE UNKNOWN PARAMETERS -----
14 NP=0
DO 15 I=8,14
TB(I)=B(I)
IF(INDEX(I-7).EQ.0) GO TO 15
NP=NP+1
AB(NP)=AB(I)
B(NP)=B(I)
TB(NP)=B(I)
TH(NP)=B(I)
15 TH(I)=B(I)
IF(NOB.EQ.0) GO TO 92
GA=0.05
DERL=0.002D0
NEXP=1+INDEX(1)+INDEX(2)+INDEX(3)+INDEX(4)+INDEX(5)
IF(KWATER.EQ.1) NOB=NWC
C
C ----- START LEAST-SQUARES ANALYSIS -----
CALL MODEL(TH,F,X,NWC,NOB,MTYPE,METHOD,INDEX,IOR)
IF(IOR.EQ.1) GO TO 94
IF(MIT.EQ.0) GO TO 83
SSQ=0.
DO 16 I=1,NOB
R(I)=W(I)*(Y(I)-F(I))
16 SSQ=SSQ+R(I)*R(I)
NIT=0
WRITE(KP,1042) (AB(I),I=1,NP)
WRITE(KP,1044) NIT,SSQ,(B(I),I=1,NP)
IF(KP.EQ.8) THEN
WRITE(7,1042) (AB(I),I=1,NP)
WRITE(7,1044) NIT,SSQ,(B(I),I=1,NP)
ENDIF
C
C ----- BEGIN OF ITERATION -----
18 NIT=NIT+1

```

```

GA=0.05*GA
DO 22 J=1,NP
TEMP=TH(J)
TH(J)=(1.DO+DERL)*TH(J)
Q(J)=0
CALL MODEL(TH,DELZ(1,J),X,NWC,NOB,MTYPE,METHOD,INDEX,IOR)
IF(IOR.EQ.1) GO TO 94
DO 20 I=1,NOB
DELZ(I,J)=W(I)*(DELZ(I,J)-F(I))
20 Q(J)=Q(J)+DELZ(I,J)*R(I)
Q(J)=Q(J)/(TH(J)*DERL)

C
C ----- STEEPEST DESCENT -----
22 TH(J)=TEMP
DO 28 I=1,NP
DO 26 J=1,I
SUM=0.0
DO 24 K=1,NOB
24 SUM=SUM+DELZ(K,I)*DELZ(K,J)
D(I,J)=SUM/(TH(I)*TH(J)*DERL**2)
26 D(J,I)=D(I,J)
28 E(I)=DSQRT(D(I,I))
30 DO 32 I=1,NP
DO 32 J=1,NP
32 A(I,J)=D(I,J)/(E(I)*E(J))

C
C ----- A IS THE SCALED MOMENT MATRIX -----
DO 34 I=1,NP
P(I)=Q(I)/E(I)
PHI(I)=P(I)
34 A(I,I)=A(I,I)+GA
CALL MATINV(A,NP,P)

C
C ----- P/E IS THE CORRECTION VECTOR -----
STEP=1.0
36 DO 38 I=1,NP
38 TB(I)=P(I)*STEP/E(I)+TH(I)
DO 40 I=1,NP
IF(TH(I)*TB(I))44,44,40
40 CONTINUE
CALL MODEL(TB,F,X,NWC,NOB,MTYPE,METHOD,INDEX,IOR)
IF(IOR.EQ.1) GO TO 94
SUMB=0.0
DO 42 I=1,NOB
R(I)=W(I)*(Y(I)-F(I))
42 SUMB=SUMB+R(I)*R(I)
44 SUM1=0.0
SUM2=0.0
SUM3=0.0
DO 46 I=1,NP
SUM1=SUM1+P(I)*PHI(I)
SUM2=SUM2+P(I)*P(I)
46 SUM3=SUM3+PHI(I)*PHI(I)
ARG=SUM1/DSQRT(SUM2*SUM3)
ARG1=0.
IF(NP.GT.1) ARG1=DSQRT(1.-ARG*ARG)
ANGLE=57.29578*DATAN2(ARG1,ARG)

C
C -----
DO 48 I=1,NP
IF(TH(I)*TB(I))50,50,48
48 CONTINUE

```

```

      IF((SUMB-SSQ)/SSQ.LT.1.D-5) GO TO 56
50  IF(ANGLE-30.D0) 52,52,54
52  STEP=0.5*STEP
      GO TO 36
54  GA=20.*GA
      GO TO 30
C
C  ----- PRINT COEFFICIENTS AFTER EACH ITERATION -----
56  CONTINUE
      DO 58 I=1,14
58  TH(I)=TB(I)
      IF(NIT.LT.KITER) WRITE(KP,1044) NIT,SUMB,(TH(I),I=1,NP)
      IF((KP.EQ.8).AND.(NIT.LT.KITER)) WRITE(7,1044) NIT,SUMB,
*(TH(I),I=1,NP)
      IF(INDEX(1).EQ.0) GO TO 60
      IF(NIT.LE.4.OR.TH(1).GT.0.001) GO TO 60
      INDEX(1)=0
      B(8)=0.0
      IF(NIT.GE.KITER) WRITE(KP,1044) NIT,SUMB,(TH(I),I=1,NP)
      IF((KP.EQ.8).AND.(NIT.GE.KITER)) WRITE(7,1044) NIT,SUMB,
*(TH(I),I=1,NP)
      WRITE(KP,1046)
      IF(KP.EQ.8) WRITE(7,1046)
      GO TO 14
60  IF(INDEX(6).EQ.0) GO TO 64
      EXPO=TH(NEXP)
      IF(EXPO.GT.1.D-3) GO TO 64
      IF(EXPO.LT.-1.D-3) GO TO 64
      IF(EXPO.LT.0.) GO TO 62
      B(13)=-0.2
      GO TO 14
62  B(13)=0.0001
      INDEX(6)=0
      WRITE(KP,1050) B(13)
      IF(KP.EQ.8) WRITE(7,1050) B(13)
      GO TO 14
64  DO 66 I=1,NP
      IF(DABS(P(I)*STEP/E(I))/(1.D-20+DABS(TH(I)))-STOPCR) 66,66,68
66  CONTINUE
      GO TO 70
68  SSQ=SUMB
      IF(NIT.LE.MIT) GO TO 18
C
C  ----- END OF ITERATION LOOP -----
70  CONTINUE
      IF(NIT.GE.KITER) WRITE(KP,1044) NIT,SUMB,(TH(I),I=1,NP)
      IF((KP.EQ.8).AND.(NIT.GE.KITER)) WRITE(7,1044) NIT,SUMB,
*(TH(I),I=1,NP)
      CALL MATINV(D,NP,P)
C
C  ----- WRITE CORRELATION MATRIX -----
      DO 72 I=1,NP
72  E(I)=DSQRT(DMAX1(D(I,I),1.D-20))
      IF(NP.EQ.1) GO TO 78
      WRITE(KP,1052) (AB(I),I=1,NP)
      IF(KP.EQ.8) WRITE(7,1052) (AB(I),I=1,NP)
      DO 76 I=1,NP
      DO 74 J=1,I
74  A(J,I)=D(J,I)/(E(I)*E(J))
      WRITE(KP,1054) AB(I),(A(J,I),J=1,I)
76  IF(KP.EQ.8) WRITE(7,1054) AB(I),(A(J,I),J=1,I)

```

```

C ----- CALCULATE R-SQUARED OF FITTED VS OBSERVED VALUES -----
78 SUM=0.0
   SUMY=0.0
   SUMF=0.0
   SUMY2=0.0
   SUMF2=0.0
   SUMYF=0.0
   DO 80 I=1,NOB
      SUM=SUM+W(I)
      SUMY=SUMY+Y(I)*W(I)
      SUMF=SUMF+F(I)*W(I)
      SUMY2=SUMY2+Y(I)**2*W(I)
      SUMF2=SUMF2+F(I)**2*W(I)
80  SUMYF=SUMYF+Y(I)*F(I)*W(I)
   RSQ=(SUMYF-SUMY*SUMF/SUM)**2/((SUMY2-SUMY**2/SUM)*(SUMF2-SUMF**2/
1SUM))
   WRITE(KP,1056) RSQ
   IF(KP.EQ.8) WRITE(7,1056) RSQ

C ----- CALCULATE 95% CONFIDENCE INTERVAL -----
C
Z=1./FLOAT(NOB-NP)
SDEV=DSQRT(Z*SUMB)
WRITE(KP,1058)
IF(KP.EQ.8) WRITE(7,1058)
TVAR=1.96+Z*(2.3779+Z*(2.7135+Z*(3.187936+2.466666*Z**2)))
DO 82 I=1,NP
   SECOEF=E(I)*SDEV
   TVALUE=TH(I)/SECOEF
   TVALUE=DMIN1(TVALUE,999999.DO)
   TSEC=TVAR*SECOEF
   TMCOE=TH(I)-TSEC
   TPCOE=TH(I)+TSEC
   IF(NP.EQ.1) WRITE(KP,1060) AB(I),TH(I),SECOEF,TMCOE,TPCOE
   IF((KP.EQ.8).AND.(NP.EQ.1)) WRITE(7,1060) AB(I),TH(I),SECOEF,
*TMCOE,TPCOE
   IF(NP.GT.1) WRITE(KP,1062) AB(I),TH(I),SECOEF,TVALUE,TMCOE,TPCOE
82 IF((KP.EQ.8).AND.(NP.GT.1)) WRITE(7,1062) AB(I),TH(I),SECOEF,
*TVALUE,TMCOE,TPCOE

C ----- GIVE FINAL OUTPUT -----
C
83 IF(MIT.GT.0) WRITE(KP,1063)
   IF(MIT.EQ.0) WRITE(KP,1064)
   IF(KP.EQ.8) THEN
      IF(MIT.GT.0) WRITE(7,1063)
      IF(MIT.EQ.0) WRITE(7,1064)
   ENDIF
   SSQ1=0.0
   SSQ2=0.0
   SSQW1=0.0
   SSQW2=0.0
   IF(KWATER.EQ.2) GO TO 85
   WRITE(KP,1065)
   IF(KP.EQ.8) WRITE(7,1065)
   DO 84 I=1,NWC
      XLOG=DLOG10(DMAX1(1.D-5,X(I)))
      R(I)=Y(I)-F(I)
      SSQ1=SSQ1+R(I)**2
      SSQW1=SSQW1+(R(I)*W(I))**2
84  WRITE(KP,1066) I,X(I),XLOG,Y(I),F(I),R(I)
   IF(KP.EQ.8) WRITE(7,1066) I,X(I),XLOG,Y(I),F(I),R(I)
   IF(KWATER.EQ.1) GO TO 89

```

```

C      ----- WRITE CONDUCTIVITY OR DIFFUSIVITY DATA -----
85  IF(METHOD.EQ.1) WRITE(KP,1068)
    IF(METHOD.EQ.2) WRITE(KP,1069)
    IF(METHOD.EQ.3) WRITE(KP,1070)
    IF(METHOD.EQ.4) WRITE(KP,1071)
    IF(METHOD.EQ.5) WRITE(KP,1072)
    IF(METHOD.EQ.6) WRITE(KP,1073)
    IF(KP.EQ.8) THEN
      IF(METHOD.EQ.1) WRITE(7,1068)
      IF(METHOD.EQ.2) WRITE(7,1069)
      IF(METHOD.EQ.3) WRITE(7,1070)
      IF(METHOD.EQ.4) WRITE(7,1071)
      IF(METHOD.EQ.5) WRITE(7,1072)
      IF(METHOD.EQ.6) WRITE(7,1073)
    ENDIF
    DO 88 I=NWC1,NOB
      R(I)=Y(I)-F(I)
      SSQ2=SSQ2+R(I)**2
      SSQW2=SSQW2+(R(I)*W(I))**2
      RLX=DLOG10(DMAX1(1.D-30,X(I)))
      RLY=DLOG10(DMAX1(1.D-30,Y(I)))
      RPZ=10.**DMIN1(3.D1,Y(I))
      RLF=DLOG10(DMAX1(1.D-30,F(I)))
      RPF=10.**DMIN1(3.D1,F(I))
      IF(METHOD.EQ.1.OR.METHOD.EQ.5) WRITE(KP,1074) I,X(I),Y(I),F(I),
1R(I),RLY,RLF
      IF(METHOD.EQ.2.OR.METHOD.EQ.6) WRITE(KP,1075) I,X(I),Y(I),F(I),
1R(I),RPZ,RPF
      IF(METHOD.EQ.3) WRITE(KP,1076) I,X(I),RLX,Y(I),F(I),R(I),RLY
      IF(METHOD.EQ.4) WRITE(KP,1077) I,X(I),RLX,Y(I),F(I),R(I),RPZ
      IF(KP.EQ.8) THEN
        IF(METHOD.EQ.1.OR.METHOD.EQ.5) WRITE(7,1074) I,X(I),Y(I),F(I),
1R(I),RLY,RLF
        IF(METHOD.EQ.2.OR.METHOD.EQ.6) WRITE(7,1075) I,X(I),Y(I),F(I),
1R(I),RPZ,RPF
        IF(METHOD.EQ.3) WRITE(7,1076) I,X(I),RLX,Y(I),F(I),R(I),RLY
        IF(METHOD.EQ.4) WRITE(7,1077) I,X(I),RLX,Y(I),F(I),R(I),RPZ
      ENDIF
88  CONTINUE
89  IF(MIT.EQ.0) GO TO 90
    SSQ=SSQ1+SSQ2
    SSQW=SSQW1+SSQW2
    WRITE(KP,1078) SSQ1,SSQW1,SSQ2,SSQW2,SSQ,SSQW
    IF(KP.EQ.8) WRITE(7,1078) SSQ1,SSQW1,SSQ2,SSQW2,SSQ,SSQW
90  CONTINUE
92  IF(KOUT.EQ.1) CALL PRINT(RETPLT,CONPLT,KP,MTYPE,TH,METHOD,NW)
94  IF(IOR.EQ.1) WRITE(1080)
    WRITE(KP,1082)
    WRITE(KP,'(A2)') CHAR(12)
    IF(KP.EQ.8) THEN
      WRITE(7,1082)
      WRITE(7,'(A2)') CHAR(12)
    ENDIF
    CLOSE(5)
    CLOSE(7)
    GO TO 999
C
C      ----- END OF PROBLEM -----
1000 FORMAT(10I5)
1002 FORMAT(A60)
1004 FORMAT(8F10.0)
1008 FORMAT(5X,67(1H*)/5X,1H*,65X,1H*/5X,1H*,5X,'ANALYSIS OF SOIL HYDRA

```

```

1000 'MULIC PROPERTIES', 23X, 1H*/5X, 1H*, 65X, 1H*/5X, 1H*, 5X, A60, 1H*/5X, 1H*,
265X, 1H*)
1010 FORMAT(5X, 1H*, 5X, 'VARIABLE N AND M (MUALEM-THEORY FOR K)', 22X, 1H*)
1011 FORMAT(5X, 1H*, 5X, 'VARIABLE N AND M (BURDINE-THEORY FOR K)', 21X, 1H*
1)
1012 FORMAT(5X, 1H*, 5X, 'MUALEM-BASED RESTRICTION, M=1-1/N', 27X, 1H*)
1014 FORMAT(5X, 1H*, 5X, 'BURDINE-BASED RESTRICTION, M=1-2/N', 26X, 1H*)
1015 FORMAT(5X, 1H*, 5X, 'BROOKS AND COREY EQUIVALENT (MUALEM)', 24X, 1H*)
1016 FORMAT(5X, 1H*, 5X, 'BROOKS AND COREY EQUIVALENT (BURDINE)', 23X, 1H*)
1017 FORMAT(5X, 1H*, 5X, 'ANALYSIS OF RETENTION DATA ONLY', 29X, 1H*)
1018 FORMAT(5X, 1H*, 5X, 'SIMULTANEOUS FIT OF RETENTION AND CONDUCTIVITY D
1ATA', 9X, 1H*)
1019 FORMAT(5X, 1H*, 5X, 'SIMULTANEOUS FIT OF RETENTION AND DIFFUSIVITY DA
1TA', 10X, 1H*)
1020 FORMAT(5X, 1H*, 5X, 'ANALYSIS OF CONDUCTIVITY DATA ONLY', 26X, 1H*)
1021 FORMAT(5X, 1H*, 5X, 'ANALYSIS OF DIFFUSIVITY DATA ONLY', 27X, 1H*)
1022 FORMAT(5X, 1H*, 5X, 'FIT ON LOG-TRANSFORMED K/D DATA', 29X, 1H*)
1023 FORMAT(5X, 1H*, 5X, 'MTYPE=', I2, 5X, 'METHOD=', I2, 38X, 1H*/5X, 1H*, 65X,
11H*/5X, 67(1H*))
1024 FORMAT(//5X, 'INITIAL VALUES OF THE COEFFICIENTS'/5X, 34(1H=)/5X, 'NO
1', 6X, 'NAME', 8X, 'INITIAL VALUE', 3X, 'INDEX'/(4X, I3, 5X, A6, 4X, F12.4, 7X
2, I3))
1025 FORMAT(///5X, 'OBSERVED DATA'/5X, 13(1H=))
1027 FORMAT(5X, 'OBS. NO.', 4X, 'PRESSURE HEAD', 5X, 'WATER CONTENT', 5X, 'WEI
1GHTING COEFFICIENT')
1029 FORMAT(5X, I5, 4X, F12.3, 7X, F12.4, 7X, F12.4)
1031 FORMAT(16X, 'WATER CONTENT', 6X, 'CONDUCTIVITY', 5X, 'WEIGHTING COEFFIC
1IENT')
1032 FORMAT(16X, 'WATER CONTENT', 4X, 'LOG-CONDUCTIVITY', 3X, 'WEIGHTING COE
1FFICIENT')
1033 FORMAT(16X, 'PRESSURE HEAD', 6X, 'CONDUCTIVITY', 5X, 'WEIGHTING COEFFIC
1IENT')
1034 FORMAT(16X, 'PRESSURE HEAD', 4X, 'LOG-CONDUCTIVITY', 3X, 'WEIGHTING COE
1FFICIENT')
1035 FORMAT(16X, 'WATER CONTENT', 6X, 'DIFFUSIVITY', 6X, 'WEIGHTING COEFFICI
1ENT')
1036 FORMAT(16X, 'WATER CONTENT', 4X, 'LOG-DIFFUSIVITY', 4X, 'WEIGHTING COEF
1FICIENT')
1037 FORMAT(5X, I5, 4X, F12.4, 8X, E12.4, 7X, F12.4)
1038 FORMAT(5X, I5, 4X, F12.4, 7X, F12.4, 7X, F12.4)
1040 FORMAT(//5X, 'WEIGHTING COEFFICIENTS'/5X, 22(1H=)/5X, 'W1=', F9.5, 4X,
1'W2=', F9.5, 5X, 'W12=', F9.5)
1042 FORMAT(//5X, 'NIT', 5X, 'SSQ', 2X, 7(2X, A6))
1044 FORMAT(4X, I3, F11.5, 7F8.4)
1046 FORMAT(//5X, 'WCR IS LESS THEN 0.001: CHANGED TO FIT WITH WCR=0.0')
1050 FORMAT(40X, 'EXPO FIXED AT', F8.6)
1052 FORMAT(//5X, 'CORRELATION MATRIX'/5X, 18(1H=)/9X, 8(2X, A5, 3X))
1054 FORMAT(2X, A5, 10(2X, F7.4, 1X))
1056 FORMAT(//5X, 'RSQUARED FOR REGRESSION OF OBSERVED VS FITTED VALUES
1=', F11.8/5X, 65(1H=))
1058 FORMAT(//5X, 'NONLINEAR LEAST-SQUARES ANALYSIS: FINAL RESULTS'/
15X, 47(1H=)/51X, '95% CONFIDENCE LIMITS'/5X, 'VARIABLE', 5X, 'VALUE',
25X, 'S.E. COEFF.', 4X, 'T-VALUE', 5X, 'LOWER', 7X, 'UPPER')
1060 FORMAT(5X, A6, F13.5, F12.5, 9X, '-', 2X, 2F11.4)
1062 FORMAT(5X, A6, F13.5, F12.5, 4X, F9.2, 2F11.4)
1063 FORMAT(//5X, 'OBSERVED AND FITTED DATA'/5X, 24(1H=))
1064 FORMAT(//5X, 'OBSERVED AND CALCULATED VALUES (FOR CALCULATED VALUES
1'/5X, 29(1H=), ' USE THE ENTRIES LABELED "FIT")')
1065 FORMAT(5X, 'NO', 9X, 'P', 9X, 'LOG-P', 4X, 'WC-OBS', 4X, 'WC-FIT', 4X, 'WC-DE
1V')
1066 FORMAT(4X, I3, E14.4, 4F10.4)
1068 FORMAT(/12X, 'WC', 6X, 'K-OBS', 7X, 'K-FIT', 7X, 'K-DEV', 6X, 'LOGK-OBS',

```



```

12X, 'LOGK-FIT')
1069 FORMAT(/12X, 'WC', 5X, 'LOGK-OBS', 2X, 'LOGK-FIT', 2X, 'LOGK-DEV',
13X, 'K-OBS', 7X, 'K-FIT')
1070 FORMAT(/15X, 'P', 7X, 'LOG-P', 4X, 'K-OBS', 7X, 'K-FIT', 7X, 'K-DEV',
15X, 'LOGK-OBS')
1071 FORMAT(/15X, 'P', 7X, 'LOG-P', 3X, 'LOGK-OBS', 2X, 'LOGK-FIT', 2X,
1'LOGK-DEV', 4X, 'K-OBS')
1072 FORMAT(/12X, 'WC', 6X, 'D-OBS', 7X, 'D-FIT', 7X, 'D-DEV', 6X, 'LOGD-OBS',
12X, 'LOGD-FIT')
1073 FORMAT(/12X, 'WC', 5X, 'LOGD-OBS', 2X, 'LOGD-FIT', 2X, 'LOGD-DEV',
14X, 'D-OBS', 7X, 'D-FIT')
1074 FORMAT(4X, I3, F9.4, 3E12.4, 2F10.4)
1075 FORMAT(4X, I3, F9.4, 3F10.4, 2F12.4)
1076 FORMAT(4X, I3, E13.4, F8.4, 3E12.4, F10.4)
1077 FORMAT(4X, I3, E13.4, F8.4, 3F10.4, E12.4)
1078 FORMAT(/5X, 'SUM OF SQUARES OF OBSERVED VERSUS FITTED VALUES'/5X,
147(1H=)/22X, 'UNWEIGHTED', 3X, 'WEIGHTED'/5X, 'RETENTION DATA', 2F12.5/
25X, 'COND/DIFF DATA', 2F12.5/11X, 'ALL DATA', 2F12.5)
1080 FORMAT(/5X, 'PARAMETER N IS TOO SMALL, THIS CASE IS NOT EXECUTED')
1082 FORMAT(/5X, 'END OF PROBLEM'/5X, 14(1H=)/)
END

```

C  
C  
C  
C  
C

```

-----
SUBROUTINE MODEL(B,Y,X,NWC,NOB,MTYPE,METHOD,INDEX,IOR)

```

```

PURPOSE: TO CALCULATE THE HYDRAULIC PROPERTIES

```

```

IMPLICIT REAL*8 (A-H,O-Z)
DIMENSION B(14),Y(200),X(200),INDEX(7)
K=0
IOR=0
DO 2 I=8,14
IF(INDEX(I-7).EQ.0) GO TO 2
K=K+1
B(I)=B(K)
2 CONTINUE
WCR=B(8)
WCS=B(9)
ALPHA=B(10)
IND=INDEX(1)+INDEX(2)+INDEX(3)+INDEX(4)
B(11)=DMAX1(1.005D0,B(11))
IF(MTYPE.EQ.3) B(12)=1.-1./B(11)
IF(MTYPE.NE.4) GO TO 4
B(11)=DMAX1(2.005D0,B(11))
B(12)=1.-2./B(11)
4 IF(IND.GT.0) B(IND)=B(11)
RN=B(11)
RM=B(12)
EXPO=B(13)
CONDS=B(14)
RMN=RM*RN
DLGA=DLOG10(ALPHA)
RMT=FLOAT(MTYPE-2*((MTYPE-1)/2))
IF(NOB.EQ.NWC) GO TO 12

```

C  
C

```

-----CALCULATE COMPLETE BETA FUNCTION-----

```

```

IF(MTYPE.GT.2) GO TO 10
AA=RM+RMT/RN
BB=1.-RMT/RN
IF(BB.GT.0.004) GO TO 8
IOR=1
GO TO 60

```

```

      8 BETA=GAMMA(AA)*GAMMA(BB)/GAMMA(RM+1.)
      WCL=DMAX1(2./(2.+RM),0.2D0)
      DLG1=(3.0-RMT)*DLOG10(RN/(BETA*(RMN+RMT)))
10    DLG2=3.0-RMT+EXPO+2.0/RMN
      DLG3=DLOG10(RMN*ALPHA*(WCS-WCR))
      DLG4=DLOG10(CONDS)
      DLGC=-35.0
      DLGD=-35.0

```

C  
C

```

      ----- CALCULATE FUNCTIONAL VALUES Y(I) -----
12  DO 54 I=1,NOB
      IF(METHOD.EQ.3.OR.METHOD.EQ.4) GO TO 13
      IF(I.GT.NWC) GO TO 28
13  AX=ALPHA*X(I)
      IF(AX.LT.1.D-20) GO TO 16
      EX=RN*DLOG10(AX)
      IF(MTYPE.LT.5) GO TO 14
      IF(AX.LE.1.) GO TO 16
      IF(EX.GT.10.) GO TO 20
      GO TO 22
14  IF(EX.GT.-10.) GO TO 18
16  RWC=-1.0
      GO TO 26
18  IF(EX.LT.10.) GO TO 24
      EX=RM*EX
      IF(EX.LT.30.) GO TO 22
20  RWC=0.0
      GO TO 26
22  RWC=AX**(-RM*RN)
      GO TO 26
24  RWC=(1.+AX**RN)**(-RM)
26  Y(I)=WCR+(WCS-WCR)*RWC
      IF(I.LE.NWC) GO TO 54
      GO TO 30

```

C  
C

```

      ----- CONDUCTIVITY DATA -----
28  RWC=(X(I)-WCR)/(WCS-WCR)
30  IF(RWC.GT.1.D-10) GO TO 31
      DLGC=-30
      DLGD=-30
      COND=1.D-30
      DIF=1.D-30
      GO TO 50
31  IF(RWC.LT.0.999999D0) GO TO 32
      DLGC=DLG4
      COND=CONDS
      DLGD=30.0
      DIF=1.D30
      GO TO 50
32  DLGW=DLOG10(RWC)
      DLGC=DLG2*DLGW+DLG4
      DLGD=DLGC-DLG3-(RMN+1)*DLGW/RMN
      IF(DLGC.LT.-30..OR.DLGW.LT.(-15.*RM)) GO TO 48
      IF(MTYPE.GT.4) GO TO 46
      DW=RWC*(1./RM)
      IF(MTYPE.GT.2) GO TO 42

```

C  
C

```

      ----- MTYPE = 1 OR 2 (VARIABLE M,N) -----
      IF(DW.GT.1.D-06) GO TO 34
      DLGC=DLGC+DLG1
      DLGD=DLGC-DLG3-(RMN+1)*DLGW/RMN
      GO TO 48

```

```

34 IF(RWC-WCL) 36,36,38
36 TERM=BINC(DW,AA,BB,BETA)
   GO TO 44
38 TERM=1.-BINC(1.-DW,BB,AA,BETA)
   GO TO 44
C
C   ----- MTYPE = 3 OR 4 (RESTRICTED M,N) -----
42 A=DMIN1(0.999999D0,DMAX1(1.D-7,1.-DW))
   TERM=1.D0-A**RM
   IF(DW.LT.1.D-04) TERM=RM*DW*(1.-0.5*(RM-1.)*DW)
44 RELK=RWC**EXPO*TERM
   IF(RMT.LT.1.5) RELK=RELK*TERM
   DLGC=DLOG10(RELK)+DLG4
   DLGD=DLGC-DLG3-(RMN+1.)*DLGW/RMN-(RN-1.)*DLOG10(1.-DW)/RN
   GO TO 48
C
C   ----- MTYPE = 5 OR 6 -----
46 DLGD=DLG4-DLG3+(2.0-RMT+EXPO+1./RN)*DLGW
48 DLGC=DMAX1(-30.D0,DLGC)
   DLGD=DMAX1(-30.D0,DLGD)
   DLGD=DMIN1(30.D0,DLGD)
   COND=10.**DLGC
   DIF=10.**DLGD
50 IF(METHOD.EQ.1.OR.METHOD.EQ.3) Y(I)=COND
   IF(METHOD.EQ.2.OR.METHOD.EQ.4) Y(I)=DLGC
   IF(METHOD.EQ.5) Y(I)=DIF
   IF(METHOD.EQ.6) Y(I)=DLGD
1000 FORMAT(I5,6D13.5)
54 CONTINUE
60 CONTINUE
   RETURN
   END
C
C   -----
C   SUBROUTINE MATINV(A,NP,B)
C
C   PURPOSE: TO INVERT THE MATRIX FOR PARAMETER ESTIMATION
C
C   IMPLICIT REAL*8 (A-H,O-Z)
C   DIMENSION A(7,7),B(7),INDEX(7,2)
C   DO 2 J=1,7
2   INDEX(J,1)=0
   I=0
4   AMAX=-1.0
   DO 12 J=1,NP
   IF(INDEX(J,1)) 12,6,12
6   DO 10 K=1,NP
   IF(INDEX(K,1)) 10,8,10
8   P=ABS(A(J,K))
   IF(P.LE.AMAX) GO TO 10
   IR=J
   IC=K
   AMAX=P
10  CONTINUE
12  CONTINUE
   IF(AMAX) 30,30,14
14  INDEX(IC,1)=IR
   IF(IR.EQ.IC) GO TO 18
   DO 16 L=1,NP
   P=A(IR,L)
   A(IR,L)=A(IC,L)
16  A(IC,L)=P

```

```

P=B(IR)
B(IR)=B(IC)
B(IC)=P
I=I+1
INDEX(I,2)=IC
18 P=1./A(IC,IC)
A(IC,IC)=1.0
DO 20 L=1,NP
20 A(IC,L)=A(IC,L)*P
B(IC)=B(IC)*P
DO 24 K=1,NP
IF(K.EQ.IC) GO TO 24
P=A(K,IC)
A(K,IC)=0.0
DO 22 L=1,NP
22 A(K,L)=A(K,L)-A(IC,L)*P
B(K)=B(K)-B(IC)*P
24 CONTINUE
GO TO 4
26 IC=INDEX(I,2)
IR=INDEX(IC,1)
DO 28 K=1,NP
P=A(K,IR)
A(K,IR)=A(K,IC)
28 A(K,IC)=P
I=I-1
30 IF(I) 26,32,26
32 RETURN
END

```

C  
C  
C  
C  
C

-----  
FUNCTION GAMMA(Z)

PURPOSE: TO CALCULATE THE GAMMA FUNCTION FOR POSITIVE Z

```

IMPLICIT REAL*8 (A-H,O-Z)
IF(Z.LT.33.) GO TO 2
GAMMA=1.D36
RETURN
2 X=Z
GAMMA=1.0
IF(X-2.0) 10,10,8
6 IF(X-2.0) 14,14,8
8 X=X-1.0
GAMMA=GAMMA*X
GO TO 6
10 IF(X-1.0) 12,16,14
12 GAMMA=GAMMA/X
X=X+1.0
14 Y=X-1.0
FY=1.0-Y*(.5771017-Y*(.985854-Y*(.8764218-Y*(.8328212-Y*(.5684729-
2Y*(.2548205-.0514993*Y))))))
GAMMA=GAMMA*FY
16 RETURN
END

```

C  
C  
C  
C  
C

-----  
FUNCTION BINC(X,A,B,BETA)

PURPOSE: TO CALCULATE THE INCOMPLETE BETA-FUNCTION

IMPLICIT REAL\*8 (A-H,O-Z)

```

DIMENSION T(200)
DATA NT/10/
NT1=NT+1
T(1)=-(A+B)*X/(A+1.0)
DO 2 I=2,NT,2
Y=FLOAT(I/2)
Y2=FLOAT(I)
T(I)=Y*(B-Y)*X/((A+Y2-1.0)*(A+Y2))
2 T(I+1)=-(A+Y)*(A+B+Y)*X/((A+Y2)*(A+Y2+1.0))
BINC=1.0
DO 4 I=1,NT
K=NT1-I
4 BINC=1.+T(K)/BINC
BINC=X**A*(1.-X)**B/(BINC*A*BETA)
RETURN
END

```

```

-----
SUBROUTINE PRINT(RETPLT,CONPLT,KP,MTYPE,TH,METHOD,NW)

```

```

PURPOSE: TO PRINT THE SOIL-HYDRAULIC PROPERTIES

```

```

IMPLICIT REAL*8(A-H,O-Z)
CHARACTER*12 RETPLT,CONPLT
DIMENSION TH(14)
WRITE(KP,1000) MTYPE
IF(KP.EQ.8) WRITE(7,1000) MTYPE
WCR=TH(8)
WCS=TH(9)
ALPHA=TH(10)
RN=TH(11)
RM=TH(12)
EXPO=TH(13)
CONDS=TH(14)
COND=0.0
DIF=0.0
RMN=RM*RN
DLGA=DLOG10(ALPHA)
RMT=FLOAT(MTYPE-2*((MTYPE-1)/2))
IF(MTYPE.GT.2) GO TO 4
AA=RM+RMT/RN
BB=1.-RMT/RN
IF(BB.GT.0.004) GO TO 2
WRITE(KP,1002) RN
IF(KP.EQ.8) WRITE(7,1002) RN
GO TO 28
2 BETA=GAMMA(AA)*GAMMA(BB)/GAMMA(RM+1.)
WCL=DMAX1(2./(2.+RM),0.2D0)
DLG1=(3.0-RMT)*DLOG10(RN/(BETA*(RMN+RMT)))
4 DLG2=3.0-RMT+EXPO+2.0/RMN
DLG3=DLOG10(RMN*ALPHA*(WCS-WCR))
DLG4=DLOG10(CONDS)

```

```

----- CALCULATE CURVE -----

```

```

OPEN(5,FILE=RETPLT,STATUS='UNKNOWN')
OPEN(6,FILE=CONPLT,STATUS='UNKNOWN')
DWC=1.0/FLOAT(NW-2)
DO 24 I=1,NW
RWC=FLOAT(I-2)*DWC
IF(I.EQ.1) RWC=0.25*DWC
IF(I.EQ.2) RWC=0.5*DWC
IF(I.EQ.NW) RWC=1.-0.5*DWC

```

```

WC=WCR+(WCS-WCR)*RWC
DLGW=DLOG10(RWC)
DLGC=DLG2*DLGW+DLG4
DLGP=-DLGA-DLGW/RMN
IF(DLGW.GT.(-6.*RM).AND.MTYPE.LT.5) DLGP=DLGP+DLOG10(1.-RWC**(1./
1RM))/RMN
IF(DLGP.GT.20..OR.DLGC.LT.-30..OR.DLGW.LT.(-15.*RM)) GO TO 24
PP=10.**DLGP
IF(MTYPE.GT.4) GO TO 18
DW=RWC**(1./RM)
IF(MTYPE.GT.2) GO TO 14
IF(DW.GT.1.D-06) GO TO 6
DLGC=DLGC+DLG1
DLGD=DLGC-DLG3-(RMN+1.)*DLGW/RMN
GO TO 20
6 IF(RWC-WCL) 8,8,10
8 TERM=BINC(DW,AA,BB,BETA)
GO TO 16
10 TERM=1.-BINC(1.-DW,BB,AA,BETA)
GO TO 16
14 TERM=1.-RWC*(ALPHA*PP)**RMN
IF(DW.LT.1.D-04) TERM=RM*DW*(1.-0.5*(RM-1.)*DW)
16 RELK=RWC**EXPO*TERM
IF(RMT.LT.1.5) RELK=RELK*TERM
DLGC=DLOG10(RELK)+DLG4
DLGD=DLGC-DLG3-(RMN+1.)*DLGW/RMN-(RN-1.)*DLOG10(1.-DW)/RN
GO TO 20
18 DLGD=DLG4-DLG3+(2.0-RMT+EXPO+1./RN)*DLGW
20 IF(ABS(DLGC).LT.35.) COND=10.**DLGC
IF(ABS(DLGD).LT.35.) DIF=10.**DLGD
WRITE(KP,1004) WC,PP,DLGP,COND,DLGC,DIF,DLGD
IF(KP.EQ.8) WRITE(7,1004) WC,PP,DLGP,COND,DLGC,DIF,DLGD
WRITE(5,1004) WC,PP
IF (METHOD.EQ.1.OR.METHOD.EQ.2) THEN
WRITE(6,1004) WC,COND
ELSE IF (METHOD.EQ.3.OR.METHOD.EQ.4) THEN
WRITE(6,1010) PP,COND
ELSE IF (METHOD.EQ.5.OR.METHOD.EQ.6) THEN
WRITE(6,1004) WC,DIF
ENDIF
24 CONTINUE
IF(MTYPE.GT.4) GO TO 26
PP=0.
WRITE(KP,1006) WCS,PP,CONDS,DLG4
IF(KP.EQ.8) WRITE(7,1006) WCS,PP,CONDS,DLG4
IF (METHOD.EQ.1.OR.METHOD.EQ.2) THEN
WRITE(6,1004) WC,CONDS
ELSE IF (METHOD.EQ.3.OR.METHOD.EQ.4) THEN
WRITE(6,1010) PP,CONDS
ENDIF
GO TO 28
26 PP=1./ALPHA
DLGP=DLOG10(PP)
DLGD=DLG4-DLG3
DIF=10.**DIF
WRITE(KP,1004) WCS,PP,DLGP,CONDS,DLG4,DIF,DLGD
IF(KP.EQ.8) WRITE(7,1004) WCS,PP,DLGP,CONDS,DLG4,DIF,DLGD
IF (METHOD.EQ.1.OR.METHOD.EQ.2) THEN
WRITE(6,1004) WC,CONDS
ELSE IF (METHOD.EQ.3.OR.METHOD.EQ.4) THEN
WRITE(6,1010) PP,CONDS
ELSE IF (METHOD.EQ.5.OR.METHOD.EQ.6) THEN


```

```

        WRITE(6,1004) WC,DIF
        ENDIF
28 CONTINUE
        CLOSE(5)
        CLOSE(6)

C
C -----
1000 FORMAT(/5X,'SOIL HYDRAULIC PROPERTIES (MTYPE =',I2,')'/5X,37(1H-
1/8X,'WC',8X,'P',8X,'LOGP',5X,'COND',7X,'LOGK',7X,'DIF',7X,'LOGD')
1002 FORMAT(/5X,'PARAMETER N IS TOO SMALL (N=',F8.5,'): THIS CASE IS N
10T EXECUTED')
1004 FORMAT(4X,F7.4,E13.4,F7.3,2(E13.4,F8.3))
1006 FORMAT(4X,F7.4,E13.4,7X,E13.4,F8.3)
1010 FORMAT(4X,E13.4,7X,E13.4)
        RETURN
        END


```

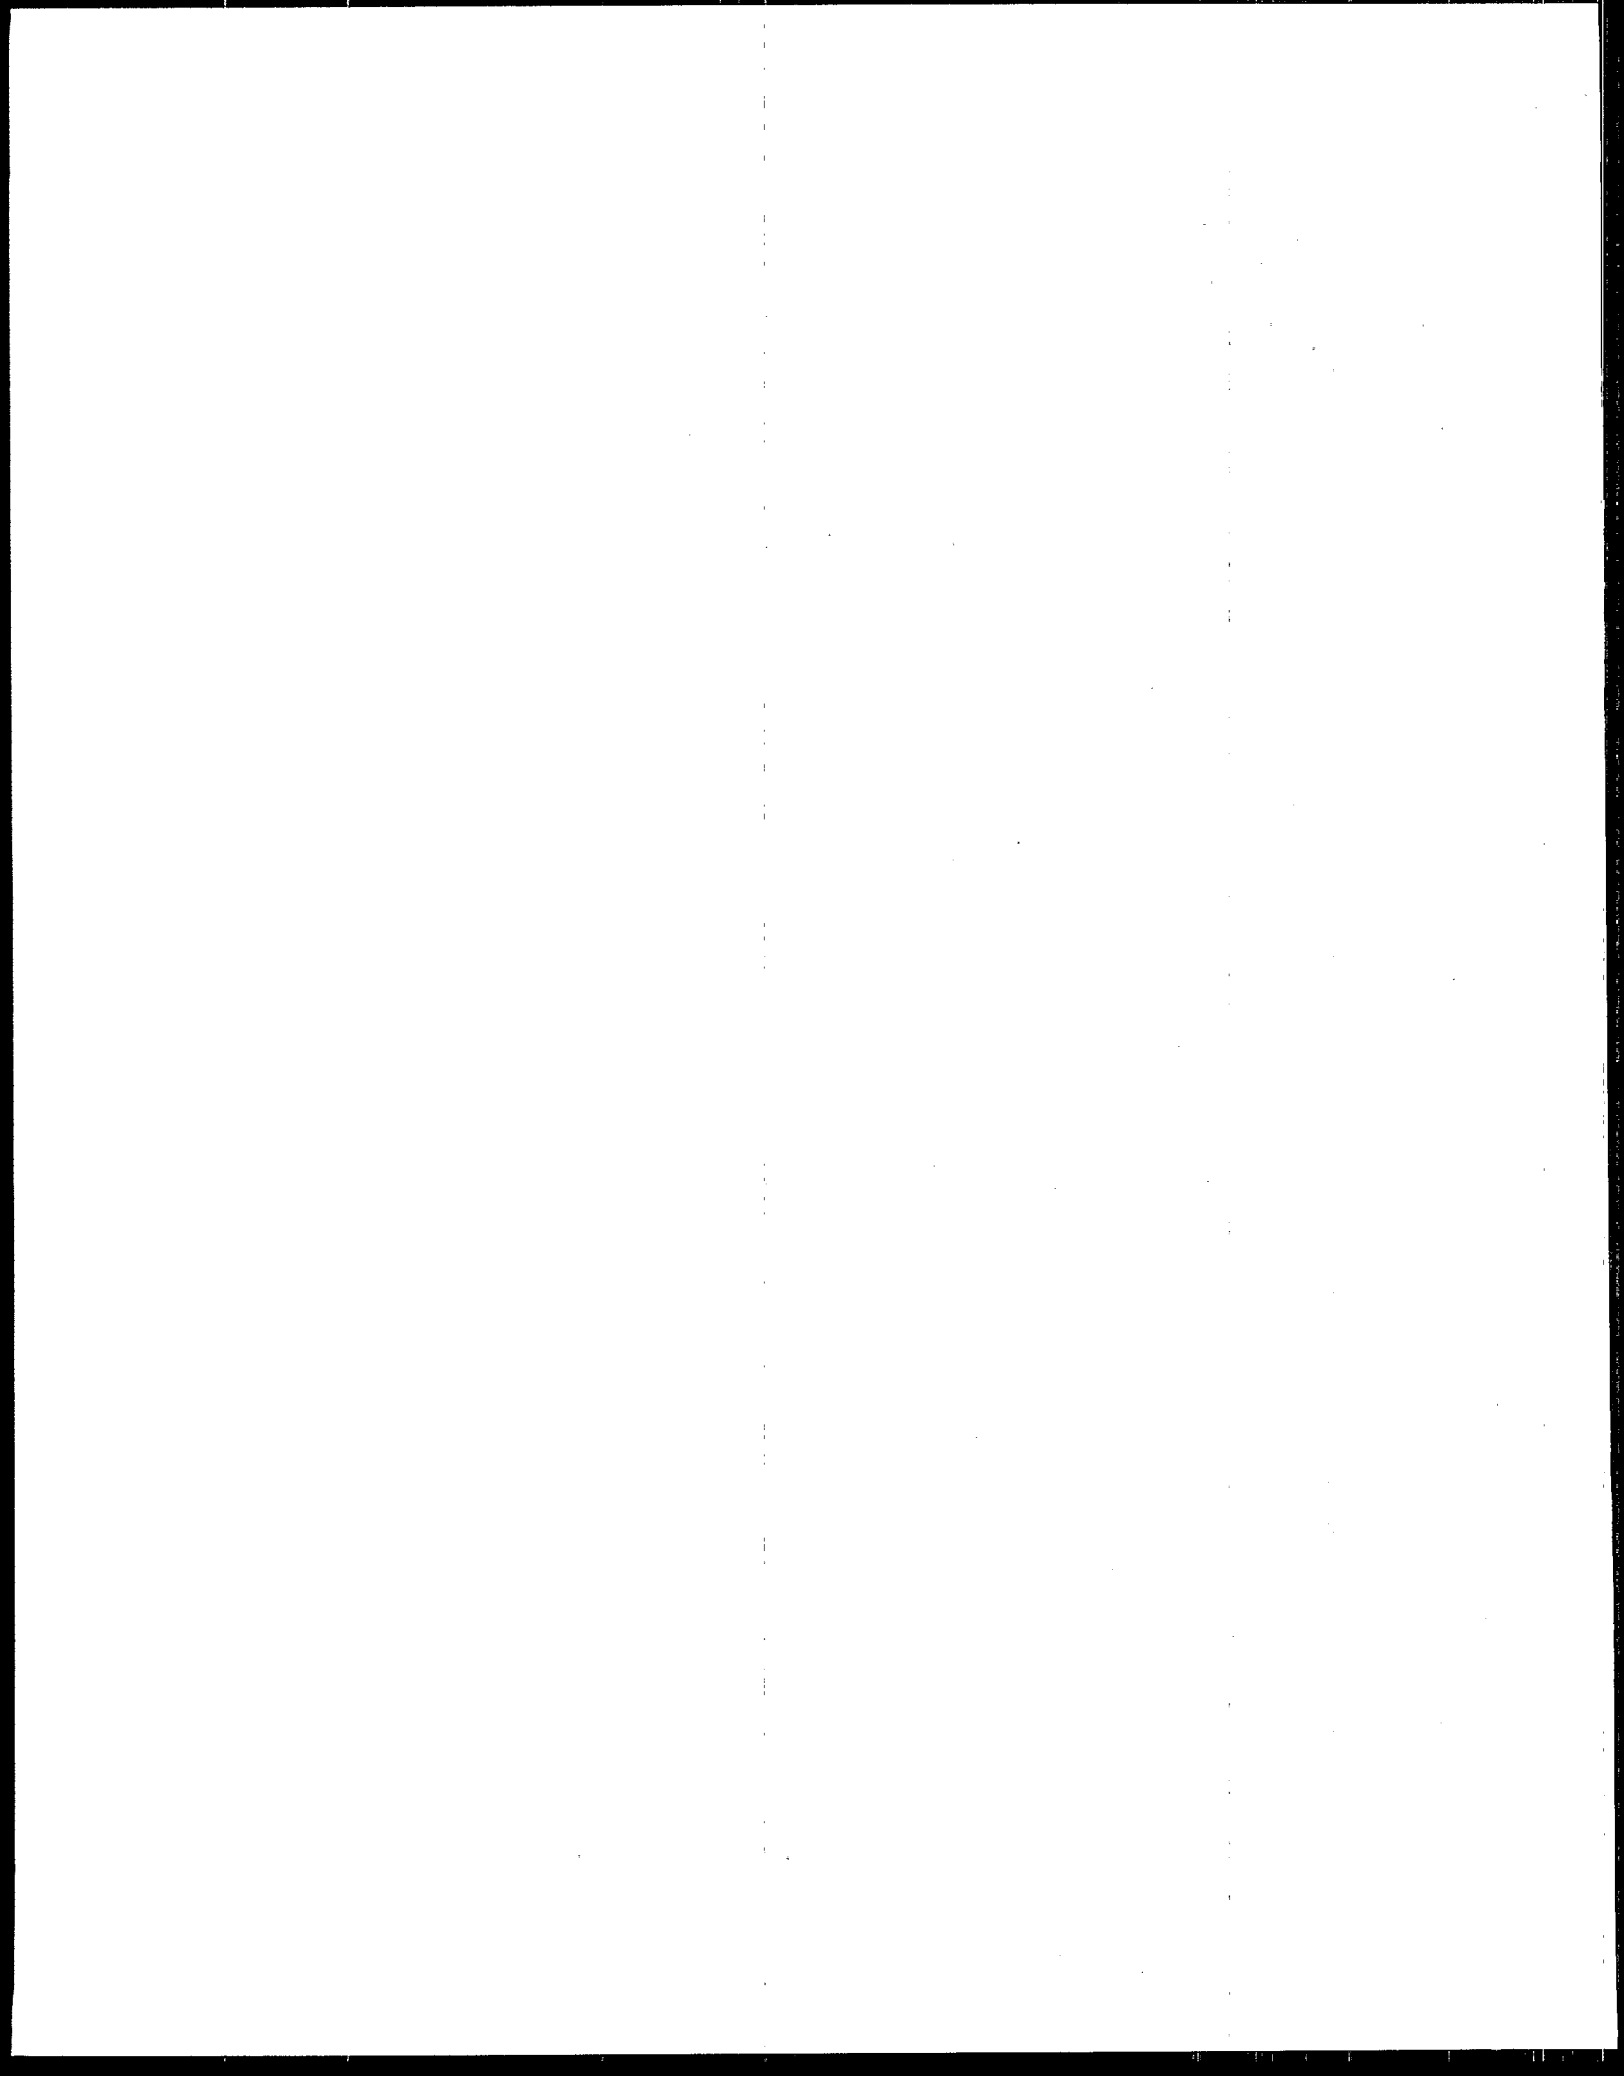




**TECHNICAL REPORT DATA**  
(Please read Instructions on the reverse before completing)

1. REPORT NO. EPA/600/2-91/065		2.		3. RECIPIENT'S ACCESSION NO. PB92-119668	
4. TITLE AND SUBTITLE  THE RETC CODE FOR QUANTIFYING THE HYDRAULIC FUNCTIONS OF UNSATURATED SOILS				5. REPORT DATE December 1991	
				6. PERFORMING ORGANIZATION CODE	
7. AUTHOR(S)  M. Th. van Genuchten, F.J. Leij, and S.R. Yates				8. PERFORMING ORGANIZATION REPORT NO.	
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Salinity Laboratory U.S. Department of Agriculture 4500 Glenwood Drive Riverside, California 92501				10. PROGRAM ELEMENT NO. CBWD1A	
				11. CONTRACT/GRANT NO.  DW12933934	
12. SPONSORING AGENCY NAME AND ADDRESS Robert S. Kerr Environmental Research Laboratory - Ada, OK U.S. Environmental Protection Agency P.O. Box 1198 Ada, OK 74820				13. TYPE OF REPORT AND PERIOD COVERED Research Report (4/90-9/91)	
				14. SPONSORING AGENCY CODE  EPA/600/15	
15. SUPPLEMENTARY NOTES  Project Officer: Joseph R. Williams					
16. ABSTRACT This report describes the RETC computer code for analyzing the soil water retention and hydraulic conductivity functions of unsaturated soils. These hydraulic properties are key parameters in any quantitative description of water flow into and through the unsaturated zone of soils. The program uses the parametric models of Brooks-Corey and van Genuchten to represent the soil water retention curve, and the theoretical pore-size distribution models of Mualem and Burdine to predict the unsaturated hydraulic conductivity function from observed soil water retention data. The report gives a detailed discussion of the different analytical expressions used for quantifying the soil water retention and hydraulic conductivity functions. A brief review is also given of the nonlinear least-squares parameter optimization method used for estimating the unknown coefficients in the hydraulic models. Several examples are presented to illustrate a variety of program options. The program may be used to predict the hydraulic conductivity from observed soil water retention data assuming that one observed conductivity value (not necessarily at saturation) is available. The program also permits one to fit analytical functions simultaneously to observed water retention and hydraulic conductivity data. The report serves as both a user manual and reference document. Detailed information is given on the computer program along with the instructions for data input preparation and sample input and output files. A listing of the source code is also provided.					
17. KEY WORDS AND DOCUMENT ANALYSIS					
a. DESCRIPTORS		b. IDENTIFIERS/OPEN ENDED TERMS		c. COSATI Field, Group	
Unsaturated hydraulic conductivity Unsaturated zone Soil water Soil moisture		Soil water retention curve			
18. DISTRIBUTION STATEMENT  RELEASE TO THE PUBLIC		19. SECURITY CLASS (This Report) UNCLASSIFIED		21. NO. OF PAGES 93	
		20. SECURITY CLASS (This page) UNCLASSIFIED		22. PRICE	

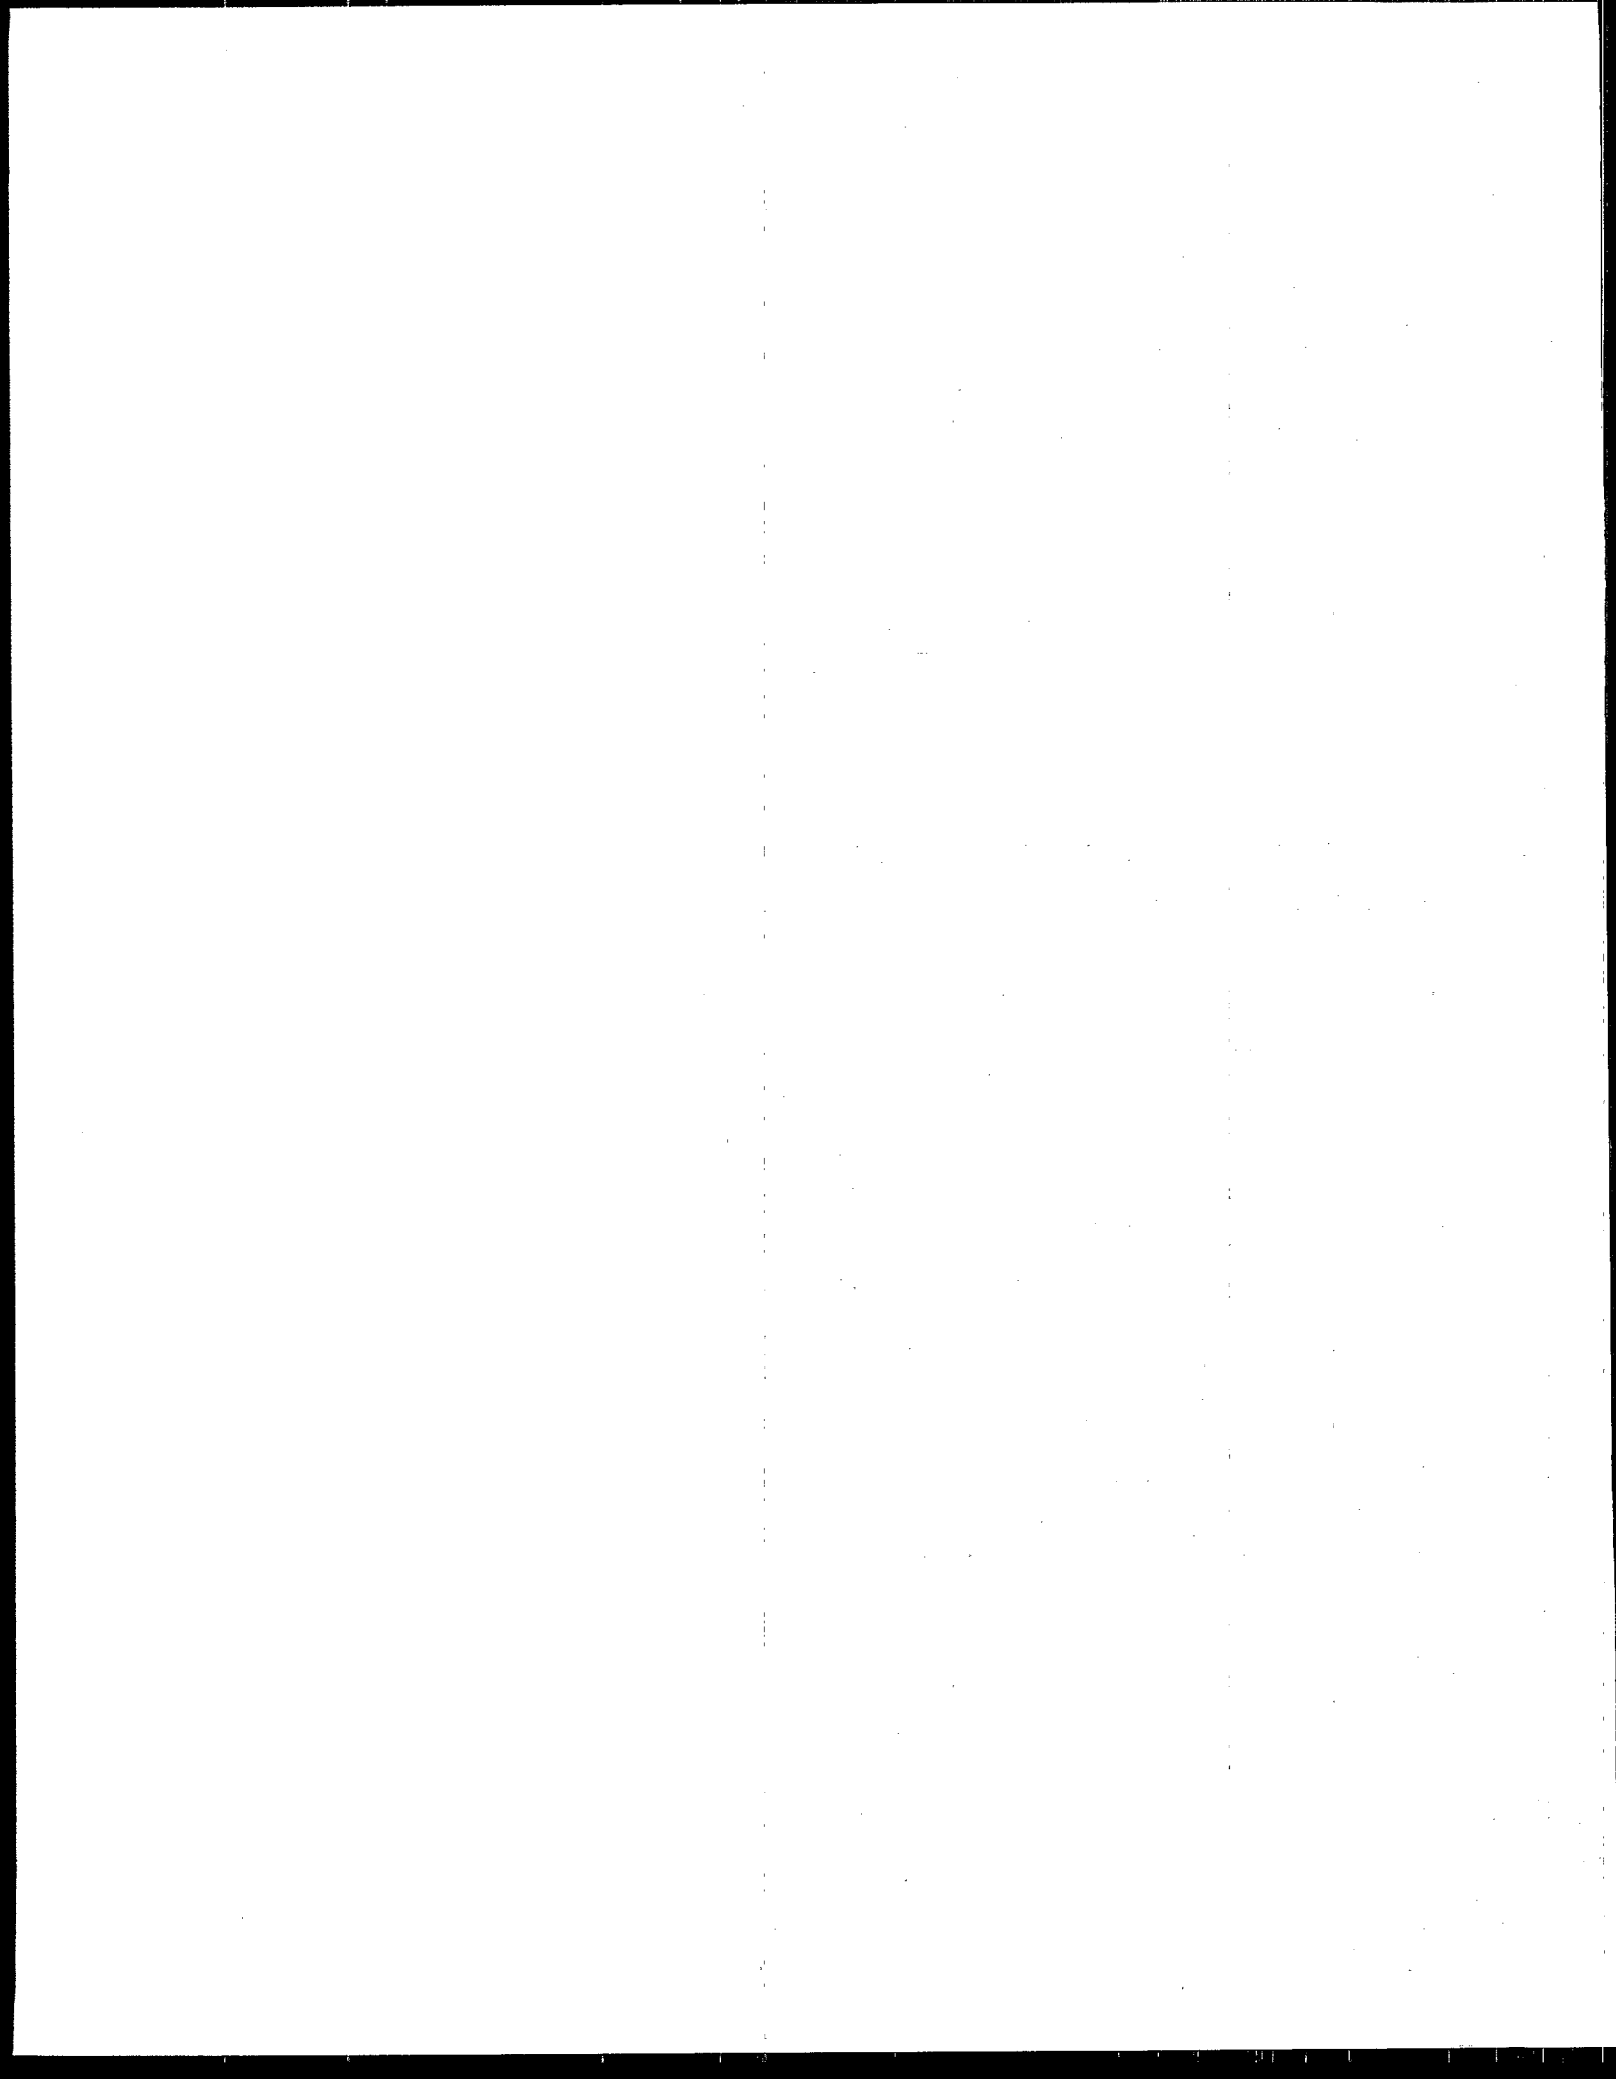



United States  
Environmental Protection Agency  
Center for Environmental Research Information  
Cincinnati, OH 45268

Official Business  
Penalty for Private Use  
\$300

EPA/600/2-91/065

Please make all necessary changes on the below label,  
detach or copy, and return to the address in the upper  
left-hand corner.

If you do not wish to receive these reports CHECK HERE ☐ ;  
detach, or copy this cover, and return to the address in the  
upper left-hand corner.

BULK RATE  
POSTAGE & FEES PAID  
EPA  
PERMIT No. G-35