




TECHNICAL REPORT DATA (Please read Instructions on the reverse before comple.)		
1. REPORT NO. EPA-600/R-96-080o	2.	3.  PB97-143069
4. TITLE AND SUBTITLE Methane Emissions from the Natural Gas Industry, Volumes 1-15 (Volume 15: Gas-Assisted Glycol Pumps)	5. REPORT DATE June 1996	6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S) L. Campbell, M. Campbell, M. Cowgill, D. Epperson, M. Hall, M. Harrison, K. Hummel, D. Myers, T. Shires, B. Stapper, C. Stapper, J. Wessels, and *	8. PERFORMING ORGANIZATION REPORT NO. DCN 96-263-081-17	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Radian International LLC P. O. Box 201088 Austin, Texas 78720-1088	10. PROGRAM ELEMENT NO.	11. CONTRACT/GRANT NO. 5091-251-2171 (GRI) 68-D1-0031 (EPA)
12. SPONSORING AGENCY NAME AND ADDRESS EPA, Office of Research and Development Air Pollution Prevention and Control Division Research Triangle Park, NC 27711	13. TYPE OF REPORT AND PERIOD COVERED Final; 3/91-4/96	14. SPONSORING AGENCY CODE EPA/600/13
15. SUPPLEMENTARY NOTES EPA project officer is D. A. Kirchgessner, MD-63, 919/541-4021. Cosponsor GRI project officer is R. A. Lott, Gas Research Institute, 8600 West Bryn Mawr Ave., Chicago, IL 60631. (*)H. Williamson (Block 7).		
16. ABSTRACT The 15-volume report summarizes the results of a comprehensive program to quantify methane (CH <sub>4</sub> ) emissions from the U.S. natural gas industry for the base year. The objective was to determine CH <sub>4</sub> emissions from the wellhead and ending downstream at the customer's meter. The accuracy goal was to determine these emissions within +/-0.5% of natural gas production for a 90% confidence interval. For the 1992 base year, total CH <sub>4</sub> emissions for the U.S. natural gas industry was 314 +/- 105 Bscf (6.04 +/- 2.01 Tg). This is equivalent to 1.4 +/- 0.5% of gross natural gas production, and reflects neither emissions reductions (per the voluntary Ameri-Gas Association/EPA Star Program) nor incremental increases (due to increased gas usage) since 1992. Results from this program were used to compare greenhouse gas emissions from the fuel cycle for natural gas, oil, and coal using the global warming potentials (GWPs) recently published by the Intergovernmental Panel on Climate Change (IPCC). The analysis showed that natural gas contributes less to potential global warming than coal or oil, which supports the fuel switching strategy suggested by the IPCC and others. In addition, study results are being used by the natural gas industry to reduce operating costs while reducing emissions.		
17. KEY WORDS AND DOCUMENT ANALYSIS		
a. DESCRIPTORS	b. IDENTIFIERS/OPEN ENDED TERMS	c. COSATI Field/Group
Pollution Emission Greenhouse Effect Natural Gas Gas Pipelines Methane	Pollution Prevention Stationary Sources Global Warming	13B 14G 04A 21D 15E 07C
18. DISTRIBUTION STATEMENT  Release to Public	19. SECURITY CLASS (This Report) Unclassified 20. SECURITY CLASS (This page) Unclassified	21. NO. OF PAGES 30 22. PRICE

## FOREWORD

The U.S. Environmental Protection Agency is charged by Congress with protecting the Nation's land, air, and water resources. Under a mandate of national environmental laws, the Agency strives to formulate and implement actions leading to a compatible balance between human activities and the ability of natural systems to support and nurture life. To meet this mandate, EPA's research program is providing data and technical support for solving environmental problems today and building a science knowledge base necessary to manage our ecological resources wisely, understand how pollutants affect our health, and prevent or reduce environmental risks in the future.

The National Risk Management Research Laboratory is the Agency's center for investigation of technological and management approaches for reducing risks from threats to human health and the environment. The focus of the Laboratory's research program is on methods for the prevention and control of pollution to air, land, water, and subsurface resources; protection of water quality in public water systems; remediation of contaminated sites and groundwater; and prevention and control of indoor air pollution. The goal of this research effort is to catalyze development and implementation of innovative, cost-effective environmental technologies; develop scientific and engineering information needed by EPA to support regulatory and policy decisions; and provide technical support and information transfer to ensure effective implementation of environmental regulations and strategies.

This publication has been produced as part of the Laboratory's strategic long-term research plan. It is published and made available by EPA's Office of Research and Development to assist the user community and to link researchers with their clients.

E. Timothy Oppelt, Director  
National Risk Management Research Laboratory

## EPA REVIEW NOTICE

This report has been peer and administratively reviewed by the U.S. Environmental Protection Agency, and approved for publication. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161.

PROTECTED UNDER INTERNATIONAL COPYRIGHT  
ALL RIGHTS RESERVED.  
NATIONAL TECHNICAL INFORMATION SERVICE  
U.S. DEPARTMENT OF COMMERCE

EPA-600/R-96-080o  
June 1996

**METHANE EMISSIONS FROM  
THE NATURAL GAS INDUSTRY,  
VOLUME 15: GAS-ASSISTED GLYCOL PUMPS**

**FINAL REPORT**

Prepared by:

Duane B. Myers  
Matthew R. Harrison

Radian International LLC  
8501 N. Mopac Blvd.  
P.O. Box 201088  
Austin, TX 78720-1088

DCN: 95-263-081-11

For

GRI Project Manager: Robert A. Lott  
GAS RESEARCH INSTITUTE  
Contract No. 5091-251-2171  
8600 West Bryn Mawr Ave.  
Chicago, IL 60631

and

EPA Project Manager: David A. Kirchgessner  
U.S. ENVIRONMENTAL PROTECTION AGENCY  
Contract No. 68-D1-0031  
National Risk Management Research Laboratory  
Research Triangle Park, NC 27711



## DISCLAIMER

**LEGAL NOTICE:** This report was prepared by Radian International LLC as an account of work sponsored by Gas Research Institute (GRI) and the U.S. Environmental Protection Agency (EPA). Neither EPA, GRI, members of GRI, nor any person acting on behalf of either:

- a. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any apparatus, method, or process disclosed in this report may not infringe privately owned rights; or
- b. Assumes any liability with respect to the use of, or for damages resulting from the use of, any information, apparatus, method, or process disclosed in this report.

**NOTE:** EPA's Office of Research and Development quality assurance/quality control (QA/QC) requirements are applicable to some of the count data generated by this project. Emission data and additional count data are from industry or literature sources, and are not subject to EPA/ORD's QA/QC policies. In all cases, data and results were reviewed by the panel of experts listed in Appendix D of Volume 2.

## RESEARCH SUMMARY

Title	Methane Emissions from the Natural Gas Industry, Volume 15: Gas-Assisted Glycol Pumps Final Report
Contractor	Radian International LLC  GRI Contract Number 5091-251-2171 EPA Contract Number 68-D1-0031
Principal Investigators	Duane B. Myers Matthew R. Harrison
Report Period	March 1991 - June 1996 Final Report
Objective	This report describes a study to quantify the annual methane emissions from gas-assisted glycol pumps, which are significant sources of methane emissions within the gas industry.
Technical Perspective	<p>The increased use of natural gas has been suggested as a strategy for reducing the potential for global warming. During combustion, natural gas generates less carbon dioxide (CO<sub>2</sub>) per unit of energy produced than either coal or oil. On the basis of the amount of CO<sub>2</sub> emitted, the potential for global warming could be reduced by substituting natural gas for coal or oil. However, since natural gas is primarily methane, a potent greenhouse gas, losses of natural gas during production, processing, transmission, and distribution could reduce the inherent advantage of its lower CO<sub>2</sub> emissions.</p> <p>To investigate this, Gas Research Institute (GRI) and the U.S. Environmental Protection Agency's Office of Research and Development (EPA/ORD) cofunded a major study to quantify methane emissions from U.S. natural gas operations for the 1992 base year. The results of this study can be used to construct global methane budgets and to determine the relative impact on global warming of natural gas versus coal and oil.</p>
Results	<p>The annual emissions rates for gas-assisted glycol pumps are production, <math>11.0 \pm 110\%</math> Bscf and gas processing, <math>0.17 \pm 228\%</math> Bscf.</p> <p>Based on data from the entire program, methane emissions from natural gas operations are estimated to be <math>314 \pm 105</math> Bscf for the 1992 base year. This is about <math>1.4 \pm 0.5\%</math> of gross natural gas production. The</p>

overall project also showed that the percentage of methane emitted for an incremental increase in natural gas sales would be significantly lower than the baseline case.

The program reached its accuracy goal and provides an accurate estimate of methane emissions that can be used to construct U.S. methane inventories and analyze fuel switching strategies.

#### Technical Approach

Glycol dehydrators are used to remove water from natural gas streams. A lean (low water content) glycol stream is contacted with the wet natural gas and the glycol absorbs most of the water. At locations without electricity, pumps that circulate the glycol may recover energy from the high-pressure gas/glycol mixture to provide motive force for the lean glycol. Additional gas is entrained with the glycol to supply the necessary energy. The entrained gas is then either removed from the glycol in a flash tank or in the reboiler when the glycol is regenerated. Gas removed in the flash tank is typically burned as fuel, but gas removed in the regenerator is often emitted to the atmosphere.

The techniques used to determine methane emissions were developed to be representative of annual emissions from the natural gas industry. However, it is impractical to measure every source continuously for a year. Therefore, emission rates for gas-assisted glycol pumps were determined by developing annual emission factors for typical units in each industry segment and extrapolating these data based on activity factors to develop a national estimate, where the national emission rate is the product of the emission factor and activity factor.

Emission factors were developed by using estimates of pump gas usage from manufacturer's data. Information from site visits and other research programs was used to develop the characteristics of representative glycol dehydrators. An emission factor was developed for gas-assisted glycol pumps that reported the amount of methane emitted per unit of natural gas throughput.

The development of activity factors for each industry segment are presented in a separate report. In general, the gas throughput for each industry segment was determined from surveys conducted across the entire industry. No active gas-assisted pumps were found during the site visits to transmission and storage stations, so the activity factors for these industry segments are zero.

#### Project Implications

For the 1992 base year the annual methane emissions estimate for the U.S. natural gas industry is 314 Bscf  $\pm$  105 Bscf ( $\pm$  33%). This is equivalent to 1.4%  $\pm$  0.5% of gross natural gas production. Results from

this program were used to compare greenhouse gas emissions from the fuel cycle for natural gas, oil, and coal using the global warming potentials (GWPs) recently published by the Intergovernmental Panel on Climate Change (IPCC). The analysis showed that natural gas contributes less to potential global warming than coal or oil, which supports the fuel switching strategy suggested by IPCC and others.

In addition, results from this study are being used by the natural gas industry to reduce operating costs while reducing emissions. Some companies are also participating in the Natural Gas-Star program, a voluntary program sponsored by EPA's Office of Air and Radiation in cooperation with the American Gas Association to implement cost-effective emission reductions and to report reductions to the EPA. Since this program was begun after the 1992 baseline year, any reductions in methane emissions from this program are not reflected in this study's total emissions.

Robert A. Lott  
Senior Project Manager, Environment and Safety

## TABLE OF CONTENTS

	<b>Page</b>
1.0 SUMMARY .....	1
2.0 INTRODUCTION .....	2
3.0 GAS-ASSISTED PUMP APPLICATIONS .....	3
4.0 DATA SOURCES .....	6
5.0 ACTIVITY FACTOR .....	7
6.0 EMISSION FACTOR .....	10
6.1 Emission-Affecting Characteristics .....	10
6.2 Emission Factor Calculations .....	10
7.0 ANNUAL METHANE EMISSIONS .....	14
8.0 REFERENCES .....	15
APPENDIX A - Source Sheets .....	A-1

## LIST OF FIGURES

	Page
3-1 Isometric Flow Diagram of a Glycol Dehydrator Unit . . . . .	4
3-2 Block Process Flow Diagram of Glycol Pumping System . . . . .	5

## LIST OF TABLES

	Page
5-1 U.S. Gas Industry Characteristics for Calculation of Activity Factors for Gas-Assisted Glycol Pumps . . . . .	8
5-2 U.S. Gas Industry Characteristics for Calculation of Emission Factors for Gas-Assisted Glycol Pumps . . . . .	9

## 1.0 SUMMARY

This report is one of several volumes that provide background information supporting the Gas Research Institute and U.S. Environmental Protection Agency Office of Research and Development (GRI-EPA/ORD) methane emissions project. The objective of this comprehensive program is to quantify the methane emissions from the gas industry for the 1992 base year to within  $\pm 0.5\%$  of natural gas production starting at the wellhead and ending immediately downstream of the customer's meter.

This report documents the basis for calculating the emissions from gas-assisted glycol pumps used in the natural gas industry. Gas-assisted glycol pumps are one of the most common types of glycol recirculation pumps. Gas pressure drives the pump. High-pressure glycol and gas are let down across the driver side of the pump, and the energy recovered is used to recirculate the glycol. Most of these pumps emit the spent gas to the atmosphere through the glycol reboiler. Emissions attributable to these pumps are a small but measurable source of methane.

The annual emissions for gas-assisted glycol pumps are production,  $10.96 \pm 110\%$  Bscf and gas processing,  $0.17 \pm 228\%$  Bscf.

## 2.0 INTRODUCTION

This report describes gas-assisted pumps, identifies their characteristics that affect methane emissions, and provides annual U.S. emissions for the 1992 base year. Background information on gas-assisted pumps is given in Section 3, and sources of data are listed in Section 4. Activity factors, which are the volume of gas processed in each industry segment by dehydrators with gas-assisted pumps, are explained in Section 5. Emission factors, which are the methane emissions per volume of gas processed, are explained in Section 6. Annual methane emissions for pumps in each industry segment are given in Section 7.

For background information on general dehydrator characteristics and for details on other methane emissions attributed to dehydrators, refer to Volume 14 on glycol dehydrators.<sup>1</sup>



### 3.0 GAS-ASSISTED PUMP APPLICATIONS

All industrial pumps have two major components: a driver side and a motive side. The driver provides the energy for pumping, and the motive side delivers the energy to the fluid being moved. In a typical centrifugal pump, the driver is an electric motor and the motive side is an impeller within a pump casing. This report discusses positive-displacement, gas-assisted glycol pumps (also called gas-driven pumps) that discharge natural gas. Other positive-displacement pumps that discharge gas are discussed in a separate report, Volume 13 on chemical injection pumps.<sup>2</sup>

In many glycol dehydrators in the gas industry, small gas-assisted pumps are used to circulate the glycol. These pumps recover energy from the high-pressure rich glycol/gas mixture leaving the absorber and use that energy to pump the low-pressure lean glycol back into the absorber. Figure 3-1 shows an isometric flow diagram of a typical field glycol dehydrator unit with a gas-assisted glycol pump.

Normal electrical pump configurations would have level controllers in the absorber tower to prevent gas from leaving the absorber bottom with the rich glycol. The gas-assisted pumps used in glycol circulation have a specialized design and construction. The gas-assisted glycol pump configuration, by design, has no level control; natural gas is intentionally entrained with the rich glycol feeding the pump. The natural gas mixed with the rich glycol is a source of pressure energy. The gas is not burned, as in an engine driver, but is discharged from the pump at a lower pressure. The spent gas is not emitted directly from the pump, but is exhausted into the pumped glycol stream that flows to the regenerator.

If the glycol unit has a flash tank, most of the pump exhaust gas can be recovered and used as fuel or stripping gas. If the flash gas is used as stripping gas, or if there is no flash tank, all of the pump exhaust gas will be vented through the regenerator's atmospheric vent stack. Figure 3-2 shows a block flow diagram of the pump configuration. The internal operation of the pumps is complex. For a detailed description, refer to the manufacturer's catalogue.<sup>3</sup>

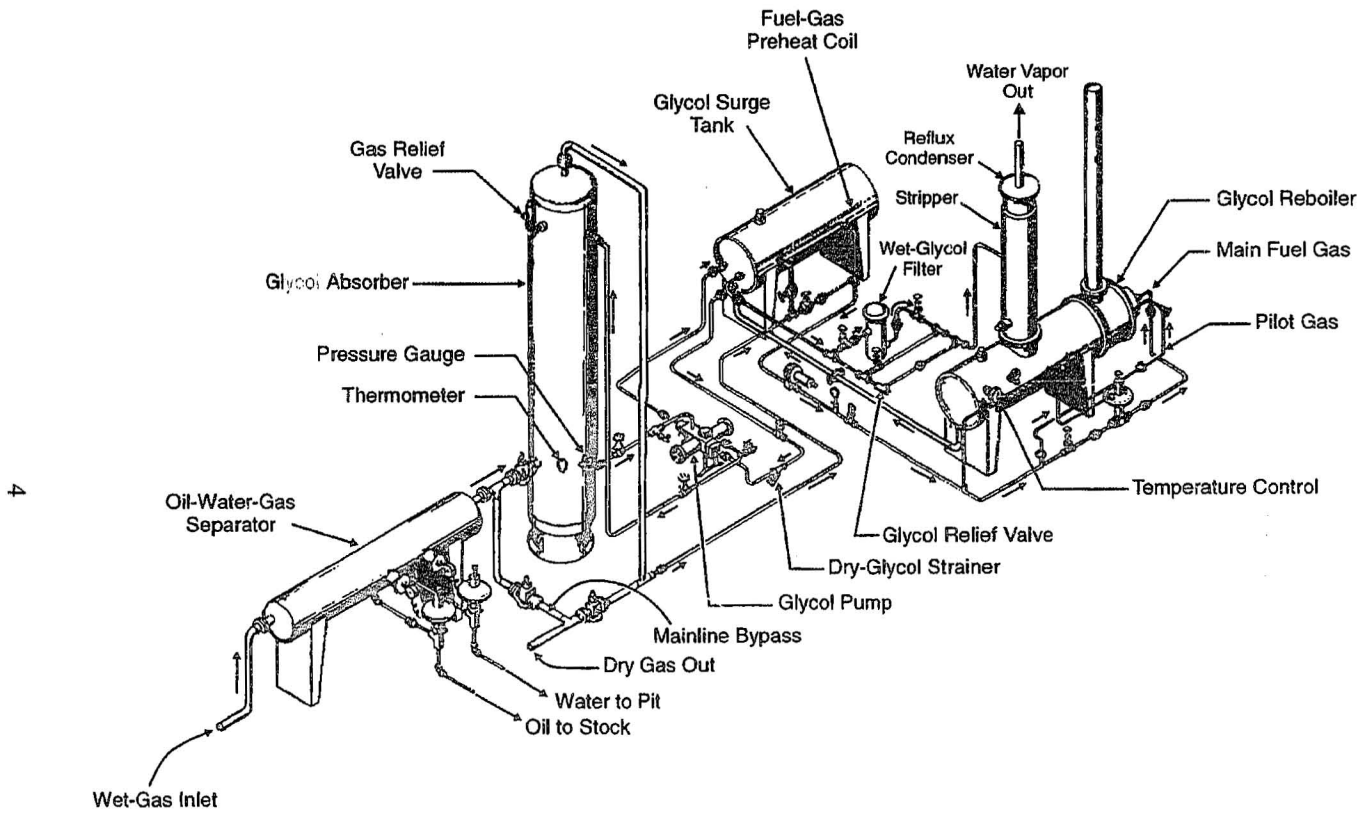


Figure 3-1. Isometric Flow Diagram of a Glycol Dehydrator Unit

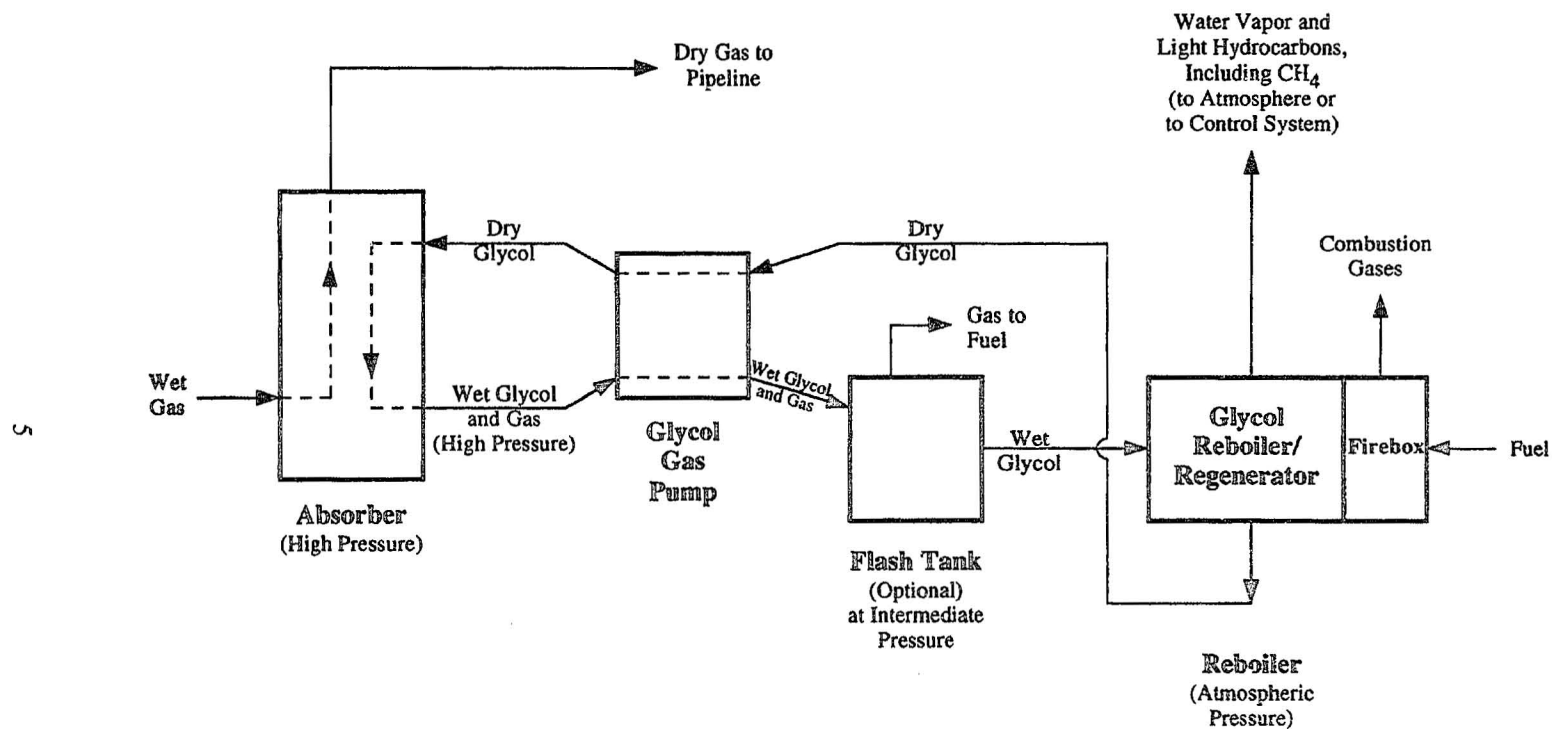


Figure 3-2. Block Process Flow Diagram of Glycol Pumping System

#### 4.0 DATA SOURCES

The manufacturer's data for a pump operating at typical design conditions were used to calculate emissions. No direct measurements of pump gas usage were used in the calculations.

Kimray, the leading manufacturer of gas-assisted glycol pumps, provided technical data. The most fundamental characteristic of these pumps is the gas usage per unit of glycol pumped, usually expressed as actual cubic feet<sup>a</sup> (acf) per gallon of glycol. Therefore, the usage rate and inherent emissions per pump depend on the size of the unit. Kimray reports that gas usage ranges from 0.081 acf/gallon for high-pressure pumps (>400 psig) to 0.130 acf/gallon for low-pressure pumps (<400 psig).<sup>3</sup> These data underwent QA analysis by other pump vendors and industry reviewers and were revised by Kimray as a result of that analysis. As a result, the manufacturer's data are believed to be accurate and representative.

To estimate the glycol circulation rate for a typical dehydrator, and consequently, the amount of gas used to drive the pump, it was necessary to choose values for wet gas water content and glycol circulated per pound of water. It was assumed that a typical high-pressure dehydrator would remove 53 pounds of water per MMscf of gas and a typical low-pressure dehydrator would remove 127 pounds of water per MMscf of gas. The design glycol-to-gas ratio is calculated using 3 gallons of glycol per pound of water removed.

---

<sup>a</sup>Actual cubic feet of gas are used in the calculations because the pump cylinders fill with the same ratio of gas and glycol regardless of the pressure.<sup>3</sup>

## 5.0 ACTIVITY FACTOR

The activity factor development described here for glycol circulation pumps is also reported in detail in Volume 5 on activity factors.<sup>5</sup> The activity factor for gas-driven glycol circulation pumps is calculated on the same basis as the dehydrator vented emissions in Volume 14 (i.e., Tscf/year gas throughput for each industry segments).<sup>1</sup> The total gas throughputs listed in Table 5-1 were multiplied by the fraction of dehydrators using gas-driven pumps to determine the gas-driven pump activity factor. This value is based on the average from Radian site surveys of the number of pumps per dehydrator. The resulting gas throughputs for glycol dehydrators using gas-assisted pumps are as follows:

- Production: 11.1 Tscf/year  $\pm$  62.0%;
- Processing: 0.96 Tscf/year  $\pm$  192%;
- Transmission: 0 Tscf/year; and
- Storage: 0 Tscf/year.

These figures are based on total dehydrator gas throughput for each industry segment and the estimates of gas-assisted pump usage based on site visit data. No active gas-assisted pumps were found at transmission or storage facilities during the site visits, so no throughput is reported for those two segments. Although there may be a small number of gas-assisted pumps in transmission or storage service, the resulting methane emissions will be insignificant in comparison to the production and processing emissions.

Table 5-1 lists the characteristics of glycol dehydrators used to develop the activity factors for gas-assisted pumps. Table 5-2 lists some other characteristics of glycol dehydrators that affect emissions from gas-assisted pumps but are not used in the activity factor calculations. These characteristics are accounted for in the emission factor calculations described in Section 5. These characteristics were developed from the site visit data discussed in the Activity Factor Report.<sup>1</sup>

**TABLE 5-1. U.S. GAS INDUSTRY CHARACTERISTICS FOR CALCULATION OF ACTIVITY  
FACTORS FOR GAS-ASSISTED GLYCOL PUMPS**

Segment	Industry Segment Gas Throughput	Fraction of Dehydrators with Active Gas Pumps	Throughput for Dehydrators with Gas-Assisted Pumps
Production	12.4 Tscf/yr $\pm$ 61.9%	0.891 $\pm$ 2.79%	11.1 Tscf/yr $\pm$ 62.0%
Gas Processing Plants	8.63 Tscf/yr $\pm$ 22.4%	0.111 $\pm$ 186%	0.958 Tscf/yr $\pm$ 192%
Transmission	1.09 Tscf/yr $\pm$ 144%	0	
Storage	2.00 Tscf/yr $\pm$ 25%	0	
Total Gas Industry	24.1 Tscf/yr $\pm$ 33.5%		12.1 Tscf/yr $\pm$ 58.6%

**TABLE 5-2. U.S. GAS INDUSTRY CHARACTERISTICS FOR CALCULATION  
OF EMISSION FACTORS FOR GAS-ASSISTED GLYCOL PUMPS**

Segment	Fraction of Dehydrators with Flash Drums	Fraction of Dehydrators with Vapor Recovery that Consumes Methane
Production	$0.265 \pm 8.35\%$	$0.0118 \pm 73.1\%$
Gas Processing Plants	$0.667 \pm 10.1\%$	$0.100 \pm 90.0\%$
Transmission	$0.669 \pm 9.70\%$	$0.148 \pm 80.3\%$
Storage	$0.520 \pm 33.6\%$	$0.160 \pm 80.0\%$

## 6.0 EMISSION FACTOR

In general, the emission factor for a Kimray pump was determined to be a function of the pump gas usage and the vent controls on the dehydrator. The use of a flash tank virtually eliminates methane emissions associated with pump gas because the flash gas is typically burned as fuel.

### 6.1 Emission-Affecting Characteristics

The characteristics that affect methane emissions from the gas-assisted pumps in glycol circulation service are:

- Frequency of operation (pumping rate);
- Size of the unit (volume displacement of the motive chamber);
- Supply gas pressure;
- Inlet methane composition; and
- Use of a flash tank;
  - Percentage of units that have a tank
  - Disposition of the flash gas.

It has been assumed that the operation of the glycol reboiler has no effect on methane emissions to the atmosphere vent arising from the gas-driven pump. If the methane reaches the regenerator/reboiler, all of the methane from the pump exhaust is assumed to vent to the atmosphere.

### 6.2 Emission Factor Calculations

The following equation was used to determine the emission factor for the average pump in each industry segment:



$$EF_{\text{pump}} = PGU \times CR \times WR \times OC \times F_{\text{ND}} \times F_{\text{NVC}} \quad (1)$$

where:

$PGU$  = pump gas usage (scf  $\text{CH}_4$ )/(gallon glycol)

$CR$  = circulation ratio (gallons glycol)/(pound water removed from gas)

$WR$  = water removed from gas (pounds  $\text{H}_2\text{O}$ /MMscf gas)

$OC$  = overcirculation ratio

$F_{\text{ND}}$  = fraction of dehydrators without flash tanks

$F_{\text{NVC}}$  = fraction of the dehydrators without combustion vent controls

$CR$ ,  $WR$ ,  $F_{\text{ND}}$ , and  $F_{\text{NVC}}$  were discussed in Sections 4 and 5. The overcirculation factor ( $OC$ ) was determined from data collected from ten glycol dehydrators.<sup>6</sup> The  $PGU$  rate depends on the glycol circulation rate, the absorber operating pressure and temperature, and the pump model.  $PGU$  was determined from values reported by the manufacturer. High pressure pumps use on average 0.081 acf gas per gallon of glycol, which corresponds to 4.49 scf/gallon for gas at 800 psig. Low pressure pumps use on average 0.130 acf gas per gallon of glycol, which is equivalent to 2.78 scf/gallon for 300 psig gas. Multiplying by 83 mole% methane in the pump gas results in a methane usage of 3.73 scf/gallon for high pressure and 2.31 scf/gallon for low pressure. The estimated split for high and low pressure in production is 80% high pressure and 20% low pressure.<sup>7</sup> All processing pumps were assumed to be high pressure.

The final emission factor ( $EF_{\text{pump}}$ ) for methane from an average gas-assisted glycol pump was determined for the production and processing industry segments using Equation 1. The transmission and storage segments do not use gas-assisted pumps. The results are as follows:

Production - High Pressure:

$$PGU = 3.73 \text{ scf/gallon} \pm 30\%$$

$$CR = 3.0 \text{ gallons glycol/lb H}_2\text{O} \pm 33.3\%$$

$$WR = 53 \text{ lb H}_2\text{O/MMscf gas} \pm 20\%$$

$$OC = 2.1 \pm 71.4\%$$

$$F_{ND} = 0.735 \pm 2.99\%$$

$$F_{NVC} = 0.988 \pm 0.87\%$$

$$\begin{aligned} EF_{\text{pump}} &= (3.73) \times (3.0) \times (53) \times (2.1) \times (0.735) \times (0.988) \\ &= 904.5 \text{ scf/MMscf} \pm 95.0\% \end{aligned}$$

Production - Low Pressure:

$$PGU = 2.31 \text{ scf/gallon} \pm 30\%$$

$$CR = 3.0 \text{ gallons glycol/lb H}_2\text{O} \pm 33.3\%$$

$$WR = 127 \text{ lb H}_2\text{O/MMscf gas} \pm 20\%$$

$$OC = 2.1 \pm 71.4\%$$

$$F_{ND} = 0.735 \pm 2.99\%$$

$$F_{NVC} = 0.988 \pm 0.87\%$$

$$\begin{aligned} EF_{\text{pump}} &= (2.31) \times (3.0) \times (127) \times (2.1) \times (0.735) \times (0.988) \\ &= 1342.2 \text{ scf/MMscf} \pm 95.0\% \end{aligned}$$

Production - Combined:

$$\text{Fraction High pressure} = 0.80 \pm 12.5\%$$

$$\text{Fraction Low Pressure} = 0.20 \pm 50\%$$

$$EF \text{ (High Pressure)} = 904.45 \text{ scf/MMscf} \pm 95.0\%$$

$$EF \text{ (Low pressure)} = 1342.18 \text{ scf/MMscf} \pm 95.0\%$$

$$\begin{aligned} EF_{\text{pump}} &= (0.80) (904.45) + (0.20) (1342.18) \\ &= 992.00 \text{ scf/MMscf} \pm 77.29\% \end{aligned}$$

Processing:

$$\text{PGU} = 3.73 \text{ scf/gallon} \pm 30\%$$

$$\text{CR} = 3.0 \text{ gallons glycol/lb H}_2\text{O} \pm 33.3\%$$

$$\text{WR} = 53 \text{ lb H}_2\text{O/MMscf gas} \pm 20\%$$

$$\text{OC} = 1.0 \pm 0\%$$

$$\text{F}_{\text{ND}} = 0.333 \pm 20.1\%$$

$$\text{F}_{\text{NVC}} = 0.900 \pm 10\%$$

$$\begin{aligned}\text{EF}_{\text{pump}} &= (3.73) \times (3.0) \times (53) \times (1.0) \times (0.333) \times (0.900) \\ &= 177.8 \text{ scf/MMscf} \pm 56.85\%\end{aligned}$$

## 7.0 ANNUAL METHANE EMISSIONS

Annual methane emissions from gas-assisted glycol pumps were calculated to be 11.1 Bscf. This was calculated by multiplying the activity factor (number of pumps) by the emission factor (scf/MMscf) for each industry segment and then summing the values.

The results are as follows:

- Production:  
 $(992.0 \text{ scf/MMscf}) \times 11.05 \text{ Tscf} = 10.96 \text{ Bscf}$
- Gas Processing:  
 $(177.745 \text{ scf/MMscf}) \times 0.9579 \text{ Tscf} = 0.170 \text{ Bscf}$
- Transmission: no emissions
- Storage: no emissions

## 8.0 REFERENCES

1. Myers, D.B. *Methane Emissions from the Natural Gas Industry, Volume 14: Glycol Dehydrators*. Final Report, GRI-94/0257.31 and EPA-600/R-96-080n. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.
2. Shires, T.M. *Methane Emissions from the Natural Gas Industry, Volume 13: Chemical Injection Pumps*. Final Report, GRI-94/0257.30 and EPA-600/R-96-080m. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.
3. Kimray, Inc. *Glycol Pumps and Accessories*, Tulsa, OK, undated.
4. Sivalls, Inc. *Glycol Dehydration Design Manual*. Odessa, TX, 1982.
5. Stapper, B.E. *Methane Emissions from the Natural Gas Industry, Volume 5: Activity Factors*. Final Report, GRI-94/0257.22 and EPA-600/R-96-080e. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.
6. Rueter, C.O., et al. *Glycol Dehydrator Emissions: Sampling and Analytical Methods and Estimation Techniques*. GRI-94/0324. Gas Research Institute, Chicago, IL. . March 1995.
7. Memorandum from Richard Garrett (Roger-Tech, Inc., Houston, TX) to Rhone Resch (U.S. EPA OAR), March 4, 1996.
8. Texas Mid-Continent Oil and Gas Association Glycol Dehydrator Survey. Personal communication with L. Litzen (Shell Oil Western Exploration and Production) and C.O. Rueter (Radian Corporation). June 17, 1991.

## **APPENDIX A**

### **Source Sheets**

**P-7**  
**PRODUCTION SOURCE SHEET**

<b>SOURCES:</b>	Dehydrators
<b>COMPONENTS:</b>	Gas Driven Kimray Pumps
<b>OPERATING MODE:</b>	Normal Operation
<b>EMISSION TYPE:</b>	Unsteady, Vented
<b>ANNUAL EMISSIONS:</b>	10.96 Bscf $\pm$ 110.0%

**BACKGROUND:**

Gas driven Kimray glycol circulation pumps use a mixed phase of wet glycol liquid and absorber gas to drive pistons that pump dry (lean) glycol circulation. Unlike chemical injection pumps which vent the driving gas directly to the atmosphere, Kimray pumps pass the driving gas along with the wet glycol to the reboiler. In the reboiler the methane is driven off into the vent line. Depending on dehydrator vent gas dispositions, the methane may be vented to the atmosphere or controlled and burned.

**EMISSION FACTOR: (992.0 scf CH<sub>4</sub>/MMscf gas processed)**

The average glycol pump gas emission factor was determined by an equation describing the gas generation and disposition of gas from the pump. The disposition of gas generated by the pump depends upon the existence of a flash tank and vent controls. Measured and estimated parameters were input into the equation.

In general, the emission factor for a gas-assisted pump was determined by the following equation:

$$EF_{\text{pump}} = PGU \times CR \times WR \times OC \times F_{NT} \times F_{NVC}$$

**EF DATA SOURCES:**

- Equation 1, i.e. the effects of operating variables on emissions, was defined by the report on *Methane Emissions from the Natural Gas Industry, Volume 15, Gas-Assisted Glycol Pumps* (1).
- CR = glycol circulation ratio = 3.0 gal glycol/lb water  $\pm$  33.3%.
- WR = water removed from gas  
= 53 lb/MMscf  $\pm$  20% for high pressure  
= 127 lb/MMscf  $\pm$  20% for low pressure
- OC = factor to account for overcirculation of glycol = 2.1  $\pm$  71.4%.
- F<sub>NT</sub> = fraction of dehydrators without flash tanks = 0.735  $\pm$  2.99%.
- F<sub>NVC</sub> = fraction of the dehydrators without combustion vent controls = 0.9882  $\pm$  0.87%.
- PGU = pump gas usage (assume 83% methane)  
= 3.73 scf CH<sub>4</sub>/gal glycol  $\pm$  30% for high pressure

$$= 2.31 \text{ scf CH}_4/\text{gal glycol} \pm 30\% \text{ for low pressure}$$

#### CALCULATION METHOD:

It is estimated that 80% of the production dehydrators would be high pressure (R. Garrett memo) (4). The overall production emission factor is then calculated as a weighted average of the high and low pressure emission factors.

$$\begin{aligned} \text{EF (high pressure)} &= (3.73 \text{ scf/gal}) \times (3.0 \text{ gal/lb H}_2\text{O}) \times (53 \text{ lb H}_2\text{O/MMscf}) \\ &\times (2.1) \times (0.735) \times (0.9882) \\ &= 904.45 \text{ scf/MMscf} \pm 95.04\% \end{aligned}$$

$$\begin{aligned} \text{EF (low pressure)} &= (2.31 \text{ scf/gal}) \times (3.0 \text{ gal/lb H}_2\text{O}) \times (127 \text{ lb H}_2\text{O/MMscf}) \\ &\times (2.1) \times (0.735) \times (0.9882) \\ &= 1342.18 \text{ scf/MMscf} \pm 95.04\% \end{aligned}$$

$$\begin{aligned} \text{EF (Production)} &= (0.80 \pm 12.5\%) (904.45 \text{ scf/MMscf} \pm 95.04\%) + \\ &(0.20 \pm 50\%) (1342.18 \text{ scf/MMscf} \pm 95.04\%) \\ &= 992.00 \text{ scf CH}_4/\text{MMscf} \pm 77.29\% \end{aligned}$$

#### EF ACCURACY: ( $\pm 77.29\%$ )

Basis:

1. Assumption: The manufacturer's data and ranges are relatively accurate ( $\pm 30\%$ ).
2. Dehydrator characteristics based on site visit observations and TMOGA survey.

#### ACTIVITY FACTOR: (11.05 Tscf/year in the production segment with gas-assisted pumps)

The volume of gas processed through dehydrators using gas-assisted pumps was calculated from the total throughput for production dehydrators and the fraction of dehydrators using gas-assisted pumps determined from site visits. The activity factor is then:

$$\begin{aligned} \text{AF} &= (\text{fraction of dehydrators with gas-assisted pumps}) \times (\text{throughput for production dehydrators}) \\ &= (0.8913 \pm 2.79\%) \times (12.4 \text{ Tscf/year} \pm 48.21\%) \\ &= 11.05 \text{ Tscf/year} \pm 61.96\% \end{aligned}$$

#### AF DATA SOURCES:

1. See *Methane Emissions from the Natural Gas Industry, Volume 14: Glycol Dehydrators* (2) for an explanation of production dehydrator throughput. See the *Methane Emissions from the Natural Gas Industry, Volume 5: Activity Factors* (3) for more details.
2. Fraction of dehydrators using gas-assisted pumps came from data from site visits.

#### AF ACCURACY: ( $\pm 61.96\%$ )

Basis:

Calculated from confidence limits of gas throughput and fraction of dehydrators by standard error propagation analysis.



**ANNUAL METHANE EMISSIONS: (10.962 Bscf  $\pm$  110.03%)**

The annual methane emissions were determined by multiplying an emission factor (scf CH<sub>4</sub>/MMscf) by the total throughput for production dehydrators using gas-assisted pumps.

$$(992.00 \text{ scf/MMscf}) \times (11.05 \text{ Tscf}) = 10.962 \text{ Bscf } (\pm 110.03\%)$$

**REFERENCES**

1. Myers, D.B. and M.R. Harrison. *Methane Emissions from the Natural Gas Industry, Volume 15: Gas-Assisted Glycol Pumps*. Final Report, GRI-94/0257.33 and EPA-600/R-96-080c. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.
2. Myers, D.B. *Methane Emissions from the Natural Gas Industry, Volume 14: Glycol Dehydrators*. Final Report, GRI-94/0257.31 and EPA-600/R-96-080n. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.
3. Stapper, B.E. *Methane Emissions from the Natural Gas Industry, Volume 5: Activity Factors*. Final Report, GRI-94/0257.22 and EPA-600/R-96-080e. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.
4. Memorandum from Richard Garrett (Roger-Tech, Inc., Houston, TX) to Rhone Resch (U.S. EPA OAR), March 4, 1996.

**GP-5**  
**PROCESSING SOURCE SHEET**

<b>SOURCES:</b>	Glycol Dehydrators
<b>COMPONENTS:</b>	Gas Assisted Kimray Pumps
<b>OPERATING MODE:</b>	Normal Operation
<b>EMISSION TYPE:</b>	Unsteady, Vented
<b>ANNUAL EMISSIONS:</b>	0.170 scf ± 228%

**BACKGROUND:**

Most glycol circulation pumps in gas plants are electric. However, some gas driven pumps do exist. Gas-assisted Kimray glycol circulation pumps use a mixed phase of wet glycol liquid and absorber gas to drive pistons that pump dry (lean) glycol circulation. Unlike chemical injection pumps which vent the driving gas directly to the atmosphere, Kimray pumps pass the driving gas along with the wet glycol to the reboiler. In the reboiler the methane is driven off into the vent line. Depending on dehydrator vent gas dispositions, the methane may be vented to the atmosphere or controlled and burned.

**EMISSION FACTOR:** (177.75 scf CH<sub>4</sub>/MMscf gas processed)

The average glycol pump gas emission factor was determined by an equation describing the gas generation and disposition of gas from the pump. The disposition of gas generated by the pump depends upon the existence of a flash tank and vent controls. Measured and estimated parameters were input into the equation.

In general, the emission factor for a gas-assisted pump was determined by the following equation:

$$\begin{aligned}
 EF_{\text{pump}} &= PGU \times CR \times WR \times OC \times F_{NT} \times F_{NVC} \\
 &= (3.73 \text{ scf/gal}) \times (3.0 \text{ gal/lb H}_2\text{O}) \times (53 \text{ lb H}_2\text{O/MMscf}) \times (1.0) \times (0.333) \times (0.900) \\
 &= 177.75 \text{ scf CH}_4\text{/MMscf gas} \pm 56.85\%
 \end{aligned}$$

**EF DATA SOURCES:**

- Equation 1, i.e. the effects of operating variables on emissions, was defined in *Methane Emissions from the Natural Gas Industry, Volume 15: Gas-Assisted Glycol Pumps* (1).
- CR = glycol circulation ratio = 3.0 gal glycol/lb water ± 33.3%.
- WR = water removed from wet gas = 53 lb water/MMscf gas ± 20%. For inlet gas stream of 95°F and 800 psig dried to 7 lb water/MMscf gas.
- OC = factor to account for overcirculation of glycol = 1.0 ± 0%.
- F<sub>NT</sub> = fraction of dehydrators without flash tanks = 0.333 ± 20.12%.
- F<sub>NVC</sub> = fraction of the dehydrators without combustion vent controls = 0.900 ± 16%.
- PGU = pump gas usage = 3.73 scf CH<sub>4</sub>/gal glycol ± 30%. Determined by multiplying the volume of gas used by high-pressure pump models by a typical fraction of methane in the natural gas (83 mole%).

$$\begin{aligned}\text{PGU} &= 4.49 \text{ scf/gallon} \times 83\% \\ &= 3.73 \text{ scf/gallon} \pm 30\%\end{aligned}$$

**EF ACCURACY: ( $\pm 56.85\%$ )**

Basis:

1. Assumption: The manufacturer's data and ranges are relatively accurate ( $\pm 30\%$ ).
2. Dehydrator characteristics based on site visit observations and TMOGA survey.

**ACTIVITY FACTOR: (0.9579 Tscf/year in the processing segment with gas-assisted pumps)**

The volume of gas processed through dehydrators using gas-assisted pumps was calculated from the total throughput for gas processing dehydrators and the fraction of dehydrators using gas-assisted pumps determined from site visits. The activity factor is then:

$$\begin{aligned}\text{AF} &= (\text{fraction of dehydrators with gas-assisted pumps}) \times (\text{throughput for gas processing dehydrators}) \\ &= (0.111 \pm 186\%) \times (8.63 \text{ Tscf/year} \pm 22.4\%) \\ &= 0.9579 \text{ Tscf/year} \pm 191.95\%\end{aligned}$$

**AF DATA SOURCES:**

1. See *Methane Emissions from the Natural Gas Industry, Volume 14: Glycol Dehydrators* (2) for an explanation of processing dehydrator throughput (8.63 Tscf/year). See the *Methane Emissions from the Natural Gas Industry, Volume 5: Activity Factors* (3) for more details.
2. Fraction of dehydrators using gas-assisted pumps came from data from site visits.

**AF ACCURACY: ( $\pm 192\%$ )**

Basis:

Calculated from confidence limits of gas throughput and fraction of dehydrators by standard error propagation analysis.

**ANNUAL METHANE EMISSIONS: (0.1703 Bscf  $\pm 228\%$ )**

The annual methane emissions were determined by multiplying an emission factor (scf CH<sub>4</sub>/MMscf) by the total throughput for processing dehydrators using gas-assisted pumps.

$$(177.75 \text{ scf/MMscf}) \times (0.9579 \text{ Tscf}) = 0.1703 \text{ Bscf} (\pm 228.00\%)$$

**REFERENCES**

1. Myers, D.B. and M.R. Harrison. *Methane Emissions from the Natural Gas Industry, Volume 15: Gas-Assisted Glycol Pumps*. Final Report, GRI-94/0257.33 and EPA-600/R-96-080o. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.
2. Myers, D.B. *Methane Emissions from the Natural Gas Industry, Volume 14: Glycol Dehydrators*. Final Report, GRI-94/0257.31 and EPA-600/R-96-080n. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.

3. Stapper, B.E. *Methane Emissions from the Natural Gas Industry, Volume 5: Activity Factors*. Final Report, GRI-94/0257.22 and EPA-600/R-96-080e. Gas Research Institute and U.S. Environmental Protection Agency, June 1996.

NTIS does not permit return of items for credit or refund. A replacement will be provided if an error is made in filling your order, if the item was received in damaged condition, or if the item is defective.

## *Reproduced by NTIS*

National Technical Information Service  
Springfield, VA 22161

*This report was printed specifically for your order  
from nearly 3 million titles available in our collection.*

For economy and efficiency, NTIS does not maintain stock of its vast collection of technical reports. Rather, most documents are printed for each order. Documents that are not in electronic format are reproduced from master archival copies and are the best possible reproductions available. If you have any questions concerning this document or any order you have placed with NTIS, please call our Customer Service Department at (703) 487-4660.

### **About NTIS**

NTIS collects scientific, technical, engineering, and business related information — then organizes, maintains, and disseminates that information in a variety of formats — from microfiche to online services. The NTIS collection of nearly 3 million titles includes reports describing research conducted or sponsored by federal agencies and their contractors; statistical and business information; U.S. military publications; audiovisual products; computer software and electronic databases developed by federal agencies; training tools; and technical reports prepared by research organizations worldwide. Approximately 100,000 new titles are added and indexed into the NTIS collection annually.

For more information about NTIS products and services, call NTIS at (703) 487-4650 and request the free *NTIS Catalog of Products and Services*, PR-827LPG, or visit the NTIS Web site  
<http://www.ntis.gov>.

### **NTIS**

*Your indispensable resource for government-sponsored  
information—U.S. and worldwide*