SmartWay®
Transport Partnership
U.S. Environmental Protection Agency

Truck Carrier Partner 2.0.14 Tool: Technical Documentation 2014 Data Year - United States Version

EPA United States Environmental Protection Agency

SmartWay®
Transport Partnership
U.S. Environmental Protection Agency

Truck Carrier Partner 2.0.14 Tool: Technical Documentation 2014 Data Year - United States Version

Transportation and Climate Division
Office of Transportation and Air Quality
U.S. Environmental Protection Agency

EPA United States Environmental Protection Agency

Office of Transportation and Air Quality
EPA-420-B-15-002
January 2015

SmartWay 2.0.14
Truck Tool Technical Documentation
United States Version
1-7-2015

1.0 Overview

This document provides detailed background information on the data sources, calculation methods, and assumptions used within the SmartWay Truck Tool, version 2.0.14. The SmartWay Truck Tool utilizes the most up-to-date emission factors, in combination with detailed vehicle activity data, to estimate emissions and associated performance metrics. The primary purpose of the Tool is to help fleets calculate actual pollutant emissions for specific truck types and applications and track their emissions performance over time. Shippers can, in turn, use the data that truck carriers report using these Tools to develop more advanced emissions inventories associated with their freight activity and to track their emissions performance over time.

The Tool allows the user to evaluate fleet performance in terms of different mass-based performance metrics for CO_2, NOx, and PM (PM_{10} and $PM_{2.5}$), including:[1]

- Grams per mile
- Grams per average payload ton-mile
- Grams per thousand cubic foot-miles
- Grams per thousand utilized cubic foot-miles

The Tool can also generate estimates of emissions associated with the total miles, loaded miles, and revenue miles traveled by a fleet. Fleet performance can then be assessed at the truck-class and/or fuel-type level, or on an aggregated basis across all classes and fuels.

The Tool also collects extensive information on fleet operations and truck body types, allowing detailed segmentation of Partner fleets for more appropriate, equitable comparisons. For example, fleets that cube-out with low payloads (e.g., those hauling potato chips) will be able to compare themselves to similar fleets on a simple grams per mile basis, rather than a mix of fleets that includes fleets that routinely weigh-out. Similarly, fleets that operate in primarily short-haul, urban environments at relatively low average speeds will have fundamentally different emission rates and constraints than

[1] At this time the Truck Tool does not calculate performance metrics for specialty fleets that track their activity in terms of hours of use rather than miles traveled or freight hauled (e.g., refuse haulers and utility fleets). Future modifications may be made to the current Tool to accommodate such fleets.

long-haul fleets operating at highway speeds. By collecting detailed information on fleet operations (short vs. long, TL vs. LTL, urban vs. highway, etc), as well as truck class (2b through 8b) and body type (dry van, reefer, flatbeds, etc.), individual fleets can compare their performance to other, similar fleets, which can help them to better manage their emissions performance.

2.0 Data Inputs and Sources

The SmartWay Truck Tool user provides most vehicle characteristic, operational, and activity data needed for emissions performance estimation (see Section 3 for more information). The Tool calculates emissions by multiplying fleet activity data with EPA-approved emission rate factors that are stored in look-up tables within the Tool.

The Tool contains different types of emission rate factors for different pollutants. CO_2 factors are expressed in grams of CO_2 *per gallon of fuel*.[2,3] NOx and PM factors are expressed in *grams of pollutant per mile traveled* for operating emissions, and in *grams per hour* for idle emissions. In general, CO_2 factors are independent of the truck types, classes, and operational practices in a fleet. NOx and PM factors, however, vary depending upon a number of parameters, including:

- Truck class
- Engine model year/emission certification standard
- Vehicle speed
- Vehicle driving pattern (referred to as "drive cycle")

In addition, PM emissions will also vary with the application of PM control retrofits, including diesel oxidation catalysts (DOC), closed crankcase ventilation (CCV), and diesel particulate filters ("PM traps" or flow-through filters). In the Tool, PM control retrofits are assumed to have the same impact on operating and idle emission factors.[4]

2.1 CO_2 Factors

EPA populated the SmartWay Truck Tool with CO_2 factors that are based on fuel consumption. These factors and their sources and are summarized below in Table 1.

[2] At this time other greenhouse gases such as methane (CH_4), nitrous oxide (N_2O) and black carbon are not included in the current Truck Tool.
[3] The Truck Tool also estimates emissions associated with battery-electric trucks. In this case pollutant emissions (CO_2, NOx and PM) are determined based on the kWhrs used for charging.
[4] Future versions of the Tool may account for differences in retrofit effectiveness for running versus idle emissions.

Table 1. CO_2 Factors by Fuel Type*

	g/gal	Source[5]
Gasoline	**8,887**	**(i)**
Diesel	**10,180**	**(ii)**
Biodiesel (B100)	**9,460**	**(iii)**
Ethanol (E100)	**5,764**	**(iv)**
CNG	**7,030**	**(v)**
LNG	**4,394**	**(vi)**
LPG	**5,790**	**(vii)**

*** 100% combustion (oxidation) assumed**

Note that the Tool calculates tailpipe emissions from biofuel blends (gasoline/ethanol, diesel/biodiesel) by applying separate emission factors to the user-specified volume of each blend component. The Tool then adds the emissions from each blend component together to determine total CO_2 emissions. Therefore emission factors for specific blend ratios are not needed for CO_2.[6]

Within the Tool, users may provide their CNG fuel use estimates in terms of gasoline-equivalent gallons (on a Btu basis), or in standard cubic feet (scf). If CNG consumption is expressed in scf, the Tool applies a fuel factor expressed in grams per scf (57.8), based on 983 Btu/scf and 58,819 g CO_2/mmBtu.[7]

---

[5] i) Final Rule on Light-Duty Vehicle Greenhouse Gas Emissions Standards and Corporate Average Fuel Economy Standards (75 FR 25324, May 7, 2010). The gasoline factor used in this rule was sourced from the California Air Resources Board and is based on measurement of carbon from a gasoline test fuel (indolene).
ii) Fuel economy calculations in 40 C.F.R 600.113 available at http://edocket.access.gpo.gov/cfr_2004/julqtr/pdf/40cfr600.113-93.pdf.
iii) Tables IV.A.3-2 and 3-3 in A Comprehensive Analysis of Biodiesel Impacts on Exhaust Emissions, available at http://www.epa.gov/oms/models/analysis/biodsl/p02001.pdf
iv) Final Rule on Mandatory Reporting of Greenhouse Gases (70 FR 56260, October 30, 2009). Full source documentation is available on pp. 31-32 in the Technical Support Document, *Petroleum Products and Natural Gas Liquids: Definitions, Emission Factors, Methods and Assumptions*, available at www.epa.gov/climatechange/emissions/downloads09/documents/SubpartMMProductDefinitions.pdf.
v) Calculations of Lifecycle Greenhouse Gas Emissions for the 2005 Gasoline and Diesel Baselines in the Notice of Availability of Expert Peer Review Record supporting the proposed revisions to the Renewable Fuel Standard Program (74 FR 41359) available in Docket EPA-HQ-OAR-2005-0161-0925.1 (Spreadsheet "Emission Factors").
vi) Assuming 74,720 Btu/gal lower heating value (http://www.afdc.energy.gov/afdc/fuels/properties.html), and 0.059 g/Btu (from CNG calculation, source v).
vii) Table C-1 in the Final Rule on Mandatory Reporting of Greenhouse Gases (70 FR 56260, October 30, 2009). Full source documentation is available in Table A-39 and pg. A-60 of the *Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990 – 2007* available at http://epa.gov/climatechange/emissions/downloads/US_GHG_Inv_Annexes_1990-2007.pdf

[6] The Tool also estimates the barrels of petroleum required to make the reported gallons of diesel and gasoline based on national averages: 19 gallons of gasoline and 10 gallons of diesel assumed per barrel of petroleum – see http://205.254.135.24/tools/faqs/faq.cfm?id=24&t=10 and http://205.254.135.24/tools/faqs/faq.cfm?id=327&t=9.

[7] See footnote 4, v.

2.2 NOx and PM Factors

The SmartWay Truck Tool contains NOx, PM_{10} and $PM_{2.5}$ emission factor outputs for on-road operation from EPA's MOVES2014 model for gasoline, diesel, and E10 for all heavy truck classes (2b – 8b) under national default temperature and fuel conditions, for model years 1985 through 2015, for the 2015 calendar year (see Appendix A for a full list of factors). The emission factors are broken out by general drive cycle type (urban or highway), and average speed range, as discussed below.

Short-duration (less than 15 minutes) idle emission factors for NOx and PM were developed separately by model year, truck class, and fuel type (diesel and gasoline). MOVES2014 does not currently provide short duration idle factors in terms of grams per hour, so MOVES2014 was run using the Project Level scale with a single link and with an average speed of zero. Runs were performed for typical winter and summer conditions, taking the average of outputs from those runs to obtain g/hr factors.

MOVES2014 does provide emission factors for long-duration idle for long-haul diesel trucks. These factors are applied separately to the long-duration idle hour estimates provided for Class 8b trucks within the Truck Tool.[8] Short-duration factors are applied across the board for the remaining truck class types.

Note that hybrid electric trucks are assumed to have no short-duration idle emissions (due to assumed engine auto-shut off), although long-duration idle (and regular exhaust[9]) emissions are assumed unchanged relative to their conventional vehicle counterparts. Finally, battery-electric trucks are assumed to have no idle emissions.

The resulting idle factors are presented in Appendix B.

Version 2.0.14 of the Truck Tool also calculates the NOx and PM emissions associated with use of transportation refrigeration (reefer) units. EPA's NONROAD2008a emissions model was used to develop emission rates for these units for the 2014 calendar year, following these steps:

- Three A/C refrigeration (reefer) unit standard classification codes (SCCs) were identified within the NONROAD model – 2265003060 (gasoline); 2268003060 (CNG); and 2270003060 (diesel);
- A national average model run was performed for these three fuel types for 2014;
- Tons per year outputs were converted to grams per year for each horsepower (hp) bin grouping, for each fuel type, for NOx, PM_{10} and $PM_{2.5}$;
- Grams/gallon factors were calculated for each hp bin by dividing grams/year by gallons/year, for each fuel type, for NOx, PM_{10} and $PM_{2.5}$;

[8] NOx factors for long-term extended idling are higher than short-duration factors (at least for late model engines), since engine operation temperatures and loads at idle are generally not high enough to activate late-model emission controls such as SCR and EGR.

[9] While there is evidence that NOx emissions may be decreased through the use of hybrid electric technology, EPA has not performed emission testing to assess this effect. Therefore hybrid NOx and PM exhaust emission rates are assumed to equal conventional vehicle equivalents in the current Truck Tool.

- Weighting factors were applied to the gram per gallon factors for each hp bin. These weighting factors reflected relative emission impacts across the different hp bins, accounting for differences in equipment population, hours of use, and engine load factors. For a given hp bin, the weighting factor is expressed as:

  weighting factor = pop x avg hp x hrs/year x engine load factor

- Weighted g/gal factors were summed across hp bins for each fuel type and pollutant to obtain the final, national fleet-average fuel factors for reefers.

Table 2 provides the NOx and PM fuel factors used in the latest Truck Tool.

Table 2. Weighted Average Reefer Fuel Factors (g/gallon)

Fuel	NOx	PM_{10}	$PM_{2.5}$
Diesel	62.026	4.044	3.922
Gasoline	16.369	1.010	0.929
CNG	17.732	0.790	0.790

The next section describes the process followed to select the on-road emission factors from MOVES2014 for use in the Truck Tool. Emission factors in grams per mile were developed for gasoline, E10, and diesel fuel types for all MOVES source types that correspond to MOBILE6 heavy duty vehicle classes, 2b-8b inclusive. The MOVES source types modeled are shown in the table below. Of these, school buses, refuse trucks and motor homes represent only a small fraction of total activity.

Table 3. MOVES Source Types Associated with Class 2b – 8b Vehicles

Source Type ID	Source Type Name
31	Passenger Truck
32	Light Commercial Truck
43	School Bus
51	Refuse Truck
52	Single Unit Short-haul Truck
53	Single Unit Long-haul Truck
54	Motor Home
61	Combination Short-haul Truck
62	Combination Long-haul Truck

Separate factors were developed for “Urban” and “Highway/Rural” roadway types. These factors were apportioned according to MOVES operating mode groups, which correspond to speed ranges of 0-25 mph, 25-50 mph, and 50+ mph.

Emission factors calculated by the model, output by MOVES source type, were then converted to a MOBILE6 vehicle class basis. In this way, the Truck Tool can select appropriate emission factors for use by:

- weight class
- model year
- road type (urban vs. highway/rural)
- speed distribution

The following describes the methodology for the emission factor calculation.

Calculation of MOVES emission factors by operating mode

In calculating emission factors, the primary goal is to disaggregate factors by the percentage of time a given type of vehicle spends operating at certain speeds. The ranges of speeds analyzed include 0-25 mph, 25-50 mph, and greater than 50 mph. These speed ranges correspond to MOVES operating modes #11-16, 21-29, and 30-40 inclusive, where each operating mode is defined by both the speed of the vehicle and its vehicle specific power (VSP). First, for a given source type and model year, the fraction of emissions attributable to each range of speed was determined. Emissions for a vehicle can be expressed in Equation 1:

Equation 1

$$E` = A_1E_1` + A_2E_2` + A_3E_3` + A_IE_I + A_BE_B$$

Where:

$E`$ = uncorrected[10] mass emissions calculated based on operating mode and emissions contribution by speed bin

$A_{1\text{-}3}$ = the sum of activity fractions (in seconds) over speed range n. (A_I and A_B represent the activity associated with the individual operating modes for idling and braking, respectively.)

$E_{1\text{-}3}`$ = the weighted average emissions over a given speed range n. (E_I and E_B represent the emissions associated with the individual operating modes for idling and braking, respectively.)

The following figure shows a range of emissions and activity fractions for an example source type and model year. The operating mode (or VSP bin) are shown on the x-axis. The dashed red line presents the fraction of vehicle activity associated with a given operating mode, while the black circles present average HC emissions for each operating mode.

[10] Subsequent adjustment factors are presented in Equation 3 below.

Figure 1. Example Emissions and Activity Fractions by Operating Mode

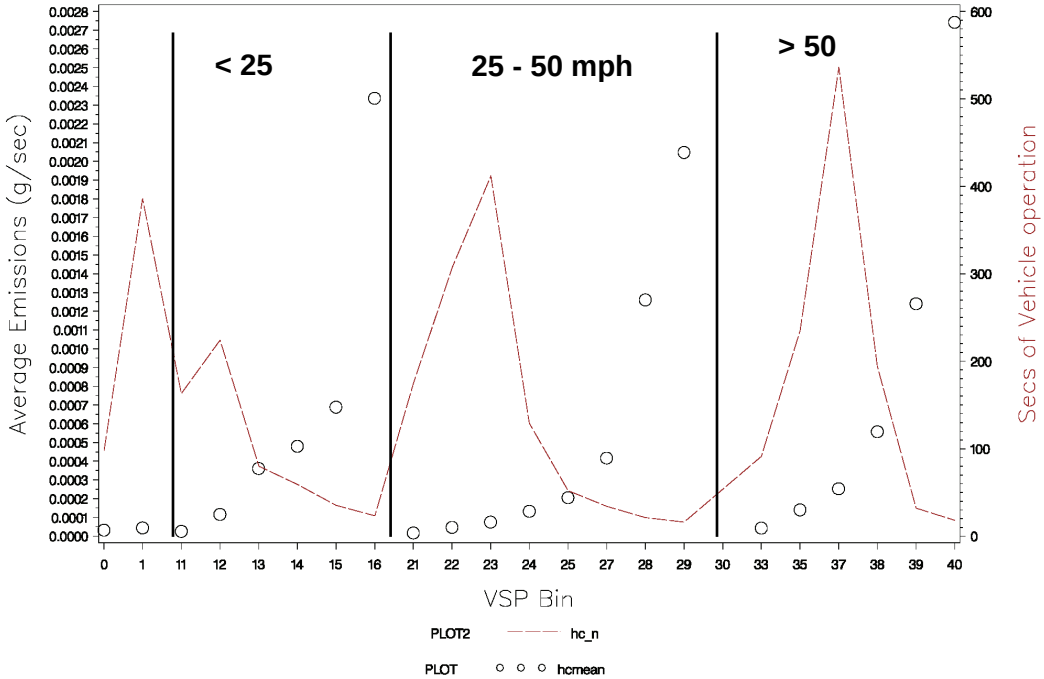

For our purposes, A_n from Equation 1 is obtained by retaining the "opmodefraction2" table from the MOVESExecution database, which is created by the Operating Mode Distribution Generator (OMDG) during a MOVES run. This table contains operating mode fractions by source type, roadway type, average speed bin, and pollutant/process. The fractions from this table are normalized using average speed distributions from the "avgspeeddist" table, and the sum of the normalized operating mode fractions in each speed bin constitutes A_n.

E_n` is derived from data obtained from the default MOVES "emissionratebyage" table. This table contains emission rates by pollutant process, operating mode, and age group for a wide variety of *sourcebinIDs*. For this analysis, a MySQL query was used to select *sourcebinIDs* corresponding to the source type, fuel type, and calendar year of interest, and limited our rate selection to the 4-5 year age group. The emissions obtained here were then converted to a source type basis (from their current *sourcebinID* basis); this was done by retaining the "sourcebindistribution" table from the MOVESExecution database, which is created by the Source Bin Distribution Generator (SBDG) during each MOVES run, and weighting the activity fractions for each source type and model year combination in this table with the data from the "emissionratebyage" table described above. Having finished this mapping, an emission rate is generated, by source type and model year, for each operating mode (corresponding to the circles in the figure above). Since E_n` for each speed range represents the average emissions of

the range weighted by the activity in that range, the weighted average emissions can be calculated from the 0-25 mph speed bin, E_1`, as follows in Equation 2:

Equation 2

$$E_1` = \frac{R_{11}T_{11} + R_{12}T_{12} + R_{13}T_{13} + R_{14}T_{14} + R_{15}T_{15} + R_{16}T_{16}}{\sum_{11}^{16} R_n}$$

Where:

R_n = The activity fraction for operating mode n, obtained from the "opmodedist2" table
T_n = The emissions for operating mode n.

Other speed bins will use different operating modes in their calculations; the equation above is merely an example illustrating the calculation method for the first speed bin. Having calculated an appropriate E_n` for each speed range for a given source type and model year, Equation 1 can be used, along with the appropriate activity fraction, to arrive at a total uncorrected emissions value. In and of itself, this emission factor has little value in estimating emissions. However, it can be used along with the <u>modeled</u> emission factor for a particular source type and model year to arrive at an overall adjustment factor, as shown in Equation 3:

Equation 3

$$Z = \frac{E}{E`}$$

Where:

E = The <u>modeled</u> emission, obtained from MOVES outputs, for an individual source type and model year
E`= The uncorrected emissions for an individual source type and model year, calculated using operating mode distributions and emission factors from the "emissionratebyage" table

This overall adjustment factor, in turn, can be applied to each individual emissions component, E_n`, as shown in Equation 4:

Equation 4

$$\mathbf{E_n = ZE_n`}$$

The adjusted emissions, E_n, are subsequently used to calculate a total, corrected emission factor for a given source type and model year combination, as described by Equation 5:

Equation 5

$$E = A_1E_1 + A_2E_2 + A_3E_3 + A_IE_I + A_BE_B$$

In this way, a representative emission factor is calculated by operating mode/speed group. This will allow the Truck Tool to adjust the default operating mode percentages (A_n) to more accurately represent a user-provided speed profile for the vehicles they are evaluating. Default operating mode percentages may also be used, as calculated above.

Conversion of Emission Factors from Source Type to Weight Class Basis

Ultimately, emission factor lookup tables are required for use in the Truck Tool by weight class, fuel type, and model year. However, modeled output from MOVES is aggregated by source type. Therefore a post-processing Tool was developed to convert vehicle emission factors from source types to weight class based on internal MOVES tables. The conversion methodology used in this Tool is described below.

First, the adjusted emissions and activity output from MOVES are combined, *by pollutantID*, by joining the "movesoutput" and "movesactivityoutput" tables by calendar year, source type, fuel type and model year. The sourcetype and model year for each record are combined in a new field, *sourcetypemodelyearID*.

Next, the emissions and activity output from the first step are combined with the MOVES "sizeweightfraction" table by joining on the *sourcetypemodelyearID*. The "sizeweightfraction" table contains, for a given combination of source type and model year, the fraction of vehicles apportioned across *weightclassID*. Given the *weightclassID*, the portion of emissions and activity attributable to a given range of vehicle weights is determined, and subsequently, those weights (along with fuel type) are mapped back to MOBILE6 vehicle classes, which are based on GVWR. (This is achieved with a separate lookup table, "M6VehType", which is derived from Appendix B, Table 3 of the EPA's MOBILE6.2 User's Guide.) For each calendar year, *sourcetypemodelyearID* and *pollutantID*, the sizeweightfraction is multiplied by the emissions (in grams) and activity (in miles) to obtain *EmissionFrac* and *ActivityFrac*, respectively.

Finally, the *EmissionFrac* and *ActivityFrac* calculated above are summed by *yearID*, *pollutantID*, *fueltypeID*, and MOBILE6 vehicle type (e.g., HDDV8b). This provides total emissions and activity independent of the MOVES source type or vehicle model year. Finally, the aggregated emissions are divided by the activity to arrive at g/mi emission factors, presented in Appendix A.

Modeling E10 Emission Rates

In a MOVES run that uses nationwide defaults for fuel supply, the model includes dozens of fuel formulations on a by-fuel region basis in its calculations. In addition to

diesel fuels, many counties in the model defaults are characterized by varying market shares of and E10 and E15 (usually about 97.5% and 2.5%, respectively

In order to isolate Gasoline emission factors, the new Fuels Wizard included in MOVES2014 was used to alter the ethanol percentage of fuels nationwide to zero. Thus, separate E10 and gasoline MOVES runs were then performed using the newly updated information.

Sensitivity Analysis Results

The relative emissions impact of different speed regimes were evaluated for four road types – urban arterial, urban freeway, rural arterial, and rural freeway. To simplify the sensitivity analysis, MOVES outputs were generated for diesel long-haul combination trucks, model year 2012, run for the 2015 calendar year, using national average defaults (e.g., fuel specifications, temperatures, etc). The results of the analysis are shown for NOx and $PM_{2.5}$ below.

Figure 2. Default NOx Emission Contribution by Speed Bin

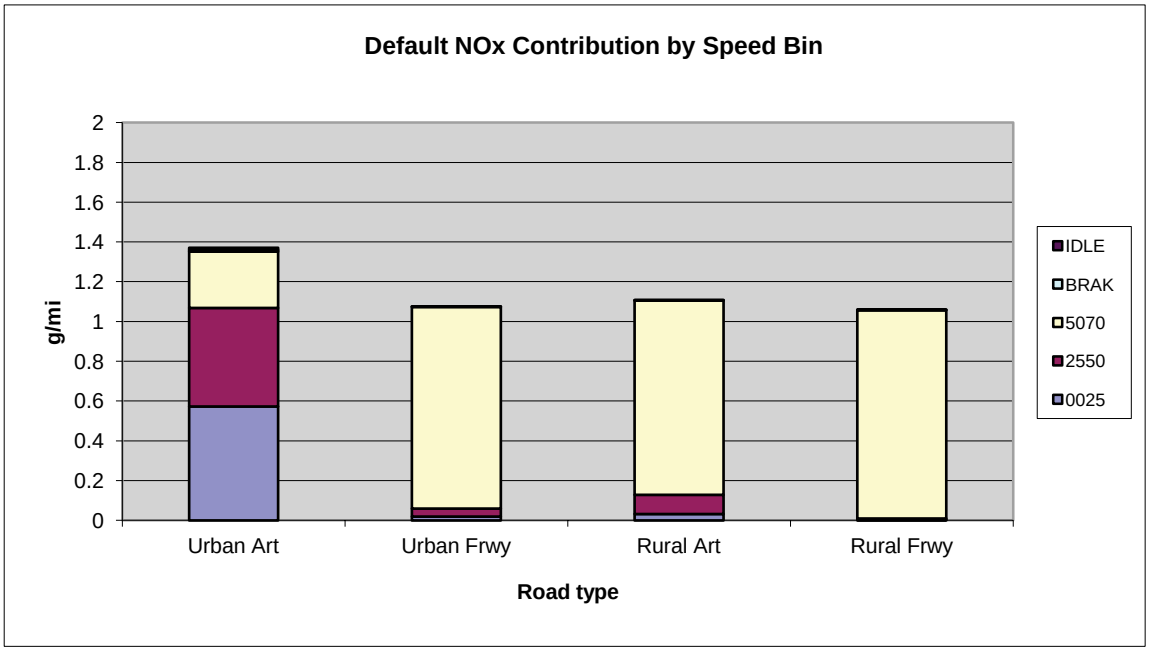

Figure 3. Default $PM_{2.5}$ Emission Contribution by Speed Bin

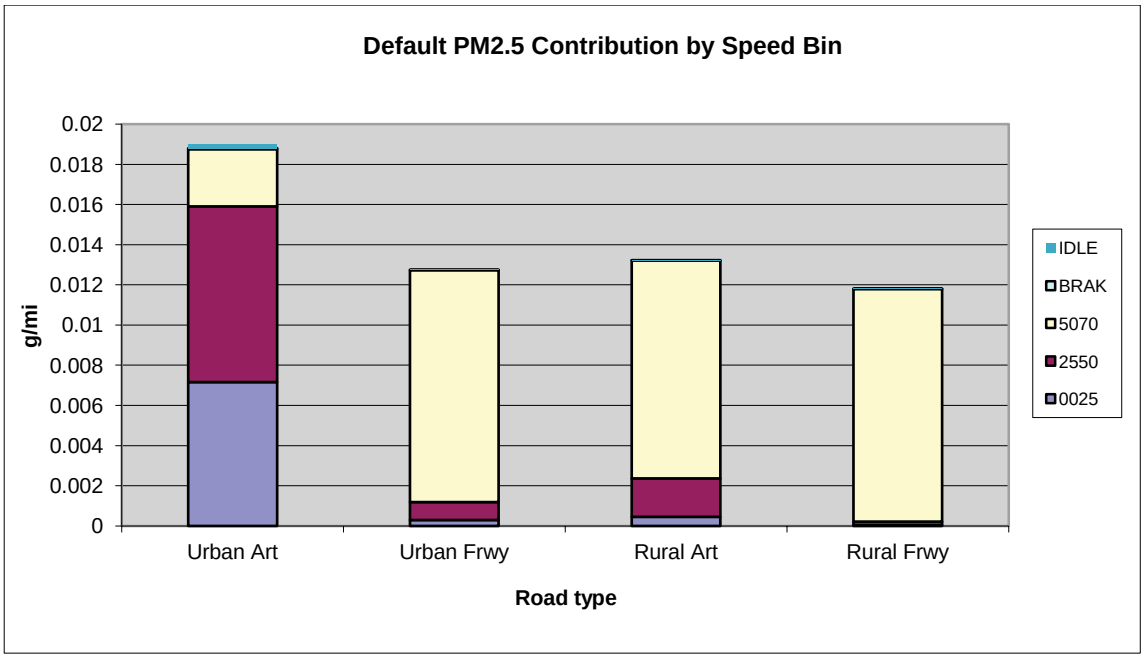

As shown in the above charts, the emissions for urban freeways, rural arterials, and rural freeways are all heavily dominated by high speed (50 – 70 mph) operation.[11] In addition, actual emission levels are relatively insensitive to road type across these three types. However, speed distribution appears to have a significant bearing on emissions for urban arterial operation. Accordingly, the recommendation for Truck Tool application was to develop fully disaggregated emission factor look up tables (retaining all four road types), and then weight urban freeway, rural arterial, and rural freeway road type operations in order to aggregate emission lookup tables within the SmartWay Tool to reflect "urban" (i.e., urban arterial) and "other" road types. In addition, under this approach users can choose default speed distributions for these selections, or specify the percent of operation by major speed range (0 – 25, 25 – 50, 50 – 70). Given the relative insensitivity to speed for the "other" category, specifying speed distributions would only be permitted for urban arterial operation.

Under this approach, the user is given the follow input options:

- Specify % Highway/Rural ("other") operation fraction
- Specify % urban operation distribution by speed bin, or select "default speed distribution"

[11] This finding is consistent with the 2008 SmartWay Partner data submissions, wherein 87% of Partners selected the 50+ mph category as the most representative of their non-urban operations.

Data entry is handled through the addition of a popup screen for non-default data entry (see the Truck Tool User Guides for details).

2.3 Alternative Fuels

NOx and PM emission factors are not available from MOVES2014 for certain alternative fuels, including biodiesel, E85, natural gas, and LPG. Accordingly, EPA used adjustment factors from a number of sources described below to estimate NOx and PM factors for these other fuels.

NOx and PM emission factors for biodiesel were based on the findings from an EPA study, A Comprehensive Analysis of Biodiesel Impacts on Exhaust Emissions (EPA420-P-02-001, October 2002). This study developed regression equations to predict the percentage change in NOx and PM emission rates relative to conventional diesel fuel, as a function of biodiesel blend percentage, expressed in the following form:

Equation 6

$$\text{\% change in emissions} = \{\exp[a \times (\text{vol\% biodiesel})] - 1\} \times 100\%$$

Where:

a = 0.0009794 for NOx, and
a = -0.006384 for PM

Using Equation 6, adjustment factors were developed for biodiesel blends based on the percentage of the biofuel component,[12] and then these adjustment factors were applied to the appropriate conventional diesel emission factors in Appendix A (see Section 2.2 for the sources of conventional diesel emission factors). Note that the fleet-average blend value is assumed to be the same for all truck classes, since the biofuel consumption data is not collected at the truck class level. (This assumption holds for ethanol consumption data inputs as well.)

For gasoline-ethanol blends, the SmartWay Truck Tool only accepts fuel consumption estimates for E10 and E85 since, unlike biodiesel where the biofuel fraction can vary significantly, ethanol is generally blended with gasoline at two discrete levels: 10% (E10) and 85% (E85). As discussed in Section 2.2 above, NOx and PM factors for E10 were output directly from MOVES2014. Given the lack of heavy-duty E85 test data, adjustment factors for E85 were based on emissions estimates for light-duty vehicles cited by the US DOE Alternative Fuels and Advanced Vehicles Data Center.[13] These estimates come from a technical paper published in the Journal of Air & Waste Management.[14] Relative to conventional gas vehicles, the authors of this paper estimate that vehicles running on E85 provide an **average NOx reduction of 54%** (based on 73

[12] Biodiesel blend percentage is calculated by dividing B100-equivalent gallons by total fuel gallons at the fleet level – see the Truck Tool User Guides for details regarding biodiesel use inputs.
[13] See http://www.afdc.energy.gov/afdc/vehicles/emissions_e85.html, last validated December 22, 2011.
[14] http://www.afdc.energy.gov/afdc/pdfs/technical_paper_feb09.pdf

vehicle tests), and an **average PM reduction of 34%** (based on 3 vehicle tests). These adjustment factors are applied to the appropriate gasoline engine emission factors in Appendix A to develop emission factors for E85.

If the consumption level of E10 is unknown, the Truck Tool user may also specify national average default blend levels for ethanol. National totals for gasoline use for 2012 were obtained from the Energy Information Administration's (EIA) Annual Energy Outlook Reference Case for 2013, Table 37 (Transportation Sector Energy Use by Fuel Type within a Mode). Summing the energy use values for light-duty gasoline vehicles, commercial light trucks, and freight trucks from the table yields an estimate of 16,040 TBtu (15,315 + 336 + 389) for 2012. National fuel ethanol consumption estimates for 2012 were also obtained from the EIA, totaling 1,064 TBtu (see Table 10.3, consumption minus denaturant in http://www.eia.gov/totalenergy/data/monthly/pdf/sec10_7.pdf). Assuming 114,100 Btu/gallon of gasoline, and 76,100 Btu/gallon of E100,[15] ethanol is estimated to constitute 9.05% of gasoline fuel consumption in the U.S., on a volumetric basis.[16]

Emission adjustment factors were used for gaseous fuels (LPG, CNG and LNG) that were cited by the Alternative Fuels and Advanced Vehicles Data Center, Table 2: NREL/UWV Field Tests of Natural Gas Vehicle Emissions.[17]. These factors were developed by the National Renewable Energy Lab and University of West Virginia based on field studies on natural gas vehicles. For this assessment, it was assumed that CNG and LNG emissions were identical. In addition, it was also assumed LPG vehicle emissions would be equal to natural gas vehicle emissions.[18] To be conservative, the smallest emission reduction estimates were selected from Table 2 (**86% for PM and 17% for NOx**) relative to comparable diesel vehicles. These adjustment factors are then applied to the diesel emission factors in Appendix A for to develop emission factors for these fuels.

The same adjustment factors are applied for all model years in the Truck Tool because model year-specific emissions data do not appear to be available at this time. Note, however, that the emissions from the combustion of alternative fuels may be different for older trucks (with minimal emission controls) and newer trucks (with extensive control systems in place) due to vehicle emission standards.

Emission estimates for battery-electric trucks are based on national average electric generation mix profiles from USDOE's GREET model, as described in Appendix C.

---

[15] https://www.afdc.energy.gov/afdc/prep/popups/gges.html, last verified 12-22-11.

[16] 16,040 TBtu gasoline x 10^{12} Btu/TBtu / 114,100 Btu/gal = 1.41 x 10^{11} gallons of gasoline;
1,064 TBtu E100 x 10^{12} Btu/TBtu / 76,100 Btu/gal = 0.140 x 10^{11} gallons of E100;
0.140 / (1.41 + 0.140) = 9.05%.
Note this methodology disregards the relatively small volumes of ethanol consumed as E85.

[17] http://www.afdc.energy.gov/afdc/vehicles/emissions_natural_gas.html, last validated 12-22-11.

[18] The PM and NOx estimates cited by this source for LPG vehicles were actually slightly lower than for natural gas vehicles - http://www.afdc.energy.gov/afdc/vehicles/emissions_propane.html. However, based on engineering judgment it was assumed that LPG PM and NOx emissions would be similar to comparable CNG vehicles.

2.4 PM Control Effectiveness

The Truck Tool applies adjustment factors to the PM emission factors in Appendix A and B for any pre-2007 diesel truck for which Partners have installed a specific retrofit control device. The following adjustment factors were obtained from EPA OTAQ (presented as a % reduction in emissions; see Section 3.2 below for details):

- Diesel oxidation catalyst (DOC) – 25%
- Closed crankcase ventilation (CCV) – 5%
- Diesel particulate filter (DPF) – 90%

The Tool applies these adjustment factors to pre-2007 PM operating and idle emission estimates. The Tool also allows for situations where CCVs are applied in combination with either DOCs or DPFs. In such a case, the reduction effectiveness is calculated additively. For example, if pre-control operating emissions were 1.0 g/mile for a diesel truck, and a CCV and DOC were applied, the resulting emission rate would be:

Equation 7

$$1.0 \times [1 - (0.25 + 0.05)] = 0.07 \text{ g/mile, post-control}$$

However, the Truck Tool assumes that DOC and DPF application are mutually exclusive.

3.0 Emission and Activity Estimation

The emission rates and adjustment factors discussed above are combined with appropriate activity data (provided by the Partners) to calculate mass emissions at the fleet and/or partner level for CO_2, NOx and PM, as described below.

3.1 CO_2

CO_2 is calculated within the Truck Tool utilizing emission factors expressed in *grams per gallon of fuel*, (with the exception of battery-electric trucks), as discussed in Section 2.1 above. The general equation for calculating CO_2 emissions using reported fuel consumption values is

Equation 8

$$E_{CO2} = ((F - B) \times EF_F) + (B \times EF_B)$$

Where:

E_{CO2} = grams CO_2 per year
F = Fossil Fuel (Gallons per year)
B = Biofuel (Gallons per year)
EF_F = Fossil Fuel Emissions Factor (g/gal based on fuel type)
EF_B = Biofuel Emissions Factor (g/gal based on biofuel type)

Emissions for *all* pollutants for battery electric trucks are calculated by multiplying the reported kWhrs used for charging by the associated g/kWhr factor (see Appendix C).

In most instances reefer fuel is aggregated with vehicle fuel inputs in the Truck Tool, with the reefer fuel type assumed to be the same as the vehicle fuel type. However, reefer units associated with LPG and electric trucks are assumed to use diesel fuel (by far the most common type of reefer engine). Accordingly, any reefer fuel use reported for LPG and electric trucks is included in the total CO_2 calculation using the diesel fuel factors in Equation 8.

Fuel Allocator

The Truck Carrier Tool asks users to enter Gallons of Diesel Used by truck class in order to estimate CO_2 emissions. This information may be entered directly if available. However, if the user does not have this information but does know total fuel use and MPG by truck class, the Truck Tool's **Fuel Allocator** can be used to apportion fuel use across truck classes.

In the **Fuel Allocator**, the user enters total fuel consumption and truck class MPG estimates. The allocator then calculates the fuel used for each class based on the total fuel and class MPG. If the total fuel calculated matches the total fuel entered to within 2%, the allocator indicates a "Match". However, instead of writing the exact calculated value seen in the Fuel Allocator to the Activity screen, the Tool adjusts the class fuel

amounts (and therefore MPG) so the sum matches the Total Fuel entered exactly, and then writes these values on the Activity screen. That means, the MPG entered into the Fuel Allocator, and the calculated fuel used seen on the Fuel Allocator, are not necessarily equal to the MPG and the fuel used that is written to the Activity Screen.

If the user re-opens the Fuel Allocator at this point, the Allocator brings in the MPGs listed on the Activity Screen, NOT the MPGs the user input into the calculator the first time (although it doesn't overwrite the saved MPGs entered on the worksheet, if the user presses Cancel). For remaining calculations in the Tool, the values shown on the Activity Screen are used. The Allocator values the user entered are saved for the XML file, but aren't used for further calculations. Separately in the XML, the MPG and fuel totals that were put onto the Activity Screen are also written.

3.2 NOx and PM

Unlike CO_2 emissions which only vary with fuel type, NOx and PM emission rates also vary substantially depending upon engine model year and/or emission certification level, vehicle class, drive cycle, speed, and operation mode (running or idle). For this reason, EPA developed lookup tables in the Truck Tool with emission factors that correspond to user-supplied inputs regarding their fleet activity. The NOx and PM emission rates expressed in *grams per mile* were combined with the appropriate mileage metric (i.e., total miles) in order to estimate mass emissions. The general equation for calculating NOx emissions is as follows:

Equation 9

$$E_{NOx} = (M_C \times ((GPM_H \times HDC) + (GPM_{U1} \times UDC_1) + (GPM_{U2} \times UDC_2) + (GPM_{U3} \times UDC_3) + (GPM_{U4} \times UDC_4))) \times T_{CY} / T_{CT}) + (GPH_I \times H_I \times T_{CY})$$

Where:

E_{NOx} = grams NOx per year for a given truck class
M_C = Miles driven for Truck Class C per year
GPM_H = Grams/mi (by truck class & engine yr) for Highway/Rural Driving
HDC = Highway drive cycle % (% of miles under highway/rural driving)
$GPM_{U1/2/3/4}$ = Grams/mi (by truck class & engine yr) for Urban Driving by mode (1 = 0 – 25 mph; 2 = 25 – 50 mph; 3 = 50+ mph; 4 = deceleration)
$UDC_{1/2/3/4}$ = Urban drive cycle % (% of miles under urban driving conditions, by mode (1,2,3,4))
T_{CY} = Number of trucks for a given Class/Year combination
T_{CT} = Number of trucks total for a given Class
GPH_I = Grams per hour (by truck class & engine year) for Idling[19]
H_I = Hours of Idling per year (average per truck per year by class)

[19] As discussed in Section 2 above, separate emission factors are applied for Class 8b diesel trucks to differentiate short- and long-duration idling. In addition, hybrid electric trucks are assumed to have no short-duration idling emissions, while battery-electric trucks have no idling emissions of any kind.

PM emissions for non-diesel vehicles are calculated using an equation identical to that for NOx, utilizing PM emission factors. PM emission for diesel vehicles may be adjusted for PM control effectiveness, as shown below.

Equation 10

$$\mathbf{E_{PM} = (((M_C \times ((GPM_H \times HDC) + (GPM_{U1} \times UDC_1) + (GPM_{U2} \times UDC_2) + (GPM_{U3} \times UDC_3) + (GPM_{U4} \times UDC_4))) \times T_{CY} / T_{CT}) + (GPH_I \times H_I \times T_{CY})) \times (1 - ((0.25 \times T_{DOC} / T_{CT}) + (0.05 \times T_{CCV} / T_{CT}) + (0.9 \times T_{DPF} / T_{CT})))}$$

Where:

E_{PM} = grams PM per year for a given truck class
T_{DOC} = Number of trucks using Diesel Oxidation Catalysts by class
T_{CCV} = Number of trucks using Closed Crankcase Ventilation by class
T_{DPF} = Number of trucks using Diesel Particulate Filters by class
0.25 = Effectiveness of DOCs (25%) at reducing particulate matter
0.05 = Effectiveness of CCVs (5%) at reducing particulate matter
0.9 = Effectiveness of DPFs (90%) at reducing particulate matter

Note the above calculation methodology assumes that the same highway/urban drive cycle fractions apply across all model years of a given truck class. Similarly, the method assumes that estimated idle hours apply equally to all model years of a given truck class.

The above methodology also utilizes estimates for the fraction of miles traveled associated with different road types and speed categories, as shown in the equations above. The Truck Tool user must provide an estimate of the percent of total miles associated with highway/rural driving for each truck class. The user may also provide percentages for the miles spent driving in urban conditions (e.g., unrestricted access, surface roads in well-traveled urban areas), for different speed categories (0 – 25 / 25 – 50 / 50+ mph). This information may be obtained from analysis of truck ECM or possibly GPS data. If urban speed distribution data is not available, the user may select to use default distributions, obtained from the MOVES model. The default speed distributions for urban operation (as defined in Section 2.2 above) varies with vehicle class and model year. However, the variation over model years is very slight (typically with a range of 1 to 2 percent for the largest speed category), the percentages were averaged over all model years for a given speed category/vehicle type combination for use within the Truck Tool.

Table 4 presents the resulting default urban speed distributions by speed category for each truck class, for both diesel and gasoline vehicles. Note that the Truck Tool utilizes the diesel default speed distributions for LPG, LNG, and CNG.

Table 4. Default Speed Category Distributions by Vehicle Class for Urban Operation (MOVES2010a basis)[20]

Vehicle Class	Speed Group	Percent by Class
Diesels		
HDDV2b	0 - 25	35%
	25 - 50	38%
	50+	13%
	Deceleration	15%
HDDV3	0 - 25	41%
	25 - 50	36%
	50+	12%
	Deceleration	11%
HDDV4	0 - 25	42%
	25 - 50	35%
	50+	12%
	Deceleration	11%
HDDV5	0 - 25	42%
	25 - 50	35%
	50+	12%
	Deceleration	11%
HDDV6	0 - 25	42%
	25 - 50	35%
	50+	12%
	Deceleration	10%
HDDV7	0 - 25	42%
	25 - 50	35%
	50+	12%
	Deceleration	10%
HDDV8a	0 - 25	44%
	25 - 50	35%
	50+	12%
	Deceleration	9%
HDDV8b	0 - 25	45%
	25 - 50	34%
	50+	12%
	Deceleration	8%
Gasoline		
HDGV2b	0 - 25	43%
	25 - 50	31%
	50+	10%
	Deceleration	15%
HDGV3	0 - 25	45%
	25 - 50	34%
	50+	11%
	Deceleration	11%
HDGV4	0 - 25	45%
	25 - 50	34%
	50+	11%
	Deceleration	10%
HDGV5	0 - 25	46%
	25 - 50	33%
	50+	10%
	Deceleration	11%
HDGV6	0 - 25	46%
	25 - 50	33%
	50+	10%
	Deceleration	11%
HDGV7	0 - 25	45%
	25 - 50	32%
	50+	10%
	Deceleration	14%
HDGV8a	0 - 25	45%
	25 - 50	34%
	50+	11%
	Deceleration	10%
HDGV8b	0 - 25	43%
	25 - 50	31%
	50+	10%
	Deceleration	15%

As seen in the above table, the MOVES model assumes that some fraction of vehicle operation is associated with "deceleration" events, evaluated independently from other operation due to their unique emission rate patterns.[21] However, it is assumed that

[20] These values represent the urban component of driving only. If the user specifies a non-zero percentage for Highway/Rural driving, the values in the above table are automatically renormalized, so as to make the sum across urban and highway operation modes equal to 100%.

[21] MOVES also assigns some fraction of emissions to idle operation. However, operating fractions and emission factors associated with idle in MOVES outputs are expressed in grams per mile rather than grams per hour. Thus, in

most Truck Tool users will not know their fleet's deceleration fraction. As such, the Truck Tool will adjust any values input by the user to include a deceleration fraction based on MOVES model percentages. If the user selects the default urban speed distributions, the Truck Tool will adjust the urban values from Table 4 to account for the percentage of miles specified for Highway/Rural operation as well. The following provides an illustrative example for calculating PM emissions for diesels given a specific set of road type/speed category distributions. NOx emission calculations follow the same procedure.

User specifies 1 Class 8b diesel, model year 2011, traveling 100,000 mi/yr.
User specifies the following Road type/speed category distributions:

- 40% highway/rural
- 30% 0-25 mph
- 20% 25-50 mph
- 10% 50+ mph

For highway/rural operation, the lookup value from MOVES is 0.0195 g/mi for PM2.5
For urban operation, the lookup values are as follows:

- 0-25: 0.031 g/mi
- 25-50: 0.052 g/mi
- 50+: 0.012 g/mi
- deceleration: 0.002 g/mi

Now the urban speed distribution percentage inputs must to account for deceleration, as follows:

- 0-25: 30% x sum of default percentages for the three speed bins (but excluding default deceleration fraction) = 30% x (45% + 34% + 12%) = 27.5%
- 25-50: 20% x sum of default percentages (45% + 34% + 12%) = 18.3%
- 50+: 10% x sum of default percentages (45% + 34% + 12%) = 9.2%

deceleration: the remaining percentage, which equals 100% - 40% (highway) - 27.5% - 18.3% - 9.2% = 5.1%

Now apply these percentage weights to the total mileage, and then multiply by the corresponding emission factors to obtain mass, as follows:

- Highway/rural component: 0.40 x 100,000 x 0.0195 = 780 grams
- 0-25 urban component: 0.275 x 100,000 x 0.031 = 826 grams
- 25 - 50 urban component: 0.183 x 100,000 x 0.052 = 952 grams
- 50+ urban component: 0.092 x 100,000 x 0.012 = 110 grams
- Deceleration urban component: 0.51 x 100,000 x 0.002 = 10 grams

Therefore total = 2,678 grams of PM2.5 (This value will then be summed with any other model year/vehicle class combinations and converted to short tons.)

order to utilize the grams per hour emission factors developed especially for use in the Truck Tool, MOVES outputs associated with idle operation were removed and the operating mode fractions for the four remaining categories were renormalized to equal 100%.

As discussed in Section 2.3, the Truck Tool assumes that B100-equivalent biodiesel volumes are distributed proportionately across all diesel vehicle classes. For example, if a fleet uses 100 B-100 equivalent gallons of biodiesel, and 1,000 gallons of fuel total, the Tool assumes that B10 (100 / 1,000 = 10%) is the blend used by each truck class. Accordingly, emission rate adjustment factors are calculated for B10 using Equation 6, and applied to the diesel emission factors for each vehicle class.

Emission calculations for ethanol blends follow a different methodology, however, applying discrete emission factors for gasoline and E10 from MOVES (and adjusted gasoline emission factors for E85) with the specific fuel volume estimates provided by the user. The following provides an example illustrating how the miles of travel are apportioned across different blend volumes, in order to estimate mass emissions.

User specifies 1,000 gallons of fuel total, and 10,000 miles of travel total

User inputs:
100 gallons of E10
100 gallons of E85

Therefore there are 800 gallons of pure gasoline (1,000 – 100 - 100)

Apportion the 10,000 miles of travel across the different blend levels using gasoline-gallon equivalent (gge) factors (from https://www.afdc.energy.gov/afdc/prep/popups/gges.html) as follows:

100 gallons of E10 is equivalent to 100/1.05 = 95 gallons of gasoline*
100 gallons of E85 is equivalent to 100/1.39 = 72 gallons of gasoline

Therefore there are 800 + 95 + 72 = 967 gasoline equivalent gallons of fuel, total.

Applying the energy-equivalent fuel volume ratios to the 10,000 miles of total travel:

gasoline (E0) miles = 10,000 x 800/967 = 8,273 miles
E10 miles = 10,000 x 95/967 = 982 miles
E85 miles = 10,000 x 72/967 = 745 miles

Finally, multiplying these mileage values by the appropriate E0 and E10 gram/mile emission factors from MOVES results in the desired mass emission estimates. Similarly, multiplying the E85 miles by the E85 emission factors (adjusted from E0 factors as discussed in Section 2.3, provides mass emissions associated with E85).

* E10 gge factor developed from linear interpolation of E100 and gasoline Btu/gallon values

In addition, if national default ethanol blend levels are specified for gasoline fuel use, the Truck Tool assumes that *all* ethanol consumed is in an E10 blend. For example, assuming 1,000 gallons of gasoline are specified by the user, there would be 905 gallons of E10 (1,000 x .905 – see Section 2.3), and 95 (1,000 - 905) gallons of gasoline. Mass emissions would then be calculated for the gasoline and E10

components of the fuel as in the above example, apportioning total miles across gasoline and E10 in order to apply the appropriate g/mi factors.

Finally, note that the PM factors output by the MOVES model for use in the Truck Tool are expressed in terms of $PM_{2.5}$. The MOVES model assumes a fixed ratio of PM_{10} / $PM_{2.5}$ for a given fuel type, as summarized below:

- Gasoline – 1.086
- Diesel – 1.031
- CNG – 1.000

These factors were applied directly to the $PM_{2.5}$ emission factors to obtain mass emission and performance metrics for PM_{10} within the Truck Tool. In addition, it was assumed that LNG and LPG had PM ratios equivalent to the CNG value (1.00). Ethanol was assumed to have a ratio equal to that for gasoline, while the ratio for biodiesel was assumed to equal that for diesel.

3.3 Activity Calculations

The Truck Tool requires users to provide specific activity information on fuel consumption, miles traveled, payload, capacity volume, capacity volume utilization, road type/speed, and idle hours at the vehicle class level for the emissions performance assessment (see Section 4.0 below). While the user may provide direct data inputs for any or all of these activity parameters, the Truck Tool also allows the user to select default values for payload and volume determination, in the absence of fleet-specific information. (Direct inputs for payload are highly preferred over the use of calculator defaults.) The data sources and assumptions used to develop these default values are discussed below.

<u>Default Payload Distributions</u>

Average payloads can vary widely among fleets, even within a given vehicle class, depending upon commodity type and body/trailer type. (While the Truck Tool does collect commodity information, this information is not used in determining payloads.) With the exception of LTL and Package carriers (see below), exact data entries were used from the 2011 Truck Tool submissions to obtain payload distributions for the 2014 Tool. This data was categorized by fuel type, truck class, body-type, and SmartWay ranking category. Body-type refers to the categories presented in the Truck Tool payload calculator (e.g., Step Van, Beverage, Combination Flatbed, etc.). Ranking category is based on the Fleet Characterization inputs (e.g., Truckload Dry Van, Dray, Mixed, etc.). 1,850 unique records were identified using this categorization of the 2011 Partner data.

This data was then reviewed and four outliers were identified and removed from the data set.[22] Next, the data was grouped by truck class and body type and examined for

[22] Three Class 2b entries were removed due to suspiciously high payloads (16, 13, and 5 tons). One Class 8b truck was also removed (1 ton) due to an incongruous text explanation ("none used").

notable differences in payload values across ranking categories. However, with the exception of certain Class 8 trucks, no truck class/body-type/ranking category combination had greater than 20 observations. Therefore it was concluded that there was not an adequately large data set available for establishing ranking-category specific payload distributions for Truck Classes 2b-7. In these cases payload data were aggregated across all ranking categories for each truck class/body-type combination.

The larger population of Class 8 trucks in the 2011 data set allowed for a differentiation of payload distributions across ranking categories. Considering both available sample size and average payloads, the following unique truck class/body-type/SmartWay ranking category groupings were established.

- Class 8a Dry Van Single body-types: differentiate LTL (9.9 tons average) and non-LTL (12.4 tons average) categories. No differentiation across categories for other body-types.
- Class 8b Dry Van Single body-types: differentiate Heavy-bulk (24.1 tons), LTL/Moving/Package (15.0 tons), Tanker (24 tons), and all other categories (18.5 tons).
- Class 8b Specialty body-types: differentiate Auto Carriers (16.2 tons), Heavy/Mixed (30.3 tons), Flatbed (21.6 tons), and all other categories (25.6 tons).
- Class 8b Dry Van Double body-types: differentiate TL/Reefer/Mixed (27.7 tons) and all other categories (19.4 tons)
- Class 8b Other body-types: differentiate Heavy/Flatbed/Mixed (27.4 tons) and all other categories (21.5 tons).

Based on this data, Table 5 presents the payload averages, standard deviations, minimum and maximum values by truck class/body-type/and-or ranking category.[23] Note that the average values and standard deviations presented below are not weighted by fleet size.

[23] Given the lack of data on non-diesel heavy-duty vehicles, payload ranges are assumed to apply to all fuel types.

Table 5. Average Payload and Standard Deviation (short tons) by Vehicle Class/Body-Type/Ranking Category (2011 SmartWay Partner Data – Exact Payload Entries)

Body-Type (Bin Category)	Avg Payload (tons)	Std Dev
Class 2b		
Flatbed	1.19	0.69
Step Van	1.14	0.48
Walk-In Van	1.05	0.48
Conventional Van	0.77	0.41
Other	0.58	0.49
Class 3		
Step Van	1.65	0.53
Walk-In Van	1.64	0.57
Conventional Van	1.50	0.83
Other	1.08	0.90
Class 4		
Flatbed	2.68	1.53
Step Van	2.24	1.19
Walk-In Van	1.70	0.80
Conventional Van	2.27	0.90
Other	1.16	0.76
Class 5		
Walk-In Van	1.99	1.08
Conventional Van	3.39	0.99
Other	2.91	1.19
Class 6		
Flatbed	4.67	1.71
Reefer	4.84	1.80
Walk-In Van	4.01	1.68
Single-Axle Van	3.78	1.19
Other	4.17	1.48
Class 7		
Beverage	6.10	2.22
Flatbed	7.05	0.85
Reefer	6.03	1.27
Tanker	7.45	0.92
Single-Axle Van	5.53	1.83
Other - straight truck	8.30	4.63
Combination Flatbed	5.22	0.41

Body-Type (Bin Category)	Avg Payload (tons)	Std Dev
Combination Reefer	3.58	1.01
Dry Van - Single	5.44	2.57
Other - combo	5.90	1.15
Class 8a		
Flatbed	10.04	5.88
Tanker	12.12	5.43
Single-Axle Van	8.09	3.80
Other - straight truck	9.76	4.08
Beverage	12.30	4.40
Combination Flatbed	12.51	1.41
Dry Van - Single (other than LTL)	12.42	4.66
Other - combo	12.68	4.56
Class 8b		
Dry Van - Single (Heavy-Bulk)	24.1	2.98
Dry Van - Single (other bins)	18.46	3.97
Dry Van - Double (Tanker)	24.06	2.96
Dry Van - Double (Mixed-TL-Reefer)	27.74	13.33
Dry Van - Double (Other bins)	19.39	3.82
Dry Van – Triple	27.10	3.20
Combination Reefer	20.10	2.82
Combination Flatbed	22.50	4.23
Combination Tanker	24.90	2.89
Chassis	21.80	5.28
Specialty (Other bins)	25.62	2.72
Other (Other bins)	21.50	8.41
Specialty (Auto bin)	16.18	5.22
Specialty (Heavy-Mixed bins)	30.25	13.78
Specialty (Flatbed bin)	21.56	2.58
Other (Heavy-Flatbed-Mixed bins)	27.41	6.36

The values above serve as the basis for the default payload ranges provided in the Truck Tool payload calculator. For most vehicle class/body-type/ranking category combinations,[24] seven default ranges are offered for Partner selection:

[24] In a few instances, the calculated lower bound value for Range 2 was less than zero. In these cases the lower bound value for Range 2 was set to zero and the Payload Calculator indicates Range 1 as "N/A".

- Range 1: from 0 tons to (Average payload – 2 x standard deviation);
- Range 2: from (Average payload – 2 x standard deviation) to (Average payload – 1 x standard deviation);
- Ranges 3-5: evenly split in three sections, from (Average payload – 1 x standard deviation) to (Average payload + 1 x standard deviation);
- Range 6: from (Average payload + 1 x standard deviation) to (Average payload + 2 x standard deviation); and,
- Range 7: from (Average payload + 2 x standard deviation) to (Average payload + 3 x standard deviation).

Once a particular range is selected, the payload calculator estimates the midpoint of the range in order to estimate class level average payloads. The estimated midpoint payload values for each body type are weighted by one of the four allocation methods specified by the user in the payload calculator: # miles, # trips, % operation, and # vehicles by body type. The weighted sum is then used as the class level average payload, which in turn is used directly in determining grams per ton-mile performance metrics for the fleet.

Payload data based on bills of lading and entered directly into the payload calculator are validated using the same data described above (see Section 3.4).

LTL and Package Fleet Payloads

For most payload validations in the Tool, ranges are calculated by class and by body type as described above. LTL and package delivery payload validation ranges were recently updated, and are calculated simply on a truck class basis, as there is not enough LTL and Package Delivery Partner information to break payload out by body type. Therefore each body type in a class is validated using the same range, as shown in Table 6 below.

Table 6. Payload Validation Ranges for LTL and Package Delivery Fleets

Truck Class	Avg Payload	# Obs	Standard Dev	R1 Min	R2 Min	R3 Min	R4 Min	R5 Min	R6 Min	R7 Min
2B	0.96	12	0.195	>0	0.565	0.761	0.891	1.021	1.151	1.249
3	1.57	19	0.303	>0	0.967	1.270	1.472	1.674	1.876	2.027
4	1.92	11	0.679	>0	0.562	1.241	1.693	2.146	2.598	2.937
5	2.79	10	0.790	>0	1.212	2.002	2.529	3.055	3.582	3.977
6	3.72	70	0.678	>0	2.362	3.040	3.492	3.945	4.397	4.736
7	5.44	64	0.981	>0	3.481	4.462	5.116	5.770	6.424	6.914
8A	9.78	63	2.170	>0	5.437	7.607	9.054	10.501	11.948	13.033
8B	15.79	110	3.532	>0	8.729	12.261	14.615	16.970	19.324	21.090
All	**8.50**	**359**	**5.862**							

The lower payload ranges (for "R1" and "R2") were set so as to identify less than 20% of the observed LTL/package fleets during validation. The middle R3-R5 ranges extend from one standard deviation less than the average payload to one standard deviation greater than the average. The upper payload values for "R6" range from the payload average plus one standard deviation to the average plus 1.5 standard deviations. The range for "R7" extends above the "R6" maximum value. The maximum R7 range values are taken directly from the original R7 maximum values described above by class and by body type.[25]

Default Capacity Volumes[26]

The Truck Tool also provides a volume calculator to estimate the cubic feet associated with the common straight truck body types (classes 2b through 7) identified using the 2011 Partner dataset, as well as typical trailer, container, carrier, and tanker sizes, for combination trucks (classes 8a and b).[27] Capacity volumes in cubic feet are relatively easy to estimate for many combination trucks. Per unit interior volume defaults are assumed for standard dry vans - no high cubes, reefers, etc.), and containers. Trailer calculations assume an 8' x 9' cross-section, and the exterior length less 1/2 foot. 20 and 40 foot container dimensions are referenced in many places, such as http://www.mussonfreight.com/containers/containers.html.[28] Table 7 summarizes the default volumes assumed for a number of standard trailers, containers, tankers, and bulk carriers.

Table 7. Default Average Cubic Feet (Class 8a – 8b trucks)

Type	Size	Cubic Feet
Trailers	28ft	1,980
	40ft	2,844
	42ft	2,988
	45ft	3,204
	48ft	3,420
	53ft	3,780
	57ft	4,068
	28x28	3,960
	48x28	4,824
	40x40	5,688
	48x48	6,840
	28x28x28	5,940
Containers	20ft	1,159

[25] For two body types **under** Class 7 **trucks** (Combination Flatbed and Combination Reefer), the original Range **7** max value is less than the new Range **6** max value. (R**7** max is 6.45 and 6.61 respectively, while the new R**6** max value for all class 7 body types is 6.914). Therefore, for just these two body types within Class 7, instead of using the original Range 5 max, we use the Range 5 max that would be calculated from the new table values. This is calculated as Avg + 2.5 **x standard deviation,** based on the table **above** (7.896 in this case). [Note it is Avg + 2.5 **x standard deviation** instead of Avg + 3 **x standard deviation** because of the 1.5 sigma rule for Range **6. Therefore the** Range 5 max **value** is simply 1 **standard deviation** larger than the Range **6** max.]

[26] The Truck Tool allows users to enter capacity volume in either cubic feet or TEUs, with one TEU assumed equal to 1,360 cubic feet – see http://www.dimensionsinfo.com/20ft-container-size/.

[27] Default capacity volumes for Class 7 combination vehicles were not available, and were set equal to the average volume for Class 8 combination trucks in the 2010 SmartWay database.

[28] 53 foot containers are assumed to have interior dimensions of 52' 5" x 7' 8" x 7' 10"

Type	Size	Cubic Feet
	40ft	2,347
	45 ft[29]	3,031
	48 ft	3,454
	53ft	3,148
Tankers	Small (3,000 gal)	401
	Medium (5,250 gal)	702
	Large (7,500 gal)	1,003
Bulk Carriers	Small (22'x8'10.25')	1,804
	Medium (32'x8'x11')	2,816
	Large (42'x8.5'x11.5')	4,106

Cargo volume capacity data is often not readily available for straight trucks, however. Such trucks are highly variable in their configuration and when volume estimates are found, the data often do not permit cross-referencing with vehicle class. Most highway infrastructure and operating agencies, including enforcement, are concerned about weight (e.g., pavement and structure damage), but not cubic capacity. The operating agencies are also concerned about maximum dimensions, of length, height and width (for, respectively, turning radii, vertical clearance, and lane width) but the shape of the box and its relation to the truck superstructure, not these maximums, dictates cubic capacity. Little public research on the cubic capacity of the box has been done, and thus little information is published.

A relatively small number of volume estimates were compiled from the 2011 Partner data (218 unique observations for truck class/body-type combinations). Of these observations 13 were identified as outliers and removed from the data set (11 observations of less than 100 cu ft; one Class 3 truck at 1,360 cu ft; and one Class 2b truck at 3,600 cu ft). Given the overall "thinness" of the dataset, those truck class/body-type combinations with three or more observations were used to estimate average capacity volumes. The following truck class/body-type combinations had fewer than three observations in the Partner dataset.

- Class 2b Flatbed
- Class 3 Other
- Class 4 Flatbed, Step Van, Other
- Class 6 Flatbed, Walk-In Van
- Class 7 Flatbed, Tanker
- Class 8a Beverage

For these remaining truck class/body-type combinations available information was compiled as it relates to cargo *volume* capacity for the common straight truck body types.

[29] 45 and 48 foot container references from http://www.shippingcontainers24.com/dimensions/45-foot/, and http://www.containertech.com/container-sales/48ft-high-cube-container-domestic/

Without a comprehensive data source, such as the Partner data, other strategies needed to be employed to develop examples, or ranges, of volume capacity for the remaining body type/truck class combinations of interest. A literature review and vendor interviews were performed to determine appropriate values for cargo volume capacity. The first step in the literature review involved preparing a list of vendors responsible for designing, manufacturing, or operating all the different truck types identified.

Cubic capacity is also dependent upon a variety of factors and is not uniform for even the same make and model, as many truck manufactures will design to specifications based on a client's unique needs for their cargo. For example, a client may request a manufacturer to design a truck interior to best accommodate the delivery of a certain size of parcel, and install shelving or otherwise compartmentalize to that end. Consideration was given to these factors during the review.

The literature review encompassed Internet searches of vendors of the truck types described above. Sources explored included truck manufacturers, dealers, and fleet lessors of vehicles such as Budget/U-haul/Enterprise/Ryder/E-Dart). Additionally, validation searches were performed on websites outlining current truck sales to help identify the appropriate size/class of the vehicles and applicable specifications. The following information was collected from these searches for over 40 different vehicles currently available on the market:

- Length, width, height of the cargo hold
- Reported cargo space (cubic feet)
- Gross Vehicle Weight
- Payload
- Manufacturer
- Make/Model
- Reference website

Outreach to key stakeholders in the commercial vehicle industry was also performed to further validate the information collected from the literature and resource review. Contact was made with representatives from Volvo Trucks North America; the American Transportation Research Institute (ATRI); the Commercial Vehicle Safety Alliance (CVSA); the Truck Manufacturers Association (TMA); Federal Highway Administration (FHWA) Truck Size and Weight; and a wide variety of trucking manufactures and other vendors.

The results of this review are combined with the averages from the Partner data and are provided in Table 8 below for straight trucks, classes 2b through 7. In those instances where multiple vehicle models were identified for a given body type/vehicle class combination, simple averages were calculated across models.

Table 8. Estimated Capacity Volumes (cubic feet) for Straight Truck Body Types, by Vehicle Class

Body- type	Average Capacity Volume (Cubic Feet)
Class 2b	
Flatbed*	336
Step Van	479
Walk-In Van	580
Conventional Van	357
Other	303
Class 3	
Step Van	468
Walk-In Van	706
Conventional Van	538
Other*	599
Class 4	
Flatbed*	448
Step Van*	700
Walk-In Van	667
Conventional Van	699
Other*	830
Class 5	
Walk-In Van	655
Conventional Van	1,010
Other	691
Class 6	
Flatbed*	672
Reefer	1,146
Walk-In Van*	1,496
Single-Axle Van	1,583
Other	1,257
Class 7	
Beverage	1,576
Flatbed*	728
Reefer	1,413
Tanker*	267
Single-Axle Van	1,476
Other	1,486

*From literature/web review

Once a default capacity volume is selected, the volume calculator weights the volume estimates for each body type by one of the four allocation methods: # miles, # trips, % operation, and # vehicles by body type. The weighted sum is then used as the class level average capacity volume, which in turn is used directly in determining grams per volume-mile performance metrics for the fleet.

A list of websites utilized in the literature review is provided below.

Truck manufacturers:
www.gmc.com
www.chevrolet.com
www.ford.com
www.freightlinersprinterusa.com
www.silvercrowncoach.com

Fleet operators:
www.uhaul.com
www.pensketruckrental.com
www.budgettruck.com
www.hendersonrentals.co.nz
www.hackneybeverage.com
www.hackneyusa.com
www.fedex.com
www.grummanolson.com

Other sources:
www.usedtruckdepot.com
www.usedtrucks.ryder.com
www.truckingauctions.com
www.truckpaper.com
www.motortrend.com
files.harc.edu/Projects/Transportation/FedExReportTask3.pdf

The detailed findings of the literature/web review are presented in Appendix D.

3.4 Data Validation

The SmartWay Truck Tool has a number of standard logical, range and value checks that must be passed before Partners can submit their data to EPA. Many of these checks simply confirm the presence of required data (e.g., total miles for each truck class selected), or the accuracy of logical relationships (e.g., revenue miles <= total miles). The list of these basic checks is provided below. Partners will not be able to finalize their fleet files until all associated errors have been resolved. Also note that there is an implicit validation check on all numeric fields because the system will not accept any non-numeric characters (including minus signs) within these fields.

Table 9. Basic Range and Logical Checks – Conditions Resulting in Error or Warning Messages

Contact Information	User must enter at least two distinct contacts
Fleet Characterization	User must include a Partner Name.
Fleet Characterization	If entered, SCACs must be between 2 and 4 characters in length, and at least one character must be a letter. Multiple SCACs must be separated by commas.
Fleet Characterization	If entered, MCNs must be between 6 and 7 digits.
Fleet Characterization	If entered, DOT numbers must be 7 digits or less.
Fleet Characterization	User must select a Fleet Type.
Fleet Characterization	User must indicate operational control over at least 95% of the fleet. (If Partner does not have at least 95% operational control, Truck Tool may not be used for the fleet.)
Fleet Characterization	User must include a Fleet Contact name for each fleet.
Fleet Characterization	The Operation Category totals must add up to 100%.
Fleet Characterization	The Body Type totals must add up to 100%.
Fleet Characterization	Warnings are issued for any of the following Operation Type/Body Type combinations. NOTE: This validation will only be invoked if there is a single selection made for either Operation or Body Type - otherwise combinations can't be determined with certainty. LTL/Chassis; LTL/Moving; LTL/Heavy; LTL/Specialized; Dray/Flatbed; Dray/Moving; Dray/Utility; Package/Flatbed; Package/Chassis; Package/Heavy; Package/Auto; Package/Moving; Package/Utility; Package/Specialized.
General Information	User must designate the Short-haul vs. Long-haul split.
General Information	User must select at least one fuel type.
General Information	User must designate the percentage of truckloads that utilize 100% of available cargo capacity.
General Information	User must indicate the commodities that are carried by each fleet.
General Information	If participating in the Port Dray Program, user must indicate the number of trucks equipped with APUs and SmartWay tires. (If none of the trucks in the fleet are equipped with these, a zero must be entered into the field.)
General Information	If participating in the Port Dray Program, the number of trucks equipped with APUs or SmartWay tires cannot exceed the number of trucks in the fleet.
Activity Information	All fields are required, so no field can be left blank. (If appropriate, a zero can be placed in certain fields.)
Activity Information	For all numeric fields except Empty Miles, Biofuel gallons, and Idle Hours, the value must be greater than zero. (An explanation must be provided for zero Empty Miles).

Activity Information	For mileage and gallons fields, enter exact rather than rounded values. (warning)
Activity Information	For Revenue Miles, the amount cannot exceed the number of Total Miles Driven.
Activity Information	For Revenue Miles, if the Data Source Detail "Equal to total miles" is selected, the amount must equal the Total Miles Driven.
Activity Information	For Revenue Miles, if the Data Source Detail "Total miles less empty miles" is selected, the amount must equal the Total Miles Driven minus Empty Miles Driven.
Activity Information	For Empty Miles, the amount must be less than the number of Total Miles.
Activity Information	For Empty Miles, if the Data Source Detail "Total miles less revenue miles " is selected, the amount must equal the Total Miles Driven minus Revenue Miles Driven.
Activity Information	On the Biofuel Blend Worksheet, the total gallons of biofuel cannot exceed the amount entered for Total Fuel on the Activity Information screen.
Activity Information	For each row of data, user must specify a Data Source.
Activity Information	For Capacity Utilization, the value cannot exceed 100%.
Activity Information	For Capacity Utilization, the value must be less than 100% if user indicated that the fleet is 100% Less-Than-Truckload (LTL). (By definition, LTL fleets cannot have 100% capacity utilization.)
Activity Information	The implicit commodity density derived from the payload, volume, and capacity utilization inputs must be between 0.001 and 0.65 tons/cubic foot.[30]
Activity Information	For Idle Hours, the value cannot exceed 8,760.
Activity Information	For Idle Hours, values significantly outside the expected range must be explained.
Activity Information	If company no idle policy is specified under Idle Data Source, then a warning is displayed if idle hours/yr are > 100.
Activity Information	MPG must be greater than zero.
Activity Information	MPG that is significantly outside the expected range for the given truck class (based on a lookup table) must be explained.
Activity Information	Reefer fuel inputs for each fuel type must be less than the total vehicle fuel volume input.
Model Year & Class	Total truck count for each fleet cannot be zero.
Model Year & Class	Total truck counts for each selected truck class (those with a check mark) cannot be zero.
PM Reduction	The number of trucks using any particular PM reduction strategy cannot be greater than the number of trucks for the given class and model year.
PM Reduction	The sum of the trucks using either DOC or Particulate Matter Traps cannot be greater than the number of trucks for the given class and model year.

[30] The upper bound density range was based on gold (~0.6 tons/cubic foot) and the lower bound range on potato chips (~0.003 tons/cubic foot) – see http://www.aqua-calc.com/page/density-table/substance/Snacks-coma-and-blank-potato-blank-chips-coma-and-blank-white-coma-and-blank-restructured-coma-and-blank-baked.

PM Reduction	If participating in the Port Dray Program, the sum of the trucks using either DOC/CCV, Flow Through Filters, or Particulate Matter Traps cannot be greater than the number of trucks for the given class and model year.
PM Reduction	If user indicates that the company uses PM reduction equipment, there must be at least one truck included on the PM Reduction sub-tab.
Payload & Volume Calculators	User must provide a Data Source and preferred allocation method for the information entered on the calculators.
Payload & Volume Calculators	The sum of the total miles or total trucks entered in the calculator must equal the number entered on the Activity Information screen.
Payload & Volume Calculators	The calculated average cannot be equal to zero.
Payload & Volume Calculators	For percentages, the total must equal 100%.
Payload & Volume Calculators	For each body type for which some information has been entered, all of the visible field must be completed (including the explanation field if shown).
Payload & Volume Calculators	Zero is not a valid value for any payload or volume.
Payload & Volume Calculators	Values that are significantly outside the expected range for the given body type and class must be explained.
Payload & Volume Calculators	The body types indicated in the Volume Calculator must agree with those used in the Payload Calculator.
Payload & Volume Calculators	Ensure consistency between body-type selections in the Fleet Characterization section with those from the Payload and Volume Calculators. For example, if 100% is specified for Dry Van under Fleet Characterization, only Dry Vans (single, double, triple) may be selected within the calculators. See Table 9.
Payload & Volume Calculators	If “# of Vehicles in this class” is selected for both the Payload and Volume calculators for a given truck class, the number of trucks entered into each calculator must agree.
Payload & Volume Calculators	If “# of Vehicles in this class” is selected for either the Payload or Volume calculator, the number of body-types selected cannot exceed the number of vehicles specified.
Payload & Volume Calculators	If “# of miles in this class” is selected for both the Payload and Volume calculators for a given truck class, the number of miles entered into each calculator must agree.
Payload & Volume Calculators	If “# of Trips done by this class” is selected for both the Payload and Volume calculators for a given truck class, the number of trips entered into each calculator must agree.
Payload & Volume Calculators	Ensure consistency between the body-type selections in the Class 8a/b payload calculator and the corresponding Volume calculator – i.e., issue warnings for any type of dry van, reefer or beverage selected in payload calc but no Trailers specified in volume calculator; If flatbed, auto or specialty is selected in payload, "Other Trailers" should be selected in volume calculator

Validations have been added to the Truck Tool to ensure the selections in the 8a/8b volume calculator are consistent with the selections in the payload calculator for those classes:

RED errors (must address):

- If the user has values for 8a body type “Beverage” or “Dry Van – Single” in the Payload calculator, they must have a value in the “Trailer” section of the volume calculator.
- If the user has values for 8b body type “Dry Van – Single” or “Dry Van – Double” or “Dry Van – Triple” in the Payload calculator, they must have a value in the “Trailer” section of the volume calculator.

YELLOW warnings (comments/changes not mandatory):

- If the user has values for 8a body type “Flatbed” or “Combination Flatbed” in the Payload calculator, they must have a “Flatbed” checkbox checked in the “Trailer” section of the volume calculator.
- If the user has values for 8a body type “Single-Axle Van” or “Dry Van - Single” in the Payload calculator, they must have a “Box” checkbox checked in the “Trailer” section of the volume calculator.
- If the user has values for 8a body type “Beverage” in the Payload calculator, they must have a “Box” or “Reefer” checkbox checked in the “Trailer” section of the volume calculator.
- If the user has values for 8a body type “Tanker” in the Payload calculator, they must have a value in the “Tanker” section of the volume calculator.
- If the user has values for 8a body type “Other (straight truck)” or “Other (combo)” in the Payload calculator, they must have a value in the “Bulk”, “Auto Carrier”, or “Other” section of the volume calculator.

- If the user has values for 8b body type “Dry Van – Single” or “Dry Van – Double” or “Dry Van – Triple” in the Payload calculator, they must have a “Box” checkbox checked in the “Trailer” section of the volume calculator.
- If the user has values for 8b body type “Combination Reefer” in the Payload calculator, they must have a “Reefer” checkbox checked in the “Trailer” section of the volume calculator.
- If the user has values for 8b body type “Combination Flatbed” in the Payload calculator, they must have a “Flatbed” checkbox checked in the “Trailer” section of the volume calculator.
- If the user has values for 8b body type “Combination Tanker” in the Payload calculator, they must have a value in the “Tanker” section of the volume calculator.
- If the user has values for 8b body type “Chassis” in the Payload calculator, they must have a value in the “Chassis” section of the volume calculator.
- If the user has values for 8b body type “Specialty” or “Other” in the Payload calculator, they must have a value in the “Bulk”, “Auto Carrier”, or “Other” section of the volume calculator.

As noted in Table 9 above, a warning is issued if an inconsistency is identified between body-types specified within the Fleet Characterization Section and those within the

Payload/Volume Calculators. Warning conditions (associated with 100% body-type entries under Fleet Characterization) are presented in Table 10 below.

Table 10. Consistent Body-Types Resulting in No Warning Messages

Acceptable selections -								
Body Type (100%)	**2b**	**3**	**4**	**5**	**6**	**7**	**8a**	**8b**
Dry Van	all except flatbed	all	all except flatbed	all	walk-in, single axle van	single axle van, dry van single	single axle van, dry van single	dry van (single, double, triple)
Refrigerated	other	other	other	other	reefer, other	reefer, beverage, combination reefer, other	beverage, other	combination reefer, other
Flatbed	flatbed	other	flatbed	other	flatbed	flatbed, combination flatbed	flatbed, combination flatbed	combination flatbed
Tanker	other	other	other	other	other	tanker	tanker	combination tanker
Chassis	N/A	N/A	N/A	N/A	N/A	other	other	chassis
Hvy-Bulk	N/A	N/A	N/A	N/A	N/A	other	other	other
Auto Carrier	N/A	N/A	N/A	N/A	N/A	other	other	other
Moving	all except flatbed	all	all except flatbed	all	all except reefer, flatbed	single axle van, dry van-single, other	single axle van, dry van-single, other	dry van single, specialty, other
Spec Hauler	other	other	other	other	other	other	other	specialty
Utility	all	all	all	all	all except reefer	flatbed, combination flatbed, other	flatbed, combination flatbed, other	combination flatbed, specialty, other

Additional, rigorous validation checks of key data inputs are also needed to ensure the overall quality of the performance metrics calculated by the Truck Tool. Validation checks serve three purposes to this end. First, unusually high or low values can be identified and flagged for the user's attention before finalizing inputs. For example, a user may misplace a decimal, inadvertently add an extra zero, or utilize the wrong units (e.g. reporting pounds instead of tons for payload) upon data entry. By comparing these data entries to reliable industry averages and distributions, these values can be flagged allowing users to quickly correct such errors.

Second, under certain circumstances Partners may operate their fleets under atypical conditions, resulting in extreme (outlier) data values. For example, permitted heavy-haul operations may routinely exceed industry-average payload values by 10 or more tons. By flagging such data entries Partners have the opportunity to provide additional information regarding their unique operating conditions through use of the Truck Tool comment fields.

Finally, independent criteria can be established to ensure that data inputs are never allowed to exceed certain physically-constrained absolute limits. For example, a truck cannot exceed roughly 500,000 miles per year, even with dual drivers and minimal maintenance time, simply due to the available hours per year and highway speed limits. Data values above these absolute maximum levels are not allowed by the Truck Tool, and users are required to modify the associated inputs before proceeding.

The following presents the updates to the Truck Tool validation ranges for all parameters but payload and volume, which were discussed above. Validation ranges are of three types:

1. "Yellow" values indicating that the input or derived performance value is notably lower/higher than the expected value. Partners may enter an explanation backing up such entries, but this is not mandatory.
2. "Red" values indicating that the input or derived performance value differs greatly from the expected value. In this case the partner must enter text explaining why this value is accurate. Once entered, the value will change from "Red" to "Orange" on the data entry screen.
3. "Absolute errors" exceed values deemed physically possible and must be changed in order to be accepted by the tool.

Reefer Fuel Validation

507 diesel fleets designated as "Reefer" for the 2013 calendar year were evaluated to determine the distribution of the fraction of reefer fuel consumption to total fuel consumption. Ten of these observations were dropped from the analysis data set, having either 0 gallons of reefer fuel entered, or reefer fuel consumption was greater than total consumption. As shown in Figure 4 below, the distribution for the remaining reefer fleets was highly skewed toward low fractions (reefer consumption / total consumption). For ths reason EPA simply used 5% increments for the Range 1 and 2

validation values, but used the average plus 1 to 2 standard deviations for Range 4, and > 2 standard deviations for Range 5. The resulting values are shown in Table 11 below.

Figure 4

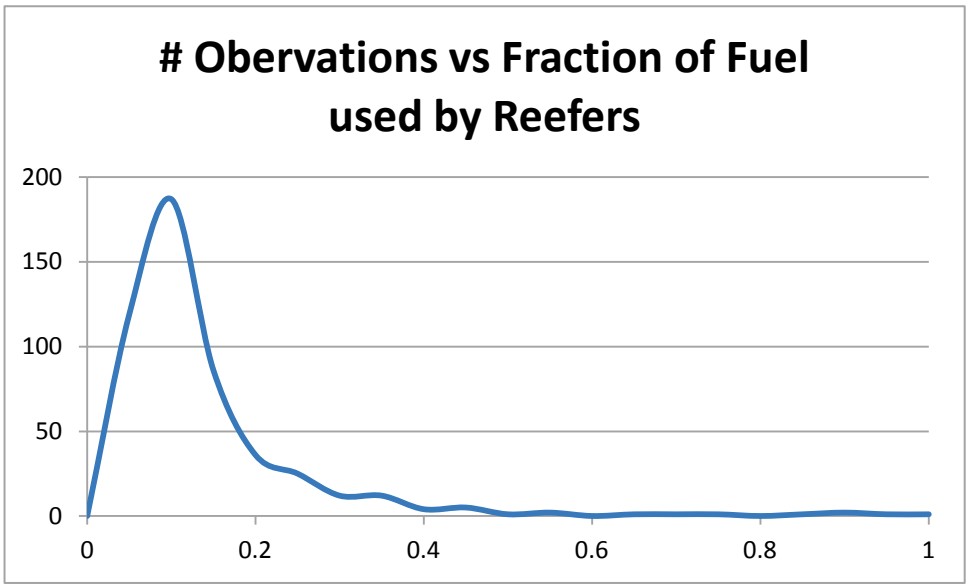

Table 11. Reefer Fuel Consumption Validation Ranges

	Min	Max	% of Obs	Comments
Range 1^	>0	0.18%	4.8%	Set to include ~5% of obs
Range 2	0.18%	1.45%	5.2%	Set to include ~5% of obs
Range 3	1.45%	24.25%	81.1%	Max value set at average + 1 sigma
Range 4	24.25%	36.90%	4.8%	between 1 and 2 sigma from average
Range 5*	36.90%	<100%	4.0%	2+ sigma from avg

^ Note - reefer fuel consumption cannot = 0 - absolute error

* Note - reefer fuel consumption cannot = 100% - absolute error

Basis - all diesel reefer fleets, 2013 reporting year

Data Processing

The validation range recommendations are based upon a distributional analysis performed on the 2011 Truck Partner input and performance data. Fleet level data was input into SAS and grouped by truck class, bin category, and fuel type combinations. If a particular combination had less than 20 fleets, it was aggregated to the next "higher" level until at least 20 fleets were included. This process resulted in 26 groupings, as shown in Table 12. Note these groupings are mutually exclusive – e.g. "Class 6_Mixed" (Group 6) includes all Class 6 vehicles with the exception of TL/Dry Van, LTL/Dry Van, Moving, Package, (Groups 5, 7, 8, and 9).

Table 12. Truck Fleet Groupings Used for Distributional Analysis

Group #	Name	# Fleets
1	2B_Mixed	90
2	3_Mixed	67
3	4_Mixed	59
4	5_Mixed	49
5	6_LTL/Dry Van_Diesel	52
6	6_Mixed	98
7	6_Moving	24
8	6_Package_Diesel	29
9	6_TL/Dry Van_Diesel	29
10	7_LTL/Dry Van_Diesel	56
11	7_Mixed	129
12	7_TL/Dry Van_Diesel	31
13	8A_LTL/Dry Van_Diesel	57
14	8A_Mixed	164
15	8A_Refrigerated_Diesel	24
16	8A_TL/Dry Van_Diesel	70
17	8B_AutoCarrier_Diesel	22
18	8B_Dray_Diesel	84
19	8B_Flatbed_Diesel	150
20	8B_Heavy/Bulk_Diesel	29
21	8B_LTL/Dry Van_Diesel	95
22	8B_Mixed	463
23	8B_Refrigerated_Diesel	408
24	8B_Specialized_Diesel	61
25	8B_TL/Dry Van_Diesel	719
26	8B_Tanker_Diesel	74
	Sum	**3,133**

ERG then performed a distributional assessment for each of the above groupings for the following parameters.

- Miles per vehicle
- Miles per gallon
- Revenue Miles (as a percent of total miles)
- Empty Miles (as a percent of total miles)
- Percent Biofuel
- Percent Capacity Utilization
- Percent Miles Traveled, Urban
- Percent Miles Traveled, Highway
- Average Idle Hours per year

ERG then identified suspected outliers and erroneous data entry values for each parameter/group combination, based on the criteria presented in Table 13.

Table 13. Outlier Definition

Metric	Unreasonably Low	Unreasonably High
Miles per Vehicle	Mean – 3*Std.dev	Mean + 3*std.dev
MPG	0	Mean + 3*std.dev
Percent Revenue Miles	<40	100
Percent Empty Miles	0	>60
Percent Biofuel	0	>20
Percent Capacity Utilization	0	100
Percent Urban Operation	0	100
Percent Highway Operation	0	100
Average Idle Hours	0	Mean + 3*std.dev

Using these criteria ERG identified 49 values, which were subsequently dropped from the data set in order to develop “yellow” and “red” validation ranges for generalized distributions. The dropped values are shown below in Table 14.

Table 14. Values Flagged as Outliers

Group	Value	Mean	Parameter
1	121,133	30,058	Mi/Veh
1	121,108	30,058	Mi/Veh
3	86,827	25,894	Mi/Veh
7	111,401	31,584	Mi/Veh
9	124,685	33,782	Mi/Veh
10	115,287	38,540	Mi/Veh
12	118,006	37,498	Mi/Veh
14	166,342	38,957	Mi/Veh
14	143,660	38,957	Mi/Veh
15	184,305	45,563	Mi/Veh
16	113,448	38,336	Mi/Veh
18	157,713	54,525	Mi/Veh
20	185,244	54,430	Mi/Veh
20	186,529	54,430	Mi/Veh
32	228,151	94,557	Mi/Veh
32	209,269	94,557	Mi/Veh
32	205,840	94,557	Mi/Veh
3	18.9	10.0	MPG
4	30	11.5	MPG
19	8	6.3	MPG

Group	Value	Mean	Parameter
20	8.7	6.3	MPG
20	9	6.3	MPG
32	7.8	6.0	MPG
32	7.9	6.0	MPG
32	7.9	6.0	MPG
1	1,560	345	Avg Idle hrs/yr
1	1,785	345	Avg Idle hrs/yr
3	1,267	328	Avg Idle hrs/yr
7	1,462	441	Avg Idle hrs/yr
8	1,825	414	Avg Idle hrs/yr
8	1,680	414	Avg Idle hrs/yr
10	1,500	473	Avg Idle hrs/yr
10	1,505	473	Avg Idle hrs/yr
12	1,615	350	Avg Idle hrs/yr
14	1,835	494	Avg Idle hrs/yr
14	1,825	494	Avg Idle hrs/yr
14	2,077	494	Avg Idle hrs/yr
15	1,440	346	Avg Idle hrs/yr
16	1,400	430	Avg Idle hrs/yr
16	1,505	430	Avg Idle hrs/yr
18	2,574	694	Avg Idle hrs/yr
19	2,071	443	Avg Idle hrs/yr
19	2,050	443	Avg Idle hrs/yr
20	2,100	525	Avg Idle hrs/yr
20	2,000	525	Avg Idle hrs/yr
20	1,986	525	Avg Idle hrs/yr
32	3,024	918	Avg Idle hrs/yr
32	3,410	918	Avg Idle hrs/yr
33	2,816	853	Avg Idle hrs/yr

Once values were defined as outliers and excluded from the data set, the mean and standard deviation of the distribution for each truck fleet grouping were then re-calculated for each metric. Each fleet was treated equally in the distributional assessment, independent of the number of vehicles in the fleet. Histograms presenting the distributions for each truck fleet grouping/metric combination are available electronically from SmartWay.

For groupings with large numbers of fleets (e.g., Class 8b diesel TL/Dry Van, Refrigerated, and Mixed), the data for miles per vehicle and MPG appear normally distributed. Examples for Class 8b TL/Dry Van Diesel fleets are shown in Figures 5 and 6.

Figure 5. Annual Miles Per Vehicle Distribution, Class 8b TL/Dry Van Diesel Fleets

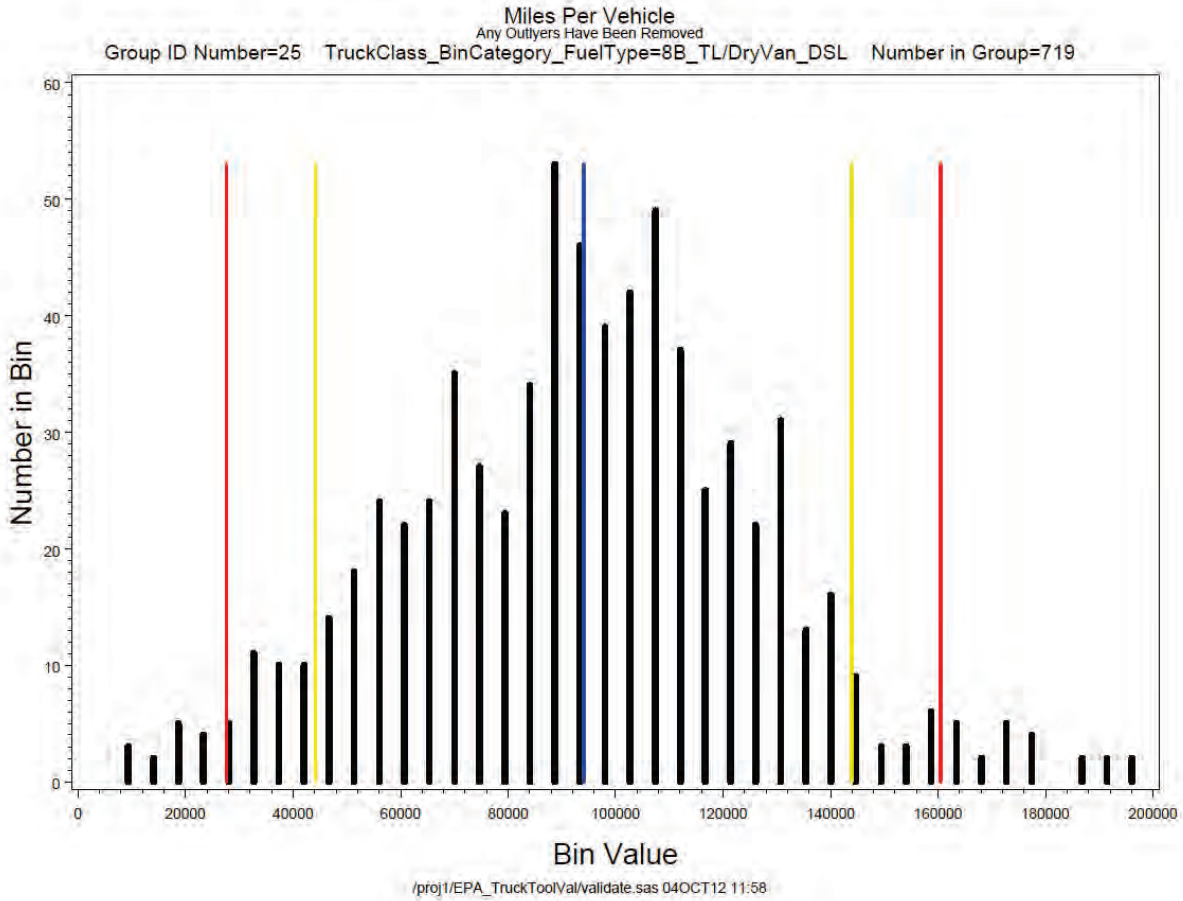

Figure 6. Miles per Gallon Distribution, Class 8b TL/Dry Van Diesel Fleets

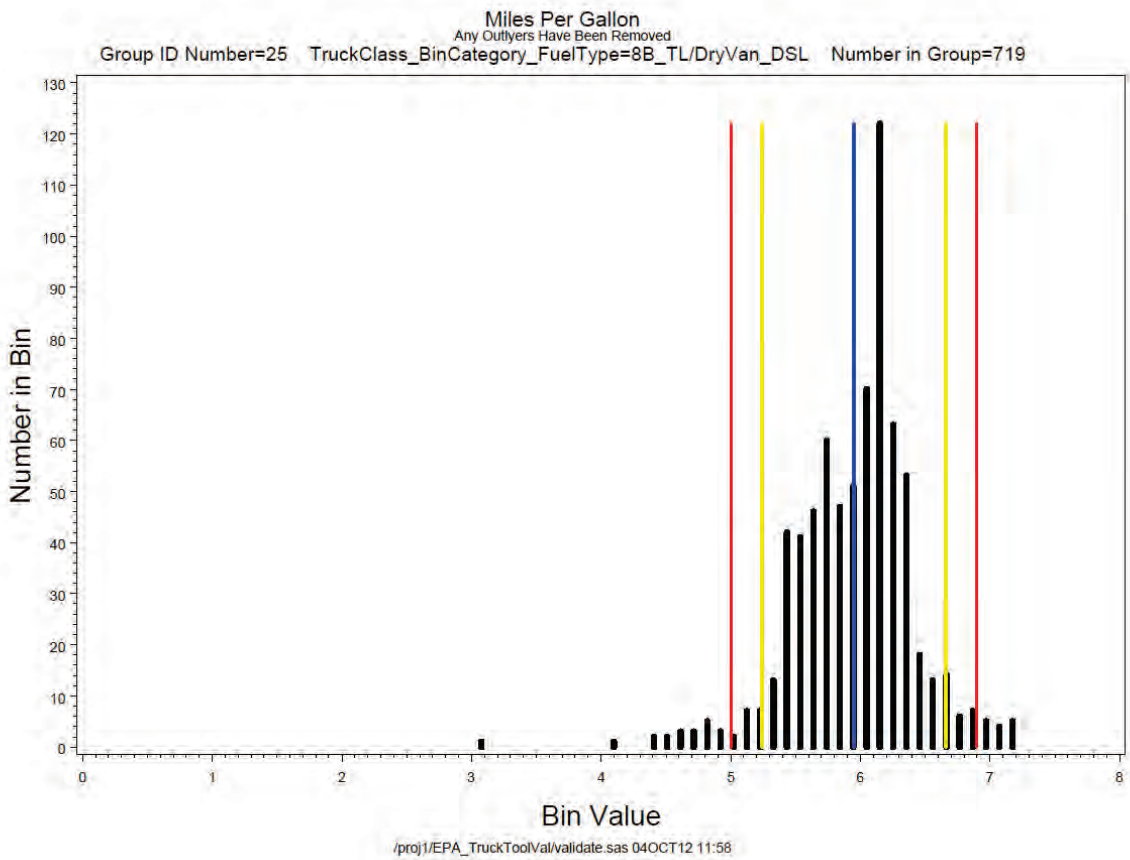

Other fleet group/metric combinations displayed sharp drop offs at certain discrete levels. For example, % Revenue Miles were seldom less than 50% of total miles, and conversely, % Empty Miles were seldom greater than 50% of total miles. % Biofuel also displayed a discrete maximum value with no fleets using blends higher than 20% biodiesel.[31] Finally, % Urban and % Highway Operation data showed no clear distributions, with values ranging from 0 % to 100 %.

Based on this preliminary assessment, red and yellow flag areas were defined for each fleet group/metric combination as shown in Table 15.

[31] As such, a yellow warning is issued for any biodiesel blend > 20%, with no red warning.

Table 15. "Red" and "Yellow" Flag Criteria

Metric	Low Red Flag	Low Yellow Flag	High Yellow Flag	High Red Flag
Miles per Vehicle	Mean – 2StD^	Mean-1.5StD^	Mean+1.5StD	Mean+2StD
MPG	Mean – 2StD	Mean-1.5StD	Mean+1.5StD	Mean+2StD
% Revenue Miles	variable^^	variable^^	None	None
% Empty Miles	1	5	variable^^	variable^^
% Biofuel	None	None	None	None
% Capacity Utilization	Mean – 2StD	Mean-1.5StD	variable*	variable*
% Urban Operation	None	None	None	None
% Highway Operation	None	None	None	None
Average Idle Hours	Mean – 2StD^	Mean-1.5StD^	Mean+1.5StD	Mean+2StD

^ If the calculated values are < 0 for a particular fleet category/metric combination, an alternate cutoff is applied based on expert judgment.
* Cutoffs developed based on expert judgment.
^^ Values selected in consultation with SmartWay support staff.

For six of the metrics,[32] yellow flag criteria were set at ± 1.5 times the standard deviation (StD), and the red flag criteria at ± 2.0 times the standard deviation of the distribution for each truck fleet grouping. In most cases these criteria result in roughly 10-15% of the values for these metrics being flagged as either red or yellow for partner attention (although the flag rates associated with % Revenue and % Empty Miles is substantially higher). Selecting cutoffs at this level of stringency is intended to identify likely input errors without unduly burdening the large majority of Truck Tool users with unnecessary data checks and text explanations. Tables 16-21 present the actual yellow and red flag values for each fleet group/metric combination, given the decision criteria presented in Table 15. Tables 22-27 present the number of observations that would be flagged with yellow and red warnings for these combinations.

[32] Standard deviations are only used on the low end to determine red/yellow cutoffs for the % Capacity Utilization metric, due to a number of carriers utilizing 100% of available space. Upper end cutoffs are based on expert judgment for LTL categories.

Table 16. Yellow/Red Criteria by Fleet Group/Metric Combination
Annual Miles per Vehicle

Group	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
1	2B_Mixed	2,000	4,000	28,884	62,834	74,151
2	3_Mixed	6,000	8,000	30,479	62,193	72,764
3	4_Mixed	2,000	6,000	27,133	55,662	65,171
4	5_Mixed	2,000	4,000	29,922	60,351	70,494
5	6_LTL/Dry Van_Diesel	3,000	9,000	32,000	61,481	71,308
6	6_Mixed	5,000	10,000	35,838	68,836	79,835
7	6_Moving	3,000	8,000	33,908	68,107	79,506
8	6_Package_Diesel	7,376	14,188	34,622	55,057	61,869
9	6_TL/Dry Van_Diesel	5,000	10,000	33,738	69,723	81,718
10	7_LTL/Dry Van_Diesel	5,000	10,000	43,040	85,533	99,697
11	7_Mixed	4,000	8,000	36,778	69,979	81,046
12	7_TL/Dry Van_Diesel	2,000	6,000	31,764	65,241	76,399
13	8A_LTL/Dry Van_Diesel	4,000	10,000	49,990	94,443	109,260
14	8A_Mixed	4,000	8,000	52,847	102,878	119,555
15	8A_Refrigerated_Diesel	10,000	20,000	66,376	120,026	137,909
16	8A_TL/Dry Van_Diesel	4,000	7,433	74,532	141,631	163,997
17	8B_AutoCarrier_Diesel	39,712	49,944	80,640	111,335	121,567
18	8B_Dray_Diesel	4,000	12,344	56,782	101,219	116,032
19	8B_Flatbed_Diesel	34,715	47,250	84,858	122,465	135,001
20	8B_Heavy/Bulk_Diesel	7,717	23,515	70,909	118,303	134,101
21	8B_LTL/Dry Van_Diesel	16,801	30,898	73,188	115,477	129,574
22	8B_Mixed	12,171	29,882	83,016	136,150	153,861
23	8B_Refrigerated_Diesel	38,363	55,515	106,968	158,422	175,573
24	8B_Specialized_Diesel	1,705	23,589	89,242	154,895	176,780
25	8B_TL/Dry Van_Diesel	27,591	44,207	94,054	143,902	160,518
26	8B_Tanker_Diesel	32,467	44,793	81,769	118,745	131,071

Table 17. Yellow/Red Criteria by Fleet Group/Metric Combination
Miles per Gallon[33]

Group	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
1	2B_Mixed	4.6	6.7	12.9	19.1	21.1
2	3_Mixed	5.0	6.3	10.2	14.1	15.4
3	4_Mixed	5.4	6.4	9.3	12.2	13.1
4	5_Mixed	4.5	5.5	8.4	11.4	12.4
5	6_LTL/Dry Van_Diesel	5.7	6.3	8.0	9.7	10.3
6	6_Mixed	5.2	5.8	7.8	9.7	10.3
7	6_Moving	5.8	6.2	7.3	8.5	8.9
8	6_Package_Diesel	6.1	6.7	8.7	10.6	11.3
9	6_TL/Dry Van_Diesel	4.9	5.6	7.7	9.8	10.5
10	7_LTL/Dry Van_Diesel	5.6	6.1	7.6	9.1	9.6
11	7_Mixed	4.5	5.2	7.3	9.4	10.1
12	7_TL/Dry Van_Diesel	5.3	5.9	7.7	9.4	10.0
13	8A_LTL/Dry Van_Diesel	5.3	5.5	6.3	7.0	7.2
14	8A_Mixed	4.4	4.8	6.2	7.6	8.1
15	8A_Refrigerated_Diesel	4.8	5.0	5.9	6.7	7.0
16	8A_TL/Dry Van_Diesel	5.0	5.3	6.3	7.3	7.6
17	8B_AutoCarrier_Diesel	4.2	4.5	5.2	5.8	6.1
18	8B_Dray_Diesel	4.9	5.1	5.8	6.5	6.7
19	8B_Flatbed_Diesel	4.4	4.7	5.7	6.6	6.9
20	8B_Heavy/Bulk_Diesel	3.4	3.8	5.0	6.3	6.7
21	8B_LTL/Dry Van_Diesel	5.1	5.4	6.0	6.7	6.9
22	8B_Mixed	4.8	5.0	5.8	6.6	6.9
23	8B_Refrigerated_Diesel	4.8	5.1	5.7	6.4	6.6
24	8B_Specialized_Diesel	3.8	4.3	5.5	6.8	7.2
25	8B_TL/Dry Van_Diesel	5.0	5.2	5.9	6.7	6.9
26	8B_Tanker_Diesel	4.8	5.0	5.8	6.6	6.9

[33] Equivalent MPG cutoffs can be found by dividing these values by 1.26 for gasoline and CNG vehicles; dividing by 1.35 for LPG vehicles; and dividing by 1.52 for LNG vehicles – see “Non-Diesel MPG” section below for details.

Table 18. Yellow/Red Criteria by Fleet Group/Metric Combination
% Revenue Miles

Group	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
1	2B_Mixed	55	60	84.9	N/A	N/A
2	3_Mixed	50	60	84.4	N/A	N/A
3	4_Mixed	50	60	87.8	N/A	N/A
4	5_Mixed	50	60	85.7	N/A	N/A
5	6_LTL/Dry Van_Diesel	50	60	89.7	N/A	N/A
6	6_Mixed	55	65	82.8	N/A	N/A
7	6_Moving	55	65	84.5	N/A	N/A
8	6_Package_Diesel	55	65	95.5	N/A	N/A
9	6_TL/Dry Van_Diesel	55	65	86.1	N/A	N/A
10	7_LTL/Dry Van_Diesel	55	65	90.4	N/A	N/A
11	7_Mixed	55	65	83.6	N/A	N/A
12	7_TL/Dry Van_Diesel	55	65	84.4	N/A	N/A
13	8A_LTL/Dry Van_Diesel	55	60	90.5	N/A	N/A
14	8A_Mixed	55	60	82.6	N/A	N/A
15	8A_Refrigerated_Diesel	55	60	81.8	N/A	N/A
16	8A_TL/Dry Van_Diesel	55	60	87.1	N/A	N/A
17	8B_AutoCarrier_Diesel	50	55	70.6	N/A	N/A
18	8B_Dray_Diesel	55	60	84.9	N/A	N/A
19	8B_Flatbed_Diesel	60	65	81.6	N/A	N/A
20	8B_Heavy/Bulk_Diesel	50	55	65.1	N/A	N/A
21	8B_LTL/Dry Van_Diesel	60	70	90.3	N/A	N/A
22	8B_Mixed	50	60	85.6	N/A	N/A
23	8B_Refrigerated_Diesel	60	70	87.7	N/A	N/A
24	8B_Specialized_Diesel	55	60	64.5	N/A	N/A
25	8B_TL/Dry Van_Diesel	55	65	87.4	N/A	N/A
26	8B_Tanker_Diesel	45	50	66.8	N/A	N/A

Table 19. Yellow/Red Criteria by Fleet Group/Metric Combination
% Empty Miles

Group	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
1	2B_Mixed	1	5	14.3	40	45
2	3_Mixed	1	5	18.9	40	50
3	4_Mixed	1	5	13.4	40	50
4	5_Mixed	1	5	24.0	40	50
5	6_LTL/Dry Van_Diesel	1	5	9.6	40	50
6	6_Mixed	1	5	19.0	40	50
7	6_Moving	1	5	15.0	40	50
8	6_Package_Diesel	1	5	18.5	40	50
9	6_TL/Dry Van_Diesel	1	5	12.1	40	50
10	7_LTL/Dry Van_Diesel	1	5	17.0	40	45
11	7_Mixed	1	5	15.4	40	45
12	7_TL/Dry Van_Diesel	1	5	4.5	40	45
13	8A_LTL/Dry Van_Diesel	1	5	17.1	40	45
14	8A_Mixed	1	5	18.5	40	45
15	8A_Refrigerated_Diesel	1	5	12.0	40	45
16	8A_TL/Dry Van_Diesel	1	5	15.5	40	45
17	8B_AutoCarrier_Diesel	1	5	18.2	45	50
18	8B_Dray_Diesel	1	5	21.2	40	45
19	8B_Flatbed_Diesel	1	5	11.3	40	45
20	8B_Heavy/Bulk_Diesel	1	5	16.8	50	60
21	8B_LTL/Dry Van_Diesel	1	5	20.7	35	45
22	8B_Mixed	1	5	14.2	45	50
23	8B_Refrigerated_Diesel	1	5	11.3	40	45
24	8B_Specialized_Diesel	1	5	32.0	45	50
25	8B_TL/Dry Van_Diesel	1	5	22.4	45	50
26	8B_Tanker_Diesel	30	40	18.6	65	75

Table 20. Yellow/Red Criteria by Fleet Group/Metric Combination
% Capacity Utilization

Group	Name	Low Red	Low Yellow	Mean	High Yellow^	High Red^
1	2B_Mixed	30	40	69.7	N/A	N/A
2	3_Mixed	37	47	74.8	N/A	N/A
3	4_Mixed	37	47	75.7	N/A	N/A
4	5_Mixed	39	48	77.1	N/A	N/A
5	6_LTL/Dry Van_Diesel	48	54	74.0	90	95
6	6_Mixed	46	54	77.3	N/A	N/A
7	6_Moving	36	42	59.8	80	90
8	6_Package_Diesel	53	60	83.1	N/A	N/A
9	6_TL/Dry Van_Diesel	40	49	76.3	N/A	N/A
10	7_LTL/Dry Van_Diesel	52	58	77.1	90	95
11	7_Mixed	43	51	75.0	N/A	N/A
12	7_TL/Dry Van_Diesel	49	56	80.1	N/A	N/A
13	8A_LTL/Dry Van_Diesel	55	61	79.5	90	95
14	8A_Mixed	48	56	80.5	N/A	N/A
15	8A_Refrigerated_Diesel	40	50	77.5	N/A	N/A
16	8A_TL/Dry Van_Diesel	50	58	81.0	N/A	N/A
17	8B_AutoCarrier_Diesel	69	75	91.4	N/A	N/A
18	8B_Dray_Diesel	55	63	85.7	N/A	N/A
19	8B_Flatbed_Diesel	62	69	87.2	N/A	N/A
20	8B_Heavy/Bulk_Diesel	60	67	88.4	N/A	N/A
21	8B_LTL/Dry Van_Diesel	58	64	81.3	90	95
22	8B_Mixed	55	62	82.6	N/A	N/A
23	8B_Refrigerated_Diesel	58	65	85.0	N/A	N/A
24	8B_Specialized_Diesel	61	69	90.1	N/A	N/A
25	8B_TL/Dry Van_Diesel	59	65	85.2	N/A	N/A
26	8B_Tanker_Diesel	63	69	89.1	N/A	N/A

^ “N/A” indicates calculated flag value > 100. Any value ≤100 is acceptable for these group/metric combinations. Other values based on expert judgment.

Table 21. Yellow/Red Criteria by Fleet Group/Metric Combination
Annual Average Idle Hours per Truck

Group	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
1	2B_Mixed	50	100	323	693	817
2	3_Mixed	40	100	371	778	914
3	4_Mixed	50	100	364	695	806
4	5_Mixed	50	100	420	808	937
5	6_LTL/Dry Van_Diesel	50	80	311	574	662
6	6_Mixed	50	80	425	875	1,025
7	6_Moving	20	40	275	519	601
8	6_Package_Diesel	10	20	305	741	887
9	6_TL/Dry Van_Diesel	20	50	514	1,217	1,451
10	7_LTL/Dry Van_Diesel	70	100	326	578	662
11	7_Mixed	60	100	413	825	963
12	7_TL/Dry Van_Diesel	20	70	288	523	601
13	8A_LTL/Dry Van_Diesel	50	100	384	762	888
14	8A_Mixed	40	100	574	1,268	1,499
15	8A_Refrigerated_Diesel	100	200	713	1,538	1,813
16	8A_TL/Dry Van_Diesel	40	80	629	1,391	1,645
17	8B_AutoCarrier_Diesel	300	400	1,154	2,278	2,653
18	8B_Dray_Diesel	100	200	672	1,377	1,612
19	8B_Flatbed_Diesel	100	200	911	1,735	2,010
20	8B_Heavy/Bulk_Diesel	100	200	601	1,102	1,270
21	8B_LTL/Dry Van_Diesel	100	200	518	1,048	1,225
22	8B_Mixed	100	200	782	1,636	1,921
23	8B_Refrigerated_Diesel	100	200	843	1,705	1,993
24	8B_Specialized_Diesel	100	220	760	1,613	1,897
25	8B_TL/Dry Van_Diesel	100	200	912	1,786	2,077
26	8B_Tanker_Diesel	100	150	826	1,745	2,051

Table 22. Number of Values Flagged by Fleet Group/Metric Combination
Annual Miles per Vehicle

Group	Name	# Low Red	# Low Yellow	# High Yellow	# High Red
1	2B_Mixed	4	3	7	2
2	3_Mixed	6	2	1	4
3	4_Mixed	1	5	2	3
4	5_Mixed	3	0	1	2
5	6_LTL/Dry Van_Diesel	0	0	3	3
6	6_Mixed	6	5	4	3
7	6_Moving	1	1	0	1
8	6_Package_Diesel	0	0	0	2
9	6_TL/Dry Van_Diesel	2	2	1	1
10	7_LTL/Dry Van_Diesel	1	2	0	4
11	7_Mixed	4	1	3	5
12	7_TL/Dry Van_Diesel	2	0	1	0
13	8A_LTL/Dry Van_Diesel	0	1	1	4
14	8A_Mixed	4	3	11	3
15	8A_Refrigerated_Diesel	0	1	1	0
16	8A_TL/Dry Van_Diesel	1	1	6	1
17	8B_AutoCarrier_Diesel	1	1	0	0
18	8B_Dray_Diesel	0	2	4	4
19	8B_Flatbed_Diesel	4	7	6	3
20	8B_Heavy/Bulk_Diesel	0	2	3	0
21	8B_LTL/Dry Van_Diesel	2	2	5	3
22	8B_Mixed	4	27	20	13
23	8B_Refrigerated_Diesel	14	19	10	11
24	8B_Specialized_Diesel	0	3	2	4
25	8B_TL/Dry Van_Diesel	19	31	20	22
26	8B_Tanker_Diesel	2	2	3	2
	Sum	81	123	115	100
		2.6%	3.9%	3.7%	3.2%

Table 23. Number of Values Flagged by Fleet Group/Metric Combination
Miles per Gallon

Group	Name	# Low Red	# Low Yellow	# High Yellow	# High Red
1	2B_Mixed	1	2	4	3
2	3_Mixed	0	3	1	2
3	4_Mixed	3	0	0	1
4	5_Mixed	0	2	1	1
5	6_LTL/Dry Van_Diesel	0	4	3	0
6	6_Mixed	4	0	5	1
7	6_Moving	0	0	3	0
8	6_Package_Diesel	1	1	1	0
9	6_TL/Dry Van_Diesel	1	0	1	1
10	7_LTL/Dry Van_Diesel	2	4	0	1
11	7_Mixed	3	2	3	1
12	7_TL/Dry Van_Diesel	0	2	1	1
13	8A_LTL/Dry Van_Diesel	1	5	0	1
14	8A_Mixed	3	5	4	8
15	8A_Refrigerated_Diesel	0	2	0	2
16	8A_TL/Dry Van_Diesel	2	1	2	2
17	8B_AutoCarrier_Diesel	0	0	0	1
18	8B_Dray_Diesel	3	4	5	0
19	8B_Flatbed_Diesel	2	4	3	1
20	8B_Heavy/Bulk_Diesel	1	3	2	0
21	8B_LTL/Dry Van_Diesel	3	2	0	2
22	8B_Mixed	15	15	7	7
23	8B_Refrigerated_Diesel	13	10	29	5
24	8B_Specialized_Diesel	3	1	1	0
25	8B_TL/Dry Van_Diesel	22	14	20	21
26	8B_Tanker_Diesel	3	2	2	1
	Sum	86	88	99	63
		2.7%	2.8%	3.2%	2.0%

Table 24. Number of Values Flagged by Fleet Group/Metric Combination Revenue Miles

Group	Name	# Low Red	# Low Yellow	# High Yellow	# High Red
1	2B_Mixed	6	3	N/A	N/A
2	3_Mixed	1	5	N/A	N/A
3	4_Mixed	0	2	N/A	N/A
4	5_Mixed	0	1	N/A	N/A
5	6_LTL/Dry Van_Diesel	0	1	N/A	N/A
6	6_Mixed	7	9	N/A	N/A
7	6_Moving	1	2	N/A	N/A
8	6_Package_Diesel	0	1	N/A	N/A
9	6_TL/Dry Van_Diesel	2	2	N/A	N/A
10	7_LTL/Dry Van_Diesel	2	3	N/A	N/A
11	7_Mixed	11	9	N/A	N/A
12	7_TL/Dry Van_Diesel	2	2	N/A	N/A
13	8A_LTL/Dry Van_Diesel	1	0	N/A	N/A
14	8A_Mixed	16	4	N/A	N/A
15	8A_Refrigerated_Diesel	2	1	N/A	N/A
16	8A_TL/Dry Van_Diesel	4	1	N/A	N/A
17	8B_AutoCarrier_Diesel	1	2	N/A	N/A
18	8B_Dray_Diesel	7	6	N/A	N/A
19	8B_Flatbed_Diesel	4	8	N/A	N/A
20	8B_Heavy/Bulk_Diesel	1	7	N/A	N/A
21	8B_LTL/Dry Van_Diesel	2	5	N/A	N/A
22	8B_Mixed	1	19	N/A	N/A
23	8B_Refrigerated_Diesel	13	14	N/A	N/A
24	8B_Specialized_Diesel	25	5	N/A	N/A
25	8B_TL/Dry Van_Diesel	10	21	N/A	N/A
26	8B_Tanker_Diesel	1	5	N/A	N/A
	Sum	120	138	0	0
		3.8%	4.4%	0.0%	0.0%

Table 25. Number of Values Flagged by Fleet Group/Metric Combination
Empty Miles

Group	Name	# Low Red	# Low Yellow	# High Yellow	# High Red
1	2B_Mixed	21	14	3	6
2	3_Mixed	19	4	5	1
3	4_Mixed	18	8	2	0
4	5_Mixed	13	1	1	0
5	6_LTL/Dry Van_Diesel	14	12	1	0
6	6_Mixed	23	10	9	0
7	6_Moving	6	0	0	0
8	6_Package_Diesel	18	4	0	0
9	6_TL/Dry Van_Diesel	7	5	2	0
10	7_LTL/Dry Van_Diesel	15	12	1	2
11	7_Mixed	26	15	1	11
12	7_TL/Dry Van_Diesel	8	2	1	3
13	8A_LTL/Dry Van_Diesel	16	11	0	1
14	8A_Mixed	27	17	2	18
15	8A_Refrigerated_Diesel	3	1	1	3
16	8A_TL/Dry Van_Diesel	13	6	2	4
17	8B_AutoCarrier_Diesel	1	1	2	0
18	8B_Dray_Diesel	12	13	7	16
19	8B_Flatbed_Diesel	6	5	1	3
20	8B_Heavy/Bulk_Diesel	1	1	0	0
21	8B_LTL/Dry Van_Diesel	10	24	3	1
22	8B_Mixed	60	59	15	1
23	8B_Refrigerated_Diesel	27	51	7	11
24	8B_Specialized_Diesel	2	2	5	0
25	8B_TL/Dry Van_Diesel	43	103	9	3
26	8B_Tanker_Diesel	4	0	0	0
	Sum	413	381	80	84
		13.2%	12.2%	2.6%	2.7%

Table 26. Number of Values Flagged by Fleet Group/Metric Combination
% Capacity Utilization

Group	Name	# Low Red	# Low Yellow	# High Yellow	# High Red
1	2B_Mixed	2	4	N/A	N/A
2	3_Mixed	2	4	N/A	N/A
3	4_Mixed	2	1	N/A	N/A
4	5_Mixed	0	5	N/A	N/A
5	6_LTL/Dry Van_Diesel	1	4	3	3
6	6_Mixed	5	3	N/A	N/A
7	6_Moving	0	0	3	0
8	6_Package_Diesel	1	3	N/A	N/A
9	6_TL/Dry Van_Diesel	0	1	N/A	N/A
10	7_LTL/Dry Van_Diesel	3	2	4	6
11	7_Mixed	3	14	N/A	N/A
12	7_TL/Dry Van_Diesel	0	2	N/A	N/A
13	8A_LTL/Dry Van_Diesel	3	4	10	5
14	8A_Mixed	6	9	N/A	N/A
15	8A_Refrigerated_Diesel	1	2	N/A	N/A
16	8A_TL/Dry Van_Diesel	1	7	N/A	N/A
17	8B_AutoCarrier_Diesel	2	0	N/A	N/A
18	8B_Dray_Diesel	7	5	N/A	N/A
19	8B_Flatbed_Diesel	7	9	N/A	N/A
20	8B_Heavy/Bulk_Diesel	3	0	N/A	N/A
21	8B_LTL/Dry Van_Diesel	5	4	5	11
22	8B_Mixed	28	12	N/A	N/A
23	8B_Refrigerated_Diesel	22	10	N/A	N/A
24	8B_Specialized_Diesel	4	2	N/A	N/A
25	8B_TL/Dry Van_Diesel	35	30	N/A	N/A
26	8B_Tanker_Diesel	6	1	N/A	N/A
	Sum	149	138	25	25
		4.8%	4.4%	0.8%	0.8%

Table 27. Number of Values Flagged by Fleet Group/Metric Combination
Average Annual Idle Hours per Truck

Group #	Name	# Low Red	# Low Yellow	# High Yellow	# High Red
1	2B_Mixed	3	4	2	5
2	3_Mixed	2	7	7	2
3	4_Mixed	0	1	3	4
4	5_Mixed	1	2	2	1
5	6_LTL/Dry Van_Diesel	0	2	3	3
6	6_Mixed	6	2	3	6
7	6_Moving	0	2	1	0
8	6_Package_Diesel	1	1	2	1
9	6_TL/Dry Van_Diesel	1	1	0	2
10	7_LTL/Dry Van_Diesel	0	4	2	2
11	7_Mixed	2	2	1	8
12	7_TL/Dry Van_Diesel	1	1	3	0
13	8A_LTL/Dry Van_Diesel	0	5	1	3
14	8A_Mixed	3	3	3	13
15	8A_Refrigerated_Diesel	0	2	1	2
16	8A_TL/Dry Van_Diesel	1	4	4	5
17	8B_AutoCarrier_Diesel	1	0	1	1
18	8B_Dray_Diesel	1	5	9	2
19	8B_Flatbed_Diesel	0	1	15	6
20	8B_Heavy/Bulk_Diesel	0	1	1	2
21	8B_LTL/Dry Van_Diesel	3	6	3	7
22	8B_Mixed	15	10	21	31
23	8B_Refrigerated_Diesel	8	15	29	21
24	8B_Specialized_Diesel	0	2	0	6
25	8B_TL/Dry Van_Diesel	8	6	72	23
26	8B_Tanker_Diesel	2	1	7	3
	Sum	59	90	196	159
		1.9%	2.9%	6.3%	5.1%

Absolute errors were also developed for each fleet category/metric combination. Cutoffs for absolute errors are intended to prevent users from inadvertently entering data with incorrect units and typos. For this reason we have defined absolute errors to ensure an adequate "safety" interval between the highest values observed in the cleaned (no outlier) dataset. The recommended values for absolute errors and their associated justifications are discussed below for each metric.

Annual Miles per Vehicle

The maximum number of miles a vehicle can accumulate in a year are constrained by truck highway speed limits (typically 65 mph or less) and the number of hours in a year.[34] Excluding engine down-time associated with maintenance and repairs, the absolute maximum annual mileage possible for a truck is estimated to be ~500,000 miles per year. This estimate is more than twice the highest observed value of 228,151 miles per year (for Class 8b TL/Dry Van diesels). Therefore 500,000 miles per year value is set as the absolute maximum for all vehicle classes. Values greater than 0 and less than 500,000 are permissible.

Miles per Gallon

The maximum and minimum miles per gallon from the dataset (prior to cleaning) are presented in Table 28.

Table 28. Maximum and Minimum Miles per Gallon

Group #	Name	Min	Mean	Max
1	2B_Mixed	2.0	12.9	21.6
2	3_Mixed	5.4	10.2	30.0[35]
3	4_Mixed	5.0	9.3	14.9
4	5_Mixed	4.8	8.4	13.7
5	6_LTL/Dry Van_Diesel	5.7	8.0	10.3
6	6_Mixed	4.2	7.8	10.4
7	6_Moving	6.4	7.3	8.9
8	6_Package_Diesel	5.7	8.7	10.8
9	6_TL/Dry Van_Diesel	4.4	7.7	11.6
10	7_LTL/Dry Van_Diesel	5.6	7.6	9.8
11	7_Mixed	1.2	7.3	11.9
12	7_TL/Dry Van_Diesel	5.8	7.7	10.8
13	8A_LTL/Dry Van_Diesel	4.9	6.3	8.0
14	8A_Mixed	2.8	6.2	9.0
15	8A_Refrigerated_Diesel	4.9	5.9	7.1
16	8A_TL/Dry Van_Diesel	4.4	6.3	8.3
17	8B_AutoCarrier_Diesel	4.5	5.2	6.3

[34] While DOT regulations limit drivers' daily hours, some companies utilize driver teams to maximize on-road time.
[35] Value for a hybrid electric truck. Hybrids are subject to separate validation ranges for the 2014 version of the Truck Tool as discussed below. The maximum value for non-hybrid Class 3 diesel trucks was 14.4 mpg.

Group #	Name	Min	Mean	Max
18	8B_Dray_Diesel	4.7	5.8	6.6
19	8B_Flatbed_Diesel	0.6	5.7	7.0
20	8B_Heavy/Bulk_Diesel	3.4	5.0	6.4
21	8B_LTL/Dry Van_Diesel	4.4	6.0	7.1
22	8B_Mixed	3.0	5.8	7.3
23	8B_Refrigerated_Diesel	4.3	5.7	7.1
24	8B_Specialized_Diesel	2.8	5.5	6.8
25	8B_TL/Dry Van_Diesel	3.1	5.9	7.9
26	8B_Tanker_Diesel	3.8	5.8	7.0

[Note: Unlike the other parameters discussed above, miles per gallon values are derived from other inputs (total miles and gallons). Therefore any changes to address absolute limits on MPG (as well as red and yellow warnings) must be handled through updates to one or both of these primary inputs.]

As seen from the above table, fuel efficiency estimates can be very low (<1.0) and for this reason no absolute lower bound is used for miles per gallon. To establish absolute upper bounds for miles per gallon estimates the results from the PERE modeling analysis previously developed for the 2010 Truck Model were used. Background on the PERE modeling exercise is provided in Appendix E.

Absolute maximum miles per gallon estimates were developed for conventional diesel trucks using the PERE model, and are shown in Table 29 by truck class.

Table 29. Maximum Diesel Miles per Gallon Estimates (PERE Model Basis)

Class	Maximum MPG
2b	25.0
3	23.3
4	20.2
5	18.7
6	18.0
7	14.5
8a	11.2
8b	11.2

Note that the maximum MPG estimates obtained from the PERE model are all substantially higher than the maximum value observed for non-hybrid diesel trucks in the 2011 Truck Tool data.

Non-Diesel MPG

The 2011 data submissions from SmartWay Truck partners did not include enough information on non-diesel trucks in order to develop a robust distribution of mpg values specific to non-diesels for validation purposes. Accordingly, engineering judgment was used to adjust the diesel mpg values for other fuel types, accounting for general, relative vehicle and/or fuel efficiency differences. First, a ratio was developed for adjusting diesel mpg values to comparable gasoline mpg values, based upon simulated modeling performed by Argonne National Laboratory.[36] The Argonne data for gas and diesel trucks was based on PSAT simulations of a typical pickup in the Class 2b or Class 3 range. The fuel consumption was reported for the same truck equipped with both gasoline and diesel engines over the various EPA emissions and fuel economy driving cycles. Using this data, a combined fuel economy was calculated using the method from EPA's pre-2008 combined 2-cycle fuel economy using the FTP and Highway cycles as given in 40 CFR Part 600. This method uses a weighted harmonic average of the two values, with the FTP weighted at 55% and the Highway weighted at 45%.

The difference in the calculated combined fuel economies for the gas- and diesel-powered model results showed that the diesel had a 25.9% greater fuel economy than gasoline. These results are a direct volumetric comparison rather than in terms of gasoline-equivalent gallons. As such, the diesel mpg values shown in Table 27 above can be divided by 1.259 to obtain comparable mpg ranges for gasoline vehicles. Since CNG vehicle fuel consumption is reported in terms of gasoline-equivalent gallons, the mpg validation ranges for CNG vehicles can be set equal to those for comparable gasoline vehicles.

Validation ranges for LPG and LNG vehicles can be developed from the gasoline ranges, dividing the gasoline values by the appropriate gasoline gallon-equivalent factor for these fuels (1.35 for LPG and 1.52 for LNG),[37] thereby adjusting mpg values for volumetric energy density. Table 3028 presents the corresponding upper bound MPG values for non-diesel vehicles by truck class.

Table 30. Maximum Miles per Gallon Estimates – Non-Diesel Vehicles

Class	Gasoline/CNG	LPG	LNG
2b	19.9	18.5	16.4
3	18.5	17.3	15.3
4	16.0	15.0	13.3
5	14.9	13.9	12.3
6	14.3	13.3	11.8

[36] Delorme, A. et. al., *Impact of Advanced Technologies on Medium-Duty Trucks Fuel Efficiency*, Argonne National Laboratory, 2010-01-1929.
[37] https://www.afdc.energy.gov/afdc/prep/popups/gges.html

Class	Gasoline/CNG	LPG	LNG
7	11.5	10.7	9.5
8a	8.9	8.3	7.4
8b	8.9	8.3	7.4

Hybrid MPG

EPA's Physical Emission Rate Estimator (PERE) model was used in order to establish estimates of the fuel economy benefit of hybridization of medium- and heavy-duty trucks. The details of the modeling are presented in Appendix E.

However, the in-use fuel economy of hybrid vehicles is highly dependent upon drive cycle. Specifically the expected hybrid truck fuel economy will vary depending upon the relative fraction of highway versus urban driving. Therefore the MPG ranges used for validation of hybrid fuel economy are calculated using the following steps.

Step 1 – Weight the following GALLON PER MILE (Not MPG) values based on the Highway/Urban split.

Gal/Mi - Urban

Group #	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
1	2B_Mixed	0.2641	0.1813	0.0942	0.0636	0.0576
2	3_Mixed	0.2340	0.1857	0.1147	0.0830	0.0760
3	4_Mixed	0.2090	0.1763	0.1213	0.0925	0.0861
4	5_Mixed	0.2599	0.2127	0.1392	0.1026	0.0943
5	6_LTL/Dry Van_Diesel	0.1951	0.1765	0.1390	0.1147	0.1080
6	6_Mixed	0.2200	0.1972	0.1467	0.1179	0.1111
7	6_Moving	0.1906	0.1783	0.1514	0.1301	0.1242
8	6_Package_Diesel	0.1788	0.1628	0.1254	0.1029	0.0965
9	6_TL/Dry Van_Diesel	0.2350	0.2056	0.1495	0.1175	0.1097
10	7_LTL/Dry Van_Diesel	0.1968	0.1806	0.1450	0.1211	0.1148
11	7_Mixed	0.2506	0.2169	0.1545	0.1200	0.1117
12	7_TL/Dry Van_Diesel	0.2131	0.1915	0.1467	0.1202	0.1130
13	8A_LTL/Dry Van_Diesel	0.2184	0.2104	0.1837	0.1653	0.1607
14	8A_Mixed	0.2747	0.2519	0.1950	0.1591	0.1492
15	8A_Refrigerated_Diesel	0.2502	0.2402	0.2036	0.1793	0.1716
16	8A_TL/Dry	0.2477	0.2337	0.1966	0.1697	0.1630

Gal/Mi - Urban

Group #	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
	Van_Diesel					
17	8B_AutoCarrier_Diesel	0.2980	0.2781	0.2407	0.2158	0.2052
18	8B_Dray_Diesel	0.2434	0.2338	0.2056	0.1835	0.1780
19	8B_Flatbed_Diesel	0.2912	0.2727	0.2248	0.1942	0.1857
20	8B_Heavy/Bulk_Diesel	0.3768	0.3371	0.2562	0.2033	0.1912
21	8B_LTL/Dry Van_Diesel	0.2383	0.2250	0.2025	0.1814	0.1761
22	8B_Mixed	0.2597	0.2493	0.2149	0.1889	0.1807
23	8B_Refrigerated_Diesel	0.2656	0.2500	0.2236	0.1992	0.1931
24	8B_Specialized_Diesel	0.3389	0.2995	0.2342	0.1894	0.1789
25	8B_TL/Dry Van_Diesel	0.2534	0.2436	0.2147	0.1891	0.1836
26	8B_Tanker_Diesel	0.2596	0.2492	0.2149	0.1888	0.1806

Gal/Mi – Highway

Group #	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
1	2B_Mixed	0.1759	0.1208	0.0627	0.0424	0.0383
2	3_Mixed	0.1594	0.1265	0.0781	0.0565	0.0518
3	4_Mixed	0.1482	0.1250	0.0860	0.0656	0.0611
4	5_Mixed	0.1805	0.1477	0.0967	0.0713	0.0655
5	6_LTL/Dry Van_Diesel	0.1470	0.1330	0.1047	0.0864	0.0813
6	6_Mixed	0.1657	0.1486	0.1105	0.0889	0.0837
7	6_Moving	0.1436	0.1343	0.1141	0.0980	0.0936
8	6_Package_Diesel	0.1347	0.1226	0.0944	0.0775	0.0727
9	6_TL/Dry Van_Diesel	0.1770	0.1549	0.1127	0.0885	0.0826
10	7_LTL/Dry Van_Diesel	0.1513	0.1389	0.1115	0.0931	0.0883
11	7_Mixed	0.1928	0.1668	0.1188	0.0923	0.0859
12	7_TL/Dry Van_Diesel	0.1640	0.1473	0.1128	0.0924	0.0869
13	8A_LTL/Dry Van_Diesel	0.1558	0.1501	0.1310	0.1179	0.1147
14	8A_Mixed	0.1960	0.1796	0.1391	0.1135	0.1065
15	8A_Refrigerated_Diesel	0.1785	0.1714	0.1452	0.1279	0.1224
16	8A_TL/Dry Van_Diesel	0.1767	0.1667	0.1402	0.1210	0.1163
17	8B_AutoCarrier_Diesel	0.2126	0.1984	0.1717	0.1539	0.1464

Gal/Mi – Highway

Group #	Name	Low Red	Low Yellow	Mean	High Yellow	High Red
18	8B_Dray_Diesel	0.1736	0.1668	0.1467	0.1309	0.1270
19	8B_Flatbed_Diesel	0.2078	0.1945	0.1604	0.1385	0.1325
20	8B_Heavy/Bulk_Diesel	0.2688	0.2405	0.1828	0.1450	0.1364
21	8B_LTL/Dry Van_Diesel	0.1700	0.1605	0.1445	0.1294	0.1256
22	8B_Mixed	0.1853	0.1779	0.1533	0.1347	0.1289
23	8B_Refrigerated_Diesel	0.1894	0.1783	0.1595	0.1421	0.1378
24	8B_Specialized_Diesel	0.2418	0.2137	0.1670	0.1351	0.1276
25	8B_TL/Dry Van_Diesel	0.1807	0.1738	0.1532	0.1349	0.1310
26	8B_Tanker_Diesel	0.1852	0.1778	0.1533	0.1347	0.1288

Example – Truck Class 2b has 40% urban, 60% highway. The Low Red Gallon/Mile value is therefore 0.2641 x 0.40 + 0.1759 x 0.60 = 0.2112

Step 2: Convert the weighted gallon per mile values back to MPG
Example: 0.2112 gal/mi = 4.74 MPG

Step 3: Use these final, weighted, converted MPG values for validation.

Electric Truck Efficiency

Mi/kWhr estimates for battery electric trucks were developed based on available data sources and engineering judgment. The average value for Class 2b trucks was assumed to equal the mi/kWhr value estimates for large SUVs in EPA's MARKAL model (3.01). The values for Class 4 and 6 electric trucks (1.43 and 1.00 respectively) were taken from Calstart's E-Truck Task Force Business Case Calculator. Values for Class 3 and 5 trucks were based on simple averages of the Class 2b, 4, and 6 values. Given the lack of available data for the heavier truck classes, values for Class 7 (0.75), Class 8a (0.5) and Class 8b (0.4) were based on engineering judgment.

Once average mi/kWhr estimates were derived, "red" and "yellow" ranges were established based on simple multiplicative factors applied to the averages – Low red from 0 to 0.5 x average; low yellow from 0.5 x average to 0.75 x average; high yellow from 1.25 x average to 1.5 x average; and high red from 1.5 x average to 10 x average (absolute max).

Percent Revenue Miles

Revenue miles were frequently equal to total miles in the dataset. Accordingly, no absolute upper (or lower) bound was set for this field, beyond requiring all values to be ≥ 0 and ≤100.

Percent Empty Miles
Empty miles were occasionally equal to 0 in the dataset. Accordingly, no absolute lower (or upper) bound was set for this field, beyond requiring all values to be ≥0 and ≤100.

Percent Biodiesel
While the maximum observed blend level for biodiesel was 20 percent, B100 use is possible. Therefore no absolute upper (or lower) bound was set for this field, beyond requiring all values to be ≥0 and ≤100.

Average Payload
The maximum and minimum payloads from the dataset (prior to cleaning) are presented in Table 31.

Table 31. Maximum and Minimum Observed Payloads (Short Tons)

Group #	Name	Min	Mean	Max
1	2B_Mixed	0.1	1.0	1.9[38]
2	3_Mixed	0.1	1.7	3.0
3	4_Mixed	0.5	2.4	4.0
4	5_Mixed	1.3	3.1	5.3
5	6_LTL/Dry Van_Diesel	0.9	4.6	6.3
6	6_Mixed	0.9	4.5	6.5
7	6_Moving	2.5	3.6	4.9
8	6_Package_Diesel	2.0	4.2	6.0
9	6_TL/Dry Van_Diesel	0.9	4.1	6.9
10	7_LTL/Dry Van_Diesel	1.8	6.0	8.7
11	7_Mixed	1.1	6.0	20.0
12	7_TL/Dry Van_Diesel	4.5	6.4	12.7
13	8A_LTL/Dry Van_Diesel	6.0	10.6	15.0
14	8A_Mixed	1.9	11.3	24.0
15	8A_Refrigerated_Diesel	6.3	13.3	21.0
16	8A_TL/Dry Van_Diesel	3.8	11.4	20.0
17	8B_AutoCarrier_Diesel	9.3	19.6	24.5
18	8B_Dray_Diesel	15.0	20.5	24.5
19	8B_Flatbed_Diesel	14.8	23.2	33.3
20	8B_Heavy/Bulk_Diesel	20.0	27.6	40.0
21	8B_LTL/Dry Van_Diesel	7.8	18.2	27.9
22	8B_Mixed	7.5	20.3	33.1
23	8B_Refrigerated_Diesel	13.2	20.9	27.5
24	8B_Specialized_Diesel	7.3	24.4	37.0
25	8B_TL/Dry Van_Diesel	6.5	18.9	50.0

[38] Three extreme outliers for Class 2b trucks were dropped for the purposes of establishing maximum upper bounds: 16.0, 13.0 and 5.0 tons.

Group #	Name	Min	Mean	Max
26	8B_Tanker_Diesel	17.5	24.6	34.6

Based on a review of previous out of range values, unit conversion problems are the most common source of data entry errors for payload. One type of error results from data being entered in pounds instead of short tons, resulting in overestimates by a factor of 2,000. Such errors should be easy to prevent using a reasonable upper bound ton level. Another possible source of error could be reporting metric or long tons instead of short tons, although detecting these errors will be extremely difficult, due to the small difference in units (roughly 10 percent difference). Finally, note that standard payload limitations can be waived by obtaining permits for heavy loads, or by avoiding over-the-road operation.[39] Accordingly, the absolute upper bound payload levels were set equal to 3 times the maximum observed values shown in Table 31.

However, no absolute lower-bound payload value was set, to allow for light package and specialty deliveries. Therefore the only low end constraint is the requirement that payloads be > 0.

Average Volume

The maximum and minimum observed volumes from the dataset (prior to cleaning) are presented in Table 32.

[39] One SmartWay Truck Partner indicated unusually high payloads for their Class 2b truck fleet, but noted they only use their trucks in terminal operations.

Table 32. Maximum and Minimum Observed Volumes (cubic feet)

Group #	Name	Min	Mean	Max
1	2B_Mixed	1	343	1,000
2	3_Mixed	1	498	940
3	4_Mixed	54	659	1,185
4	5_Mixed	141	1,215	1,894
5	6_LTL/Dry Van_Diesel	693	1,375	1,115
6	6_Mixed	336	1,324	878
7	6_Moving	141	1,382	1,894
8	6_Package_Diesel	300	1,398	1,800
9	6_TL/Dry Van_Diesel	693	1,255	1,521[40]
10	7_LTL/Dry Van_Diesel	693	1,687	3,765
11	7_Mixed	267	1,601	3,521
12	7_TL/Dry Van_Diesel	728	1,581	3,521
13	8A_LTL/Dry Van_Diesel	1,000	3,272	3,852
14	8A_Mixed	1	2,862	6,302
15	8A_Refrigerated_Diesel	1	2,759	3,780
16	8A_TL/Dry Van_Diesel	1,454	3,410	3,848
17	8B_AutoCarrier_Diesel	2,844	4,424	8,350
18	8B_Dray_Diesel	1,516	2,387	3,892
19	8B_Flatbed_Diesel	2,341	3,485	5,000
20	8B_Heavy/Bulk_Diesel	1,000	3,114	4,824
21	8B_LTL/Dry Van_Diesel	2,205	3,615	4,925
22	8B_Mixed	1,991	3,565	4,896
23	8B_Refrigerated_Diesel	3,171	3,721	4,068
24	8B_Specialized_Diesel	450	2,604	5,843
25	8B_TL/Dry Van_Diesel	1,159	3,740	6,316
26	8B_Tanker_Diesel	702	1,210	4,004

Maximum volumes are extremely difficult to define given the presence of non-uniform body styles, oversized loads, etc. Accordingly a simple upper bound was set at 3 times the maximum observed values shown above.

However, no absolute lower-bound volume value was set, to allow for small package and specialty deliveries. Therefore the only low end constraint is the requirement that volumes be > 0.

[40] One Class 6 LTL fleet with an extreme outlier volume of 12,000 cubic feet was dropped for the purposes of this analysis.

Percent Capacity Utilization
Capacity utilization was frequently equal to 100 in the dataset. Accordingly, no upper bound was set for this field. In addition, no absolute lower-bound was set for utilization either, to allow for small package and LTL/specialty deliveries. The only requirement is that all values be ≥0 and ≤100.

The new Truck Tool adds a new Data Source option for Dray carriers allows them to select an industry average capacity utilization factor, since these carriers may not know how their containers are loaded. To calculate the industry average value the following calculation steps were performed:

1) All truck carriers with a Dray Operation tag were identified from the 2012 Truck Tool submittals - 109 dray carriers with 20,774 trucks. 75.9% of these trucks had a Chassis Body Type tag, 23.2% had a Dry Van tag, and 0.9% had a Mixed tag. No other body type tags were reported for dray carriers. Essentially all of these trucks were Class 8b diesels.

2) All *non*-dray carriers with Chassis, Dry Van, and Mixed Body Type tags were selected, and the average capacity utilization was calculated for Body Type tag, weighted by the number of trucks. (This approach assumes that none of the capacity utilization values reported for Dray carriers were reliable, regardless of their Data Source selection.) There were 229,349 trucks in this data set. The weighted average capacity utilization values for non-dray carriers were as follows.

Chassis	90.5%
Dry Van	84.8%
Mixed	85.4%

3) The weighted average capacity utilization values from Step 2 were combined with the body type percentage distribution from Step 1 to obtain a single, industry average capacity utilization value for use by Dray carriers of 89.13%. This estimate applies for all truck classes and fuel types, as the data set is very thin for anything other than class 8b diesels. Note that this value will only be used if a Dray Carrier selects the "I don't know my cap utilization" Data Source selection. Also note that the default option is only available to carriers that specified a non-zero Dray operations percentage in the Fleet Characterization section - otherwise the new Data Source selection will not appear.

Percent Urban/Highway Miles
There is no clear distributional pattern associated with these data fields, with values frequently ranging from 0 to 100. Therefore no lower or upper bound values are set.

Average Annual Idle Hours per Truck
The maximum and minimum observed idle hours from the dataset (prior to cleaning) are presented in Table 33.

Table 33. Maximum and Minimum Observed Idle Hours per Truck

Group #	Name	Min	Mean	Max
1	2B_Mixed	0	323	1,785
2	3_Mixed	20	371	1,267
3	4_Mixed	50	364	1,524
4	5_Mixed	30	420	1,462
5	6_LTL/Dry Van_Diesel	0	311	720
6	6_Mixed	2	425	1,825
7	6_Moving	22	275	576
8	6_Package_Diesel	8	305	1,196
9	6_TL/Dry Van_Diesel	0	514	1,820
10	7_LTL/Dry Van_Diesel	75	326	1,440
11	7_Mixed	55	413	2,077
12	7_TL/Dry Van_Diesel	3	288	598
13	8A_LTL/Dry Van_Diesel	61	384	2,071
14	8A_Mixed	0	574	2,574
15	8A_Refrigerated_Diesel	130	713	2,000
16	8A_TL/Dry Van_Diesel	25	629	2,016
17	8B_AutoCarrier_Diesel	240	1,154	3,380
18	8B_Dray_Diesel	78	672	2,080
19	8B_Flatbed_Diesel	100	911	2,100
20	8B_Heavy/Bulk_Diesel	161	601	1,401
21	8B_LTL/Dry Van_Diesel	61	518	1,675
22	8B_Mixed	0	782	2,475
23	8B_Refrigerated_Diesel	41	843	2,349
24	8B_Specialized_Diesel	140	760	2,200
25	8B_TL/Dry Van_Diesel	17	912	3,410
26	8B_Tanker_Diesel	54	826	2,816

Absolute bounds on idle hours are based on simple operational constraints: a truck can idle no more than 24 hours per day, 7 days a week, or 8,760 hours per year. Zero hours are also acceptable values with explanations.

4.0 Performance Metrics

The Truck Tool allows the user to calculate their emissions performance using a number of different metrics, at different levels of aggregation. Available performance metrics include:

- Grams per mile
- Grams per Payload Ton-Mile
- Grams per Thousand Cubic Foot-Miles
- Grams per Thousand Utilized Cubic Foot-Miles

The Internal Metrics report within the Truck Tool presents the results of 36 calculations (4 x 4 x 3 = 48), which represent the following four calculations for each of the three pollutants (CO_2, NOx, PM_{10} and $PM_{2.5}$) and for each of three different mileage types (total, payload, and loaded). Note that all capitalized fields represent fields in the user interface:

1. **g/mile: $\sum E / M$**
   where E = Emissions, M = Miles Driven
2. **g/avg payload ton-mile: $\sum E / (M \times AP)$**
   where E = Emissions, M = Miles Driven, AP = Average Payload
3. **g/avg cubic foot volume: $\sum E / (M \times ACV)$**
   where E = Emissions, M = Miles Driven, ACV = Average Capacity Volume
4. **g/avg utilized cubic foot: $\sum E / (M \times ACV) / CU$**
   where E = Emissions, M = Miles Driven, ACV = Average Capacity Volume, CU = % Cube Utilization

For all four calculations:

Emissions = grams of pollutant (as specified above)
Miles Driven = Total Miles, Payload Miles, or Loaded Miles (Total Miles minus Empty Miles)

As shown in the equations above, summations are performed for the different metrics. Each of the metrics is automatically aggregated across model years (for NOx and PM) for all reporting purposes. Additional aggregation may be reported across truck classes, fuel types, divisions, and at the company level, as specified by the user.

5.0 Port Dray Program Inputs and Calculations

Those fleets with 75% or more of their operation in the Dray Operation Type category are eligible to participate in SmartWay's Port Drayage Program. This voluntary program recognizes Partners for reducing diesel emissions from port drayage trucks. Participating Partners must provide information on their drayage fleet's model year distribution, use of PM control equipment, auxiliary power units (APUs), SmartWay tires, and LNG trucks in order to obtain an Environmental Performance Rating for the program.

The following summarizes the calculations used in the Truck Tool to calculate Port Dray Program Environmental Performance Rating.

Baseline CO_2 Emissions from Average Dray Truck Fleet

To calculate baseline CO_2 emissions from the average dray truck fleet, the total number of trucks within a single model year group, as supplied by the user, is multiplied by an average model year distribution factor, as seen in Table 34.

Table 34. Average Model Year Distribution Factors by Model Year Group

Model Year Group	Average Model Year Distribution Factor
Pre-1988	0.061
1988 – 1993	0.190
1994 – 2002	0.632
2003 – 2006	0.083
2007 – 2009	0.033
Post 2009	0.000

Then, the fuel consumption is calculated by dividing the average miles per truck, also supplied by the user, by an assumed 5.47 miles per gallon.[41] This calculated fuel consumption is then multiplied by the CO_2 emission factor of 0.01015. CO_2 emissions across all model year groups are summed to obtain the total baseline CO_2 emissions.

Untreated and Controlled CO_2 Emissions

To calculate CO_2 emissions from untreated trucks (e.g., without PM retrofits), as well as trucks with diesel oxidation catalysts (DOCs), closed crankcase ventilation (CCVs), flow through filters, and diesel particulate filters in the fleet, the fuel consumption is

[41] This and other calculation elements used to derive the Dray Program Environmental Performance Score are completely independent of the performance metric calculations in other portions of the Truck Tool. For example, the truck fleet gram per mile and gram per ton-mile performance metrics are calculated using the fleet's actual fuel efficiency, not the 5.47 value used for the Dray Program calculations.

calculated by dividing the average miles per truck, supplied by the user, by the assumed value of 5.47 miles per gallon. This calculated fuel consumption is then multiplied by the CO_2 emission factor of 0.01015. CO_2 emissions across all model year bins are summed to obtain the total untreated plus controlled vehicle CO_2 emissions.

Baseline PM Emissions from Average Dray Truck Fleet

To calculate baseline PM emissions from the average dray truck fleet, the total number of trucks within a single model year group, as supplied by the user, is multiplied by an average model year distribution factor, as shown in Table 34. The resulting value is then multiplied by the average miles per truck, as supplied by the user, as well as the specified PM emission factor, as shown in Table 35. PM emissions across all model year bins are summed to obtain the total baseline PM emissions.

Table 35. PM Emission Factors by Model Year Group

Model Year Group	PM Emission Factor
Pre '88	3.428E-06
88-'93	2.535E-06
94-'02	1.157E-06
03-'06	6.834E-07
07-'09	9.921E-08
post 2009	7.716E-08

PM Emissions from Untreated Trucks

To calculate PM emissions from untreated trucks, the total number of untreated trucks within a single model year bin, as supplied by the user, is multiplied by the average miles per truck, also supplied by the user, as well as an appropriate PM emission factor, as shown in Table 35. PM emissions across all model year groups are summed to obtain the total PM emissions from untreated trucks within the fleet.

PM Emissions from Controlled Trucks

To calculate PM emissions from controlled trucks, the total number of controlled trucks within a single model year group, as supplied by the user, is multiplied by the average miles per truck, also supplied by the user, as well as an appropriate PM emission factor, as shown in Table 35. This value is then multiplied by a control factor, as shown in Table 36. PM emissions across all model year groups are summed to obtain the total PM emissions from untreated trucks within the fleet.

Table 36. PM Control Factors by Control Type

Control Type	PM Control Factor
DOC & CCVs	70%
Flow Through Filter	50%
Diesel Particulate	10%

Baseline NO_X Emissions from Average Dray Truck Fleet

To calculate baseline NO_x emissions from the average dray truck fleet, the total number of trucks within a single model year group, as supplied by the user, is multiplied by an average model year distribution factor, as seen in Table 34. The resulting value is then multiplied by the average miles per truck, as supplied by the user, as well as an appropriate NO_x emission factor, as shown in Table 37. NO_x emissions across all model year groups are summed to obtain the total baseline NO_x emissions.

Table 37. NO_x Emission Factors by Model Year Group

Model Year Group	PM Emission Factor
Pre '88	2.65E-05
88-'93	2.51E-05
94-'02	2.38E-05
03-'06	1.68E-05
07-'09	1.01E-05
post 2009	3E-06

NO_X Emissions from Untreated and Controlled Trucks

To calculate NO_x emissions from untreated trucks, the total number of untreated trucks within a single model year group, as supplied by the user, is multiplied by the average miles per truck, also supplied by the user, as well as an appropriate NO_x emission factor, as seen in Table 35. NO_x emissions across all model year groups are summed to obtain the total NO_x emissions from untreated trucks within the fleet.

Reductions in CO_2 Emissions from Auxiliary Power Units (APUs), SmartWay Approved Tires, and LNG Vehicles

The user-supplied number of vehicles with each control is divided by the total number of trucks in the fleet and multiplied by a control factor, as shown in Table 38.

Table 38. Control Strategy Control Factors

Control Type	PM Control Factor
APUs	11%
SmartWay Tires	2%
LNG	21%

The reductions are then summed across all control types and multiplied by the sum of CO_2 emissions for untreated trucks, and trucks with DOCs & CCVs, flow through filters, and diesel particulate traps installed. This value is then multiplied by -1 to indicate a reduction in emissions.

Reductions in PM Emissions from Auxiliary Power Units (APUs)

The user-supplied number of trucks with APUs installed is divided by the total number of trucks in the fleet and multiplied by a control factor of 8%. The reductions are then multiplied by the sum of PM emissions for untreated trucks, and trucks with DOCs & CCVs, flow through filters, and diesel particulate traps installed. This value is then multiplied by -1 to indicate a reduction in emissions.

Reductions in NO_X Emissions from Auxiliary Power Units (APUs) and SmartWay Tires

The user-supplied number of trucks with APUs and SmartWay Tires installed is divided by the total number of trucks in the fleet and multiplied by a control factor of 11% and 2% for APUs and SmartWay tires, respectively. The reductions are then multiplied by the sum of NO_x emissions for untreated trucks, and trucks with DOCs & CCVs, flow through filters, and diesel particulate traps installed. This value is then multiplied by -1 to indicate a reduction in emissions.

Total Fleet Emissions

The total fleet emissions are calculated by subtracting the reductions that were calculated for each pollutant from the sum of the emissions, by pollutant, for untreated trucks and trucks equipped with DOCs & CCVs, flow through filters, and diesel particulate traps.

Change in Emissions from Baseline

Total fleet emissions are subtracted from the baseline emissions for each pollutant to determine the change in emissions from baseline.

Percent Change in Emissions

The change in emissions from baseline is divided by the baseline emissions, by pollutant.

Fleet Composite Score and Environmental Performance Rating

The fleet composite score determines the dray fleet's Environmental Performance Rating, which is used by shippers to assess their status in the Port Dray Program. The fleet composite score is determined by the formula:

$$\left[\frac{CO2\ \%\ C\quad ange\ in\ Emissions}{40} + \frac{NOX\ \%\ C\quad ange\ in\ Emissions}{80} + \frac{PM\ \%\ C\quad ange\ in\ Emissions}{80}\right] * -100$$

The Environmental Performance Rating is assigned based on the value of the fleet composite score, as shown in Table 39.

Table 39. Environmental Performance Rating Assignments

Fleet Composite Score	Environmental Performance Rating
≤0.05	No Rating
>0.05 and ≤0.499	Average
>0.499 and ≤1.00	Good
>1.00 and ≤1.8	Very Good
>1.8	Outstanding

Appendix F shows a detailed breakdown of all equations in EPA's Drayage Calculator, which is used as the basis of the drayage calculations within the SmartWay Truck Tool.

Appendix A: MOVES2014-based NOx/$PM_{2.5}$ Emission Factors (g/mi)

Year & Class	Diesel NOx Decel	Diesel NOx 0 to 25	Diesel NOx 25 to 50	Diesel NOx 50 +	Diesel NOx Highway	Diesel PM 2.5 Decel	Diesel PM 2.5 0 to 25	Diesel PM 2.5 25 to 50	Diesel PM 2.5 50 +	Diesel PM 2.5 Highway
1987-2b	0.891	12.460	19.229	39.919	17.119	0.0068	0.367	0.748	2.706	1.176
1987-3	0.890	12.461	19.250	39.993	17.182	0.0068	0.368	0.751	2.710	1.178
1987-4	0.824	11.533	17.901	41.763	18.582	0.0073	0.299	0.559	2.315	0.999
1987-5	0.873	12.265	19.067	40.767	17.795	0.0069	0.357	0.723	2.643	1.157
1987-6	0.862	12.571	20.417	43.283	19.881	0.0066	0.406	0.888	2.868	1.293
1987-7	0.777	12.935	23.587	52.695	26.288	0.0058	0.513	1.261	3.350	1.581
1987-8a	0.684	13.340	26.498	62.590	31.386	0.0049	0.626	1.625	3.937	1.847
1987-8b	0.577	13.738	29.115	72.357	35.458	0.0039	0.734	1.971	4.567	2.098
1988-2b	0.725	10.809	16.306	35.229	15.652	0.0067	0.261	0.421	1.366	0.579
1988-3	0.879	12.551	19.898	41.515	18.531	0.0081	0.307	0.537	1.576	0.651
1988-4	0.842	11.771	18.216	41.174	18.103	0.0083	0.296	0.476	1.668	0.672
1988-5	0.850	12.492	20.481	43.982	20.495	0.0079	0.315	0.579	1.619	0.674
1988-6	0.857	12.655	20.871	44.234	20.675	0.0078	0.318	0.595	1.602	0.671
1988-7	0.812	12.795	22.406	49.014	24.034	0.0073	0.334	0.688	1.653	0.704
1988-8a	0.711	13.241	25.783	60.094	30.191	0.0061	0.372	0.886	1.748	0.759
1988-8b	0.578	13.682	28.865	71.675	35.113	0.0046	0.404	1.061	1.845	0.804
1989-2b	0.806	12.428	20.990	45.154	21.812	0.0073	0.318	0.619	1.587	0.676
1989-3	0.888	12.423	19.139	39.602	17.042	0.0082	0.299	0.495	1.560	0.639
1989-4	0.845	11.799	18.248	41.071	18.031	0.0083	0.296	0.475	1.667	0.671
1989-5	0.863	12.491	20.153	42.851	19.624	0.0080	0.312	0.557	1.611	0.667
1989-6	0.840	12.710	21.496	46.209	22.134	0.0077	0.326	0.632	1.633	0.689
1989-7	0.847	12.665	21.202	45.491	21.659	0.0077	0.323	0.617	1.630	0.685
1989-8a	0.732	13.165	25.245	58.402	29.362	0.0064	0.370	0.855	1.751	0.756
1989-8b	0.565	13.732	29.187	72.979	35.609	0.0045	0.409	1.080	1.864	0.811
1990-2b	0.544	8.052	12.157	26.762	12.027	0.0065	0.258	0.408	1.346	0.574
1990-3	0.687	9.527	14.783	30.945	13.515	0.0083	0.308	0.511	1.590	0.650
1990-4	0.682	9.531	14.700	30.944	13.289	0.0083	0.305	0.494	1.603	0.651
1990-5	0.671	9.505	14.914	31.850	14.063	0.0082	0.309	0.515	1.623	0.662
1990-6	0.647	9.819	16.628	35.719	17.069	0.0077	0.331	0.635	1.648	0.693
1990-7	0.641	9.814	16.760	36.277	17.463	0.0076	0.333	0.647	1.659	0.698
1990-8a	0.529	10.301	20.466	48.388	24.261	0.0059	0.387	0.927	1.800	0.779
1990-8b	0.414	10.660	22.934	58.095	28.106	0.0042	0.422	1.109	1.912	0.825
1991-2b	0.558	7.129	10.693	23.721	10.718	0.0100	0.223	0.288	0.963	0.390
1991-3	0.634	8.869	13.947	28.566	12.373	0.0086	0.293	0.376	1.151	0.448
1991-4	0.575	9.155	16.433	35.371	17.450	0.0075	0.313	0.597	1.361	0.602
1991-5	0.613	7.962	12.375	27.818	12.594	0.0102	0.260	0.331	1.108	0.434
1991-6	0.604	9.012	15.286	32.198	15.298	0.0081	0.304	0.496	1.263	0.536
1991-7	0.560	9.136	16.716	36.791	18.387	0.0073	0.316	0.624	1.399	0.624
1991-8a	0.450	9.573	20.010	48.383	24.075	0.0052	0.349	0.917	1.762	0.798
1991-8b	0.370	9.851	21.741	54.871	26.540	0.0037	0.361	1.078	1.975	0.886
1992-2b	0.500	6.269	9.288	21.445	9.932	0.0091	0.187	0.245	0.849	0.353
1992-3	0.604	8.572	13.387	27.781	12.072	0.0082	0.281	0.358	1.114	0.438
1992-4	0.634	8.854	13.863	28.379	12.167	0.0085	0.291	0.371	1.148	0.445
1992-5	0.608	8.540	13.514	29.425	13.000	0.0086	0.284	0.353	1.153	0.445
1992-6	0.595	9.036	15.562	33.040	15.850	0.0078	0.307	0.518	1.288	0.551

Year & Class	Diesel NOx Decel	Diesel NOx 0 to 25	Diesel NOx 25 to 50	Diesel NOx 50 +	Diesel NOx Highway	Diesel PM 2.5 Decel	Diesel PM 2.5 0 to 25	Diesel PM 2.5 25 to 50	Diesel PM 2.5 50 +	Diesel PM 2.5 Highway
1992-7	0.562	9.055	16.407	36.171	18.035	0.0074	0.313	0.595	1.375	0.609
1992-8a	0.445	9.625	20.234	48.820	24.324	0.0051	0.350	0.935	1.778	0.809
1992-8b	0.365	9.862	21.815	55.175	26.643	0.0036	0.363	1.073	1.976	0.881
1993-2b	0.597	7.711	11.654	25.045	11.121	0.0098	0.243	0.312	1.024	0.409
1993-3	0.623	8.610	13.378	27.579	11.965	0.0088	0.280	0.357	1.117	0.438
1993-4	0.626	8.934	14.424	29.640	13.311	0.0084	0.295	0.418	1.188	0.480
1993-5	0.628	8.769	13.778	28.668	12.453	0.0086	0.288	0.366	1.149	0.446
1993-6	0.599	8.952	15.193	32.259	15.353	0.0080	0.301	0.491	1.262	0.536
1993-7	0.590	9.051	15.775	33.738	16.421	0.0078	0.307	0.543	1.312	0.572
1993-8a	0.450	9.615	20.150	48.517	24.200	0.0051	0.348	0.935	1.774	0.810
1993-8b	0.368	9.872	21.840	55.159	26.660	0.0036	0.363	1.081	1.981	0.886
1994-2b	0.471	7.022	10.701	23.708	10.840	0.0122	0.388	0.435	1.258	0.477
1994-3	0.583	8.062	12.443	26.514	11.762	0.0153	0.454	0.528	1.473	0.537
1994-4	0.634	8.852	13.864	28.401	12.177	0.0163	0.484	0.566	1.586	0.564
1994-5	0.614	8.647	13.707	29.360	12.956	0.0161	0.478	0.568	1.654	0.587
1994-6	0.599	8.867	14.900	31.960	15.079	0.0153	0.479	0.697	1.666	0.627
1994-7	0.567	9.117	16.521	36.201	18.019	0.0140	0.476	0.881	1.705	0.686
1994-8a	0.433	9.645	20.466	49.996	24.756	0.0089	0.462	1.342	1.879	0.824
1994-8b	0.373	9.863	21.766	54.806	26.550	0.0066	0.451	1.487	1.926	0.861
1995-2b	0.542	6.366	9.361	21.676	10.013	0.0157	0.422	0.452	1.284	0.472
1995-3	0.625	8.716	13.672	28.326	12.311	0.0164	0.490	0.570	1.597	0.567
1995-4	0.621	8.734	13.906	28.898	12.835	0.0163	0.489	0.600	1.604	0.578
1995-5	0.605	8.785	14.432	30.829	14.192	0.0158	0.486	0.645	1.676	0.612
1995-6	0.598	8.979	15.291	32.522	15.466	0.0153	0.487	0.735	1.670	0.634
1995-7	0.575	9.087	16.241	35.333	17.430	0.0144	0.483	0.847	1.707	0.675
1995-8a	0.442	9.641	20.363	49.424	24.572	0.0092	0.461	1.333	1.870	0.820
1995-8b	0.379	9.865	21.731	54.514	26.481	0.0068	0.448	1.488	1.914	0.859
1996-2b	0.538	6.599	9.656	22.066	10.098	0.0161	0.432	0.475	1.324	0.487
1996-3	0.632	8.843	13.789	28.651	12.426	0.0162	0.481	0.576	1.580	0.567
1996-4	0.620	9.005	14.670	30.690	14.012	0.0156	0.480	0.661	1.612	0.600
1996-5	0.589	8.758	14.660	32.306	15.410	0.0151	0.472	0.692	1.688	0.635
1996-6	0.591	9.098	15.767	34.090	16.619	0.0146	0.474	0.799	1.667	0.655
1996-7	0.554	9.231	17.019	38.144	19.131	0.0133	0.471	0.944	1.723	0.706
1996-8a	0.435	9.751	20.599	50.616	25.035	0.0087	0.457	1.366	1.871	0.827
1996-8b	0.375	9.965	21.873	55.418	26.791	0.0066	0.449	1.505	1.927	0.865
1997-2b	0.474	5.166	7.315	17.663	8.350	0.0146	0.384	0.396	1.127	0.417
1997-3	0.606	8.537	13.475	28.552	12.896	0.0161	0.484	0.598	1.583	0.575
1997-4	0.637	8.907	13.852	28.619	12.265	0.0166	0.499	0.568	1.624	0.569
1997-5	0.610	8.661	13.763	30.031	13.443	0.0161	0.486	0.581	1.701	0.600
1997-6	0.617	8.960	14.603	30.830	14.107	0.0159	0.492	0.659	1.654	0.606
1997-7	0.600	9.037	15.317	32.907	15.710	0.0153	0.487	0.747	1.678	0.638
1997-8a	0.471	9.653	19.822	47.340	23.767	0.0101	0.456	1.280	1.823	0.800
1997-8b	0.393	9.928	21.588	54.062	26.358	0.0072	0.441	1.480	1.890	0.852
1998-2b	0.366	3.206	4.499	12.996	6.413	0.0088	0.078	0.115	0.481	0.201
1998-3	0.646	6.724	10.327	26.279	11.398	0.0128	0.149	0.249	0.830	0.320

Year & Class	Diesel NOx Decel	Diesel NOx 0 to 25	Diesel NOx 25 to 50	Diesel NOx 50 +	Diesel NOx Highway	Diesel PM 2.5 Decel	Diesel PM 2.5 0 to 25	Diesel PM 2.5 25 to 50	Diesel PM 2.5 50 +	Diesel PM 2.5 Highway
1998-4	0.666	6.892	10.645	26.903	11.588	0.0130	0.153	0.256	0.846	0.324
1998-5	0.653	6.754	10.450	27.229	11.857	0.0130	0.145	0.242	0.841	0.323
1998-6	0.661	6.864	10.652	27.188	11.833	0.0130	0.152	0.259	0.850	0.327
1998-7	0.642	6.913	11.204	28.990	13.382	0.0126	0.163	0.312	0.882	0.352
1998-8a	0.499	7.709	15.705	44.060	22.230	0.0085	0.273	0.743	1.205	0.510
1998-8b	0.411	8.051	17.416	50.912	24.872	0.0061	0.312	0.899	1.346	0.560
1999-2b	0.364	2.723	3.530	10.496	4.834	0.0107	0.083	0.119	0.540	0.218
1999-3	0.355	4.185	5.530	15.923	7.007	0.0130	0.138	0.223	0.813	0.313
1999-4	0.352	4.289	5.692	16.303	7.129	0.0133	0.142	0.232	0.831	0.319
1999-5	0.352	4.304	5.741	16.443	7.243	0.0132	0.143	0.237	0.835	0.321
1999-6	0.346	4.266	5.759	16.622	7.463	0.0131	0.142	0.240	0.839	0.325
1999-7	0.345	4.438	6.239	17.794	8.356	0.0128	0.154	0.285	0.867	0.344
1999-8a	0.295	6.297	11.339	32.741	16.381	0.0083	0.277	0.763	1.224	0.517
1999-8b	0.264	6.981	13.070	38.801	18.542	0.0060	0.318	0.921	1.365	0.568
2000-2b	0.333	2.925	3.786	11.396	5.314	0.0102	0.091	0.134	0.572	0.234
2000-3	0.351	4.228	5.602	16.096	7.069	0.0130	0.140	0.227	0.820	0.315
2000-4	0.352	4.310	5.754	16.472	7.253	0.0132	0.144	0.237	0.836	0.321
2000-5	0.352	4.328	5.813	16.643	7.392	0.0132	0.145	0.243	0.840	0.324
2000-6	0.348	4.275	5.752	16.584	7.404	0.0131	0.142	0.239	0.838	0.324
2000-7	0.343	4.607	6.686	18.739	9.072	0.0126	0.164	0.325	0.889	0.360
2000-8a	0.302	6.047	10.685	30.301	15.415	0.0091	0.259	0.697	1.163	0.496
2000-8b	0.266	6.958	13.009	38.514	18.465	0.0061	0.316	0.916	1.358	0.566
2001-2b	0.367	2.417	3.123	9.148	4.118	0.0108	0.074	0.103	0.496	0.195
2001-3	0.357	4.193	5.551	15.980	7.063	0.0130	0.139	0.226	0.814	0.315
2001-4	0.353	4.302	5.713	16.350	7.147	0.0132	0.143	0.233	0.833	0.319
2001-5	0.353	4.314	5.752	16.461	7.238	0.0132	0.144	0.237	0.835	0.321
2001-6	0.344	4.399	6.136	17.470	8.163	0.0129	0.151	0.276	0.859	0.341
2001-7	0.345	4.434	6.208	17.654	8.241	0.0128	0.153	0.282	0.863	0.342
2001-8a	0.288	6.430	11.681	33.734	16.786	0.0079	0.284	0.791	1.245	0.527
2001-8b	0.264	6.936	12.975	38.507	18.414	0.0060	0.315	0.910	1.356	0.563
2002-2b	0.362	2.394	3.097	9.111	4.129	0.0107	0.073	0.100	0.497	0.195
2002-3	0.343	3.918	5.158	15.074	6.726	0.0130	0.126	0.197	0.786	0.304
2002-4	0.340	4.089	5.419	15.704	6.915	0.0134	0.132	0.209	0.818	0.313
2002-5	0.340	4.089	5.419	15.704	6.915	0.0134	0.132	0.209	0.818	0.313
2002-6	0.335	4.047	5.420	15.893	7.124	0.0133	0.131	0.212	0.822	0.317
2002-7	0.332	4.355	6.257	17.719	8.578	0.0129	0.150	0.287	0.865	0.349
2002-8a	0.296	5.992	10.663	30.319	15.477	0.0091	0.257	0.695	1.163	0.497
2002-8b	0.262	6.871	12.866	38.136	18.273	0.0062	0.311	0.895	1.344	0.559
2003-2b	0.148	1.484	2.279	6.850	3.201	0.0090	0.063	0.088	0.430	0.171
2003-3	0.491	3.436	4.253	12.563	5.254	0.0116	0.116	0.184	0.713	0.276
2003-4	0.548	3.641	4.489	13.143	5.407	0.0121	0.122	0.195	0.742	0.284
2003-5	0.548	3.641	4.489	13.143	5.407	0.0121	0.122	0.195	0.742	0.284
2003-6	0.542	3.635	4.517	13.277	5.510	0.0120	0.121	0.198	0.746	0.288
2003-7	0.534	3.792	4.948	13.896	6.006	0.0115	0.140	0.274	0.789	0.320
2003-8a	0.463	4.577	7.061	17.984	8.182	0.0080	0.239	0.651	1.070	0.457

Year & Class	Diesel NOx Decel	Diesel NOx 0 to 25	Diesel NOx 25 to 50	Diesel NOx 50 +	Diesel NOx Highway	Diesel PM 2.5 Decel	Diesel PM 2.5 0 to 25	Diesel PM 2.5 25 to 50	Diesel PM 2.5 50 +	Diesel PM 2.5 Highway
2003-8b	0.405	4.968	8.035	20.287	9.003	0.0055	0.284	0.820	1.224	0.509
2004-2b	0.151	1.490	2.219	6.626	3.074	0.0091	0.064	0.089	0.437	0.174
2004-3	0.493	3.443	4.254	12.603	5.267	0.0117	0.115	0.180	0.712	0.276
2004-4	0.545	3.631	4.477	13.160	5.419	0.0121	0.119	0.189	0.738	0.283
2004-5	0.545	3.631	4.477	13.160	5.419	0.0121	0.119	0.189	0.738	0.283
2004-6	0.540	3.627	4.506	13.283	5.514	0.0120	0.119	0.193	0.742	0.286
2004-7	0.532	3.767	4.891	13.833	5.957	0.0116	0.136	0.260	0.780	0.314
2004-8a	0.465	4.530	6.952	17.765	8.098	0.0083	0.230	0.621	1.045	0.446
2004-8b	0.404	4.952	8.002	20.233	8.990	0.0056	0.279	0.802	1.209	0.502
2005-2b	0.135	1.359	2.148	6.256	2.860	0.0097	0.064	0.089	0.440	0.171
2005-3	0.471	3.358	4.159	12.278	5.161	0.0116	0.116	0.184	0.707	0.275
2005-4	0.550	3.649	4.498	13.128	5.396	0.0120	0.124	0.199	0.744	0.285
2005-5	0.550	3.649	4.498	13.128	5.396	0.0120	0.124	0.199	0.744	0.285
2005-6	0.545	3.652	4.541	13.259	5.499	0.0119	0.124	0.205	0.750	0.289
2005-7	0.535	3.818	5.004	13.945	6.042	0.0114	0.144	0.286	0.796	0.323
2005-8a	0.460	4.600	7.119	18.118	8.234	0.0079	0.240	0.657	1.076	0.458
2005-8b	0.403	4.967	8.035	20.305	9.009	0.0055	0.282	0.814	1.220	0.506
2006-2b	0.141	1.414	2.251	6.510	2.949	0.0105	0.068	0.094	0.468	0.181
2006-3	0.471	3.360	4.168	12.311	5.172	0.0117	0.116	0.183	0.709	0.275
2006-4	0.549	3.645	4.494	13.136	5.402	0.0121	0.123	0.197	0.743	0.285
2006-5	0.549	3.645	4.494	13.136	5.402	0.0121	0.123	0.197	0.743	0.285
2006-6	0.545	3.650	4.536	13.255	5.495	0.0120	0.123	0.203	0.748	0.289
2006-7	0.535	3.806	4.973	13.901	6.008	0.0115	0.142	0.280	0.792	0.321
2006-8a	0.462	4.580	7.068	17.996	8.186	0.0080	0.238	0.650	1.069	0.456
2006-8b	0.404	4.965	8.028	20.277	8.999	0.0055	0.283	0.816	1.221	0.507
2007-2b	0.258	0.998	1.331	3.668	1.623	0.0019	0.005	0.007	0.025	0.010
2007-3	0.229	1.933	2.388	7.096	2.970	0.0009	0.006	0.009	0.026	0.011
2007-4	0.225	2.035	2.519	7.461	3.072	0.0008	0.006	0.009	0.026	0.011
2007-5	0.225	2.035	2.519	7.461	3.072	0.0008	0.006	0.009	0.026	0.011
2007-6	0.224	2.052	2.574	7.541	3.146	0.0008	0.006	0.009	0.027	0.011
2007-7	0.211	2.315	3.135	8.319	3.696	0.0008	0.008	0.013	0.029	0.012
2007-8a	0.133	3.436	5.388	12.378	5.593	0.0007	0.012	0.027	0.041	0.018
2007-8b	0.089	3.891	6.237	14.211	6.184	0.0006	0.014	0.032	0.046	0.020
2008-2b	0.272	0.935	1.278	3.413	1.467	0.0020	0.005	0.007	0.025	0.010
2008-3	0.251	1.746	2.156	6.461	2.726	0.0010	0.006	0.007	0.025	0.010
2008-4	0.247	1.882	2.327	6.959	2.875	0.0008	0.006	0.008	0.025	0.010
2008-5	0.247	1.882	2.327	6.959	2.875	0.0008	0.006	0.008	0.025	0.010
2008-6	0.246	1.889	2.352	7.008	2.916	0.0008	0.006	0.008	0.025	0.010
2008-7	0.239	2.019	2.625	7.379	3.192	0.0007	0.006	0.009	0.026	0.011
2008-8a	0.176	2.987	4.576	10.667	4.963	0.0007	0.010	0.022	0.036	0.016
2008-8b	0.102	3.766	6.025	13.727	6.038	0.0006	0.014	0.031	0.045	0.019
2009-2b	0.207	0.818	1.093	3.066	1.373	0.0015	0.004	0.006	0.022	0.009
2009-3	0.216	1.921	2.366	7.053	2.970	0.0009	0.006	0.009	0.026	0.011
2009-4	0.219	2.075	2.570	7.593	3.124	0.0008	0.007	0.009	0.027	0.011
2009-5	0.219	2.075	2.570	7.593	3.124	0.0008	0.007	0.009	0.027	0.011

Year & Class	Diesel NOx Decel	Diesel NOx 0 to 25	Diesel NOx 25 to 50	Diesel NOx 50 +	Diesel NOx Highway	Diesel PM 2.5 Decel	Diesel PM 2.5 0 to 25	Diesel PM 2.5 25 to 50	Diesel PM 2.5 50 +	Diesel PM 2.5 Highway
2009-6	0.219	2.083	2.616	7.657	3.199	0.0008	0.007	0.010	0.027	0.011
2009-7	0.205	2.370	3.223	8.497	3.786	0.0008	0.008	0.013	0.029	0.013
2009-8a	0.126	3.513	5.516	12.634	5.686	0.0007	0.013	0.028	0.042	0.018
2009-8b	0.085	3.938	6.312	14.345	6.233	0.0006	0.014	0.033	0.047	0.020
2010-2b	0.079	0.279	0.397	1.138	0.499	0.0012	0.004	0.005	0.018	0.008
2010-3	0.090	0.571	0.703	2.058	0.864	0.0008	0.006	0.008	0.023	0.009
2010-4	0.094	0.621	0.765	2.213	0.908	0.0007	0.006	0.008	0.024	0.010
2010-5	0.094	0.621	0.765	2.213	0.908	0.0007	0.006	0.008	0.024	0.010
2010-6	0.093	0.620	0.773	2.241	0.930	0.0007	0.006	0.008	0.024	0.010
2010-7	0.091	0.656	0.866	2.383	1.041	0.0007	0.007	0.012	0.026	0.011
2010-8a	0.079	0.810	1.262	3.192	1.452	0.0006	0.012	0.026	0.038	0.017
2010-8b	0.071	0.875	1.415	3.571	1.584	0.0006	0.014	0.031	0.044	0.019
2011-2b	0.108	0.357	0.503	1.362	0.577	0.0016	0.004	0.006	0.021	0.009
2011-3	0.095	0.574	0.712	2.082	0.870	0.0009	0.005	0.007	0.023	0.009
2011-4	0.092	0.611	0.754	2.202	0.905	0.0007	0.005	0.008	0.023	0.009
2011-5	0.092	0.611	0.754	2.202	0.905	0.0007	0.005	0.008	0.023	0.009
2011-6	0.091	0.612	0.761	2.225	0.923	0.0007	0.006	0.008	0.023	0.009
2011-7	0.090	0.641	0.836	2.337	1.012	0.0007	0.006	0.010	0.025	0.011
2011-8a	0.080	0.791	1.220	3.097	1.416	0.0006	0.011	0.024	0.036	0.016
2011-8b	0.071	0.869	1.405	3.548	1.577	0.0006	0.013	0.030	0.043	0.019
2012-2b	0.069	0.234	0.327	0.888	0.375	0.0010	0.003	0.004	0.013	0.005
2012-3	0.059	0.363	0.450	1.314	0.546	0.0005	0.003	0.004	0.014	0.006
2012-4	0.057	0.381	0.470	1.371	0.563	0.0004	0.003	0.005	0.014	0.006
2012-5	0.057	0.381	0.470	1.371	0.563	0.0004	0.003	0.005	0.014	0.006
2012-6	0.057	0.383	0.476	1.386	0.575	0.0004	0.003	0.005	0.014	0.006
2012-7	0.057	0.397	0.511	1.439	0.617	0.0004	0.004	0.006	0.015	0.006
2012-8a	0.053	0.501	0.762	1.939	0.895	0.0004	0.006	0.014	0.022	0.010
2012-8b	0.047	0.573	0.922	2.326	1.039	0.0004	0.008	0.019	0.027	0.012
2013-2b	0.069	0.233	0.327	0.886	0.375	0.0010	0.003	0.004	0.013	0.005
2013-3	0.059	0.359	0.445	1.300	0.541	0.0005	0.003	0.004	0.014	0.005
2013-4	0.057	0.376	0.464	1.356	0.557	0.0004	0.003	0.004	0.014	0.005
2013-5	0.057	0.376	0.464	1.356	0.557	0.0004	0.003	0.004	0.014	0.005
2013-6	0.056	0.378	0.469	1.369	0.568	0.0004	0.003	0.005	0.014	0.006
2013-7	0.056	0.390	0.500	1.416	0.605	0.0004	0.004	0.006	0.014	0.006
2013-8a	0.052	0.484	0.732	1.871	0.862	0.0004	0.006	0.013	0.021	0.009
2013-8b	0.046	0.551	0.886	2.237	1.000	0.0004	0.008	0.018	0.026	0.011
2014-2b	0.069	0.233	0.327	0.887	0.375	0.0010	0.003	0.004	0.013	0.005
2014-3	0.059	0.358	0.444	1.298	0.539	0.0005	0.003	0.004	0.014	0.005
2014-4	0.057	0.375	0.462	1.352	0.554	0.0004	0.003	0.004	0.014	0.005
2014-5	0.057	0.375	0.462	1.352	0.554	0.0004	0.003	0.004	0.014	0.005
2014-6	0.056	0.376	0.468	1.364	0.565	0.0004	0.003	0.005	0.014	0.006
2014-7	0.056	0.387	0.497	1.408	0.597	0.0004	0.004	0.006	0.014	0.006
2014-8a	0.051	0.474	0.717	1.835	0.831	0.0004	0.006	0.013	0.020	0.009
2014-8b	0.044	0.533	0.857	2.164	0.947	0.0004	0.008	0.017	0.025	0.011

Year & Class	Diesel NOx Decel	Diesel NOx 0 to 25	Diesel NOx 25 to 50	Diesel NOx 50 +	Diesel NOx Highway	Diesel PM 2.5 Decel	Diesel PM 2.5 0 to 25	Diesel PM 2.5 25 to 50	Diesel PM 2.5 50 +	Diesel PM 2.5 Highway
2015-2b	0.069	0.234	0.327	0.888	0.375	0.0010	0.003	0.004	0.013	0.005
2015-3	0.059	0.358	0.444	1.298	0.539	0.0005	0.003	0.004	0.014	0.005
2015-4	0.057	0.375	0.462	1.352	0.554	0.0004	0.003	0.004	0.014	0.005
2015-5	0.057	0.375	0.462	1.352	0.554	0.0004	0.003	0.004	0.014	0.005
2015-6	0.056	0.376	0.468	1.364	0.565	0.0004	0.003	0.005	0.014	0.006
2015-7	0.056	0.388	0.497	1.408	0.598	0.0004	0.004	0.006	0.014	0.006
2015-8a	0.051	0.474	0.718	1.838	0.832	0.0004	0.006	0.013	0.021	0.009
2015-8b	0.044	0.533	0.857	2.166	0.947	0.0004	0.008	0.017	0.025	0.011

Year & Class	Gasoline NOx Decel	Gasoline NOx 0 to 25	Gasoline NOx 25 to 50	Gasoline NOx 50 +	Gasoline NOx Highway	Gasoline PM 2.5 Decel	Gasoline PM 2.5 0 to 25	Gasoline PM 2.5 25 to 50	Gasoline PM 2.5 50 +	Gasoline PM 2.5 Highway
1987-2b	0.199	3.490	7.052	7.260	4.642	0.0028	0.031	0.085	0.076	0.078
1987-3	0.245	8.090	11.848	12.213	8.370	0.0033	0.055	0.112	0.094	0.183
1987-4	0.245	8.101	11.903	12.276	8.439	0.0033	0.056	0.114	0.096	0.186
1987-5	0.244	8.209	11.718	11.937	8.070	0.0033	0.058	0.111	0.087	0.173
1987-6	0.244	8.209	11.718	11.937	8.070	0.0033	0.058	0.111	0.087	0.173
1987-7	0.244	8.209	11.718	11.937	8.070	0.0033	0.058	0.111	0.087	0.173
1987-8a	0.240	8.766	12.456	12.691	8.816	0.0032	0.070	0.161	0.124	0.204
1987-8b	0.184	13.449	18.320	18.836	13.165	0.0027	0.170	0.575	0.434	0.382
1988-2b	0.203	3.827	7.290	7.516	4.905	0.0041	0.053	0.064	0.084	0.066
1988-3	0.245	8.115	11.868	12.226	8.381	0.0046	0.118	0.092	0.136	0.149
1988-4	0.245	8.080	11.974	12.394	8.592	0.0046	0.116	0.094	0.143	0.159
1988-5	0.244	8.275	11.794	12.027	8.164	0.0045	0.122	0.095	0.127	0.138
1988-6	0.244	8.268	11.786	12.018	8.155	0.0045	0.122	0.094	0.127	0.138
1988-7	0.244	8.220	11.729	11.959	8.092	0.0046	0.121	0.091	0.123	0.135
1988-8a	0.239	8.911	12.767	12.987	9.054	0.0045	0.138	0.142	0.176	0.178
1988-8b	0.184	13.449	18.320	18.836	13.165	0.0038	0.249	0.436	0.498	0.358
1989-2b	0.205	4.199	7.566	7.851	5.216	0.0041	0.058	0.065	0.086	0.072
1989-3	0.245	8.036	11.743	12.158	8.297	0.0046	0.116	0.088	0.132	0.145
1989-4	0.245	8.037	11.904	12.340	8.529	0.0047	0.115	0.091	0.140	0.156
1989-5	0.245	8.072	11.514	11.882	7.996	0.0046	0.117	0.087	0.118	0.131
1989-6	0.245	8.072	11.514	11.882	7.996	0.0046	0.117	0.087	0.118	0.131
1989-7	0.245	8.072	11.514	11.882	7.996	0.0046	0.117	0.087	0.118	0.131
1989-8a	0.220	13.375	19.928	19.777	13.079	0.0045	0.250	0.462	0.494	0.364
1989-8b	0.220	13.375	19.928	19.777	13.079	0.0045	0.250	0.462	0.494	0.364
1990-2b	0.133	4.999	7.765	6.458	4.733	0.0014	0.017	0.047	0.084	0.128
1990-3	0.129	6.155	8.615	6.897	5.339	0.0016	0.020	0.040	0.079	0.175
1990-4	0.129	6.229	8.900	7.183	5.672	0.0016	0.021	0.057	0.093	0.193
1990-5	0.129	6.169	8.468	6.698	5.119	0.0016	0.020	0.035	0.072	0.165
1990-6	0.129	6.169	8.468	6.698	5.119	0.0016	0.020	0.035	0.072	0.165
1990-7	0.129	6.169	8.468	6.698	5.119	0.0016	0.020	0.035	0.072	0.165
1990-8a	0.118	10.200	15.352	12.350	8.825	0.0013	0.046	0.535	0.400	0.398
1990-8b	0.118	10.200	15.352	12.350	8.825	0.0013	0.046	0.535	0.400	0.398

Year & Class	Gasoline NOx Decel	Gasoline NOx 0 to 25	Gasoline NOx 25 to 50	Gasoline NOx 50 +	Gasoline NOx Highway	Gasoline PM 2.5 Decel	Gasoline PM 2.5 0 to 25	Gasoline PM 2.5 25 to 50	Gasoline PM 2.5 50 +	Gasoline PM 2.5 Highway
1991-2b	0.133	4.348	7.478	6.366	4.510	0.0039	0.074	0.032	0.030	0.056
1991-3	0.129	6.152	8.632	6.919	5.366	0.0043	0.113	0.039	0.031	0.101
1991-4	0.129	6.277	8.925	7.169	5.628	0.0043	0.116	0.049	0.036	0.107
1991-5	0.129	6.140	8.508	6.773	5.204	0.0043	0.113	0.035	0.029	0.098
1991-6	0.129	6.174	8.477	6.700	5.122	0.0043	0.114	0.036	0.028	0.096
1991-7	0.129	6.174	8.477	6.700	5.122	0.0043	0.114	0.036	0.028	0.096
1991-8a	0.128	6.572	9.309	7.376	5.731	0.0043	0.123	0.067	0.042	0.111
1991-8b	0.128	6.572	9.309	7.376	5.731	0.0043	0.123	0.067	0.042	0.111
1992-2b	0.130	4.675	7.653	6.446	4.641	0.0039	0.080	0.032	0.029	0.063
1992-3	0.129	6.162	8.703	6.998	5.462	0.0043	0.113	0.041	0.032	0.103
1992-4	0.129	6.298	9.035	7.288	5.775	0.0043	0.116	0.053	0.038	0.110
1992-5	0.129	6.127	8.521	6.802	5.237	0.0043	0.113	0.035	0.029	0.098
1992-6	0.129	6.176	8.479	6.701	5.123	0.0043	0.114	0.036	0.028	0.096
1992-7	0.129	6.176	8.479	6.701	5.123	0.0043	0.114	0.036	0.028	0.096
1992-8a	0.127	6.696	9.560	7.579	5.903	0.0043	0.126	0.077	0.046	0.115
1992-8b	0.127	6.696	9.560	7.579	5.903	0.0043	0.126	0.077	0.046	0.115
1993-2b	0.129	4.784	7.661	6.466	4.671	0.0039	0.083	0.031	0.028	0.067
1993-3	0.129	6.063	8.450	6.819	5.254	0.0043	0.111	0.035	0.029	0.099
1993-4	0.129	6.085	8.566	6.929	5.388	0.0043	0.112	0.037	0.031	0.101
1993-5	0.129	6.055	8.439	6.812	5.249	0.0043	0.111	0.034	0.029	0.099
1993-6	0.129	6.067	8.286	6.648	5.061	0.0043	0.112	0.034	0.027	0.096
1993-7	0.129	6.067	8.286	6.648	5.061	0.0043	0.112	0.034	0.027	0.096
1993-8a	0.129	6.148	8.459	6.786	5.191	0.0043	0.114	0.041	0.030	0.099
1993-8b	0.129	6.148	8.459	6.786	5.191	0.0043	0.114	0.041	0.030	0.099
1994-2b	0.104	4.232	7.127	6.330	4.403	0.0021	0.015	0.048	0.122	0.069
1994-3	0.127	6.057	8.471	6.775	5.242	0.0026	0.023	0.085	0.187	0.115
1994-4	0.127	6.171	8.813	7.097	5.597	0.0026	0.023	0.092	0.203	0.130
1994-5	0.127	5.968	8.410	6.783	5.279	0.0026	0.022	0.083	0.188	0.117
1994-6	0.127	6.059	8.315	6.579	5.028	0.0026	0.023	0.082	0.176	0.106
1994-7	0.127	6.059	8.315	6.579	5.028	0.0026	0.023	0.082	0.176	0.106
1994-8a	0.116	10.020	15.081	12.132	8.670	0.0023	0.051	0.232	0.450	0.257
1994-8b	0.116	10.020	15.081	12.132	8.670	0.0023	0.051	0.232	0.450	0.257
1995-2b	0.108	4.194	7.072	6.282	4.370	0.0023	0.021	0.031	0.037	0.066
1995-3	0.127	6.021	8.349	6.663	5.120	0.0027	0.031	0.029	0.036	0.111
1995-4	0.127	6.028	8.477	6.814	5.295	0.0027	0.031	0.032	0.039	0.115
1995-5	0.127	5.993	8.369	6.713	5.183	0.0027	0.031	0.028	0.036	0.112
1995-6	0.127	6.049	8.297	6.574	5.022	0.0027	0.031	0.028	0.035	0.109
1995-7	0.127	6.049	8.297	6.574	5.022	0.0027	0.031	0.028	0.035	0.109
1995-8a	0.116	10.020	15.081	12.132	8.670	0.0025	0.056	0.333	0.176	0.212
1995-8b	0.116	10.020	15.081	12.132	8.670	0.0025	0.056	0.333	0.176	0.212
1996-2b	0.087	2.905	4.453	4.350	3.046	0.0023	0.013	0.035	0.015	0.043
1996-3	0.127	6.018	8.404	6.726	5.195	0.0024	0.019	0.032	0.014	0.084
1996-4	0.127	6.022	8.507	6.852	5.349	0.0024	0.019	0.035	0.015	0.086
1996-5	0.127	5.973	8.411	6.777	5.270	0.0024	0.019	0.031	0.014	0.085
1996-6	0.127	6.066	8.328	6.582	5.032	0.0024	0.019	0.031	0.014	0.081

Year & Class	Gasoline NOx Decel	Gasoline NOx 0 to 25	Gasoline NOx 25 to 50	Gasoline NOx 50 +	Gasoline NOx Highway	Gasoline PM 2.5 Decel	Gasoline PM 2.5 0 to 25	Gasoline PM 2.5 25 to 50	Gasoline PM 2.5 50 +	Gasoline PM 2.5 Highway
1996-7	0.127	6.066	8.328	6.582	5.032	0.0024	0.019	0.031	0.014	0.081
1996-8a	0.116	10.020	15.081	12.132	8.670	0.0022	0.032	0.319	0.063	0.132
1996-8b	0.116	10.020	15.081	12.132	8.670	0.0022	0.032	0.319	0.063	0.132
1997-2b	0.093	2.524	4.102	3.859	2.785	0.0010	0.009	0.029	0.038	0.034
1997-3	0.127	6.046	8.378	6.664	5.121	0.0012	0.013	0.027	0.044	0.063
1997-4	0.127	6.001	8.469	6.824	5.320	0.0012	0.013	0.027	0.046	0.067
1997-5	0.127	5.998	8.391	6.728	5.203	0.0012	0.013	0.025	0.045	0.065
1997-6	0.127	6.068	8.331	6.583	5.033	0.0012	0.013	0.026	0.042	0.062
1997-7	0.127	6.068	8.331	6.583	5.033	0.0012	0.013	0.026	0.042	0.062
1997-8a	0.116	10.020	15.081	12.132	8.670	0.0010	0.027	0.233	0.148	0.138
1997-8b	0.116	10.020	15.081	12.132	8.670	0.0010	0.027	0.233	0.148	0.138
1998-2b	0.098	1.458	3.148	3.407	2.076	0.0013	0.010	0.026	0.026	0.028
1998-3	0.241	3.815	5.889	6.145	3.957	0.0016	0.020	0.049	0.062	0.080
1998-4	0.236	4.026	6.528	6.473	4.283	0.0015	0.023	0.073	0.070	0.091
1998-5	0.247	3.550	5.165	5.807	3.599	0.0016	0.017	0.020	0.052	0.069
1998-6	0.247	3.585	5.165	5.780	3.576	0.0016	0.018	0.020	0.052	0.068
1998-7	0.247	3.585	5.165	5.780	3.576	0.0016	0.018	0.020	0.052	0.068
1998-8a	0.212	5.297	9.134	7.684	5.013	0.0013	0.036	0.177	0.104	0.112
1998-8b	0.212	5.297	9.134	7.684	5.013	0.0013	0.036	0.177	0.104	0.112
1999-2b	0.115	1.637	3.302	3.593	2.219	0.0004	0.005	0.024	0.014	0.037
1999-3	0.247	3.581	5.208	5.819	3.609	0.0005	0.010	0.013	0.018	0.091
1999-4	0.246	3.620	5.356	5.898	3.695	0.0005	0.010	0.020	0.020	0.094
1999-5	0.247	3.537	5.141	5.803	3.589	0.0005	0.009	0.009	0.018	0.092
1999-6	0.247	3.536	5.141	5.804	3.589	0.0005	0.009	0.009	0.018	0.092
1999-7	0.247	3.560	5.133	5.780	3.567	0.0005	0.009	0.009	0.017	0.090
1999-8a	0.244	3.683	5.483	5.945	3.741	0.0005	0.010	0.028	0.021	0.095
1999-8b	0.244	3.683	5.483	5.945	3.741	0.0005	0.010	0.028	0.021	0.095
2000-2b	0.119	1.630	3.308	3.598	2.215	0.0004	0.004	0.022	0.019	0.033
2000-3	0.247	3.541	5.114	5.784	3.565	0.0005	0.006	0.009	0.021	0.074
2000-4	0.247	3.533	5.122	5.795	3.576	0.0005	0.006	0.009	0.021	0.075
2000-5	0.247	3.528	5.124	5.799	3.580	0.0005	0.006	0.009	0.021	0.075
2000-6	0.247	3.527	5.124	5.800	3.581	0.0005	0.006	0.009	0.021	0.075
2000-7	0.247	3.543	5.112	5.780	3.561	0.0005	0.006	0.009	0.021	0.074
2000-8a	0.247	3.544	5.115	5.781	3.563	0.0005	0.006	0.009	0.021	0.074
2000-8b	0.247	3.544	5.115	5.781	3.563	0.0005	0.006	0.009	0.021	0.074
2001-2b	0.083	1.047	2.206	2.430	1.561	0.0001	0.003	0.016	0.012	0.018
2001-3	0.234	3.398	4.907	5.500	3.403	0.0002	0.003	0.007	0.043	0.065
2001-4	0.235	3.381	4.912	5.518	3.419	0.0002	0.003	0.007	0.043	0.065
2001-5	0.235	3.370	4.906	5.521	3.421	0.0002	0.003	0.007	0.043	0.065
2001-6	0.235	3.369	4.906	5.522	3.422	0.0002	0.003	0.007	0.043	0.065
2001-7	0.234	3.404	4.904	5.494	3.397	0.0002	0.003	0.007	0.043	0.064
2001-8a	0.234	3.408	4.916	5.499	3.404	0.0002	0.003	0.007	0.043	0.065
2001-8b	0.234	3.408	4.916	5.499	3.404	0.0002	0.003	0.007	0.043	0.065
2002-2b	0.076	1.059	2.155	2.382	1.551	0.0006	0.006	0.013	0.011	0.012
2002-3	0.234	3.408	4.917	5.498	3.405	0.0007	0.010	0.011	0.016	0.030

Year & Class	Gasoline NOx Decel	Gasoline NOx 0 to 25	Gasoline NOx 25 to 50	Gasoline NOx 50 +	Gasoline NOx Highway	Gasoline PM 2.5 Decel	Gasoline PM 2.5 0 to 25	Gasoline PM 2.5 25 to 50	Gasoline PM 2.5 50 +	Gasoline PM 2.5 Highway
2002-4	0.234	3.393	4.919	5.512	3.416	0.0007	0.010	0.011	0.016	0.030
2002-5	0.234	3.384	4.914	5.516	3.419	0.0007	0.010	0.011	0.016	0.030
2002-6	0.234	3.383	4.914	5.516	3.419	0.0007	0.010	0.011	0.016	0.030
2002-7	0.234	3.413	4.916	5.494	3.401	0.0007	0.010	0.011	0.016	0.030
2002-8a	0.234	3.415	4.922	5.497	3.404	0.0007	0.010	0.011	0.016	0.030
2002-8b	0.234	3.415	4.922	5.497	3.404	0.0007	0.010	0.011	0.016	0.030
2003-2b	0.080	1.109	2.274	2.499	1.618	0.0003	0.004	0.014	0.010	0.015
2003-3	0.234	3.408	4.917	5.498	3.404	0.0004	0.007	0.006	0.019	0.043
2003-4	0.234	3.394	4.919	5.511	3.415	0.0004	0.007	0.006	0.020	0.043
2003-5	0.234	3.385	4.914	5.515	3.418	0.0004	0.007	0.006	0.020	0.043
2003-6	0.234	3.384	4.914	5.515	3.418	0.0004	0.007	0.006	0.020	0.043
2003-7	0.234	3.413	4.916	5.494	3.401	0.0004	0.007	0.006	0.019	0.043
2003-8a	0.234	3.416	4.923	5.497	3.404	0.0004	0.007	0.006	0.019	0.043
2003-8b	0.234	3.416	4.923	5.497	3.404	0.0004	0.007	0.006	0.019	0.043
2004-2b	0.063	0.861	1.512	1.690	1.156	0.0006	0.004	0.010	0.010	0.009
2004-3	0.234	3.409	4.917	5.498	3.404	0.0007	0.009	0.008	0.021	0.022
2004-4	0.234	3.397	4.919	5.509	3.413	0.0007	0.009	0.008	0.021	0.023
2004-5	0.234	3.389	4.915	5.512	3.415	0.0007	0.009	0.008	0.021	0.023
2004-6	0.234	3.388	4.914	5.512	3.416	0.0007	0.009	0.008	0.021	0.023
2004-7	0.234	3.413	4.916	5.494	3.401	0.0007	0.009	0.008	0.021	0.022
2004-8a	0.234	3.416	4.923	5.497	3.404	0.0007	0.009	0.008	0.021	0.022
2004-8b	0.234	3.416	4.923	5.497	3.404	0.0007	0.009	0.008	0.021	0.022
2005-2b	0.046	0.521	1.040	1.164	0.771	0.0006	0.004	0.010	0.009	0.007
2005-3	0.234	3.409	4.917	5.498	3.404	0.0007	0.009	0.008	0.021	0.022
2005-4	0.234	3.395	4.919	5.511	3.415	0.0007	0.009	0.008	0.021	0.023
2005-5	0.234	3.386	4.914	5.514	3.417	0.0007	0.009	0.008	0.021	0.023
2005-6	0.234	3.386	4.914	5.514	3.417	0.0007	0.009	0.008	0.021	0.023
2005-7	0.234	3.413	4.916	5.494	3.401	0.0007	0.009	0.008	0.021	0.022
2005-8a	0.234	3.416	4.923	5.497	3.405	0.0007	0.009	0.008	0.021	0.022
2005-8b	0.234	3.416	4.923	5.497	3.405	0.0007	0.009	0.008	0.021	0.022
2006-2b	0.045	0.525	0.941	1.079	0.738	0.0005	0.003	0.008	0.008	0.006
2006-3	0.234	3.410	4.917	5.497	3.403	0.0006	0.007	0.007	0.017	0.018
2006-4	0.234	3.401	4.920	5.506	3.411	0.0006	0.007	0.007	0.017	0.019
2006-5	0.234	3.393	4.915	5.508	3.413	0.0006	0.007	0.006	0.017	0.019
2006-6	0.234	3.393	4.915	5.509	3.413	0.0006	0.007	0.006	0.017	0.019
2006-7	0.234	3.413	4.916	5.494	3.401	0.0006	0.007	0.007	0.017	0.018
2006-8a	0.234	3.416	4.923	5.497	3.404	0.0006	0.007	0.007	0.017	0.018
2006-8b	0.234	3.416	4.923	5.497	3.404	0.0006	0.007	0.007	0.017	0.018
2007-2b	0.034	0.420	0.761	0.890	0.617	0.0005	0.003	0.008	0.007	0.006
2007-3	0.234	3.409	4.917	5.497	3.404	0.0006	0.007	0.007	0.017	0.018
2007-4	0.234	3.397	4.919	5.508	3.413	0.0006	0.007	0.007	0.017	0.019
2007-5	0.234	3.389	4.915	5.511	3.415	0.0006	0.007	0.006	0.017	0.019
2007-6	0.234	3.389	4.914	5.512	3.415	0.0006	0.007	0.006	0.017	0.019
2007-7	0.234	3.413	4.916	5.494	3.401	0.0006	0.007	0.007	0.017	0.018
2007-8a	0.234	3.415	4.922	5.497	3.404	0.0006	0.007	0.007	0.017	0.018

Year & Class	Gasoline NOx Decel	Gasoline NOx 0 to 25	Gasoline NOx 25 to 50	Gasoline NOx 50 +	Gasoline NOx Highway	Gasoline PM 2.5 Decel	Gasoline PM 2.5 0 to 25	Gasoline PM 2.5 25 to 50	Gasoline PM 2.5 50 +	Gasoline PM 2.5 Highway
2007-8b	0.234	3.415	4.922	5.497	3.404	0.0006	0.007	0.007	0.017	0.018
2008-2b	0.018	0.196	0.440	0.522	0.334	0.0004	0.003	0.007	0.007	0.006
2008-3	0.070	1.023	1.475	1.649	1.021	0.0005	0.007	0.006	0.015	0.017
2008-4	0.070	1.021	1.476	1.651	1.023	0.0005	0.007	0.006	0.015	0.017
2008-5	0.070	1.019	1.474	1.652	1.023	0.0005	0.007	0.006	0.016	0.017
2008-6	0.070	1.019	1.474	1.652	1.023	0.0005	0.007	0.006	0.016	0.017
2008-7	0.070	1.024	1.475	1.648	1.020	0.0005	0.007	0.006	0.015	0.016
2008-8a	0.070	1.025	1.477	1.649	1.021	0.0005	0.007	0.006	0.015	0.017
2008-8b	0.070	1.025	1.477	1.649	1.021	0.0005	0.007	0.006	0.015	0.017
2009-2b	0.007	0.144	0.307	0.388	0.268	0.0004	0.003	0.007	0.007	0.006
2009-3	0.070	1.023	1.475	1.649	1.021	0.0005	0.007	0.006	0.015	0.017
2009-4	0.070	1.020	1.475	1.652	1.023	0.0005	0.007	0.006	0.016	0.017
2009-5	0.070	1.018	1.474	1.653	1.024	0.0005	0.007	0.006	0.016	0.017
2009-6	0.070	1.017	1.474	1.653	1.024	0.0005	0.007	0.006	0.016	0.017
2009-7	0.070	1.024	1.475	1.648	1.020	0.0005	0.007	0.006	0.015	0.016
2009-8a	0.070	1.024	1.476	1.649	1.021	0.0005	0.007	0.006	0.015	0.017
2009-8b	0.070	1.024	1.476	1.649	1.021	0.0005	0.007	0.006	0.015	0.017
2010-2b	0.005	0.103	0.224	0.288	0.199	0.0004	0.003	0.006	0.006	0.005
2010-3	0.057	0.823	1.186	1.327	0.813	0.0005	0.006	0.005	0.014	0.015
2010-4	0.057	0.820	1.187	1.329	0.815	0.0005	0.006	0.005	0.014	0.015
2010-5	0.057	0.819	1.186	1.330	0.816	0.0005	0.006	0.005	0.014	0.015
2010-6	0.057	0.819	1.186	1.330	0.816	0.0005	0.006	0.005	0.014	0.015
2010-7	0.057	0.824	1.186	1.326	0.812	0.0005	0.006	0.005	0.014	0.015
2010-8a	0.057	0.824	1.187	1.326	0.812	0.0005	0.006	0.005	0.014	0.015
2010-8b	0.057	0.824	1.187	1.326	0.812	0.0005	0.006	0.005	0.014	0.015
2011-2b	0.006	0.132	0.259	0.329	0.229	0.0004	0.003	0.006	0.006	0.005
2011-3	0.057	0.823	1.187	1.326	0.812	0.0005	0.006	0.005	0.014	0.015
2011-4	0.057	0.821	1.187	1.328	0.814	0.0005	0.006	0.005	0.014	0.015
2011-5	0.057	0.820	1.186	1.329	0.815	0.0005	0.006	0.005	0.014	0.015
2011-6	0.057	0.820	1.186	1.329	0.815	0.0005	0.006	0.005	0.014	0.015
2011-7	0.057	0.824	1.186	1.326	0.812	0.0005	0.006	0.005	0.014	0.015
2011-8a	0.057	0.824	1.188	1.326	0.812	0.0005	0.006	0.005	0.014	0.015
2011-8b	0.057	0.824	1.188	1.326	0.812	0.0005	0.006	0.005	0.014	0.015
2012-2b	0.006	0.134	0.211	0.265	0.196	0.0002	0.002	0.004	0.004	0.004
2012-3	0.057	0.823	1.187	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2012-4	0.057	0.822	1.187	1.328	0.814	0.0003	0.004	0.003	0.009	0.009
2012-5	0.057	0.821	1.186	1.328	0.814	0.0003	0.004	0.003	0.009	0.009
2012-6	0.057	0.821	1.186	1.328	0.814	0.0003	0.004	0.003	0.009	0.009
2012-7	0.057	0.824	1.186	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2012-8a	0.057	0.824	1.188	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2012-8b	0.057	0.824	1.188	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2013-2b	0.006	0.127	0.204	0.256	0.189	0.0002	0.002	0.004	0.004	0.003
2013-3	0.057	0.823	1.187	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2013-4	0.057	0.822	1.187	1.328	0.814	0.0003	0.004	0.003	0.009	0.009
2013-5	0.057	0.821	1.186	1.328	0.814	0.0003	0.004	0.003	0.009	0.009

Year & Class	Gasoline NOx Decel	Gasoline NOx 0 to 25	Gasoline NOx 25 to 50	Gasoline NOx 50 +	Gasoline NOx Highway	Gasoline PM 2.5 Decel	Gasoline PM 2.5 0 to 25	Gasoline PM 2.5 25 to 50	Gasoline PM 2.5 50 +	Gasoline PM 2.5 Highway
2013-6	0.057	0.821	1.186	1.328	0.814	0.0003	0.004	0.003	0.009	0.009
2013-7	0.057	0.824	1.186	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2013-8a	0.057	0.824	1.188	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2013-8b	0.057	0.824	1.188	1.326	0.812	0.0003	0.004	0.003	0.009	0.009
2014-2b	0.006	0.128	0.206	0.259	0.191	0.0002	0.002	0.004	0.004	0.004
2014-3	0.056	0.822	1.184	1.324	0.810	0.0003	0.004	0.003	0.009	0.009
2014-4	0.056	0.820	1.185	1.325	0.812	0.0003	0.004	0.003	0.009	0.009
2014-5	0.056	0.819	1.183	1.325	0.812	0.0003	0.004	0.003	0.009	0.009
2014-6	0.056	0.819	1.183	1.325	0.812	0.0003	0.004	0.003	0.009	0.009
2014-7	0.056	0.822	1.184	1.323	0.810	0.0003	0.004	0.003	0.009	0.009
2014-8a	0.056	0.823	1.185	1.324	0.811	0.0003	0.004	0.003	0.009	0.009
2014-8b	0.056	0.823	1.185	1.324	0.811	0.0003	0.004	0.003	0.009	0.009
2015-2b	0.006	0.128	0.206	0.259	0.191	0.0002	0.002	0.004	0.004	0.004
2015-3	0.056	0.822	1.184	1.324	0.810	0.0003	0.004	0.003	0.009	0.009
2015-4	0.056	0.820	1.185	1.325	0.812	0.0003	0.004	0.003	0.009	0.009
2015-5	0.056	0.819	1.183	1.325	0.812	0.0003	0.004	0.003	0.009	0.009
2015-6	0.056	0.819	1.183	1.325	0.812	0.0003	0.004	0.003	0.009	0.009
2015-7	0.056	0.822	1.184	1.323	0.810	0.0003	0.004	0.003	0.009	0.009
2015-8a	0.056	0.823	1.185	1.324	0.811	0.0003	0.004	0.003	0.009	0.009
2015-8b	0.056	0.823	1.185	1.324	0.811	0.0003	0.004	0.003	0.009	0.009

Note – highlighted cells are set equal to the row above (MOVES does not provide consistent outputs for Class 8b gasoline vehicles; therefore 8bs are set equal to 8as).

Year & Class	E10 NOx Decel	E10 NOx 0 to 25	E10 NOx 25 to 50	E10 NOx 50 +	E10 NOx Highway	E10 PM 2.5 Decel	E10 PM 2.5 0 to 25	E10 PM 2.5 25 to 50	E10 PM 2.5 50 +	E10 PM 2.5 Highway
1987-2b	0.216	3.790	7.659	7.884	5.042	0.0028	0.031	0.085	0.076	0.078
1987-3	0.266	8.786	12.866	13.263	9.089	0.0033	0.055	0.112	0.094	0.183
1987-4	0.266	8.798	12.927	13.332	9.165	0.0033	0.056	0.114	0.096	0.186
1987-5	0.265	8.915	12.725	12.963	8.764	0.0033	0.058	0.111	0.087	0.173
1987-6	0.265	8.915	12.725	12.963	8.764	0.0033	0.058	0.111	0.087	0.173
1987-7	0.265	8.915	12.725	12.963	8.764	0.0033	0.058	0.111	0.087	0.173
1987-8a	0.260	9.520	13.527	13.782	9.573	0.0032	0.070	0.161	0.124	0.204
1987-8b	0.199	14.605	19.895	20.456	14.297	0.0027	0.170	0.575	0.434	0.382
1988-2b	0.220	4.156	7.917	8.162	5.326	0.0041	0.053	0.064	0.084	0.066
1988-3	0.266	8.812	12.888	13.278	9.102	0.0046	0.118	0.092	0.136	0.149
1988-4	0.266	8.774	13.003	13.460	9.330	0.0046	0.116	0.094	0.143	0.159
1988-5	0.265	8.986	12.809	13.061	8.866	0.0045	0.122	0.095	0.127	0.138
1988-6	0.265	8.979	12.799	13.052	8.856	0.0045	0.122	0.094	0.127	0.138
1988-7	0.265	8.927	12.737	12.987	8.788	0.0046	0.121	0.091	0.123	0.135
1988-8a	0.260	9.678	13.865	14.104	9.832	0.0045	0.138	0.142	0.176	0.178
1988-8b	0.199	14.605	19.895	20.455	14.297	0.0038	0.249	0.436	0.498	0.358
1989-2b	0.223	4.560	8.217	8.526	5.664	0.0041	0.058	0.065	0.086	0.072

Year & Class	E10 NOx Decel	E10 NOx 0 to 25	E10 NOx 25 to 50	E10 NOx 50 +	E10 NOx Highway	E10 PM 2.5 Decel	E10 PM 2.5 0 to 25	E10 PM 2.5 25 to 50	E10 PM 2.5 50 +	E10 PM 2.5 Highway
1989-3	0.267	8.727	12.753	13.204	9.011	0.0046	0.116	0.088	0.132	0.145
1989-4	0.267	8.728	12.927	13.401	9.262	0.0047	0.115	0.091	0.140	0.156
1989-5	0.266	8.766	12.504	12.904	8.684	0.0046	0.117	0.087	0.118	0.131
1989-6	0.266	8.766	12.504	12.904	8.684	0.0046	0.117	0.087	0.118	0.131
1989-7	0.266	8.766	12.504	12.904	8.684	0.0046	0.117	0.087	0.118	0.131
1989-8a	0.239	14.525	21.642	21.478	14.204	0.0045	0.250	0.462	0.494	0.364
1989-8b	0.239	14.525	21.642	21.478	14.204	0.0045	0.250	0.462	0.494	0.364
1990-2b	0.145	5.429	8.433	7.013	5.140	0.0014	0.017	0.047	0.084	0.128
1990-3	0.140	6.684	9.356	7.490	5.798	0.0016	0.020	0.040	0.079	0.175
1990-4	0.140	6.765	9.665	7.801	6.160	0.0016	0.021	0.057	0.093	0.193
1990-5	0.140	6.700	9.196	7.274	5.559	0.0016	0.020	0.035	0.072	0.165
1990-6	0.140	6.700	9.196	7.274	5.559	0.0016	0.020	0.035	0.072	0.165
1990-7	0.140	6.700	9.196	7.274	5.559	0.0016	0.020	0.035	0.072	0.165
1990-8a	0.128	11.077	16.672	13.412	9.584	0.0013	0.046	0.535	0.400	0.398
1990-8b	0.128	11.077	16.672	13.412	9.584	0.0013	0.046	0.535	0.400	0.398
1991-2b	0.144	4.721	8.120	6.913	4.898	0.0039	0.074	0.032	0.030	0.056
1991-3	0.140	6.681	9.375	7.513	5.828	0.0043	0.113	0.039	0.031	0.101
1991-4	0.140	6.816	9.692	7.785	6.112	0.0043	0.116	0.049	0.036	0.107
1991-5	0.140	6.668	9.239	7.356	5.651	0.0043	0.113	0.035	0.029	0.098
1991-6	0.140	6.705	9.206	7.276	5.563	0.0043	0.114	0.036	0.028	0.096
1991-7	0.140	6.705	9.206	7.276	5.563	0.0043	0.114	0.036	0.028	0.096
1991-8a	0.139	7.137	10.110	8.010	6.224	0.0043	0.123	0.067	0.042	0.111
1991-8b	0.139	7.137	10.110	8.010	6.224	0.0043	0.123	0.067	0.042	0.111
1992-2b	0.141	5.077	8.311	7.000	5.040	0.0039	0.080	0.032	0.029	0.063
1992-3	0.140	6.692	9.451	7.600	5.931	0.0043	0.113	0.041	0.032	0.103
1992-4	0.140	6.840	9.812	7.914	6.271	0.0043	0.116	0.053	0.038	0.110
1992-5	0.140	6.654	9.254	7.387	5.688	0.0043	0.113	0.035	0.029	0.098
1992-6	0.140	6.707	9.208	7.277	5.563	0.0043	0.114	0.036	0.028	0.096
1992-7	0.140	6.707	9.208	7.277	5.563	0.0043	0.114	0.036	0.028	0.096
1992-8a	0.138	7.272	10.382	8.230	6.410	0.0043	0.126	0.077	0.046	0.115
1992-8b	0.138	7.272	10.382	8.230	6.410	0.0043	0.126	0.077	0.046	0.115
1993-2b	0.140	5.196	8.319	7.022	5.073	0.0039	0.083	0.031	0.028	0.067
1993-3	0.141	6.585	9.176	7.405	5.706	0.0043	0.111	0.035	0.029	0.099
1993-4	0.141	6.608	9.303	7.524	5.851	0.0043	0.112	0.037	0.031	0.101
1993-5	0.141	6.575	9.164	7.398	5.700	0.0043	0.111	0.034	0.029	0.099
1993-6	0.140	6.589	8.998	7.220	5.496	0.0043	0.112	0.034	0.027	0.096
1993-7	0.140	6.589	8.998	7.220	5.496	0.0043	0.112	0.034	0.027	0.096
1993-8a	0.140	6.677	9.186	7.369	5.638	0.0043	0.114	0.041	0.030	0.099
1993-8b	0.140	6.677	9.186	7.369	5.638	0.0043	0.114	0.041	0.030	0.099
1994-2b	0.113	4.595	7.740	6.875	4.781	0.0021	0.015	0.048	0.122	0.069
1994-3	0.138	6.578	9.199	7.358	5.692	0.0026	0.023	0.085	0.187	0.115
1994-4	0.137	6.701	9.571	7.707	6.078	0.0026	0.023	0.092	0.203	0.130
1994-5	0.138	6.481	9.133	7.367	5.733	0.0026	0.022	0.083	0.188	0.117
1994-6	0.137	6.580	9.030	7.144	5.460	0.0026	0.023	0.082	0.176	0.106
1994-7	0.137	6.580	9.030	7.144	5.460	0.0026	0.023	0.082	0.176	0.106

Year & Class	E10 NOx Decel	E10 NOx 0 to 25	E10 NOx 25 to 50	E10 NOx 50 +	E10 NOx Highway	E10 PM 2.5 Decel	E10 PM 2.5 0 to 25	E10 PM 2.5 25 to 50	E10 PM 2.5 50 +	E10 PM 2.5 Highway
1994-8a	0.126	10.881	16.378	13.176	9.415	0.0023	0.051	0.232	0.450	0.257
1994-8b	0.126	10.881	16.378	13.176	9.415	0.0023	0.051	0.232	0.450	0.257
1995-2b	0.117	4.555	7.680	6.822	4.746	0.0023	0.021	0.031	0.037	0.066
1995-3	0.138	6.539	9.067	7.236	5.560	0.0027	0.031	0.029	0.036	0.111
1995-4	0.138	6.546	9.206	7.400	5.751	0.0027	0.031	0.032	0.039	0.115
1995-5	0.138	6.509	9.089	7.290	5.629	0.0027	0.031	0.028	0.036	0.112
1995-6	0.138	6.569	9.011	7.139	5.454	0.0027	0.031	0.028	0.035	0.109
1995-7	0.138	6.569	9.011	7.139	5.454	0.0027	0.031	0.028	0.035	0.109
1995-8a	0.126	10.881	16.378	13.175	9.415	0.0025	0.056	0.333	0.176	0.212
1995-8b	0.126	10.881	16.378	13.175	9.415	0.0025	0.056	0.333	0.176	0.212
1996-2b	0.094	3.155	4.836	4.724	3.308	0.0023	0.013	0.035	0.015	0.043
1996-3	0.138	6.535	9.127	7.304	5.642	0.0024	0.019	0.032	0.014	0.084
1996-4	0.138	6.540	9.239	7.442	5.809	0.0024	0.019	0.035	0.015	0.086
1996-5	0.138	6.487	9.134	7.360	5.723	0.0024	0.019	0.031	0.014	0.085
1996-6	0.137	6.587	9.044	7.148	5.465	0.0024	0.019	0.031	0.014	0.081
1996-7	0.137	6.587	9.044	7.148	5.465	0.0024	0.019	0.031	0.014	0.081
1996-8a	0.126	10.881	16.378	13.175	9.415	0.0022	0.032	0.319	0.063	0.132
1996-8b	0.126	10.881	16.378	13.175	9.415	0.0022	0.032	0.319	0.063	0.132
1997-2b	0.101	2.741	4.454	4.190	3.025	0.0010	0.009	0.029	0.038	0.034
1997-3	0.138	6.566	9.098	7.237	5.561	0.0012	0.013	0.027	0.044	0.063
1997-4	0.138	6.517	9.197	7.411	5.778	0.0012	0.013	0.027	0.046	0.067
1997-5	0.138	6.513	9.112	7.307	5.651	0.0012	0.013	0.025	0.045	0.065
1997-6	0.137	6.589	9.047	7.149	5.466	0.0012	0.013	0.026	0.042	0.062
1997-7	0.137	6.589	9.047	7.149	5.466	0.0012	0.013	0.026	0.042	0.062
1997-8a	0.126	10.881	16.378	13.175	9.415	0.0010	0.027	0.233	0.148	0.138
1997-8b	0.126	10.881	16.378	13.175	9.415	0.0010	0.027	0.233	0.148	0.138
1998-2b	0.106	1.583	3.419	3.700	2.255	0.0013	0.010	0.026	0.026	0.028
1998-3	0.262	4.143	6.396	6.673	4.297	0.0016	0.020	0.049	0.062	0.080
1998-4	0.257	4.372	7.089	7.029	4.652	0.0015	0.023	0.073	0.070	0.091
1998-5	0.268	3.855	5.609	6.306	3.909	0.0016	0.017	0.020	0.052	0.069
1998-6	0.268	3.894	5.609	6.276	3.883	0.0016	0.018	0.020	0.052	0.068
1998-7	0.268	3.894	5.609	6.276	3.883	0.0016	0.018	0.020	0.052	0.068
1998-8a	0.231	5.752	9.920	8.345	5.444	0.0013	0.036	0.177	0.104	0.112
1998-8b	0.231	5.752	9.920	8.345	5.444	0.0013	0.036	0.177	0.104	0.112
1999-2b	0.125	1.778	3.586	3.902	2.410	0.0004	0.005	0.024	0.014	0.037
1999-3	0.268	3.889	5.655	6.319	3.919	0.0005	0.010	0.013	0.018	0.091
1999-4	0.267	3.931	5.816	6.405	4.013	0.0005	0.010	0.020	0.020	0.094
1999-5	0.268	3.841	5.583	6.302	3.897	0.0005	0.009	0.009	0.018	0.092
1999-6	0.268	3.841	5.584	6.303	3.898	0.0005	0.009	0.009	0.018	0.092
1999-7	0.268	3.866	5.574	6.277	3.874	0.0005	0.009	0.009	0.017	0.090
1999-8a	0.265	4.000	5.955	6.456	4.063	0.0005	0.010	0.028	0.021	0.095
1999-8b	0.265	4.000	5.955	6.456	4.063	0.0005	0.010	0.028	0.021	0.095
2000-2b	0.129	1.770	3.593	3.907	2.405	0.0004	0.004	0.022	0.019	0.033
2000-3	0.269	3.845	5.554	6.281	3.871	0.0005	0.006	0.009	0.021	0.074
2000-4	0.269	3.836	5.563	6.293	3.883	0.0005	0.006	0.009	0.021	0.075

Year & Class	E10 NOx Decel	E10 NOx 0 to 25	E10 NOx 25 to 50	E10 NOx 50 +	E10 NOx Highway	E10 PM 2.5 Decel	E10 PM 2.5 0 to 25	E10 PM 2.5 25 to 50	E10 PM 2.5 50 +	E10 PM 2.5 Highway
2000-5	0.269	3.831	5.564	6.298	3.888	0.0005	0.006	0.009	0.021	0.075
2000-6	0.269	3.831	5.564	6.299	3.889	0.0005	0.006	0.009	0.021	0.075
2000-7	0.269	3.848	5.551	6.277	3.868	0.0005	0.006	0.009	0.021	0.074
2000-8a	0.269	3.849	5.554	6.279	3.869	0.0005	0.006	0.009	0.021	0.074
2000-8b	0.269	3.849	5.554	6.279	3.869	0.0005	0.006	0.009	0.021	0.074
2001-2b	0.088	1.121	2.362	2.601	1.670	0.0001	0.003	0.017	0.013	0.020
2001-3	0.251	3.637	5.252	5.887	3.643	0.0002	0.003	0.008	0.047	0.070
2001-4	0.251	3.618	5.258	5.906	3.659	0.0002	0.003	0.008	0.047	0.071
2001-5	0.251	3.607	5.251	5.910	3.662	0.0002	0.003	0.007	0.047	0.071
2001-6	0.251	3.606	5.251	5.910	3.663	0.0002	0.003	0.007	0.047	0.071
2001-7	0.251	3.643	5.249	5.880	3.636	0.0002	0.003	0.008	0.047	0.070
2001-8a	0.251	3.648	5.262	5.886	3.643	0.0002	0.003	0.008	0.047	0.070
2001-8b	0.251	3.648	5.262	5.886	3.643	0.0002	0.003	0.008	0.047	0.070
2002-2b	0.081	1.133	2.307	2.549	1.660	0.0007	0.007	0.014	0.012	0.013
2002-3	0.251	3.648	5.262	5.885	3.644	0.0008	0.011	0.012	0.018	0.033
2002-4	0.251	3.631	5.264	5.899	3.656	0.0008	0.011	0.012	0.018	0.033
2002-5	0.251	3.621	5.260	5.904	3.659	0.0008	0.011	0.011	0.018	0.033
2002-6	0.251	3.621	5.260	5.904	3.660	0.0008	0.011	0.011	0.018	0.033
2002-7	0.251	3.653	5.261	5.880	3.640	0.0008	0.011	0.012	0.017	0.033
2002-8a	0.251	3.655	5.268	5.883	3.643	0.0007	0.011	0.012	0.018	0.033
2002-8b	0.251	3.655	5.268	5.883	3.643	0.0007	0.011	0.012	0.018	0.033
2003-2b	0.086	1.187	2.434	2.675	1.732	0.0003	0.004	0.016	0.011	0.016
2003-3	0.251	3.648	5.262	5.885	3.644	0.0004	0.007	0.007	0.021	0.046
2003-4	0.251	3.633	5.265	5.898	3.655	0.0004	0.007	0.007	0.021	0.047
2003-5	0.251	3.623	5.260	5.902	3.658	0.0004	0.007	0.007	0.021	0.047
2003-6	0.251	3.622	5.260	5.903	3.659	0.0004	0.007	0.007	0.021	0.047
2003-7	0.251	3.653	5.261	5.880	3.640	0.0004	0.007	0.007	0.021	0.046
2003-8a	0.251	3.656	5.269	5.883	3.644	0.0004	0.007	0.007	0.021	0.046
2003-8b	0.251	3.656	5.269	5.883	3.644	0.0004	0.007	0.007	0.021	0.046
2004-2b	0.067	0.922	1.618	1.809	1.238	0.0006	0.005	0.011	0.011	0.010
2004-3	0.251	3.649	5.263	5.884	3.643	0.0007	0.010	0.009	0.023	0.024
2004-4	0.251	3.636	5.265	5.896	3.653	0.0007	0.010	0.009	0.023	0.025
2004-5	0.251	3.627	5.260	5.899	3.655	0.0007	0.010	0.009	0.023	0.025
2004-6	0.251	3.627	5.260	5.900	3.656	0.0007	0.010	0.009	0.023	0.025
2004-7	0.251	3.653	5.261	5.880	3.640	0.0007	0.010	0.009	0.023	0.024
2004-8a	0.251	3.656	5.269	5.883	3.644	0.0007	0.010	0.009	0.023	0.024
2004-8b	0.251	3.656	5.269	5.883	3.644	0.0007	0.010	0.009	0.023	0.024
2005-2b	0.049	0.558	1.113	1.246	0.825	0.0006	0.004	0.011	0.010	0.008
2005-3	0.251	3.648	5.263	5.885	3.644	0.0007	0.010	0.009	0.023	0.024
2005-4	0.251	3.634	5.265	5.898	3.655	0.0007	0.010	0.009	0.023	0.025
2005-5	0.251	3.624	5.260	5.901	3.657	0.0007	0.010	0.009	0.023	0.025
2005-6	0.251	3.624	5.260	5.902	3.658	0.0007	0.010	0.009	0.023	0.025
2005-7	0.251	3.653	5.261	5.880	3.640	0.0007	0.010	0.009	0.023	0.024
2005-8a	0.251	3.656	5.270	5.884	3.644	0.0007	0.010	0.009	0.023	0.024
2005-8b	0.251	3.656	5.270	5.884	3.644	0.0007	0.010	0.009	0.023	0.024

Year & Class	E10 NOx Decel	E10 NOx 0 to 25	E10 NOx 25 to 50	E10 NOx 50 +	E10 NOx Highway	E10 PM 2.5 Decel	E10 PM 2.5 0 to 25	E10 PM 2.5 25 to 50	E10 PM 2.5 50 +	E10 PM 2.5 Highway
2006-2b	0.048	0.561	1.007	1.155	0.790	0.0005	0.004	0.009	0.008	0.007
2006-3	0.251	3.650	5.263	5.883	3.643	0.0006	0.008	0.007	0.019	0.020
2006-4	0.251	3.640	5.265	5.893	3.651	0.0006	0.008	0.007	0.019	0.020
2006-5	0.251	3.632	5.260	5.896	3.652	0.0006	0.008	0.007	0.019	0.020
2006-6	0.251	3.632	5.260	5.896	3.653	0.0006	0.008	0.007	0.019	0.020
2006-7	0.251	3.653	5.261	5.880	3.640	0.0006	0.008	0.007	0.019	0.020
2006-8a	0.251	3.656	5.269	5.883	3.643	0.0006	0.008	0.007	0.019	0.020
2006-8b	0.251	3.656	5.269	5.883	3.643	0.0006	0.008	0.007	0.019	0.020
2007-2b	0.037	0.450	0.815	0.953	0.660	0.0005	0.004	0.009	0.008	0.007
2007-3	0.251	3.649	5.262	5.884	3.643	0.0006	0.008	0.007	0.019	0.020
2007-4	0.251	3.636	5.264	5.895	3.653	0.0006	0.008	0.007	0.019	0.020
2007-5	0.251	3.628	5.260	5.899	3.655	0.0006	0.008	0.007	0.019	0.020
2007-6	0.251	3.627	5.260	5.899	3.655	0.0006	0.008	0.007	0.019	0.020
2007-7	0.251	3.653	5.261	5.880	3.640	0.0006	0.008	0.007	0.019	0.020
2007-8a	0.251	3.655	5.268	5.883	3.643	0.0006	0.008	0.007	0.019	0.020
2007-8b	0.251	3.655	5.268	5.883	3.643	0.0006	0.008	0.007	0.019	0.020
2008-2b	0.019	0.210	0.470	0.559	0.358	0.0005	0.003	0.008	0.007	0.006
2008-3	0.075	1.095	1.579	1.765	1.093	0.0005	0.007	0.006	0.017	0.018
2008-4	0.075	1.093	1.580	1.767	1.095	0.0005	0.007	0.006	0.017	0.018
2008-5	0.075	1.091	1.578	1.768	1.095	0.0005	0.007	0.006	0.017	0.018
2008-6	0.075	1.091	1.578	1.768	1.095	0.0005	0.007	0.006	0.017	0.018
2008-7	0.075	1.096	1.578	1.764	1.092	0.0005	0.007	0.006	0.017	0.018
2008-8a	0.075	1.097	1.580	1.765	1.093	0.0005	0.007	0.006	0.017	0.018
2008-8b	0.075	1.097	1.580	1.765	1.093	0.0005	0.007	0.006	0.017	0.018
2009-2b	0.008	0.154	0.329	0.416	0.286	0.0005	0.003	0.008	0.007	0.006
2009-3	0.075	1.095	1.579	1.765	1.093	0.0005	0.007	0.006	0.017	0.018
2009-4	0.075	1.091	1.579	1.768	1.095	0.0005	0.007	0.006	0.017	0.018
2009-5	0.075	1.089	1.578	1.769	1.096	0.0006	0.007	0.006	0.017	0.018
2009-6	0.075	1.089	1.578	1.769	1.096	0.0006	0.007	0.006	0.017	0.018
2009-7	0.075	1.096	1.578	1.764	1.092	0.0005	0.007	0.006	0.017	0.018
2009-8a	0.075	1.096	1.580	1.765	1.093	0.0005	0.007	0.006	0.017	0.018
2009-8b	0.075	1.096	1.580	1.765	1.093	0.0005	0.007	0.006	0.017	0.018
2010-2b	0.005	0.110	0.240	0.309	0.212	0.0004	0.003	0.007	0.006	0.005
2010-3	0.061	0.881	1.270	1.420	0.870	0.0005	0.006	0.006	0.015	0.016
2010-4	0.061	0.878	1.270	1.423	0.872	0.0005	0.006	0.006	0.015	0.016
2010-5	0.061	0.876	1.270	1.423	0.873	0.0005	0.006	0.006	0.015	0.016
2010-6	0.061	0.876	1.270	1.424	0.873	0.0005	0.006	0.006	0.015	0.016
2010-7	0.061	0.882	1.270	1.419	0.869	0.0005	0.006	0.006	0.015	0.016
2010-8a	0.060	0.882	1.271	1.420	0.869	0.0005	0.006	0.006	0.015	0.016
2010-8b	0.060	0.882	1.271	1.420	0.869	0.0005	0.006	0.006	0.015	0.016
2011-2b	0.007	0.141	0.277	0.352	0.245	0.0004	0.003	0.007	0.007	0.006
2011-3	0.061	0.881	1.270	1.420	0.869	0.0005	0.006	0.006	0.015	0.016
2011-4	0.061	0.879	1.271	1.422	0.872	0.0005	0.006	0.006	0.015	0.016
2011-5	0.061	0.878	1.270	1.422	0.872	0.0005	0.006	0.006	0.015	0.016
2011-6	0.061	0.878	1.270	1.422	0.872	0.0005	0.006	0.006	0.015	0.016

Year & Class	E10 NOx Decel	E10 NOx 0 to 25	E10 NOx 25 to 50	E10 NOx 50 +	E10 NOx Highway	E10 PM 2.5 Decel	E10 PM 2.5 0 to 25	E10 PM 2.5 25 to 50	E10 PM 2.5 50 +	E10 PM 2.5 Highway
2011-7	0.061	0.882	1.270	1.419	0.869	0.0005	0.006	0.006	0.015	0.016
2011-8a	0.060	0.882	1.271	1.420	0.870	0.0005	0.006	0.006	0.015	0.016
2011-8b	0.060	0.882	1.271	1.420	0.870	0.0005	0.006	0.006	0.015	0.016
2012-2b	0.006	0.143	0.226	0.283	0.210	0.0003	0.002	0.004	0.004	0.004
2012-3	0.061	0.881	1.270	1.419	0.869	0.0003	0.004	0.004	0.010	0.010
2012-4	0.061	0.880	1.271	1.421	0.871	0.0003	0.004	0.004	0.010	0.010
2012-5	0.061	0.879	1.270	1.421	0.871	0.0003	0.004	0.004	0.010	0.010
2012-6	0.061	0.879	1.270	1.422	0.871	0.0003	0.004	0.004	0.010	0.010
2012-7	0.061	0.882	1.270	1.419	0.869	0.0003	0.004	0.004	0.010	0.010
2012-8a	0.060	0.882	1.271	1.420	0.870	0.0003	0.004	0.004	0.010	0.010
2012-8b	0.060	0.882	1.271	1.420	0.870	0.0003	0.004	0.004	0.010	0.010
2013-2b	0.006	0.136	0.218	0.274	0.203	0.0003	0.002	0.004	0.004	0.004
2013-3	0.061	0.881	1.270	1.419	0.869	0.0003	0.004	0.004	0.010	0.010
2013-4	0.061	0.880	1.271	1.421	0.871	0.0003	0.004	0.004	0.010	0.010
2013-5	0.061	0.879	1.270	1.421	0.871	0.0003	0.004	0.004	0.010	0.010
2013-6	0.061	0.879	1.270	1.422	0.871	0.0003	0.004	0.004	0.010	0.010
2013-7	0.061	0.882	1.270	1.419	0.869	0.0003	0.004	0.004	0.010	0.010
2013-8a	0.060	0.882	1.271	1.420	0.870	0.0003	0.004	0.004	0.010	0.010
2013-8b	0.060	0.882	1.271	1.420	0.870	0.0003	0.004	0.004	0.010	0.010
2014-2b	0.006	0.137	0.220	0.277	0.205	0.0003	0.002	0.004	0.004	0.004
2014-3	0.060	0.879	1.267	1.417	0.867	0.0003	0.004	0.004	0.009	0.010
2014-4	0.060	0.878	1.268	1.418	0.869	0.0003	0.004	0.004	0.010	0.010
2014-5	0.060	0.877	1.267	1.418	0.869	0.0003	0.004	0.004	0.010	0.010
2014-6	0.060	0.876	1.267	1.418	0.869	0.0003	0.004	0.004	0.010	0.010
2014-7	0.060	0.880	1.267	1.416	0.867	0.0003	0.004	0.004	0.009	0.010
2014-8a	0.060	0.880	1.269	1.417	0.868	0.0003	0.004	0.004	0.009	0.010
2014-8b	0.060	0.880	1.269	1.417	0.868	0.0003	0.004	0.004	0.009	0.010
2015-2b	0.006	0.137	0.220	0.277	0.205	0.0003	0.002	0.004	0.004	0.004
2015-3	0.060	0.879	1.267	1.417	0.867	0.0003	0.004	0.004	0.009	0.010
2015-4	0.060	0.878	1.268	1.418	0.869	0.0003	0.004	0.004	0.010	0.010
2015-5	0.060	0.877	1.267	1.418	0.869	0.0003	0.004	0.004	0.010	0.010
2015-6	0.060	0.876	1.267	1.418	0.869	0.0003	0.004	0.004	0.010	0.010
2015-7	0.060	0.880	1.267	1.416	0.867	0.0003	0.004	0.004	0.009	0.010
2015-8a	0.060	0.880	1.269	1.417	0.868	0.0003	0.004	0.004	0.009	0.010
2015-8b	0.060	0.880	1.269	1.417	0.868	0.0003	0.004	0.004	0.009	0.010

Note – highlighted cells are set equal to the row above (MOVES does not provide consistent outputs for Class 8b gasoline vehicles; therefore 8bs are set equal to 8as).

Appendix B – NOx and PM Idle Factors – g/hr
(MOVES2014, 2014 Calendar Year, ULSD)

Short Duration Idle Emission Factors (< 15 minutes per idle event)

Pollutant	Fuel	Model Yr	Class 2b	Class 3	Class 4-5	Class 6-7	Class 8a/b
NOX	Gasoline	1987	22.456	14.407	14.407	14.407	14.407
NOX	Gasoline	1988	23.168	14.407	14.407	14.407	14.407
NOX	Gasoline	1989	24.249	14.407	14.407	14.407	14.407
NOX	Gasoline	1990	12.355	7.158	7.158	7.158	7.158
NOX	Gasoline	1991	12.402	7.158	7.158	7.158	7.158
NOX	Gasoline	1992	12.674	7.158	7.158	7.158	7.158
NOX	Gasoline	1993	12.851	7.158	7.158	7.158	7.158
NOX	Gasoline	1994	12.695	7.030	7.030	7.030	7.030
NOX	Gasoline	1995	12.922	7.030	7.030	7.030	7.030
NOX	Gasoline	1996	13.080	7.030	7.030	7.030	7.030
NOX	Gasoline	1997	13.237	7.030	7.030	7.030	7.030
NOX	Gasoline	1998	27.856	14.568	14.568	14.568	14.568
NOX	Gasoline	1999	27.856	14.568	14.568	14.568	14.568
NOX	Gasoline	2000	27.856	14.568	14.568	14.568	14.568
NOX	Gasoline	2001	28.887	14.752	14.752	14.752	14.752
NOX	Gasoline	2002	28.887	14.752	14.752	14.752	14.752
NOX	Gasoline	2003	29.181	14.752	14.752	14.752	14.752
NOX	Gasoline	2004	29.181	14.752	14.752	14.752	14.752
NOX	Gasoline	2005	29.181	14.752	14.752	14.752	14.752
NOX	Gasoline	2006	29.181	14.752	14.752	14.752	14.752
NOX	Gasoline	2007	29.181	14.752	14.752	14.752	14.752
NOX	Gasoline	2008	14.812	4.426	4.426	4.426	4.426
NOX	Gasoline	2009	0.296	4.426	4.426	4.426	4.426
NOX	Gasoline	2010	0.232	2.393	2.393	2.393	2.393
NOX	Gasoline	2011	0.232	2.393	2.393	2.393	2.393
NOX	Gasoline	2012	0.135	2.393	2.393	2.393	2.393
NOX	Gasoline	2013	0.135	2.393	2.393	2.393	2.393
NOX	Gasoline	2014	0.135	2.393	2.393	2.393	2.393
NOX	Gasoline	2015	0.135	2.393	2.393	2.393	2.393
NOX	Diesel	1987	194.247	191.985	191.985	191.986	191.986
NOX	Diesel	1988	200.878	191.985	191.985	191.985	191.986
NOX	Diesel	1989	210.952	191.985	191.985	191.985	191.985
NOX	Diesel	1990	242.153	148.269	148.269	148.269	148.268
NOX	Diesel	1991	219.588	139.403	139.403	139.403	139.404
NOX	Diesel	1992	224.736	139.403	139.403	139.404	139.403
NOX	Diesel	1993	228.082	139.403	139.403	139.403	139.403
NOX	Diesel	1994	229.497	139.403	139.403	139.404	139.403
NOX	Diesel	1995	233.873	139.404	139.403	139.403	139.404

Pollutant	Fuel	Model Yr	Class 2b	Class 3	Class 4-5	Class 6-7	Class 8a/b
NOX	Diesel	1996	236.910	139.403	139.403	139.403	139.403
NOX	Diesel	1997	239.947	139.403	139.403	139.403	139.403
NOX	Diesel	1998	195.129	117.055	117.055	117.055	117.056
NOX	Diesel	1999	195.128	96.293	96.293	96.293	154.417
NOX	Diesel	2000	195.128	96.293	96.293	96.293	154.416
NOX	Diesel	2001	195.129	96.293	96.293	96.293	154.416
NOX	Diesel	2002	195.128	96.293	96.293	96.293	154.416
NOX	Diesel	2003	44.823	45.696	45.696	45.696	56.802
NOX	Diesel	2004	44.823	45.696	45.696	45.696	56.802
NOX	Diesel	2005	44.823	45.696	45.696	45.696	56.802
NOX	Diesel	2006	44.823	45.696	45.696	45.696	56.802
NOX	Diesel	2007	41.620	22.780	22.780	22.780	53.190
NOX	Diesel	2008	41.837	22.780	22.780	22.780	53.190
NOX	Diesel	2009	41.837	22.780	22.780	22.780	53.190
NOX	Diesel	2010	17.765	7.212	8.088	7.498	10.054
NOX	Diesel	2011	17.765	7.212	8.088	7.498	10.054
NOX	Diesel	2012	11.566	4.564	4.558	4.850	6.761
NOX	Diesel	2013	11.566	4.564	4.564	4.777	6.489
NOX	Diesel	2014	11.566	4.564	4.564	4.777	6.489
NOX	Diesel	2015	11.566	4.564	4.564	4.777	6.489
PM10	Gasoline	1987	0.361	0.361	0.361	0.361	0.361
PM10	Gasoline	1988	1.118	1.118	1.118	1.118	1.118
PM10	Gasoline	1989	1.118	1.118	1.118	1.118	1.118
PM10	Gasoline	1990	0.353	0.353	0.353	0.353	0.353
PM10	Gasoline	1991	0.392	0.392	0.392	0.392	0.392
PM10	Gasoline	1992	0.392	0.392	0.392	0.392	0.392
PM10	Gasoline	1993	0.392	0.392	0.392	0.392	0.392
PM10	Gasoline	1994	0.128	0.128	0.128	0.128	0.128
PM10	Gasoline	1995	0.153	0.153	0.153	0.153	0.153
PM10	Gasoline	1996	0.269	0.269	0.269	0.269	0.269
PM10	Gasoline	1997	0.283	0.283	0.283	0.283	0.283
PM10	Gasoline	1998	0.169	0.169	0.169	0.169	0.169
PM10	Gasoline	1999	0.082	0.082	0.082	0.082	0.082
PM10	Gasoline	2000	0.036	0.036	0.036	0.036	0.036
PM10	Gasoline	2001	0.022	0.022	0.022	0.022	0.022
PM10	Gasoline	2002	0.091	0.091	0.091	0.091	0.091
PM10	Gasoline	2003	0.054	0.054	0.054	0.054	0.054
PM10	Gasoline	2004	0.052	0.052	0.052	0.052	0.052
PM10	Gasoline	2005	0.052	0.052	0.052	0.052	0.052
PM10	Gasoline	2006	0.043	0.043	0.043	0.043	0.043

Pollutant	Fuel	Model Yr	Class 2b	Class 3	Class 4-5	Class 6-7	Class 8a/b
PM10	Gasoline	2007	0.043	0.043	0.043	0.043	0.043
PM10	Gasoline	2008	0.038	0.038	0.038	0.038	0.038
PM10	Gasoline	2009	0.038	0.038	0.038	0.038	0.038
PM10	Gasoline	2010	0.034	0.034	0.034	0.034	0.034
PM10	Gasoline	2011	0.034	0.034	0.034	0.034	0.034
PM10	Gasoline	2012	0.022	0.022	0.022	0.022	0.022
PM10	Gasoline	2013	0.022	0.022	0.022	0.022	0.022
PM10	Gasoline	2014	0.022	0.022	0.022	0.022	0.022
PM10	Gasoline	2015	0.022	0.022	0.022	0.022	0.022
PM10	Diesel	1987	4.400	4.400	4.400	4.400	4.375
PM10	Diesel	1988	4.400	4.400	4.400	4.400	4.375
PM10	Diesel	1989	4.400	4.400	4.400	4.400	4.375
PM10	Diesel	1990	4.400	4.400	4.400	4.400	4.375
PM10	Diesel	1991	3.877	4.400	4.400	4.400	4.375
PM10	Diesel	1992	3.877	4.400	4.400	4.400	4.375
PM10	Diesel	1993	3.877	4.400	4.400	4.400	4.375
PM10	Diesel	1994	8.139	7.607	7.607	7.607	6.689
PM10	Diesel	1995	8.139	7.607	7.607	7.607	6.689
PM10	Diesel	1996	8.139	7.607	7.607	7.607	6.689
PM10	Diesel	1997	8.139	7.607	7.607	7.607	6.689
PM10	Diesel	1998	7.655	7.222	7.222	7.222	6.397
PM10	Diesel	1999	7.655	7.222	7.222	7.222	6.397
PM10	Diesel	2000	7.655	7.222	7.222	7.222	6.397
PM10	Diesel	2001	7.655	7.222	7.222	7.222	6.397
PM10	Diesel	2002	7.655	7.222	7.222	7.222	6.397
PM10	Diesel	2003	6.511	6.511	6.511	6.511	5.781
PM10	Diesel	2004	6.511	6.511	6.511	6.511	5.781
PM10	Diesel	2005	6.511	6.511	6.511	6.511	5.781
PM10	Diesel	2006	6.511	6.511	6.511	6.511	5.781
PM10	Diesel	2007	0.523	0.217	0.217	0.217	0.217
PM10	Diesel	2008	0.523	0.217	0.217	0.217	0.217
PM10	Diesel	2009	0.523	0.217	0.217	0.217	0.217
PM10	Diesel	2010	0.437	0.181	0.205	0.189	0.205
PM10	Diesel	2011	0.437	0.181	0.205	0.189	0.205
PM10	Diesel	2012	0.262	0.109	0.108	0.116	0.133
PM10	Diesel	2013	0.262	0.109	0.109	0.114	0.127
PM10	Diesel	2014	0.262	0.109	0.109	0.114	0.127
PM10	Diesel	2015	0.262	0.109	0.109	0.114	0.127

Extended Idle Emission Factors – Class 8b Diesels Only

Engine Model Yr	NOx g/hr	PM10 g/hr	PM2.5 g/hr
1987	118.561	5.013	4.612
1988	119.010	5.014	4.613
1989	117.353	5.011	4.610
1990	113.081	5.002	4.602
1991	239.060	5.012	4.611
1992	239.452	5.013	4.612
1993	232.619	5.006	4.605
1994	238.362	7.697	7.081
1995	237.926	7.700	7.084
1996	235.990	7.712	7.095
1997	238.327	7.697	7.081
1998	236.240	7.371	6.781
1999	240.174	7.349	6.761
2000	240.797	7.345	6.757
2001	238.115	7.360	6.771
2002	236.552	7.369	6.780
2003	238.162	6.651	6.119
2004	235.909	6.662	6.129
2005	237.155	6.656	6.123
2006	237.869	6.652	6.120
2007	209.087	0.418	0.385
2008	207.631	0.418	0.384
2009	210.662	0.419	0.385
2010	210.226	0.417	0.383
2011	209.098	0.416	0.383
2012	209.098	0.416	0.383
2013	209.098	0.413	0.380
2014	209.098	0.413	0.380
2015	209.098	0.413	0.380

Appendix C – Derivation of National Average g/kW-hr Emission Factors

From Argonne GREET Model Version 1 2011.

http://greet.es.anl.gov/

1. **Electric Generation Mix (From Annual Energy Outlook 2010)**

	U.S. Mix
Residual oil	1.0%
Natural gas	22.9%
Coal	46.4%
Nuclear power	20.3%
Biomass	0.2%
Others	9.2%

Biomass Type assumed = 100% forest residue
Others = Hydro, Wind, Geothermal, Solar PV etc.

2. **Electric Transmission and Distribution Loss = 8.0%**

3. **Power Plant Emissions: in Grams per kWh of Electricity Available at Power Plant Gate**

	GREET-Calculated Emission Factors						
	By Fuel-Type Plants (Stationary and Transportation)						
	Oil-Fired	NG-Fired	Coal-Fired	Biomass-Fired: Woody	Biomass-Fired: Herbaceous	Biomass-Fired: Forest Residue	TOTAL based on US Mix
NOx	0.833	0.578	1.058	1.169	1.169	1.169	0.634
PM10	0.157	0.023	0.100	0.135	0.135	0.135	0.054
PM2.5	0.118	0.023	0.050	0.067	0.067	0.067	0.030
CO2	834	505	1,083	1,086	1,016	1,379	627
CO2 in burnt biomass from atmosphere				-1,086	-1,016	-1,379	

Assumes no emissions from nuclear power plants or "Others"

4. **Power Plant Emissions: Grams per kWh of Electricity Available at User Sites (wall outlets)**

Total power plant gate emissions/(1-electric transmission and distribution loss)

	Total delivered based on US electric generation mix
NOx	0.690
PM10	0.058
PM2.5	0.033
CO2	682

Appendix D
Cargo Volume Literature Review Summary

Class	Application	Body Type	VIUS Category	Manuf	Model	Cargo Space (cubic feet)	Unit	Max Payload	GVW	Notes or Comments	URL
2b	Full Size Pick-up	Pick-up		Chevy	Silverado 2500HD		Cu. Ft	3,644	9,200		http://www.chevrolet.com/vehicles/2010/silverado2500hd/features.do
2b	Full Size Pick-up	Pick-up		Ford	F250		Cu. Ft	2,900	9,400		http://www.fordf150.net/specs/05sd_specs.pdf
2b	Step Van	Budget Cargo Van	step/walk-in	Ford		309	Cu. Ft	3,116	8,600		http://www.budgettruck.com/Moving-Trucks.aspx
2b	Step Van	Step Van	step/walk-in	Freightliner-Sprinter	2500 Standard Roof	318	Cu. Ft	3,469	8,550		http://www.freightlinersprinterusa.com/vehicles/cargo-van/models/specifications.php
2b	Utility Van	Utility/ cargo van	van (basic enclosed)	Ford	E350	237	Cu. Ft	4,239	9,500		http://www.motortrend.com/cars/2008/ford/e_350/specifications/index.html
2b	Utility Van	Uhaul 10' Truck	van (basic enclosed)	GMC		402	Cu. Ft	2,810	8,600		http://www.uhaul.com/Reservations/EquipmentDetail.aspx?model=EL
2b	Utility Van	Budget 10' Moving Truck	van (basic enclosed)			380	Cu. Ft	3,100	8,600		http://www.budgettruck.com/Moving-Trucks.aspx
2b	Stake Truck	Stake/ platform	flatbed/stake/ platform	Supreme		336	Cu. Ft				
3	Pickup	Pick-up		GMC	Sierra 3500		Cu. Ft	4,566	10,700		http://www.gmc.com/sierra/3500/specsStandard.jsp
3	Step Van	Step Van	step/walk-in	Freightliner-Sprinter	3500 Standard Roof	547	Cu. Ft	4,845	11,030		http://www.freightlinersprinterusa.com/vehicles/cargo-van/models/3500-high-roof-170-wb-6-specs.php
3	Conventional Van	Penske 12' Cargo Van	van (basic enclosed)			450	Cu. Ft	2,600			http://www.pensketruckrental.com/commercial-truck-rentals/moving-vans/12-ft.html
3	City Delivery	Budget 16' Moving Truck				800	Cu. Ft	3,400	11,500		http://www.budgettruck.com/Moving-Trucks.aspx
4	Conventional Van	Uhaul 14' Truck		Ford		733	Cu. Ft	6,190	14,050		http://www.uhaul.com/Reservations/EquipmentDetail.aspx?model=EL
4	Conventional Van	Uhaul 17' Truck		Ford		865	Cu. Ft	5,930	14,050		http://www.uhaul.com/Reservations/EquipmentDetail.aspx?model=EL
4	Conventiona	Penske 16'				826	Cu. Ft	4,300	15,000		http://www.pensketruckrental.com/com

Class	Application	Body Type	VIUS Category	Manuf	Model	Cargo Space (cubic feet)	Unit	Max Payload	GVW	Notes or Comments	URL
	l Van	Economy Van									mercial-truck-rentals/moving-cargo-vans/16-ft.html
4	City Delivery	Penske 16' Cargo Van				1,536	Cu. Ft	5,100			http://www.pensketruckrental.com/commercial-truck-rentals/moving-cargo-vans/16-ft.html
4	Large Walk-In	Walk-in			W700 Step Van	700	Cu. Ft	5,720	16,000		http://files.harc.edu/Projects/Transportation/FedExReportTask3.pdf
4	Large Walk-In	Walk-in		Eaton Hybrid	W700 Step Van	700	Cu. Ft	5,390	16,000		http://files.harc.edu/Projects/Transportation/FedExReportTask3.pdf
4	UPS	Walk-in		Grumman							http://www.grummanolson.com/index2.htm
4	Stake Truck	Stake/platform	flatbed/stake/platform	GMC	W4500	448	Cu. Ft		14,500		http://www.usedtrucksdepot.com/browse_listdetails.php?manf=GMC&scate=Stake+Truck&catname=Medium+Duty+Trucks&main_id=208
5	Bucket Truck	Bucket truck					Cu. Ft				
5	City Delivery	Uhaul 24' Truck	van (basic enclosed)			1,418	Cu. Ft	6,500	18,000		http://www.uhaul.com/Reservations/EquipmentDetail.aspx?model=EL
5	City Delivery	Uhaul 26' Truck	van (basic enclosed)			1,611	Cu. Ft	7,400	18,000		http://www.uhaul.com/Reservations/EquipmentDetail.aspx?model=EL
5	Large Walk-In	Large Walk-in	step/walk-in			670	Cu. Ft		16,000		http://news.van.fedex.com/node/7379
6	Beverage	Beverage		Hackney	6-Bay 52" Performer	588/case capacity = 531 @ 120z cans	Cu. Ft/cases cans	11,601	21,150		http://www.hackneybeverage.com/bodycad5.htm
6	Single Axle Van	Budget 24' Truck	van (basic enclosed)			1,380	Cu. Ft	12,000	25,500		http://www.budgettruck.com/Moving-Trucks.aspx
6	Stake Truck	24' Stake Truck	flatbed/stake/platform	International/ Supreme	24'	672	Cu. Ft		25,900		http://www.usedtrucks.ryder.com/Vehicle/VehicleSearch.aspx?VehicleTypeId=1&VehicleGroupId=5
6	Refrigerated /Reefer	24' Kold King Refrigerate	reefer	Supreme	24'	1,521	Cu. Ft				http://www.silvercrowncoach.com/supreme.php?page=product&body=refrigerated&product=21&section=specs

Class	Application	Body Type	VIUS Category	Manuf	Model	Cargo Space (cubic feet)	Unit	Max Payload	GVW	Notes or Comments	URL
		d									
6	Landscape Van	Vanscaper Landscape Van	step/walk-in	Supreme	22'	1,496	Cu. Ft			Note: typical step/walk-ins do not reach this size. This is a speciality vehicle	http://www.silvercrowncoach.com/supreme.php?page=product&body=landscaping&product=30
7	Refuse	Refuse Truck					Cu. Ft				
7	Furniture	Furniture Truck				2,013	Cu. Ft				http://www.hendersonrentals.co.nz/?t=38
7	Beverage	Beverage (delivery body)		Hackney	Hackney 10-Bay-48" Aluminum	1251/ case capacity = 1,100 12 oz cans	Cu. Ft/case cans	23,700	37,733		http://hackneyusa.com/
7	Stake Truck	flatbed/stake/platform	flatbed/stake/platform	Supreme	SH20096	728			33,000		http://www.usedtrucks.ryder.com/Vehicle/VehicleSearch.aspx?VehicleTypeId=1&VehicleGroupId=5
7	Refrigerated /Reefer	28' Kold King Refrigerated	reefer	Supreme	28'	1,774	Cu. Ft				http://www.silvercrowncoach.com/supreme.php?page=product&body=refrigerated&product=21&section=specs
7	Tanker Truck	tank (fluid)	tank (fluid)	Ford	F750 XL	267	Cu. Ft	2,000-4000 GAL	26,000		http://www.truckingauctions.com/browse_listdetails.php?scate=Water%20Tank%20Truck&manf=GMC&catname=Heavy%20Duty%20Trucks
7	Single Axle Van	Freightliner Truck	van (basic enclosed)	Freightliner Business Class (24')	Business Class M2 112	1,552			33,000	Note: front axle lbs 12,000/rear axle 21,000 lbs (each add'l axle approx 12,000 lbs)	http://www.truckpaper.com/listingsdetail/detail.aspx?OHID=2379362

Appendix E
PERE Efficiency Modeling Methodology

The PERE model is not specifically designed for modeling heavy duty hybrid trucks, but as it is a physical model that is primarily dependent upon input values, its use was considered appropriate for the estimation of the fuel economy effects of truck hybridization. The model calculates second-by-second fuel consumption for user-defined drive cycles based on a physical model. The model takes a number of user-specified parameters, along with some of its own defaults, to perform these calculations for a variety of vehicle and powertrain types. The assumptions and data sources for the model inputs that were used are presented below. The defaults for some parameters, such as hybrid regeneration efficiency and hybrid battery efficiency, were assumed to remain unchanged when scaling from light-duty to heavy-duty vehicles.

Many vehicle parameters, such as road load and transmission data, were used from work already done with the PERE model for the SmartWay program. Many of the parameters for that previous work were taken from findings of internet searches for specifications of various trucks in new "as-delivered" condition, prior to the addition of various vocational or cargo equipment installations that would increase drag and vehicle weight. To establish the test weights for each truck class in this modeling effort, the original estimate of minimum weight was averaged with the maximum possible weight for each truck class. This was done with the intent of modeling an average or medium payload for each truck class. An important source of information was an EPA draft document discussing the use of the PERE model by Nam and Gianelli[42]. This document contained equations that could be used for estimates of some of the input parameters, along with information describing the use of the model.

The two foremost inputs to the model include the vehicle weight and engine size. Vehicle empty weights and engine sizes were taken from manufacturer supplied truck specifications where possible. For example, Ford published a .pdf file titled *F-250/F-350/F-450/F-550 Specifications*[43] that contains base curb weights and engine sizes for some of their offerings in the light and medium duty market. Another useful source of manufacturer data was in the *Kenworth T170/T270/T370 Body Builders* Manual[44]. The T170-T370 range consists of medium duty trucks that can be delivered with a cab-only chassis. The manual describes all of the dimensions relevant to the builder of a body or cargo area on the rear of the chassis. As such, it includes curb weights, length and width dimensions, and gross vehicle weight ratings that were instrumental in creating many of the inputs for the Class 5, 6, and 7 fuel economy models. Where specifications of multiple trucks in a class were found, values were taken that would result in maximum fuel economy unless they seemed noticeably atypical of in-use vehicles. Variations in weight and engine size over the ranges found in literature did not have as large an effect on fuel economy as some of the other inputs to the PERE model. For hybrid modeling, the engine size reduction due to hybridization ranged from 1 liter for

[42] Nam, Edward and Gianelli, Robert, *Fuel Consumption Modeling of Conventional and Advanced Technology Vehicles in the Physical Emission Rate Estimator (PERE).* US EPA Publication EPA420-P-05-001, February 2005.
[43] FordF150.net. *F-250/F-350/F-450/F-550 Specifications.* Retrieved from http://www.fordf150.net/specs/05sd_specs.pdf
[44] Kenworth. *Kenworth T170/T270/T370 Body Builders Manual*. Retrieved from http://www.kenworth.com/brochures/2009_Hybrid_Body_Builders_Manual.pdf

the Class 2b and 3 trucks, up to 4 liters for the Class 8 trucks. This range was chosen based on the nature of hybrid trucks currently available on the market. Class 2 hybrid trucks on the market typically have very little engine downsizing from hybridization, however larger trucks were found to have more engine downsizing.

The number of transmission gears in each truck class was also based on specifications found on manufacturers' web sites, but there is a wide range of the number of gears in the different available transmissions. While it is very likely that the most efficient setup for Class 2b through 4 would be a 6 speed manual transmission, there are a variety of options for Classes 5 through 8. It is also typical for a modern Class 8 truck to have 10 gears, so the model input for Class 6 was taken to be 8 as a representation of typical trucks in that class, and all trucks were modeled with manual transmissions. The PERE model also requires shift speeds as an input to the model, and examples of these were not found in literature or internet searches. ERG has previously logged on-road data from Class 8 trucks with 10-speed manual transmissions, and this data was analyzed briefly to create an estimate of typical upshift speeds for this type of truck. Using this speed/gear curve, two other curves were created by scaling for the 6 and 8 speed trucks modeled in the study. Unfortunately, the shift speed chart has a very strong effect on the model's predicted fuel economy, but using carefully scaled shift point curves hopefully mitigated this source of error. The hybrid trucks were modeled with exactly the same transmissions as the conventional trucks. The model did not readily include a provision for changing the transmission characteristics when changing from conventional to hybrid powertrains. All transmission parameters were kept the same when making this change with the intent of ensuring the resulting fuel economy effects were only due to hybridization, not due to transmission effects.

There were three other values regarding the driveline that were input for this study. The engine efficiency was taken to be 40% over the cycle. The maximum engine speeds and highway cruise speeds were adjusted together as well, to account for the larger displacement heavy duty engines turning more slowly than typical Class 2b truck engines. The effects of the engine speed parameters on fuel economy were fairly small.

The road load estimation required assumptions and calculations as road load curves are not generally a part of manufacturers' literature. The method of road load calculation used for this PERE modeling was based on the coefficient of rolling resistance (C_R), the aerodynamic drag coefficient (C_d), and the vehicle frontal area (A_F) in a physical equation of the truck's road load, given in Equation 1 from Nam and Gianelli (2005). Coefficients of drag were based on values in literature, such as manufacturers' specifications for Class 2b and in a report publication by Argonne National Laboratory[45]. Values for C_d ranged from .45 for the Class 2b and the smaller medium duty trucks, to .5 for the class 8 long-haul trucks. The heavier medium duty trucks were assumed to have a C_d of .55 as they were assumed to be vocational trucks with less streamlined aerodynamics. Frontal area was taken from manufacturer specifications where available. As given in Nam and Gianelli, the product of truck height and width was

[45] Delorme, A., Karbowski, D., and Sharer, P. *Evaluation of Fuel Consumption Potential of Medium and Heavy Duty Vehicles through Modeling and Simulation*. Argonne National Laboratory, DEPS-BEES-001, October 2009.

multiplied by a factor of 0.93 to get an estimate of effective A_F. Engineering judgment was applied to the dimensions found in literature to ensure a representative increase in frontal area from the smaller to larger trucks. The rolling resistance values were estimated using the trends observed by both Nam and Gianelli (2005) along with Delorme Karbowski, and Sharer (2009), ranging from 0.01 for the light and medium duty trucks, down to 0.008 for the class 8 trucks.

The final input to the PERE model was the driving cycle. In order to get a representative range of fuel economy benefit, two drive cycles were modeled. The first was the Heavy-Duty Urban Dynamometer Driving Schedule (HDUDDS), and the second was the EPA Highway Fuel Economy Test (HwFET). The HDUDDS can be thought of as a city-type cycle with frequent stops and starts. The HwFET simulates rural driving with varying speeds but no stops. Even though the HwFET is designed only for light duty vehicles, it was still used as it was the best representation available for in-use highway driving.

The key values used as the inputs for the PERE model fuel economy calculations are given by truck class in Table E-1.

Table E-1. PERE Model Inputs for Fuel Economy Estimation

Class	Modeled Test Weight, lbs	Conventional Engine Disp., L	Hybrid Engine Disp., L	Number of Gears	Effective Gear Ratio, RPM/mph
2b	7,875	6.0	5	6	35
3	10,000	6.0	5	6	35
4	12,250	6.4	5.4	6	33
5	14,500	6.7	5.7	6	33
6	19,500	6.7	5.7	8	33
7	24,000	8.3	6.3	10	31
8	52,500	13	9	10	30

For modeling hybrid vehicles in the PERE model, the user must adjust the hybrid threshold for each different vehicle and drive cycle combination. This variable represents the amount of power demand during acceleration that is required to cause the engine to start up to assist the electric motor. The user must adjust this value such that the amount of energy taken from the battery is approximately equal to the amount of energy charged back into the battery during regenerative braking. If this is not done, the fuel economy will be misrepresented due to the battery ending up with a different state of charge at the end of the cycle compared to the beginning of the cycle.

For the HwFET cycle in the lower truck classes, there were not enough deceleration events charge the battery back to its initial charge level, even with the hybrid threshold variable at its minimum value. This meant that the battery was ending at a lower level of charge at the end of the cycle than the beginning, which has the effect of overestimating

the trucks actual fuel economy. For this reason, ERG added an extra calculation to the model in order to account for the net change in battery power. This calculation used the various efficiencies of the hybrid system to estimate the fuel required to make up the change in battery charge over the cycle, and add that number to the modeled fuel consumption. This calculation was needed for the trucks in Classes 2b through 5.

Appendix F
EPA Drayage Calculator Equations

Drayage Fleet Score and Emission Reductions for Generic Port													
Company Name	California Cartage Express												
Year 2008	Pre-1988	1988-1993	1994-2002	2003-2006	2007-2009	Post 2009	Total Trucks	CO_2 *Grams*	CO2 *Short tons*	PM *Short tons*	NOx *Short tons*	SmartWay SIF Score	Environmental Performance
Baseline Emissions From Average Dray Truck Fleet							1		**111**	**0.1**	**1.4**		
Untreated	1	0	0	0			1		**111**	**0.2**	**1.6**		
DOC & CCVS							0		**0**	**0.0**	**0.0**		
Flow Through Filter							0		**0**	**0.0**	**0.0**		
Diesel Particulate Filter/LNG			0	0	0	0	0		**0**	**0.0**	**0.0**		
Total Trucks Equipped with:	APUs	0	SW Tires		**0**	LNG	0		**0**	**0.0**	**0.0**		
2008 Total Fleet Emissions									**111**	**0.2**	**1.6**		
Change in Emissions from Baseline									**0.0**	**0.1**	**0.2**		
% Change in Emissions									**0%**	**131%**	**14%**		
Avg. Miles Per Truck	**60000**		Fuel Consumed (gal)			**10000**							
SmartWay FLEET Score and Environmental Performance for:							2008					No Rating	No Rating

I. CO_2 Short Tons

A. CO_2 (Short tons) – Baseline Emissions From Average Dray Truck Fleet

A_{CO2} = **(((BaselineEmissionsFromAverageDrayTruckFleet$_{Pre1988}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1988to1993}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1994to2002}$)** * AvgMilesPerTruck/**5.47)** + **((BaselineEmissionsFromAverageDrayTruckFleet$_{2003to2006}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{2007to2009}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{Post2009}$)** * AvgMilesPerTruck /**5.47))** * **0.01015**

NOTE: AvgMilesPerTruck =60000

B. CO_2 (Short tons) – Untreated

B_{CO2} = **(((Untreated$_{Pre1988}$** + **Untreated$_{1988to1993}$** + **Untreated$_{1994to2002}$)** * AvgMilesPerTruck **/5.47)** + **((Untreated$_{2003to2006}$** + **Untreated$_{2007to2009}$** + **Untreated$_{Post2009}$)** * AvgMilesPerTruck /**5.47))** * **0.01015**

NOTE: AvgMilesPerTruck =60000

C. CO_2 (Short tons) – DOCs & CCVs

C_{CO2} = **(((DOCs&CCVs$_{Pre1988}$** + **DOCs&CCVs$_{1988to1993}$** + **DOCs&CCVs$_{1994to2002}$)** * AvgMilesPerTruck **/5.47)** + **((DOCs&CCVs$_{2003to2006}$** + **DOCs&CCVs$_{2007to2009}$** + **DOCs&CCVs$_{Post2009}$)** * AvgMilesPerTruck **/5.47))** * **0.01015**

NOTE: AvgMilesPerTruck =60000

D. CO_2 (Short tons) – Flow Through Filter

D_{CO2} = **(((FlowThroughFilter$_{Pre1988}$** + **FlowThroughFilter$_{1988to1993}$** + **FlowThroughFilter$_{1994to2002}$)** * AvgMilesPerTruck **/5.47)** + **((FlowThroughFilter$_{2003to2006}$** + **FlowThroughFilter$_{2007to2009}$** + **FlowThroughFilter$_{Post2009}$)** * AvgMilesPerTruck **/5.47))** * **0.01015**

NOTE: AvgMilesPerTruck =60000

E. CO_2 (Short tons) – Diesel Particulate

E_{CO2} = **(((DieselParticulate$_{Pre1988}$** + **DieselParticulate$_{1988to1993}$** + **DieselParticulate$_{1994to2002}$)** * AvgMilesPerTruck **/5.47)** + **((DieselParticulate$_{2003to2006}$** + **DieselParticulate$_{2007to2009}$** + **DieselParticulate$_{Post2009}$)** * AvgMilesPerTruck **/5.47))** * **0.01015**

NOTE: AvgMilesPerTruck =60000

F. CO_2 (Short tons) – Total Trucks Equipped with APU/SWTires/LNG

F_{CO2} = **((TotalTruckEquipped$_{APU}$**/BaselineEmissionsFromAverageDrayTruckFleet$_{TotalTrucks}$ * **0.11)** + **(TotalTruckEquipped$_{SWTires}$** / BaselineEmissionsFromAverageDrayTruckFleet$_{TotalTrucks}$ * **0.02)** + **(TotalTruckEquipped$_{LNG}$** / BaselineEmissionsFromAverageDrayTruckFleet$_{TotalTrucks}$ * **0.21))** * **(**B_{CO2} + C_{CO2} **+** D_{CO2} + E_{CO2}**)** * **-1**

Where

BaselineEmissionsFromAverageDrayTruckFleet$_{TotalTrucks}$ = **BaselineEmissionsFromAverageDrayTruckFleet$_{Pre1988}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1988to1993}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1994to2002}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{2003to2006}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{2007to2009}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{Post2009}$**

B_{CO2} = **CO_2 (Short tons) – Untreated**

C_{CO2} = **CO_2 (Short tons) – DOCs & CCVs**
D_{CO2} = **CO_2 (Short tons) – Flow Through Filter**
E_{CO2} = **CO_2 (Short tons) – Diesel Particulate**

G. CO_2 (Short tons) – Total Fleet Emissions

$$G_{CO2} = B_{CO2} + C_{CO2} + D_{CO2} + E_{CO2} + F_{CO2}$$

Where

B_{CO2} = **CO_2 (Short tons) – Untreated**
C_{CO2} = **CO_2 (Short tons) – DOCs & CCVs**
D_{CO2} = **CO_2 (Short tons) – Flow Through Filter**
E_{CO2} = **CO_2 (Short tons) – Diesel Particulate**
F_{CO2} = **CO_2 (Short tons) – CO2 (Short tons) – Total Trucks Equipped with APU/SWTires/LNG**

H. CO_2 (Short tons) – Change in Emissions from Baseline

$$H_{CO2} = G_{CO2} - A_{CO2}$$

Where

G_{CO2} = **CO_2 (Short tons) – Total Fleet Emissions**
A_{CO2} = **CO_2 (Short tons) – Baseline Emissions From Average Dray Truck Fleet**

I. CO_2 (Short tons) – Percent Change in Emissions from Baseline

$$I_{CO2} = (G_{CO2} - A_{CO2}) / A_{CO2}$$

Where

G_{CO2} = **CO_2 (Short tons) – Total Fleet Emissions**
A_{CO2} = **CO_2 (Short tons) – Baseline Emissions From Average Dray Truck Fleet**

J. CO_2 (Short tons) – SmartWay Fleet Score and Environmental Performance

$$J_{CO2} = (I_{CO2} / 40) * -100$$

Where

I_{CO2} = **CO_2 (Short tons) – Percent Change in Emissions from Baseline**

II. PM Short Tons

A. PM (Short tons) – Baseline Emissions From Average Dray Truck Fleet

A_{PM} = **((BaselineEmissionsFromAverageDrayTruckFleet$_{Pre1988}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06) + (BaselineEmissionsFromAverageDrayTruckFleet$_{1988to1993}$** * PMGramsPerMile$_{1988to1993}$ * **1.10E-06) + (BaselineEmissionsFromAverageDrayTruckFleet$_{1994to2002}$** * PMGramsPerMile$_{1994to2002}$ * **1.10E-06) + (BaselineEmissionsFromAverageDrayTruckFleet$_{2003to2006}$** * PMGramsPerMile$_{2003to2006}$ * **1.10E-06) + (BaselineEmissionsFromAverageDrayTruckFleet$_{2007to2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06) + (BaselineEmissionsFromAverageDrayTruckFleet$_{Post2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

Where

PMGramsPerMile$_{Pre1988}$ = **3.11**

B. PM (Short tons) – Untreated

B_{PM} = **(((Untreated$_{Pre1988}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06) + (Untreated$_{1988to1993}$** * PMGramsPerMile$_{1988to1993}$ * **1.10E-06) + (Untreated$_{1994to2002}$** * PMGramsPerMile$_{1994to2002}$ * **1.10E-06) + (Untreated$_{2003to2006}$** * PMGramsPerMile$_{2003to2006}$ * **1.10E-06) + (Untreated$_{2007to2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06) + (Untreated$_{Post2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

C. PM (Short tons) – DOCs & CCVs

C_{PM} = **(((DOCs&CCVs$_{Pre1988}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06* 0.7) + (DOCs&CCVs$_{1988to1993}$** * PMGramsPerMile$_{1988to1993}$ * **1.10E-06 * 0.7) + (DOCs&CCVs$_{1994to2002}$** * PMGramsPerMile$_{1994to2002}$ * **1.10E-06 * 0.7) + (DOCs&CCVs$_{2003to2006}$** * PMGramsPerMile$_{2003to2006}$ * **1.10E-06 * 0.7) + (DOCs&CCVs$_{2007to2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06 * 0.7) + (DOCs&CCVs$_{Post2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06 * 0.7))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

D. PM (Short tons) – Flow Through Filter

D_{PM} = **(((FlowThroughFilter$_{Pre1988}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06* 0.5) + (FlowThroughFilter$_{1988to1993}$** * PMGramsPerMile$_{1988to1993}$ * **1.10E-06 * 0.5) + (FlowThroughFilter$_{1994to2002}$** * PMGramsPerMile$_{1994to2002}$ * **1.10E-06 * 0.5) + (FlowThroughFilter$_{2003to2006}$** * PMGramsPerMile$_{2003to2006}$ * **1.10E-06 * 0.5) + (FlowThroughFilter$_{2007to2009}$** *

$PMGramsPerMile_{Pre1988}$ * **1.10E-06** * **0.5)** **+** **(FlowThroughFilter$_{Post2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06** * **0.5))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

E. PM (Short tons) – Diesel Particulate

E_{PM} = **(((DieselParticulate$_{Pre1988}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06*** **0.1)** **+** **(DieselParticulate$_{1988to1993}$** * $PMGramsPerMile_{1988to1993}$ * **1.10E-06** * **0.1)** **+** **(DieselParticulate$_{1994to2002}$** * $PMGramsPerMile_{1994to2002}$ * **1.10E-06** * **0.1)** **+** **(DieselParticulate$_{2003to2006}$** * $PMGramsPerMile_{2003to2006}$ * **1.10E-06** * **0.1)** **+** **(DieselParticulate$_{2007to2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06)** **+** **(DieselParticulate$_{Post2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

F. PM (Short tons) – Total Trucks Equipped with APU/SWTires/LNG

F_{PM} = **((TotalTruckEquipped$_{APU}$**/$BaselineEmissionsFromAverageDrayTruckFleet_{TotalTrucks}$ * **0.08)** * **(**B_{PM} + C_{PM} **+** D_{PM} + E_{PM}**)** * **-1)**

Where

$BaselineEmissionsFromAverageDrayTruckFleet_{TotalTrucks}$ = **BaselineEmissionsFromAverageDrayTruckFleet$_{Pre1988}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1988to1993}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1994to2002}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{2003to2006}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{2007to2009}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{Post2009}$**

B_{PM} = **PM (Short tons) – Untreated**

C_{PM} = **PM (Short tons) – DOCs & CCVs**

D_{PM} = **PM (Short tons) – Flow Through Filter**

E_{PM} = **PM (Short tons) – Diesel Particulate**

G. PM (Short tons) – Total Fleet Emissions

G_{PM} = B_{PM} + C_{PM} **+** D_{PM} + E_{PM} + F_{PM}

Where

B_{PM} = **PM (Short tons) – Untreated**

C_{PM} = **PM (Short tons) – DOCs & CCVs**

D_{PM} = **PM (Short tons) – Flow Through Filter**

E_{PM} = **PM (Short tons) – Diesel Particulate**

F_{PM} = **PM (Short tons) – Total Trucks Equipped with APU/SWTires/LNG**

H. PM (Short tons) – Change in Emissions from Baseline

$H_{PM} = G_{PM} - A_{PM}$

Where

G_{PM} = **PM (Short tons) – Total Fleet Emissions**

A_{PM} = **PM (Short tons) – Baseline Emissions From Average Dray Truck Fleet**

I. PM (Short tons) – Percent Change in Emissions from Baseline

$I_{PM} = (G_{PM} - A_{PM}) / A_{PM}$

Where

G_{PM} = **PM (Short tons) – Total Fleet Emissions**

A_{PM} = **PM (Short tons) – Baseline Emissions From Average Dray Truck Fleet**

J. PM (Short tons) – SmartWay Fleet Score and Environmental Performance

$J_{PM} = (I_{PM} / 80) * -100$

Where

I_{PM} = **PM (Short tons) – Percent Change in Emissions from Baseline**

III. NO_X Short Tons

A. NO_X (Short tons) – Baseline Emissions From Average Dray Truck Fleet

A_{NOX} = **(((** $\mathbf{BaselineEmissionsFromAverageDrayTruckFleet_{Pre1988}}$ * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) +**
($\mathbf{BaselineEmissionsFromAverageDrayTruckFleet_{1988to1993}}$ * $PMGramsPerMile_{1988to1993}$ * **1.10E-06) +**
($\mathbf{BaselineEmissionsFromAverageDrayTruckFleet_{1994to2002}}$ * $PMGramsPerMile_{1994to2002}$ * **1.10E-06) +**
($\mathbf{BaselineEmissionsFromAverageDrayTruckFleet_{2003to2006}}$ * $PMGramsPerMile_{2003to2006}$ * **1.10E-06) +**
($\mathbf{BaselineEmissionsFromAverageDrayTruckFleet_{2007to2009}}$ * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) +**
($\mathbf{BaselineEmissionsFromAverageDrayTruckFleet_{Post2009}}$ * $PMGramsPerMile_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**
NOTE: AvgMilesPerTruck =60000

B. NO_X (Short tons) – Untreated

B_{NOX} = **(((Untreated$_{Pre1988}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) + (Untreated$_{1988to1993}$** * $PMGramsPerMile_{1988to1993}$ * **1.10E-06) + (Untreated$_{1994to2002}$** * $PMGramsPerMile_{1994to2002}$ * **1.10E-06) + (Untreated$_{2003to2006}$** * $PMGramsPerMile_{2003to2006}$ * **1.10E-06) + (Untreated$_{2007to2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) + (Untreated$_{Post2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

C. NO_X (Short tons) – DOCs & CCVs

C_{NOX} = **(((DOCs&CCVs$_{Pre1988}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) + (DOCs&CCVs$_{1988to1993}$** * $PMGramsPerMile_{1988to1993}$ * **1.10E-06) + (DOCs&CCVs$_{1994to2002}$** * $PMGramsPerMile_{1994to2002}$ * **1.10E-06) + (DOCs&CCVs$_{2003to2006}$** * $PMGramsPerMile_{2003to2006}$ * **1.10E-06) + (DOCs&CCVs$_{2007to2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) + (DOCs&CCVs$_{Post2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

D. NO_X (Short tons) – Flow Through Filter

D_{NOX} = **(((FlowThroughFilter$_{Pre1988}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) + (FlowThroughFilter$_{1988to1993}$** * $PMGramsPerMile_{1988to1993}$ * **1.10E-06) + (FlowThroughFilter$_{1994to2002}$** * $PMGramsPerMile_{1994to2002}$ * **1.10E-06) + (FlowThroughFilter$_{2003to2006}$** * $PMGramsPerMile_{2003to2006}$ * **1.10E-06) + (FlowThroughFilter$_{2007to2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06) + (FlowThroughFilter$_{Post2009}$** * $PMGramsPerMile_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

E. NO_X (Short tons) – Diesel Particulate

E_{NOX} = **(((DieselParticulate$_{Pre1988}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06) + (DieselParticulate$_{1988to1993}$** * PMGramsPerMile$_{1988to1993}$ * **1.10E-06) + (DieselParticulate$_{1994to2002}$** * PMGramsPerMile$_{1994to2002}$ * **1.10E-06) + (DieselParticulate$_{2003to2006}$** * PMGramsPerMile$_{2003to2006}$ * **1.10E-06) + (DieselParticulate$_{2007to2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06) + (DieselParticulate$_{Post2009}$** * PMGramsPerMile$_{Pre1988}$ * **1.10E-06))** * AvgMilesPerTruck**)**

NOTE: AvgMilesPerTruck =60000

F. NO_X (Short tons) – Total Trucks Equipped with APU/SWTires/LNG

F_{NOX} = **((TotalTruckEquipped$_{APU}$**/BaselineEmissionsFromAverageDrayTruckFleet$_{TotalTrucks}$ * **0.11) + (TotalTruckEquipped$_{SWTires}$** / BaselineEmissionsFromAverageDrayTruckFleet$_{TotalTrucks}$ * **0.02) * (**B_{NOX} + C_{NOX} **+** D_{NOX} + E_{NOX}**) * -1**

Where

BaselineEmissionsFromAverageDrayTruckFleet$_{TotalTrucks}$ = **BaselineEmissionsFromAverageDrayTruckFleet$_{Pre1988}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1988to1993}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{1994to2002}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{2003to2006}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{2007to2009}$** + **BaselineEmissionsFromAverageDrayTruckFleet$_{Post2009}$**

B_{NOX} = **NO_X (Short tons) – Untreated**

C_{NOX} = **NO_X (Short tons) – DOCs & CCVs**

D_{NOX} = **NO_X (Short tons) – Flow Through Filter**

E_{NOX} = **NO_X (Short tons) – Diesel Particulate**

G. NO_X (Short tons) – Total Fleet Emissions

G_{NOX} = B_{NOX} + C_{NOX} **+** D_{NOX} + E_{NOX} + F_{NOX}

Where

B_{NOX} = **NO_X (Short tons) – Untreated**

C_{NOX} = **NO_X (Short tons) – DOCs & CCVs**

D_{NOX} = **NO_X (Short tons) – Flow Through Filter**

E_{NOX} = **NO_X (Short tons) – Diesel Particulate**

F_{NOX} = **NO_X (Short tons) – Total Trucks Equipped with APU/SWTires/LNG**

H. NO_X (Short tons) – Change in Emissions from Baseline

H_{NOX} = G_{NOX} - A_{NOX}

Where

G_{NOX} = **NO_X (Short tons) – Total Fleet Emissions**

A_{NOX} = **NO_X (Short tons) – Baseline Emissions From Average Dray Truck Fleet**

I. NO_X (Short tons) – Percent Change in Emissions from Baseline

$I_{NOX} = (G_{NOX} - A_{NOX}) / A_{NOX}$

Where

G_{NOX} = **NO_X (Short tons) – Total Fleet Emissions**

A_{NOX} = **NO_X (Short tons) – Baseline Emissions From Average Dray Truck Fleet**

J. NO_X (Short tons) – SmartWay Fleet Score and Environmental Performance

J_{NOX} = **$(I_{NOX} / 80) * -100$**

Where

I_{NOX} = **NO_X (Short tons) – Percent Change in Emissions from Baseline**

IV. SmartWay SIF Score and Environmental Performance

A. Score Calculation

$A_{SCORE} = I_{CO2} + I_{PM} + I_{NOX}$

Where

I_{CO2} = **CO_2 (Short tons) – Percent Change in Emissions from Baseline**

I_{PM} = **PM (Short tons) – Percent Change in Emissions from Baseline**

I_{NOX} = **NO_X (Short tons) – Percent Change in Emissions from Baseline**

B. SmartWay SIF Ranking

B_{rank} = **If $A_{SCORE} < 0.498$, then "No Rating"**

B_{rank} = **If $A_{SCORE} > 0.499$ and $A_{SCORE} \leq 1$, then "0.75"**

B_{rank} = **If $A_{SCORE} > 1$ and $A_{SCORE} \leq 1.8$, then "1.00"**

B_{rank} = **If $A_{SCORE} > 1.8$, then "1.25"**

Where

A_{SCORE} = **Score Calculation**

C. Environmental Performance

$C_{EnvPerf}$ = **If** A_{SCORE} **≤0.05, then "No Rating"**

$C_{EnvPerf}$ = **If** A_{SCORE} **> 0.05 and** A_{SCORE} **≤ 0.499, then "Average"**

$C_{EnvPerf}$ = **If** A_{SCORE} **> 0.499 and** A_{SCORE} **≤ 1, then "Good"**

$C_{EnvPerf}$ = **If** A_{SCORE} **> 1 and** A_{SCORE} **≤ 1.8, then "Very Good"**

$C_{EnvPerf}$ = **If** A_{SCORE} **>1.8, then "Outstanding"**

Where

A_{SCORE} = **Score Calculation**