

600880042A

TREATABILITY MANUAL
VOLUME I. Treatability Data

U.S. ENVIRONMENTAL PROTECTION AGENCY
Washington, D.C.

January 1980

PREFACE

In January, 1979, EPA's Office of Enforcement and Office of Water and Waste Management requested help from the Office of Research and Development in compiling wastewater treatment performance data into a "Treatability Manual". This Manual was to be used in developing NPDES permit limitations for facilities which, at the time of permit issuance, were not fully covered by promulgated, industry-specific effluent guidelines authorized under Sections 301, 304, 306, 307, and 501 of the CWA.

A planning group was set up to manage the treatability program under the chairmanship of William Cawley, Deputy Director, Industrial Environmental Research Laboratory - Cincinnati. The group includes participants from: 1) the Industrial Environmental Research Laboratory - Cincinnati, 2) Effluent Guidelines Division, Office of Water and Waste Management; 3) Permits Division, Office of Enforcement; 4) Municipal Environmental Research Laboratory - Cincinnati; 5) R. S. Kerr, Environmental Research Laboratory - Ada; 6) Industrial Environmental Research Laboratory - Research Triangle Park; 7) Monsanto Research Corporation; and 8) Aerospace Corporation.

The objectives of the treatability program are:

- To provide readily accessible data and information on treatability of industrial and municipal waste streams for use by NPDES permit writers, enforcement personnel, and by industrial or municipal permit holders;
- To provide a basis for research planning by identifying gaps in knowledge of the treatability of certain pollutants and wastestreams;
- To set up a system allowing rapid response to program office requirements for generation of treatability data.

The primary output from this program is a five-volume Treatability Manual. The individual volumes are named as follows:

- Volume I - Treatability Data
- Volume II - Industrial Descriptions
- Volume III - Technologies
- Volume IV - Cost Estimating
- Volume V - Summary

- To provide readily accessible data and information on treatability of industrial and municipal waste streams for use by NPDES permit writers, enforcement personnel, and laboratory researchers; and
- To provide a basis for research planning by identifying gaps in treatability knowledge and state-of-the-art.

A primary output from the treatability program is a five volume treatability manual. The treatability manual comprises five volumes, as follows:

VOLUME I	Treatability Data
VOLUME II	Industrial Descriptions
VOLUME III	Technologies
VOLUME IV	Cost Estimating
VOLUME V	Summary

ACKNOWLEDGMENT

The sheer size and comprehensiveness of this document should make it obvious that this had to be the effort of a large number of people. It is the collection of contributions from throughout the Environmental Protection Agency, particularly from the Office of Enforcement, Office of Water and Hazardous Materials and the Office of Research and Development. Equally important to its success were the efforts of the employees of the Aerospace Corporation and the Monsanto Research Corporation who participated in this operation.

No list of the names of everyone who took part in the effort would in any way adequately acknowledge the effort which those involved in preparing this Manual made toward its development. Equally difficult would be an attempt to name the people who have made the most significant contributions both because there have been too many and because it would be impossible to adequately define the term "significant." This document exists because of major contributions by the contractor's staff and by members of the following:

Effluent Guidelines Division
Office of Water and Waste Management

Permits Division
Office of Water Enforcement

National Enforcement Investigation Center
Office of Enforcement

Center for Environmental Research Information


Municipal Environmental Research Laboratory

Robert S. Kerr Environmental Research Laboratory

Industrial Environmental Research Laboratory
Research Triangle Park, NC

Industrial Environmental Research Laboratory
Cincinnati, OH
Office of Research and Development

The purpose of this acknowledgement is to express my thanks as Committee Chairman and the thanks of the Agency to the Committee Members and others who contributed to the success of this effort.

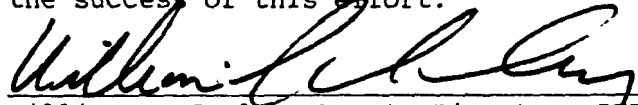
William A. Cawley, Deputy Director, IERL-Ci
Chairman, Treatability Coordination Committee

CONTENTS

I.1	Introduction.	I.1-1
I.2	Classical and Conventional Pollutants	I.2-1
I.3	Industrial Wastewater Discharges.	I.3-1
I.4	Metals and Inorganics	I.4-1
	Antimony	I.4.1-1
	Arsenic.	I.4.2-1
	Asbestos	I.4.3-1
	Beryllium.	I.4.4-1
	Cadmium.	I.4.5-1
	Chromium	I.4.6-1
	Copper	I.4.7-1
	Cyanides (total)	I.4.8-1
	Lead	I.4.9-1
	Mercury.	I.4.10-1
	Nickel	I.4.11-1
	Selenium	I.4.12-1
	Silver	I.4.13-1
	Thallium	I.4.14-1
	Zinc	I.4.15-1
I.5	Ethers.	I.5-1
	Bis(chloromethyl) ether.	I.5.1-1
	Bis(2-chloroethyl) ether	I.5.2-1
	Bis(2-chloroisopropyl) ether	I.5.3-1
	2-Chloroethyl vinyl ether.	I.5.4-1
	4-Chlorophenyl phenyl ether.	I.5.5-1
	4-Bromophenyl phenyl ether	I.5.6-1
	Bis(2-chloroethoxy)methane	I.5.7-1
I.6	Phthalates.	I.6-1
	Dimethyl phthalate	I.6.1-1
	Diethyl phthalate.	I.6.2-1
	Di-n-butyl phthalate	I.6.3-1
	Di-n-octyl phthalate	I.6.4-1
	Bis(2-ethylhexyl) phthalate.	I.6.5-1
	Butyl benzyl phthalate	I.6.6-1
I.7	Nitrogen Compounds.	I.7-1
	N-nitrosodimethylamine	I.7.1-1
	N-nitrosodiphenylamine	I.7.2-1
	N-nitrosodi-n-propylamine.	I.7.3-1
	Benzidine.	I.7.4-1
	3,3'-Dichlorobenzidine	I.7.5-1
	1,2-Diphenylhydrazine.	I.7.6-1
	Acrylonitrile.	I.7.7-1

Date: 7/31/79

CONTENTS (continued)


I.7	Nitrogen Compounds (continued)	
	Butylamine.	I.7.8-1
	Diethylamine.	I.7.9-1
	Ethylenediamine	I.7.10-1
	Monoethylamine.	I.7.11-1
	Monomethylamine	I.7.12-1
	Triethylamine	I.7.13-1
	Trimethylamine.	I.7.14-1
I.8	Phenols.	I.8-1
	Phenol.	I.8.1-1
	2-Chlorophenol.	I.8.2-1
	2,4-Dichlorophenol.	I.8.3-1
	2,4,6-Trichlorophenol	I.8.4-1
	Pentachlorophenol	I.8.5-1
	2-Nitrophenol	I.8.6-1
	4-Nitrophenol	I.8.7-1
	2,4-Dinitrophenol	I.8.8-1
	Resorcinol.	I.8.9-1
	2,4-Dimethylphenol.	I.8.10-1
	Total phenols	I.8.11-1
	<i>p</i> -Chloro- <i>m</i> -cresol	I.8.12-1
	4,6-Dinitro- <i>o</i> -cresol.	I.8.13-1
	Cresol.	I.8.14-1
I.9	Aromatics.	I.9-1
	Benzene	I.9.1-1
	Chlorobenzene	I.9.2-1
	1,2-Dichlorobenzene	I.9.3-1
	1,3-Dichlorobenzene	I.9.4-1
	1,4-Dichlorobenzene	I.9.5-1
	1,2,4-Trichlorobenzene.	I.9.6-1
	Hexachlorobenzene	I.9.7-1
	Ethylbenzene.	I.9.8-1
	Nitrobenzene.	I.9.9-1
	Toluene	I.9.10-1
	2,4-Dinitrotoluene.	I.9.11-1
	2,6-Dinitrotoluene.	I.9.12-1
	Aniline	I.9.13-1
	Benzoic acid.	I.9.14-1
	Benzyl chloride	I.9.15-1
	Styrene	I.9.16-1
	Quinoline	I.9.17-1
	Xylenes	I.9.18-1
	Nitrotoluene.	I.9.19-1
	Naphthenic acid	I.9.20-1
I.10	Polynuclear Aromatic Hydrocarbons.	I.10-1
	2-Chloronaphthalene	I.10.1-1
	Benz(a)anthracene	I.10.2-1
	Benzo(b)fluoranthene.	I.10.3-1
	Benzo(k)fluoranthene.	I.10.4-1

Date: 7/31/79

CONTENTS (continued)

I.10	Polynuclear Aromatic Hydrocarbons (continued)	
	Benzo(a)pyrene.	I.10.5-1
	Indeno(1,2,3-cd)pyrene.	I.10.6-1
	Dibenz(ah)anthracene.	I.10.7-1
	Benzo(ghi)perylene.	I.10.8-1
	Acenaphthene.	I.10.9-1
	Acenaphthylene.	I.10.10-1
	Anthracene.	I.10.11-1
	Chrysene.	I.10.12-1
	Fluoranthene.	I.10.13-1
	Fluorene.	I.10.14-1
	Naphthalene	I.10.15-1
	Phenanthrene.	I.10.16-1
	Pyrene.	I.10.17-1
I.11	PCB's and Related Compounds.	I.11-1
	Aroclor 1016.	I.11.1-1
	Aroclor 1221.	I.11.2-1
	Aroclor 1232.	I.11.3-1
	Aroclor 1242.	I.11.4-1
	Aroclor 1248.	I.11.5-1
	Aroclor 1254.	I.11.6-1
	Aroclor 1260.	I.11.7-1
I.12	Halogenated Hydrocarbons	I.12-1
	Methyl chloride	I.12.1-1
	Methylene chloride.	I.12.2-1
	Chloroform.	I.12.3-1
	Carbon tetrachloride.	I.12.4-1
	Chloroethane.	I.12.5-1
	1,1-Dichloroethane.	I.12.6-1
	1,2-Dichloroethane.	I.12.7-1
	1,1,1-Trichloroethane	I.12.8-1
	1,1,2-Trichloroethane	I.12.9-1
	1,1,2,2-Tetrachloroethane	I.12.10-1
	Hexachloroethane.	I.12.11-1
	Vinyl chloride.	I.12.12-1
	1,2-Dichloropropane	I.12.13-1
	1,3-Dichloropropene	I.12.14-1
	Hexachlorobutadiene	I.12.15-1
	Hexachlorocyclopentadiene	I.12.16-1
	Methyl bromide.	I.12.17-1
	Dichlorobromomethane	I.12.18-1
	Chlorodibromomethane	I.12.19-1
	Bromoform.	I.12.20-1
	Dichlorodifluoromethane.	I.12.21-1
	Trichlorofluoromethane	I.12.22-1
	Trichloroethylene.	I.12.23-1
	1,1-Dichloroethylene	I.12.24-1
	1,2-Trans-dichloroethylene	I.12.25-1
	Tetrachloroethylene.	I.12.26-1

Date: 7/31/79



CONTENTS (continued)

I.12	Halogenated Hydrocarbons (continued)	
	Allyl chloride	I.12.27-1
	2,2-Dichloropropionic acid	I.12.28-1
	Phosgene	I.12.29-1
	Ethylene dibromide	I.12.30-1
	Epichlorohydrin.	I.12.31-1
I.13	Pesticides.	I.13-1
	α-Endosulfan	I.13.1-1
	Endosulfan sulfate	I.13.2-1
	β-Endosulfan	I.13.3-1
	α-BHC.	I.13.4-1
	β-BHC.	I.13.5-1
	δ-BHC.	I.13.6-1
	γ-BHC.	I.13.7-1
	Aldrin	I.13.8-1
	Dieldrin	I.13.9-1
	4,4'-DDE	I.13.10-1
	4,4'-DDT	I.13.11-1
	4,4'-DDD	I.13.12-1
	Endrin	I.13.13-1
	Kelthane	I.13.14-1
	Naled.	I.13.15-1
	Dichlone	I.13.16-1
	Kepone	I.13.17-1
	Diuron	I.13.18-1
	Endrin aldehyde.	I.13.19-1
	Heptachlor	I.13.20-1
	Heptachlor epoxide	I.13.21-1
	Carbofuran	I.13.22-1
	Mercaptodimethur	I.13.23-1
	Chlordane.	I.13.24-1
	Toxaphene.	I.13.25-1
	Captan	I.13.26-1
	Carbaryl	I.13.27-1
	Coumaphos.	I.13.28-1
	Diazinon	I.13.29-1
	Dicamba.	I.13.30-1
	Dichlobenil.	I.13.31-1
	Malathion.	I.13.32-1
	Methyl parathion	I.13.33-1
	Parathion.	I.13.34-1
	Guthion.	I.13.35-1
	Ethion	I.13.36-1
	Isoprene	I.13.37-1
	Chlorpyrifos	I.13.38-1
	Dichlorvos	I.13.39-1
	Diquat	I.13.40-1
	Disulfoton	I.13.41-1

Date: 7/31/79

CONTENTS (continued)

I.13	Pesticides (continued)	
	Mevinphos.	I.13.42-1
	Mexacarbate.	I.13.43-1
	Trichlorfon.	I.13.44-1
	Propargite	I.13.45-1
	Carbon disulfide	I.13.46-1
I.14	Oxygenated Compounds.	I.14-1
	Acetaldehyde	I.14.1-1
	Acetic acid.	I.14.2-1
	Allyl alcohol.	I.14.3-1
	Amyl acetate	I.14.4-1
	Butyl acetate.	I.14.5-1
	Butyric acid	I.14.6-1
	Formaldehyde	I.14.7-1
	Formic acid.	I.14.8-1
	Fumaric acid	I.14.9-1
	Maleic acid.	I.14.10-1
	Methyl methacrylate.	I.14.11-1
	Propionic acid	I.14.12-1
	Vinyl acetate.	I.14.13-1
	Adipic acid.	I.14.14-1
	Crotonaldehyde	I.14.15-1
	Acrolein	I.14.16-1
	Furfural	I.14.17-1
	Propylene oxide.	I.14.18-1
I.15	Miscellaneous	I.15-1
	Methyl mercaptan	I.15.1-1
	Dodecyl benzene sulfonic acid.	I.15.2-1
	Cyclohexane.	I.15.3-1
	Isophorone	I.15.4-1
	Strychnine	I.15.5-1
	2,3,7,8-Tetrachlorodibenzo-p-dioxin.	I.15.6-1
	Zinc phenol sulfonate.	I.15.7-1

Date: 7/31/79

GLOSSARY

AAP: Army Ammunitions Plant.

AN: Ammonium Nitrate.

ANFO: Ammonium Nitrate/Fuel Oil.

BATEA: Best Available Technology Economically Achievable.

BAT: Best Applicable Technology.

BEJ: Best Engineering Judgement.

BOD: Biochemical Oxygen Demand.

clarification: Process by which a suspension is clarified to give a "clear" supernatant.

cryolite: A mineral consisting of sodium-aluminum fluoride.

CWA: Clean Water Act.

cyanidation process: Gold and/or silver are extracted from finely crushed ores, concentrates, tailings, and low-grade mine-run rock in dilute, weakly alkaline solutions of potassium or sodium cyanide.

comminutor: Mechanical devices that cut up material normally removed in the screening process.

effluent: A waste product discharged from a process.

EGD: Effluent Guidelines Division.

elutriation: The process of washing and separating suspended particles by decantation.

extraction: The process of separating the active constituents of drugs by suitable methods.

fermentation: A chemical change of organic matter brought about by the action of an enzyme or ferment.

flocculation: The coagulation or coalescence of a finely-divided precipitate.

fumigant: A gaseous or readily volatilizable chemical used as a disinfectant or pesticide.

GAC: Granular Activated Carbon.

gravity concentration: A process which uses the differences in density to separate valuable ore minerals from gangue.

gravity separation/settling: A process which removes suspended solids by natural gravitational forces.

grit removal: Preliminary treatment that removes large objects, in order to prevent damage to subsequent treatment and process equipment.

influent: A process stream entering the treatment system.

intake: Water, such as tap or well water, that is used as makeup water in the process.

lagoon: A shallow artificial pond for the natural oxidation of sewage and ultimate drying of the sludge.

LAP: Loading Assembly and Packing operations.

MHF: Multiple Hearth Furnace.

neutralization: The process of adjusting either an acidic or a basic wastestream to a pH in the range of seven.

NPDES. National Pollutant Discharge Elimination System.

NRDC: Natural Resources Defense Council.

NSPS: New Source Performance Standards.

photolysis: Chemical decomposition or dissociation by the action of radiant energy.

PCB: PolyChlorinated Biphenyl.

POTW: Public Owned Treatment Works.

PSES: Pretreatment Standards for Existing Sources.

purged: Removed by a process of cleaning; take off or out.

screening process: A process used to remove coarse and/or gross solids from untreated wastewater before subsequent treatment.

SIC: Standard Industrial Classification.

SS: Suspended Solids.

SRT: Solids Retention Time.

starved air combustion: Used for the volumetric and organic reduction of sludge solids.

terpene: Any of a class of isomeric hydrocarbons.

thermal drying: Process in which the moisture in sludge is reduced by evaporation using hot air, without the solids being combusted.

TKN: Total Kjeldahl Nitrogen.

TOC: Total Organic Carbon.

trickling filter: Process in which wastes are sprayed through the air to absorb oxygen and allowed to trickle through a bed of rock or synthetic media coated with a slime of micro-

bial growth to remove dissolved and collodial biodegradable organics.

TSS: Total Suspended Solids.

vacuum filtration: Process employed to dewater sludges so that a cake is produced having the physical handling characteristics and contents required for processing.

VSS: Volatile Suspended Solids.

WQC: Water Quality Criterion.

I.1 INTRODUCTION

Volume I is a compendium of treatability data for specific compounds. It is the first of a five volume set on industrial wastewater treatability. Volume II is a collection of industrial wastewater discharge information and includes data for both raw and treated wastewaters. Volume III is a compilation of available performance data for existing wastewater treatment technologies. Volume IV is a collection of capital and operating cost data for the treatment technologies described in Volume III. Volume V is an executive summary and describes the use of information contained in Volumes I - IV. The information contained in this manual was obtained from the open literature, government publications, on-going Office of Research and Development (ORD) treatability studies, equipment vendors, and regional and state EPA offices.

I.1.1 VOLUME 1 ORGANIZATION AND CONTENTS

Volume I of the Treatability Manual supplies data on specific compounds. It is intended to provide facile reference to physical data on the pollutants, their occurrence patterns, and methods of treatment and/or removal. Pollutants are grouped according to the following chemical categories:

- Metals and Inorganics
- Ethers
- Phthalates
- Nitrogen Compounds
- Phenols
- Aromatics
- Polynuclear Aromatic Hydrocarbons
- PCB's and Related Compounds
- Halogenated Hydrocarbons
- Pesticides
- Oxygenated Compounds
- Miscellaneous

The three-part entry for each pollutant includes the items discussed below:

- Description of the Pure Species

This section includes information such as name, formula, alternate names, Chemical Abstracts Registry Number, molecular or atomic weight, melting and boiling points, water solubility and vapor pressure. For organic compounds Henry's law constants, log octanol/water partition coefficients, biodegradability information, and carbon adsorption data are also presented; for metals common oxidation states and precipitation/coagulation properties are given.

A separate entry in this section summarizes current knowledge on probable fates in an aqueous medium. Processes considered in this last category are photolysis, oxidation, hydrolysis, volatilization, sorption, biological processes, and other significant reactions and interactions. When literature fate data for a specific compound are inadequate or nonexistent, the fate of closely related compounds are discussed, and the data is identified as pertaining to the general class of compounds.

- Industrial Occurrence Data

Wastewater pollutant concentrations are presented in tabular form for each industry in which the chemical substance has been detected. The minimum, maximum and average concentrations are reported for both untreated and treated wastewater. This information is derived from that presented in Volume II of the wastewater treatability manual. Consult Volume II for additional information regarding wastestreams in each industry.

Industrial wastewater discharge data presented in Section I.3 is then used in conjunction with the observed pollutant concentrations to estimate pollutant loadings for the industry. Pollutant loadings reported in kg/d form a basis for comparing relative impacts of the discharge from various industries.

- Pollutant Treatability/Removability

For each alternative standard treatment process, removal ranges and achievable concentrations for the compound of interest are presented for both synthetic and actual wastewater samples, where appropriate data are available. Cross references to Volume III are given.

I.1.2 PHYSICAL AND CHEMICAL PROPERTIES DATA

Physical/chemical data presented in this volume are useful in predicting environmental fate or probable effectiveness of alternative treatment approaches. A brief description of the presentation and utility of individual parameters follows.

I.1.2.1 Henry's Law Constant

Henry's law constant is the equilibrium partial pressure of a compound divided by the concentration of the compound in water at 25°C and is defined by the following equation:

$$K = \frac{P}{S}$$

where

K = Henry's law constant, $\text{m}^3 \text{ atm gmol}^{-1}$

P = partial pressure of compound in gas phase, atm

S = concentration of compound in liquid phase, gmol/m^3

It is an expression of the equilibrium distribution of a compound between air and water. The constant indicates qualitatively the volatility of a compound and is frequently used in equations which attempt to predict "stripping" of compound from aqueous solution. Increasing values of the constant favor volatilization as a fate mechanism and indicate amenability to steam or air stripping.

I.1.2.2 Log Octanol/Water Partition Coefficient

The log octanol/water partition coefficient or log P is the equilibrium distribution of a compound between two immiscible solvents, n-octanol and water. It is defined by the following equation:

$$\text{Log P} = \text{Log} \frac{C_{A,O}}{C_{A,H_2O}}$$

where

$C_{A,O}$ = concentration of compound in oil phase

C_{A,H_2O} = concentration of compound in water phase

Log P varies with temperature and solute concentration. The temperature of determination is assumed to be 25°C, although in many cases the temperature and method of determination is not known.

Log P measures the affinity of a compound for oil and water phases, as such it is a useful parameter for predicting the bio-concentration potential of compounds and sorption of compounds by organic soils where experimental values are not available. It is also used to determine the applicability of solvent extraction as a treatment alternative. Increasing values favoring strong bioaccumulation, adsorption and solvent extraction potentials.

I.1.2.3 Carbon Adsorption Data

Batch equilibrium carbon adsorption isotherm data were used to determine the effectiveness of carbon in adsorbing organic compounds. The adsorption isotherm is the relationship, at a given temperature and other conditions, between the amount of a substance adsorbed and its equilibrium concentration in the surrounding solution.

The carbon adsorption data were plotted according to the Freundlich equation. While this equation is empirical it is none-the-less widely used and has been found to describe adequately the adsorption process in dilute solution. The Freundlich equation has the form:

$$\frac{X}{M} = KC_f^{1/n}$$

The data were fitted to the logarithmic form of the above equation, which has the form:

$$\log \frac{X}{M} = \log K + 1/n \log C_f$$

where

$X = C_o - C_f$ = initial concentration of solute in
mg/L minus final concentration in
solution at equilibrium

M = weight in grams of adsorbent (carbon)

C_f = final concentration of solute in mg/L at
equilibrium

K = intercept at $C_f = 1$ ($\log C_f = 0$)

$1/n$ = slope of the line

For the dilute solutions in this study, this equation yields a straight line with a slope of $1/n$ and an intercept equal to the value of K when $C_f = 1$ ($\log C_f = 0$). The intercept is roughly an indicator of adsorption capacity and the slope, $1/n$, of adsorption intensity. The concentration of compound on the carbon in equilibrium with a concentration C_f is given by the $\frac{X}{M}$ value, expressed as mg compound/gram of carbon.

Figures 1 and 2 are presented to illustrate the interpretation of adsorption isotherms. In Figure 1, the isotherm for Carbon A is at a high level and has only a slight slope. This means that adsorption is large over the entire range of concentrations studied. The fact that the isotherm for Carbon B in Figure 1 is

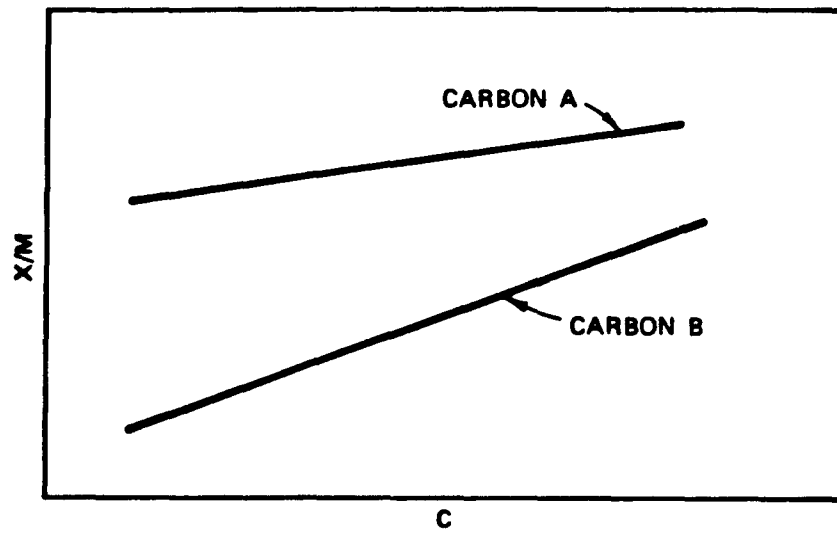


Figure 1. Adsorption isotherm, Carbon A and B.

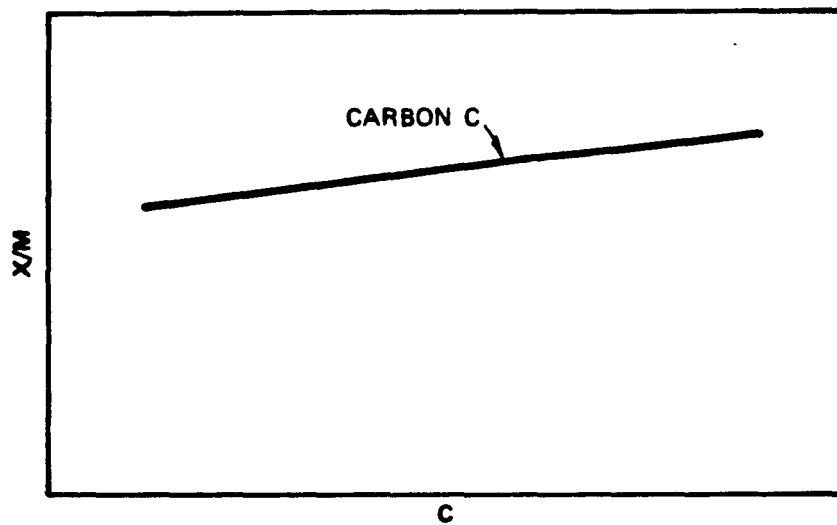


Figure 2. Adsorption isotherm, Carbon C.

at a lower level indicates proportionally less adsorption, although adsorption improves at higher concentrations over that at low concentrations. An isotherm having a steep slope, Carbon D, indicates that adsorption is good at high concentrations, but much less at low concentration.

For most compounds, the isotherm test was conducted at neutral pH. For those compounds that were expected to show an effect of pH the test was conducted at acid and/or basic pH as well as at neutral. The actual pH's are shown on the data sheets along with type of carbon used.

The adsorbability, defined as the carbon dose required to reduce a pollutant concentration from 10 mg/L to 1 mg/L at neutral pH, is also reported and serves as a basis for comparing individual compounds.

I.1.2.4 Biodegradability

The entry for biodegradability includes descriptive information on biological system utilized, measurement method, removals achieved and rate of removal. Biodegradability data are presented where available so as to give a qualitative indication as to whether or not a compound is amenable to biological oxidation. Test procedures varied as to length of time, degree of acclimation of seed organisms, and system utilized. In addition, other removal mechanisms such as vaporization and adsorption into sludge may have interfered with test results. These effects can not be clearly differentiated for the references used and their influence was not determined.

I.1.2.5 Metal Precipitation/Coagulation Properties

Solubility curves are given to illustrate the effect of lime softening and chemical coagulation on metals removal. Percent removal of metal is plotted as a function of coagulant dose, initial metal concentration and pH of the treated water.

I.2 POLLUTANT SELECTION

Pollutants selected for study in Volume I of the wastewater treatability manual were taken from the list of 299 compounds considered in Section 311 of the Water Pollution Control Act. Selection was based on a consideration of pollutant toxicity and stability in an aqueous environment. Of the 299 compounds initially considered, 129 had been previously designated as Toxic (Priority) Pollutants by the EPA and were included for study. Ninety-six of the remaining pollutants were found to readily dissociate, volatilize or otherwise degrade in an aqueous environment and were not considered. This left 74 pollutants that did not readily degrade or disappear from an aqueous environment. These were added to the list of 129 toxic pollutants to make a total of 203 and included for study in Volume I. Other pollutants will be added for study as time and data availability permits.

In addition, a number of conventional or classical water pollutants not addressed in Volume I are covered in Volumes II and III. These are listed below.

- Total Suspended Solids
- Total Kjeldahl Nitrogen
- Chemical Oxygen Demand
- Biochemical Oxygen Demand
- Oil and Grease
- Total Phenols
- Total Phosphorus
- Total Organic Chlorine
- Total Organic Carbon

Date: 12/5/79

I.3-1

INDUSTRIAL WASTEWATER DISCHARGES

Industry	Flows ^a						References
	Minimum		Mean		Maximum		
	m ³ /d	Mgal/d	m ³ /d	Mgal/d	m ³ /d	Mgal/d	
Coal mining	0	0	3,800	1.0	27,000	7.1	1
Textile mills	4.2	0.0011	1,800	0.50	29,000	7.6	2
Timber products processing	0	0	86	0.023	46,000	12	3, 4, 5
Petroleum refining	0	0	5,800	1.5	93,000	25	6
Paint and ink formulation	0	0	1.6	0.00043	46	0.012	7, 8
Gum and wood chemicals	9	0.0023	1,700	0.44	7,600	2.0	9
Rubber processing	0	0	33	0.0087	860	0.23	10
Explosives manufacture	0	0	4.3	0.0011	350	0.092	11
Pulp, paper, and paperboard mills	0	0	30,000	7.9	NA	NA	4, 5, 12
Auto and other laundries	0.9	0.00024	210	0.057	1,400	0.36	13, 14
Porcelain enameling	0.64	0.00017	80	0.021	410	0.11	15
Pharmaceutical manufacturing	0	0	920 ^b	0.24	6,800	1.8	16, 17
Ore mining and dressing	0	0	37,000	9.7	NA	NA	18, 19
Steam electric power generating (condenser cooling system)	53	0.014	240	0.063	1,100	0.28	20, 21
Steam electric power generating (water treatment)	0.0061	0.0000016	150 ^b	0.039	60,000	15	20, 21
Steam electric power generating (boiler or steam generator blowdown)	0.00042	0.0000001	150 ^b	0.039	14,000	3.8	20, 21
Steam electric power generating (maintenance cleaning)	0.0010	0.00000027	300 ^b	0.080	19,000	4.9	20, 21
Steam electric power generating (ash handling)	19	0.0049	22,000 ^b	0.022	98,000	26	20, 21
Steam electric power generating (drainage)	8.6	0.0022	20	0.0053	370	0.10	20, 21
Steam electric power generating (air pollution control devices)	0.95	0.00025	3,600 ^b	0.0036	57,000	15	20, 21
Inorganic chemicals manufacturing	0	0	25,000	6.6	125,000	33	22, 23, 5
Coil coating	50	0.013	480	0.13	1,800	0.47	24
Foundries	0	0	2,700	0.71	6,700	1.8	25, 5
Leather tanning and finishing	0	0	1,500	0.39	NA	NA	26, 27, 5
Iron and steel manufacturing	0	0	180,000	47	NA	NA	5
Nonferrous metals manufacturing	0	0	53,000	14	NA	NA	28, 5

^a May include other than strictly process wastewater.^b Average of medians for various industry subcategories.

REFERENCES

1. Technical Assistance in the Implementation of the BAT Review of the Coal Mining Industry Point Source Category (draft contractor's report). Contracts 68-01-3273, 68-01-4762, and 68-02-2618, U.S. Environmental Protection Agency, Washington, D.C., March 1979.
2. Technical Study Report BATEA-NSPS-PSES-PSNS - Textile Mills Point Source Category (draft contractor's report). Contracts 68-01-3289 and 68-01-3884, U.S. Environmental Protection Agency, Washington, D.C., November 1978.
3. Revised Technical Review of the Best Available Technology, Best Demonstrated Technology, and Pretreatment Technology for the Timber Products Processing Point Source Category (draft contractor's report). Contract 68-01-4827, U.S. Environmental Protection Agency, Washington, D.C., October 1978.
4. 1972 Census of Manufacturers. Volume II: Industry Statistics. Part 1: SIC Major Groups 20-26. U.S. Department of Commerce, Bureau of the Census, Washington, D.C., August 1976.
5. 1972 Census of Manufacturers. Special Report Series: Water Use in Manufacturing. MC72(SR)-4, U.S. Department of Commerce, Bureau of the Census, Washington, D.C., September 1975.
6. Draft Development Document Including the Data Base for the Review of Effluent Limitations Guidelines (BATEA), New Source Performance Standards, and Pretreatment Standards for the Petroleum Refining Point Source Category. U.S. Environmental Protection Agency, Washington, D.C., March 1978.
7. Development of Effluent Limitations Guidelines for the Ink Manufacturing Industry (BATEA, NSPS, Pretreatment) (contractor's draft engineering report). U.S. Environmental Protection Agency, Washington, D.C., January 1979.

8. Development of Effluent Limitations Guidelines for the Paint Manufacturing Industry (BATEA, NSPS, Pretreatment) (contractor's draft engineering report). U.S. Environmental Protection Agency, Washington, D.C., January 1979.
9. Technical Review of the Best Available Technology, Best Demonstrated Technology, and Pretreatment Technology for the Gum and Wood Chemicals Point Source Category (draft contractor's report). Environmental Science and Engineering, Inc.
10. Review of the Best Available Technology for the Rubber Processing Point Source Category. Contract 68-01-4673, U.S. Environmental Protection Agency, Washington, D.C., July 1978.
11. Technical Review of the BAT Analysis of the Explosives Industry (draft contractor's report). U.S. Environmental Protection Agency, Washington, D.C., April 1979.
12. Preliminary Data Base for Review of BATEA Effluent Limitations Guidelines, NSPS, and Pretreatment Standards for the Pulp, Paper, and Paperboard Point Source Category. Contract 68-01-4624, U.S. Environmental Protection Agency, Washington, D.C., June 1979.
13. Technical Support Document for Auto and Other Laundries Industry (draft contractor's report). Contract 68-03-2550, U.S. Environmental Protection Agency, Washington, D.C., August 1979.
14. Status Report on the Treatment and Recycle of Wastewaters from the Car Wash Industry (draft contractor's report). Contract 68-01-5767, U.S. Environmental Protection Agency, Washington, D.C., July 1979.
15. Development Document for Effluent Limitations Guidelines and Standards for the Porcelain Enameling Point Source Category. EPA-440/1-79/072a, U.S. Environmental Protection Agency, Washington, D.C., August 1975.
16. Effluent Limitations Guidelines for the Pharmaceutical Manufacturing Industry (draft contractor's report). U.S. Environmental Protection Agency, Washington, D.C., May 1979.
17. Development Document for Interim Final Effluent Limitations Guidelines and Proposed New Source Performance Standards for the Pharmaceutical Manufacturing Point Source Category. EPA 440/1-75/060, U.S. Environmental Protection Agency, Washington, D.C., December 1976. 344 pp.

18. Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Ore Mining and Dressing Point Source Category, Volumes I and II. U.S. Environmental Protection Agency, Washington, D.C., July 1978.
19. 1972 Census of Mineral Industries. Subject Series: Water Use in Mineral Industries. MIC72(1)-2, U.S. Department of Commerce, Bureau of the Census, Washington, D.C., September 1975.
20. Draft Technical Report for Revision of Steam Electric Effluent Limitations Guidelines. U.S. Environmental Protection Agency, Washington, D.C., September 1978. 607 pp.
21. Supplement for Pretreatment to the Development Document for the Steam Electric Power Generating Point Source Category. EPA-440/1-77/084, U.S. Environmental Protection Agency, Washington, D.C., April 1977. 224 pp.
22. Draft Development Document for Inorganic Chemicals Manufacturing Point Source Category - BATEA, NSPS, and Pretreatment Standards (draft contractor's report). Contract 68-01-4492, U.S. Environmental Protection Agency, Effluent Guidelines Division, Washington, D.C., April 1979.
23. Supplement for Pretreatment to the Development Document for the Inorganic Chemicals Manufacturing Point Source Category. EPA-440/1-77/087A, U.S. Environmental Protection Agency, Washington, D.C., July 1977.
24. Development Document for Effluent Limitations Guidelines and Standards for the Coil Coating Point Source Category. EPA 440/1-79/071a, U.S. Environmental Protection Agency, Effluent Guidelines Division, Washington, D.C., August 1979.
25. Foundry Industry (draft contractor's report). Contract 68-01-4379, U.S. Environmental Protection Agency, Washington, D.C., May 1979.
26. Development Document for Proposed Effluent Limitations Guidelines, New Source Performance Standards, and Pretreatment Standards for the Leather Tanning and Finishing Point Source Category. U.S. Environmental Protection Agency, Effluent Guidelines Division, Washington, D.C., July 1979.
27. Effluent Guidelines and Standards for Leather Tanning and Finishing. U.S. Environmental Protection Agency, 40 CFR 425; 39FR 12958, April 9, 1974.

28. Development Document for Effluent Limitations Guidelines and Standards for the Nonferrous Metals Manufacturing Point Source Category. Effluent Guidelines Division, Office of Water and Waste Management, U.S. Environmental Protection Agency, September 1979.

Compound: Antimony

Formula: Sb

Alternate Names [1] Antimony black, Antimony regulas

CAS #: 7440-36-0

Physical, Chemical, and Biological Properties [2-4]

at. wt.: 121.8 m.p., °C: 630 b.p. (760 torr), °C: 1,380

vapor pressure (25°C), torr: Negligible

solubility in water, mg/L: Antimonic acid and antimony oxides are very slightly soluble

common oxidation states: +5, +3, -3

Probable Fate [2]

photolysis: Not important under natural conditions (<100°C)

oxidation: Present as soluble oxide or antimonite salts under natural redox conditions

hydrolysis: Oxide or antimonic acid formed by hydrolysis

volatilization: Not important under natural redox conditions

sorption: Adsorbed to clays; coprecipitates with iron and aluminum compounds

biological processes: Slight bioaccumulation and probable biomethylation

other reactions/interactions: Not important

Precipitation/Coagulation Properties: Not available

Date: 12/5/79

I.4.1-2

INDUSTRIAL OCCURRENCE OF ANTIMONY^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<2	34	<10 ^d	0	0.26	0.038
Textile mills	NA	170	7 ^d	2.9 x 10 ⁻⁵	0.20	0.013
Explosives manufacture	ND	350	70	0	0.024	0.00030
Timber products processing	BDL	47	2 ^e	0	0.092	0.00017
Petroleum refining	<1	360	<9 ^d	0	0.84	0.052
Paint and ink formulation	BDL	2,200	190	0	0.0087	0.00030
Auto and other laundries	ND	1,800	86	7.7 x 10 ⁻⁵	0.12	0.018
Porcelain enameling	98	22,000	1,100	0.00070	0.088	0.45
Pharmaceutical manufacturing	ND	28	6.43	0	0.19	0.0059
Ore mining and dressing	<50	200	88	0	NA	<3.3
Steam electric power generating (condenser cooling system)	BDL	10	5	0.00026	0.0055	0.0012
Steam electric power generating (water treatment)	NA	NA	5,000 ^e	3.1 x 10 ⁻⁵	300	0.75
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	NA	NA	NA	NA	NA	NA
Steam electric power generating (ash handling)	5	7	6	0.00011	0.13	0.59
Steam electric power generating (air pollution control devices)	90	2,300	1,200	0.0011	68	4.3
Steam electric power generating (drainage)	NA	NA	NA	NA	NA	NA
Inorganic chemical manufacturing	NA	1,115 ^f	NA	0	70	14
Coil coating	3,000 ^g	3,000 ^g	3,000 ^g	0.15	5.4	1.4
Foundries	ND	900	270	0	1.8	0.73
Nonferrous metals manufacturing	ND	80,000	5,600	0	NA	297
Iron and steel manufacturing	NA	300	140	0	NA	25

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dMedian, not average.

^eAverage of medians reported for various industry segments or subcategories.

^fAverage of maximums reported for various industry segments or subcategories.

^gOne sample.

Date: 12/5/79

I.4.1-3

INDUSTRIAL OCCURRENCE OF ANTIMONY^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<2	16	<7	0	0.18	0.26
Textile mills	NA	680	4.5 ^d	1.9×10^{-5}	0.13	0.0081
Explosives manufacture	NA	NA	NA	NA	NA	NA
Timber products processing	BDL	14	1 ^d	0	0.046	8.6×10^{-5}
Petroleum refining	<1	370	<25 ^d	0	2.3	0.14
Paint and ink formulation	BDL	180	26	0	0.0012	4.2×10^{-5}
Auto and other laundries	1.0	20	6.9	6.2×10^{-7}	0.001	0.00014
Porcelain enameling	ND	3,300	660	4.2×10^{-5}	0.027	0.00528
Pharmaceutical manufacturing	ND	90	11	0	0.075	0.010
Ore mining and dressing	<0.2	3.8	<0.6	0	NA	0.022
Iron and steel manufactuing	NA	400	120	0	NA	22
Foundries	<20	400	120	0	0.80	0.32
Nonferrous metals manufacturing	ND	4,000	520	0	NA	28

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.4.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ANTIMONY^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	290	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			47-89	<78	III.4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Gas flotation with chemical addition (alum, polymer)			6 ^d	2,200 ^d	III.4.5
Filtration			26-89	320	III.4.6
Sedimentation			44-98	310	III.4.2
Sedimentation with chemical addition (Fe ²⁺ , lime)			8-30	13	III.4.3
Sedimentation with chemical addition (polymer)			44 ^d	43 ^d	III.4.3
Sedimentation with chemical addition (BaCl ₂)			70 ^d	<50 ^d	III.4.3
Sedimentation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum)			0 ^e	- ^e	III.4.3
Sedimentation with chemical addition (lime)			38-83	30	III.4.3
Aerated lagoons			82 ^d	30 ^d	III.5.3
Ozonation			0 ^e	- ^e	III.6.14
Activated sludge			30-90	46	III.5.1
Powdered activated carbon adsorption			0 ^{d,e}	- ^e	III.6.2
Powdered activated carbon adsorption (with activated sludge)			5 ^d	41 ^d	III.6.2
Granular activated carbon adsorption			12-33	160	III.6.1
Reverse osmosis			26-60	77	III.6.9

^aSee Volume III for detailed information.^bNA - Not available, ND - not detected, BDL - below detection limit.^cAverage and maximum removals reported.^dOnly one data point.^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 105.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 5-1 - 5-7.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-100.
4. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. B-91.

Compound: Arsenic

Formula: As

Alternate Names [1]: Arsen (German, Polish)

CAS #: 7440-38-2

Physical, Chemical, and Biological Properties [2, 3]

at. wt.: 74.9

m.p., °C: 817

b.p. (760 torr), °C: Sublimes
at 613

vapor pressure (25°C), torr: Negligible

solubility in water, mg/L: As_2O_5 , 1.05×10^6 at 16°C; As_2O_3 , 3.7×10^4 at 20°C

common oxidation states: +5, +3, 0, -3

Probable Fate [2]

photolysis: Not important

oxidation: Under reducing condition, As is a stable solid; dissolved arsenic acid is present in oxygenated water

hydrolysis: Hydrolyzed to arsenious and arsenic acid forms (soluble)


volatilization: Not important under natural redox conditions

sorption: As is removed by clays, iron and manganese oxides, and aluminum

biological processes: Bioaccumulated, but not biomagnified; biotransformed
to organic arsenicals

other reactions/interactions: Not important

Precipitation/Coagulation Properties [4]

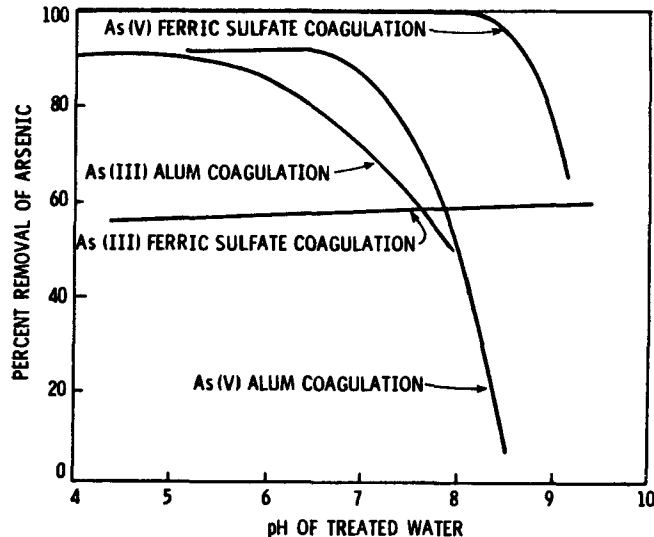

Date: 8/13/79

I.4.2-1

Date: 12/5/79

I.4.2-2

INDUSTRIAL OCCURRENCE OF ARSENIC^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<2	250	<86 ^d	0	2.3	0.32
Textile mills	NA	200	10 ^e	4.2×10^{-5}	0.29	0.018
Timber products processing	BDL	14,000	10 ^d	0	0.46	0.00086
Petroleum refining	3	480	<20 ^d	0	1.9	0.12
Paint and ink formulation	BDL	800	73	0	0.0033	0.00012
Gum and wood chemicals	<10	110	<50	0.00045	0.38	0.82
Auto and other laundries	ND	1,600	68	6.1×10^{-5}	0.095	0.014
Porcelain enameling	5	2,800	960	0.00061	0.39	0.077
Pharmaceutical manufacturing	ND	120	13	0	0.01	0.088
Ore mining and dressing	<1	110	<20	0	NA	<0.74
Steam electric power generating (condenser cooling system)	4	35	7	0.0004	0.008	0.0017
Steam electric power generating (water treatment)	NA	NA	9,500 ^e	6×10^{-5}	570	1.4
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	5	310,000	41	4.1×10^{-8}	0.78	0.012
Steam electric power generating (ash handling)	BDL	74	9	0.00017	0.88	0.20
Steam electric power generating (air pollution control devices)	<4	300	150	0.00014	8.6	0.54
Steam electric power generating (drainage)	NA	NA	NA	NA	NA	NA
Inorganic chemicals manufacturing	NA	956 ^f	NA	0	60	12
Coil Coating	75 ^g	75 ^g	75 ^g	0.004	0.135	0.036
Foundries	ND	160	29	0	0.19	0.08
Nonferrous metals manufacturing	ND	310,000	13,000	0	NA	689
Iron and steel manufacturing	NA	440	120	0	NA	22

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.^d Median, not average.^e Average of medians reported for various industry segments.^f Average of maximums reported for various industry segments.^g One sample.

Date: 12/5/79

I.4.2-3

INDUSTRIAL OCCURRENCE OF ARSENIC^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	2	35	7 ^d	0	0.18	0.026
Textile mills	NA	160	39 ^d	0.00016	1.1	0.070
Timber products processing	BDL	6,980	35 ^d	0	1.6	0.0030
Petroleum refining	2	900	<20 ^d	0	1.9	0.12
Paint and ink formulation	NA	NA	NA	NA	NA	NA
Gum and wood chemicals	NA	17 ^e	17 ^e	0.00015	0.13	0.028
Auto and other laundries	3.0	15	9.8	0	NA	0.36
Pharmaceutical manufacturing	ND	7,200	520	0	3.5	0.47
Ore mining and dressing	<0.01	3.7	<0.05	0 NA	0.0019	
Iron and steel manufacturing	NA	400	48	0	NA	8.6
Foundries	<20	30	23	0	0.15	0.062
Nonferrous metals manufacturing	ND	2,900	470	0	NA	25

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eOne sample.

Date: 12/5/79

I.4.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ARSENIC^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	46	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			>28-80	<8.5	III.4.5
Gas flotation with chemical addition (alum, polymer)			56 ^d	3.5 ^d	III.4.5
Filtration			31->99	28	III.4.6
Sedimentation			68->99	72	III.4.2
Sedimentation with chemical addition (alum, lime)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (lime, polymer)			37-75	10	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			>69->99	<2	III.4.3
Sedimentation with chemical addition (sulfide)			>99 ^d	5 ^d	III.4.3
Sedimentation with chemical addition (BaCl ₂)			17->33	<8.5	III.4.3
Sedimentation with chemical addition (alum, polymer)			29 ^d	12 ^d	III.4.3
Sedimentation with chemical addition (alum)			19->37	32	III.4.3
Sedimentation with chemical addition (lime)			60->99	<16	III.4.3
Ozonation			24-48	23	III.6.14
Activated sludge			>43->96	35	III.5.1
Granular activated carbon adsorption			21->99	11	III.6.1
Reverse osmosis			79->99	7.7	III.6.9

^a See Volume III for detailed information.^b NA - Not available, ND - not detected, BDL - below detection limit.^c Average and maximum removals reported.^d Only one data point.^e Actual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 108.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 6-1 - 6-12.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-101.
4. Manual of Treatment Techniques for Meeting the Interim Primary Drinking Water Regulations. EPA-600/8-77-005, U.S. Environmental Protection Agency, Cincinnati, Ohio, May 1977. 73 pp.

Compound: Asbestos

Formula:

Chrysotile - $3\text{MgO} \cdot 2\text{SiO}_2 \cdot 2\text{H}_2\text{O}$

Tremolite - $\text{CaMg}_3(\text{SiO}_3)_4$

Crocidolite - $\text{NO}_2\text{O} \cdot \text{Fe}_2\text{O}_3 \cdot 2\text{FeO} \cdot 6\text{SiO}$

Alternate Names [1]: Chrysotile, Amosite,
Amphibole, Crocidolite,
Tremolite,
Anthophyllite

CAS #: 1332-21-4

Physical, Chemical, and Biological Properties

mol. wt.: Varies m.p., °C: Varies b.p. (760 torr), °C: Unknown
vapor pressure (25°C), torr: Negligible
solubility in water (25°C), mg/L: Not applicable

Probable Fate [2]

photolysis: Asbestos is not photolyzed under environmental conditions

oxidation: Asbestos is resistant to oxidation

hydrolysis: Asbestos is not hydrolyzed under environmental conditions

volatilization: Negligible from aqueous solutions, may be aerosol under windy conditions

sorption: Does not have an adsorptive affinity for solids normally found in natural water systems

biological processes: No evidence was found regarding bioaccumulation

other reactions/interactions: Asbestos is refractory in the aquatic environment

Precipitation/Coagulation Properties: Not available

Date: 8/13/79

I.4.3-1

Date: 12/5/79

I.4.3-2

INDUSTRIAL OCCURRENCE OF ASBESTOS^{a,b}

Industry	Raw wastewater					
	Concentration, 10 ⁶ fibers/L			Loading, ^c 10 ⁶ fibers/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refinery	NA	34 ^d	34 ^d	0	3.2	0.20
Ore mining and dressing	4.2 x 10 ⁶	1.4 x 10 ⁷	3.8 x 10 ⁸	0	NA	1.4 x 10 ⁷
Steam electric power generating (condenser cooling system)	BDL	1.6 x 10 ⁸	BDL	- ^e	- ^e	- ^e
Steam electric power generating (water treatment)	NA	NA	NA	NA	NA	NA
Nonferrous metals manufacturing	2.2 x 10 ⁶	1.3 x 10 ¹¹	3.1 x 10 ¹⁰	0	NA	1.6 x 10 ⁹

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.4.3-3

INDUSTRIAL OCCURRENCE OF ASBESTOS^{a,b}

Industry	Treated wastewater					
	Concentration, 106 fibers/L			Loading, ^c 106 fibers/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining	NA	NA	NA	NA	NA	NA
Nonferrous metals manufacturing	NA	1.3 x 10 ¹¹ ^d	1.3 x 10 ¹¹ ^d	0	NA	6.9 x 10 ¹²

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.4.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ASBESTOS^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., 10 ⁶ fibers/L	Removal ^c range, %	Average achievable conc., 10 ⁶ fibers/L	
Filtration			90->99	470 ^f	III.4.6
Sedimentation			80->99	3,000 ^f	III.4.2
Sedimentation with chemical addition (lime, polymer)			>99 ^d	8.2 ^{d,f}	III.4.3
Sedimentation with chemical addition (BaCl ₂)			38-75	140 ^f	III.4.3
Sedimentation with chemical addition (lime)			95 ^d	6.1 ^{d,f}	III.4.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

^fMeasured in 10⁶ fibers/L.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 114.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 7-1 - 7-5.

Date: 8/13/79

I.4.3-5

Compound: Beryllium

Formula: Be

Alternate Names [1]: Glucinum

CAS #: 7440-41-7

Physical, Chemical, and Biological Properties [2, 3]

at. wt.: 9.012 m.p., °C: 1,280 b.p. (760 torr), °C: 2,970
vapor pressure (25°C), torr: Negligible
solubility in water (30°C), mg/L: BeO, 0.2
common oxidation states: +2

Probable Fate [2]

photolysis: No data found on photolysis of beryllium
oxidation: Not important
hydrolysis: Soluble beryllium salts are hydrolyzed for form insoluble
 beryllium hydroxides
volatilization: Airborne dusts are the most widely known hazard associated
 with beryllium
sorption: No data found of adsorption of beryllium
biological processes: Beryllium is only slightly bioaccumulated
other reactions/interactions: No data were found relative to aquatic fate on
 biotransformation of beryllium or its compounds

Precipitation/Coagulation Properties: Not available

Date: 8/13/79

I.4.4-1

Date: 12/5/79

I.4.4-2

INDUSTRIAL OCCURRENCE OF BERYLLIUM^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	1	57	17 ^d	0	0.45	0.064
Textile mills	NA	40	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.0090
Timber products processing	BDL	19	4 ^e	0	0.18	0.00034
Petroleum refining	<1	<20	<2 ^d	0	0.19	0.012
Paint and ink formulation	BDL	100	10	0	0.00046	1.6 x 10 ⁻⁵
Auto and other laundries	ND	15	3	2.7 x 10 ⁻⁶	0.0042	0.00063
Porcelain enameling	1.0	120	20	0.000013	0.0082	0.0016
Ore mining and dressing	<2	<20	<8	0	NA	<0.30
Steam electric power generating (condenser cooling system)	BDL	10	4.2	0.00022	0.0046	0.001
Steam electric power generating (water treatment)	NA	NA	5,000 ^e	3 x 10 ⁻⁵	300 ^e	0.75
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	NA	NA	<10	<1 x 10 ⁻⁸	<0.19	<0.003
Steam electric power generating (ash handling)	BDL	2.5	<1.0	<0.000019	<0.098	<0.022
Steam electric power generating (air pollution control devices)	<2.0	180	91	8.7 x 10 ⁻⁵	5.2	0.33
Steam electric power generating (drainage)	NA	NA	4.0 ^e	3.4 x 10 ⁻⁵	0.0015	8 x 10 ⁻⁵
Nonferrous metals manufacturing	ND	310	38	0	NA	2.0
Iron and steel manufacturing	NA	10	7.3	0	NA	1.3

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^d Median, not average.

^e Average of medians reported for various industry segments.

Date: 12/5/79

I.4.4-3

INDUSTRIAL OCCURRENCE OF BERYLLIUM^{a,b}

Industry	Treated wastewater					
	Concentration, mg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	0.001	<0.001	0	2.6 x 10 ⁻⁵	3.8 x 10 ⁻⁶
Textile mills	NA	5	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.009
Timber products processing	BDL	13	BDL	- ^e	- ^e	- ^e
Petroleum refining	<1	<3	<2 ^d	0	0.19	0.012
Paint and ink formulation	BDL	20	9	0	0.00041	1.4 x 10 ⁻⁵
Auto and other laundries	<0.1	<5.0	2.6	2.3 x 10 ⁻⁶	0.0036	0.00054
Ore mining and dressing	<0.002	<0.002	<0.002	0	NA	7.4 x 10 ⁻⁵
Foundries	<20	<20	<20	0	0.13	0.054
Iron and steel manufacturing	NA	10	76	0	NA	14
Non ferrous metals manufacturing	ND	170	19	0	NA	1.0

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.4.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BERYLLIUM^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	2 ^d	III.4.1
Filtration			29-71	1.6	III.4.6
Sedimentation			>87->98	<10	III.4.2
Sedimentation with chemical addition (Fe ²⁺ , lime)			>82->89	<0.5	III.4.3
Sedimentation with chemical addition (alum)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (lime)			38-76	0.85	III.4.3
Aerated lagoons			>50 ^d	<1 ^d	III.5.3
Granular activated carbon adsorption			0 ^e	- ^e	III.6.1
Reverse osmosis			>42->85	<2.8	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 225.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 8-1 - 8-7.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-102.

Compound: Cadmium

Formula: Cd

Alternate Names [1]: Kadmium (German)

CAS #: 7440-43-9


Physical, Chemical, and Biological Properties [2-4]

at. wt.: 112.4 m.p., °C: 321 b.p. (760 torr), °C: 765
vapor pressure (25°C), torr: Negligible
solubility in water, mg/L: CdCl_2 , 1.40×10^6 at 20°C; CdS , 1.3 at 18°C;
 Cd(OH)_2 , 26 at 25°C
common oxidation states: +2 (always +2 in water)

Probable Fate [2]

photolysis: It is not an important mechanism in determining fate of cadmium compounds
oxidation: In reducing condition, Cd may precipitate with reduced sulfur to form CdS
hydrolysis: Aqueous solutions of cadmium salts are hydrolyzed to form hydroxide compounds
volatilization: It is not known to form volatile compounds
sorption: Sorption processes are important in determining cadmium transport, partitioning, and potential for remobilization
biological processes: Accumulates in the tissues of aquatic and marine organisms at higher concentration
other reactions/interactions: Organic ligands of biological origin may affect solubility and adsorption

Precipitation/Coagulation Properties [5]

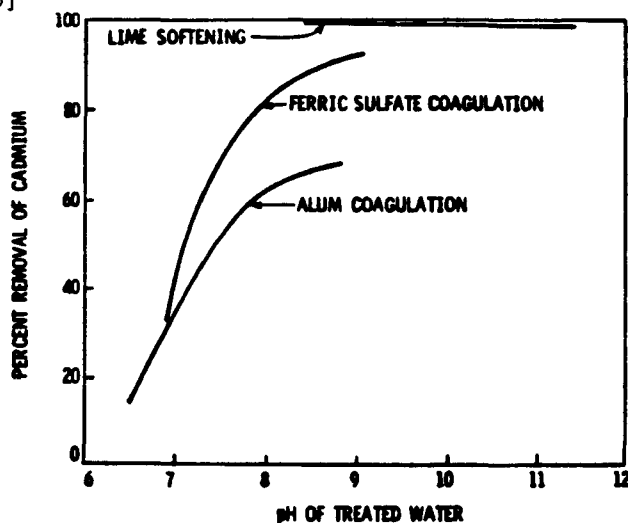

Date: 8/13/79

I.4.5-1

Date: 12/5/79

I.4.5-2

INDUSTRIAL OCCURRENCE OF CADMIUM^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	2	20	14 ^d	0	0.37	0.053
Textile mills	NA	46	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.0090
Timber products processing	BDL	10	1 ^e	0	0.046	8.6 x 10 ⁻⁵
Petroleum refining	<1	<220	<20 ^d	0	1.9	0.12
Paint and ink formulation	BDL	810	57	0	0.0026	9.1 x 10 ⁻⁵
Gum and wood chemicals	95	120	110	0.00099	0.83	0.18
Rubber processing	NA	720	190	3.8 x 10 ⁻⁵	0.16	0.0063
Auto and other laundries	ND	520	24	2 x 10 ⁻⁵	0.034	0.0050
Porcelain enameling	ND	9,600	740	0.0005	0.303	0.059
Pharmaceutical manufacturing	ND	32	2.7	0	0.018	0.0025
Ore mining and dressing	<5	25	<5.7	0	NA	<0.21
Steam electric power generating (condenser cooling systems)	BDL	200	4.0	0.0002	0.004	0.0010
Steam electric power generating (water treatment)	NA	NA	5,000 ^e	3 x 10 ⁻⁵	300	0.75
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	<1.0	51	6.5	6.5 x 10 ⁻⁹	0.12	0.002
Steam electric power generating (ash handling)	BDL	10	2	4 x 10 ⁻⁵	0.20	0.044
Steam electric power generating (air pollution control devices)	4.0	110	57	5 x 10 ⁻⁵	3.2	0.20
Steam electric power generating (drainage)	NA	NA	10 ^e	9 x 10 ⁻⁵	0.0037	0.0002
Inorganic chemicals manufacturing	NA	300 ^f	NA	0	19	3.8
Coil coating	ND	200	22	0.001	0.040	0.011
Foundries	ND	740	140	0	0.94	0.378
Nonferrous metals manufacturing	2.3	80,000	5,400	0	NA	286
Iron and steel manufacturing	NA	1,800	213	0	NA	38

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dMedian, not average.

^eAverage of medians reported for various industry segments.

^fAverage of maximums reported for various industry segments.

Date: 12/5/79

I.4.5-3

INDUSTRIAL OCCURRENCE OF CADMIUM^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	2	4	2 ^d	0	0.053	0.0076
Textile mills	NA	13	6 ^d	2.5 x 10 ⁻⁵	0.17	0.011
Timber products processing	BDL	7	1 ^d	0	0.046	8.6 x 10 ⁻⁵
Petroleum refining	<1	20	<2 ^d	0	0.19	0.012
Paint and ink formulation	BDL	200	24	0	0.0011	3.8 x 10 ⁻⁵
Gum and wood chemicals	NA	NA	NA	NA	NA	NA
Rubber processing	NA	1,500	760	0.00015	0.65	0.025
Auto and other laundries	<1.0	31	11	1.0 x 10 ⁻⁵	0.015	0.002
Porcelain enameling	ND	2,000	650	0.0004	0.27	0.052
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Ore mining and dressing	<0.002	16	<0.03	0	NA	0.001
Foundries	10	840	120	0	0.80	0.32
Iron and steel manufacturing	NA	770	270	0	NA	49
Nonferrous metals manufacturing	ND	3,000	780	0	NA	41

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.4.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CADMIUM^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	69	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			79->98	17	III.4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			39->99	20	III.4.6
Sedimentation			72->99	210	III.4.2
Sedimentation with chemical addition (lime, polymer)			27-93	<16	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			25->50	6	III.4.3
Sedimentation with chemical addition (sulfide)			>50->99	<9	III.4.3
Sedimentation with chemical addition (polymer)			25-50	80	III.4.3
Sedimentation with chemical addition (alum, polymer)			42-61	33	III.4.3
Sedimentation with chemical addition (alum)			44-88	>9	III.4.3
Sedimentation with chemical addition (lime)			60-99	>9	III.4.3
Aerated lagoons			>97	<2	III.5.3
Ultrafiltration			>83->93	<8.3	III.4.7
Ozonation			0 ^{d,e}	- ^e	III.6.14
Ion exchange			>99 ^d	<10 ^d	III.6.7
Activated sludge			31->99	4	III.5.1
Powdered activated carbon adsorption (with activated sludge)			0 ^{d,e}	- ^e	III.6.2
Granular activated carbon adsorption			34-95	12	III.6.1
Reverse osmosis			13-50	13	III.6.9

^aSee Volume III for detailed information.^bNA - Not available, ND - not detected, BDL - below detection limit.^cAverage and maximum removals reported.^dOnly one data point.^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 255.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 9-1 - 9-13.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-104.
4. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. pp. B-97, B-98.
5. Manual of Treatment Techniques for Meeting the Interim Primary Drinking Water Regulations. EPA-600/8-77-005, U.S. Environmental Protection Agency, Cincinnati, Ohio, May 1977. 73 pp.

Compound: Chromium

Formula: Cr

Alternate Names [1]: Chrome (French)

CAS #: 7440-47-3

Physical, Chemical, and Biological Properties [2]

at. wt.: 52.00 m.p., °C: 1,860 b.p. (760 torr), °C: 2,670
vapor pressure (25°C), torr: Negligible
solubility in water (0°C), mg/L: CrO_3 , 6.17×10^5
common oxidation states: +3, +6

Probable Fate [2]

photolysis: Not important

oxidation: Cr(VI) slowly transformed to more stable Cr(III)

hydrolysis: Cr(III) transformed to Cr(OH)_3 or Cr_2O_3 (both insoluble at neutral or alkaline pH)


volatilization: Not important

sorption: Cr(VI) adsorbed by organic materials; sorption of Cr(III) ancillary to precipitation of Cr(OH)_3

biological processes: Bioaccumulated by many aquatic organisms and passed on through the food chain; biotransformation is not important

other reactions/interactions: Not important

Precipitation/Coagulation Properties [3]

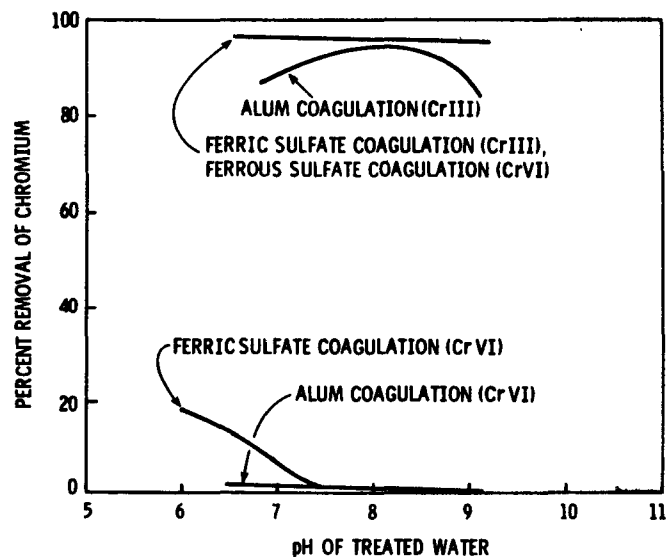

Date: 8/13/79

I.4.6-1

Date: 12/5/79

I.4.6-2

INDUSTRIAL OCCURRENCE OF CHROMIUM^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	8	530	260 ^d	0	6.9	0.98
Textile mills	NA	880	14 ^d	5.9 x 10 ⁻⁵	0.40	0.025
Timber products processing	BDL	14,000	20 ^e	0	0.92	0.0017
Petroleum refining	1	2,000	26 ^d	0	25	1.5
Paint and ink formulation	BDL	200,000	3,400	0	0.16	0.0054
Gum and wood chemicals	34	1,500	600	0.0054	4.5	0.99
Rubber processing	NA	140	250	5 x 10 ⁻⁵	0.12	0.0046
Pulp, paper and paperboard mills	<1	24	<4	0	NA	0.12
Auto and other laundries	ND	8,800	180	0.00016	0.25	0.038
Porcelain enameling	ND	840	80	5 x 10 ⁻⁵	0.033	0.006
Pharmaceutical manufacturing	ND	140	24	0	0.16	0.022
Ore mining and dressing	<10	25	<17	0	NA	<0.63
Steam electric power generating (condenser cooling system)	2	560	30	0.016	0.033	0.007
Steam electric power generating (water treatment)	20	NA	5,200 ^e	3.2 x 10 ⁻⁵	310	0.78
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	20 ^e	8.4 x 10 ⁻⁶ ^e	0.28	0.003
Steam electric power generating (maintenance cleaning)	ND	27,000	6,800	7 x 10 ⁻⁵	129	2
Steam electric power generating (ash hauling)	BDL	1,000	19	0.0004	2	0.42
Steam electric power generating (air pollution control devices)	10	500	260	0.00024	15	0.94
Steam electric power generating (drainage)	ND	17,000	610	0.005	0.22	0.01
Inorganic chemicals manufacturing	NA	67,000	NA	0	4,200	840
Coal coating	40	330,000	36,000	2	65	17
Foundries	NA	430	93	0	0.62	0.25
Leather tanning and finishing	430	180,000	130,000	0	NA	195

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.^d Median, not average.^e Average of medians reported for various industry segments.^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.4.6-3

INDUSTRIAL OCCURRENCE OF CHROMIUM^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	13	70	38 ^d	0	1.0	0.14
Textile mills	NA	1,800	20 ^d	8.4×10^{-5}	0.58	0.036
Timber products processing	1	6,600	30 ^d	0	1.4	0.0026
Petroleum refining	1	1,230	50 ^d	0	4.6	0.29
Paint and ink formulation	BDL	30,000	680	0	0.031	0.0011
Gum and wood chemicals	88	900	280	0.0025	2.1	0.46
Rubber processing	NA	220	110	2.2×10^{-5}	NA	0.36
Auto and other laundries	<5.0	170	61	5.5×10^{-5}	0.085	0.013
Porcelain enameling	ND	19	5	3.2×10^{-6}	0.0021	0.0004
Pharmaceutical manufacturing	ND	23	7.6	0	0.052	0.0070
Ore mining and dressing	<0.02	40	<0.02	0	NA	0.00074
Foundries	<20	150	33	0	0.22	0.089
Iron and steel manufacturing	NA	95,000	3,000	0	NA	540
Nonferrous metals manufacturing	ND	8,000	750	0	NA	40
Coil coating	3	2,800	780	0.039	1.4	0.37
Leather tanning and finishing	<20	20,000	4,200	0	NA	6.3

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^dMedian, not average.

Date: 12/5/79

I.4.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHROMIUM^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	1,700	III 4.1
Gas flotation			40-58	300	III 4.4
Gas flotation with chemical addition (calcium chloride, polymer)			51-67	330	III 4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III 4.5
Gas flotation with chemical addition (alum, polymer)			19 ^d	360 ^d	III 4.5
Filtration			36->99	67	III 4.6
Sedimentation			79->99	1,200	III 4.2
Filtration, Cr ⁺⁶			0 ^e	- ^e	III 4.6
Filtration, Cr ⁺³			95	610	III 4.6
Sedimentation with chemical addition (alum, lime)			72 ^d	31 ^d	III 4.3
Sedimentation with chemical addition (lime, polymer)			86-98	120	III 4.3
Sedimentation with chemical addition (lime, polymer), Cr ⁺⁶			41-82	8.5	III 4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			>55->95	<3.3	III 4.3
Sedimentation with chemical addition (sulfide)			>97->99	40	III 4.3
Sedimentation with chemical addition (polymer)			>96-97	<14	III 4.3
Sedimentation with chemical addition (BaCl ₂)			72-93	28	III 4.3
Sedimentation with chemical addition (alum, polymer)			69-95	70	III 4.3
Sedimentation with chemical addition (alum)			69-95	95	III 4.3
Sedimentation with chemical addition (lime)			49-97	340	III 4.3
Sedimentation with chemical addition (lime) chromium dissolved			>99 ^d	40 ^d	III 4.3
Tertiary polishing lagoons			>71 ^d	<10 ^d	III 5.3
Aerated lagoons			63-99	380	III 5.3
Trickling filters			0 ^{d,e}	- ^e	III 5.2
Ultrafiltration			67 ^d	2,900 ^d	III 4.7
Ozonation			0 ^{d,e}	- ^e	III 6.14
Ion exchange			>99 ^d	10 ^d	III 6.7
Activated sludge			45-99	910	III 5.1
Powdered activated carbon adsorption (with activated sludge)			87-97	55	III 6.2
Powdered activated carbon adsorption (with activated sludge), Cr ⁺⁶			41->64	<20	III 6.2
Granular activated carbon adsorption			34-95	60	III 6.1
Granular activated carbon adsorption Cr ⁺⁶			>33 ^d	<20 ^d	III 6.1
Reverse osmosis			44->99	460	III 6.9
Reverse osmosis Cr ⁺⁶			0 ^{d,e}	- ^e	III 6.9
Reverse osmosis Cr ⁺³			>99 ^d	15 ^d	III 6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 296.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 10-1 - 10-12.
3. Manual of Treatment Techniques for Meeting the Interim Primary Drinking Water Regulations. EPA-600/8-77-005, U.S. Environmental Protection Agency, Cincinnati, Ohio, May 1977. 73 pp.

Compound: Copper

Formula: Cu

Alternate Names [1]: Allbri natural copper, Bronze powder, Copper bronze,
C.I. pigment metal 2

CAS #: 7440-50-8

Physical, Chemical, and Biological Properties [2-4]

at. wt.: 63.55 m.p., °C: 1,080 b.p. (760 torr), °C: 2,600
vapor pressure (25°C), torr: Negligible
solubility in water (0°C), mg/L: CuCl_2 , 7.06×10^5
common oxidation states: +1, +2

Probable Fate [2]

photolysis: Not important

oxidation: Cu(I) quickly oxidized in water; transformation Cu(II) to CuO and
 $\text{Cu}_2(\text{OH})_2\text{CO}_3$ very pH-dependent

hydrolysis: CuO and $\text{Cu}_2(\text{OH})_2\text{CO}_3$ formed, but less effective than sorption

volatilization: Not important

sorption: Sorbed by hydrous iron and manganese oxides, enhanced by complexing
with ligands

biological processes: Bioaccumulated by all organisms, but not biomagnified;
biotransformation not important

other reactions/interactions: Not important

Precipitation/Coagulation Properties: Not available

Date: 8/13/79

I.4.7-1

Date: 12/5/79

I.4.7-2

INDUSTRIAL OCCURRENCE OF COPPER^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	6	1,300	460 ^d	0	12	1.7
Textile mills	NA	2,400	40 ^d	0.00017	1.1	0.072
Explosives manufacture	10	940	300	0	0.10	0.00013
Timber products processing	31	1,600	230 ^e	0	10	0.020
Petroleum refining	2	1,400	26 ^d	0	2.4	0.15
Paint and ink formulation	BDL	100,000	8,000	0	0.37	0.013
Gum and wood chemicals	33	6,000	1,800	0.016	14	3.0
Rubber processing	NA	120	200	4 x 10 ⁻⁵	0.17	0.0066
Pulp, paper and paperboard mills	<1	40	<13	0	NA	0.39
Auto and other laundries	ND	11,000	413	0.00037	0.58	0.09
Porcelain enameling	1.0	12,000	2,500	0.0016	1.0	0.20
Pharmaceutical manufacturing	ND	180	43	0	0.29	0.040
Ore mining and dressing	<20	100	<61	0	NA	<2.2
Steam electric power generating (condenser cooling systems)	5	3,800	38	0.002	0.042	0.009
Steam electric power generating (water treatment)	20	NA	14,000 ^e	8 x 10 ⁻⁵	840	2.1
Steam electric power generating (boiler or steam generator blowdown)	20	190	40	1.7 x 10 ⁻⁸	0.56	0.006
Steam electric power generating (maintenance cleaning)	170	12,000,000	160,000	0.0002	3,040	48
Steam electric power generating (ash handling)	12	80	21	0.00040	2.1	0.46
Steam electric power generating (air pollution control devices)	<2	560	281	0.00027	16	1.0
Steam electric power generating (drainage)	ND	3,400	880	0.0076	0.326	0.018
Inorganic chemicals manufacturing	NA	157,000 ^f	NA	0	9,800	2,000
Coil coating	ND	480	35	0.0018	0.063	0.017
Foundries	ND	110,000	11,000	0	74	30
Leather tanning and finishing	35	740	200	0	NA	0.15
Nonferrous metals manufacturing	13	2.1 x 10 ⁶	75,000	0	NA	4,000
Iron and steel manufacturing	NA	NA	915	0	NA	165

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^d Median, not average.

^e Average of medians reported for various industry segments.

^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.4.7-3

INDUSTRIAL OCCURRENCE OF COPPER^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	6	9	7 ^d	0	0.18	0.026
Textile mills	NA	290	32 ^d	0.00013	0.92	0.058
Timber products processing	18	4,000	92 ^d	0	4.2	0.0079
Petroleum refining	3	300	10 ^d	0	0.93	0
Paint and ink formulation	BDL	60,000	1,000	0	0.046	0.0016
Gum and wood chemicals	16	4,700	1,800	0.016	14	3.0
Explosives manufacture	NA	NA	NA	NA	NA	NA
Rubber processing	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	4	79	17	0	NA	0.51
Auto and other industries	21	330	129	0.0012	0.18	0.027
Porcelain enameling	ND	200	49	3.1 x 10 ⁻⁵	0.020	0.0040
Pharmaceutical manufacturing	ND	65	21	0	0.14	0.019
Ore mining and dressing	<0.02	910	22	0	NA	0.81
Foundries	5.7	2,400	270	0	1.8	0.73
Iron and steel manufacturing	NA	76,000	780	0	NA	140
Nonferrous metals manufacturing	ND	300,000	21,000	0	NA	1,100
Coil coating	ND	17	12	0.006	0.022	0.0058
Leather tanning and finishing	5	37	15	0	NA	0.023

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.4.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR COPPER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	100	III.4.1
Gas flotation			69 ^d	5	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			78-91	300	III.4.5
Gas flotation with chemical addition (polymer)			42-75	66	III.4.5
Gas flotation with chemical addition (alum, polymer)			19 ^d	660 ^d	III.4.5
Filtration			40->99	200	III.4.6
Sedimentation			66->99	73	III.4.2
Sedimentation with chemical addition (alum, lime)			62-88	36	III.4.3
Sedimentation with chemical addition (lime, polymer)			87->99	56	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			72-92	21	III.4.3
Sedimentation with chemical addition (sulfide)			>98->99	260	III.4.3
Sedimentation with chemical addition (polymer)			56->89	140	III.4.3
Sedimentation with chemical addition (BaCl ₂)			>62-73	<25	III.4.3
Sedimentation with chemical addition (alum, polymer)			49-80	6,900	III.4.3
Sedimentation with chemical addition (alum)			>64-81	<37	III.4.3
Sedimentation with chemical addition (lime)			75->99	52	III.4.3
Tertiary polishing lagoons			0 ^{d,e}	- ^e	III.5.3
Aerated lagoons			49-94	40	III.5.3
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Ultrafiltration			>73-90	<700	III.4.7
Ozonation			0 ^e	- ^e	III.6.14
Chemical oxidation (chlorination)			14 ^d	320 ^d	III.6.3
Ion exchange			98->99	95	III.6.7
Activated sludge			52->99	43	III.5.1
Powdered activated carbon adsorption (with activated sludge)			52-96	17	III.6.2
Granular activated carbon adsorption			47->85	<66	III.6.1
Reverse osmosis			73->99	1,600	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 306.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 11-1 - 11-19.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-108.
4. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. B-111.

Compound: Cyanides (Total)

Formula:

- Cyanide ion; CN^-
- Hydrogen cyanide; HCN
- Nitriles; RCN (R = organic group)

Alternate Names: None

CAS #: 57-12-5 for cyanide ion/74-90-8 for HCN

Physical, Chemical, and Biological Properties for HCN [1]

mol. wt.: 27.03 m.p., °C: -13.3 b.p. (760 torr), °C: 25.6
vapor pressure (20°C), torr: 620
solubility in water (25°C), mg/L: soluble in all proportions

Probable Fate [2]

photolysis: Presence of titanium dioxide causes rapid photooxidation of cyanide ion; otherwise, only some metallocyanides are photodecomposed

oxidation: Strong oxidizing agents are required to oxidize cyanides

hydrolysis: Too slow to compete with other fate mechanisms

volatilization: HCN, which composes almost all the total cyanides under natural conditions, is very rapidly volatilized

sorption: Cyanides are sorbed by most materials, but highly solubility precludes strong adsorption

biological processes: Toxicity precludes bioaccumulation; almost all organisms biodegrade cyanides, but not as rapidly as volatilization

other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.4.8-2

INDUSTRIAL OCCURRENCE OF CYANIDES (Total)^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	5	5 ^d	0	0.13	0.019
Textile mills	NA	39	8 ^d	3.4 x 10 ⁻⁵	0.23	0.014
Explosives manufacture	10	2,600	810	0	0.28	0.0035
Petroleum refining	<5	1,500	<50 ^d	0	46	0.29
Paint and ink formulation	BDL	2,000	200	0	0.0092	0.00032
Pulp, paper and paperboard mills	9	21	10	0	NA	0.30
Auto and other laundries	ND	1,000	63	6 x 10 ⁻⁵	0.088	0.013
Porcelain enameling	4	140	30	2 x 10 ⁻⁵	0.012	0.006
Pharmaceutical manufacturing	ND	1,000	181	0	1.2	0.17
Ore mining and dressing	<0.02	<0.02	<0.02	0	NA	0.00074
Steam electric power generating (condenser cooling system)	BDL	20	<20	<0.0011	<0.022	0.005
Steam electric power generating (water treatment)	5	NA	12,000 ^e	7 x 10 ⁻⁵	720	1.8
Steam electric power generating (boiler or steam generator blowdown)	5	14	10	4.2 x 10 ⁻⁹	0.14	0.001
Steam electric power generating (maintenance cleaning)	NA	NA	NA	NA	NA	NA
Steam electric power generating (ash handling)	BDL	22	<20	0.0004	<2.0	0.44
Steam electric power generating (air pollution control devices)	NA	NA	NA	NA	NA	NA
Steam electric power generating (drainage)	NA	NA	NA	NA	NA	NA
Inorganic chemicals manufacturing	NA	2,800 ^f	NA	0	175	35
Coil coating	ND	18,000	220	0.011	0.40	0.11
Foundries	ND	69	17	0	0.11	0.05
Leather tanning and finishing	ND	100	33	0	NA	0.05
Nonferrous metals manufacturing	<0.001	29	1.1	0	NA	0.058
Iron and steel manufacturing	NA	190,000	5,500	0	NA	9.90

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^d Median, not average.

^e Average of medians reported for various industry segments.

^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.4.8-3

INDUSTRIAL OCCURRENCE OF CYANIDES (TOTAL)^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L		Mean	Loading, ^c kg/d		
	Minimum	Maximum		Minimum	Maximum	Mean
Coal mining	5	50	10 ^d	0	0.26	0.038
Textile mills	NA	980	12 ^d	5.0 x 10 ⁻⁵	0.35	0.022
Petroleum refining	5	800	30 ^d	0	2.8	0.17
Paint and ink formulation	BDL	530	40	0	0.0018	6.4 x 10 ⁻⁵
Explosives manufacture	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	9	89	17	0	NA	0.51
Auto and other laundries	<0.002	88	13	1.2 x 10 ⁻⁵	0.018	0.0027
Pharmaceutical manufacturing	ND	400	44	0	0.30	0.040
Ore mining and dressing	<0.01	81	<0.01	0	NA	0.00037
Foundries	1.0	180	31	0	0.21	0.084
Iron and steel manufacturing	NA	16,000	580	0	NA	100
Nonferrous metals manufacturing	<0.001	1.5	0.10	0	NA	0.005
Leather tanning and finishing	10	400	110	0	NA	0.17

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^dMedian, not average.

Date: 12/5/79

I.4.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CYANIDES (TOTAL)^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	170	III.4.1
Gas flotation			0 ^{d,e}	- ^e	III.4.3
Gas flotation with chemical addition (calcium chloride, polymer)			2-5	290	III.4.5
Gas flotation with chemical addition (polymer)			14 ^d	25 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)			≥61 ^d	≤10 ^d	III.4.5
Filtration			10->99	50	III.4.6
Sedimentation			31->90	330	III.4.2
Sedimentation with chemical addition (alum, lime)			>70-80	<17	III.4.3
Sedimentation with chemical addition (lime, polymer)			69-89	21	III.4.3
Sedimentation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (lime)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			45-91	100	III.5.3
Trickling filters			79 ^d	16 ^d	III.5.2
Ultrafiltration			0 ^{d,e}	- ^e	III.4.7
Ozonation			81-99	2,100	III.6.14
Chemical oxidation			84->99	38	III.6.3
Ion exchange			>98->99	65	III.6.7
Activated sludge			18->90	520	III.5.1
Powdered activated carbon adsorption			>62-69	<28	III.6.2
Granular activated carbon adsorption			57->90	<20	III.6.1
Reverse osmosis			43-97	2,200	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 379.
2. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. pp. 12-1 - 12-15.

Date: 8/13/79

I.4.8-5

Compound: Lead

Formula: Pb

Alternate Names [1]: Pigment metal 4, Lead flake, Olow (Polish)

CAS #: 7439-92-1

Physical, Chemical, and Biological Properties [2, 3]

at. wt.: 207.2 m.p., °C: 328 b.p. (760 torr), °C: 1,740
vapor pressure (25°C), torr: Negligible
solubility in water (20°C), mg/L: PbO, 17; PbCl₂, 9.9×10^3
common oxidation states: 0, +2, +4

Probable Fate [2]

photolysis: Not important

oxidation/reduction: Pb(IV) readily reduces to Pb(II); solubility control
by PbSO₄ at low pH and by PbCO₃ at high pH

hydrolysis: Not important at pH <11.5


volatilization: Importance of volatilization of (CH₃)₄Pb unknown in natural
condition

sorption: Pb removed to sediments effectively by inorganic solids, hydrous
iron oxides and crystalline structures

biological processes: Bioaccumulation by aquatic organisms and biomethylation
by microbes

other reactions/interactions: Not important

Precipitation/Coagulation Properties [4]

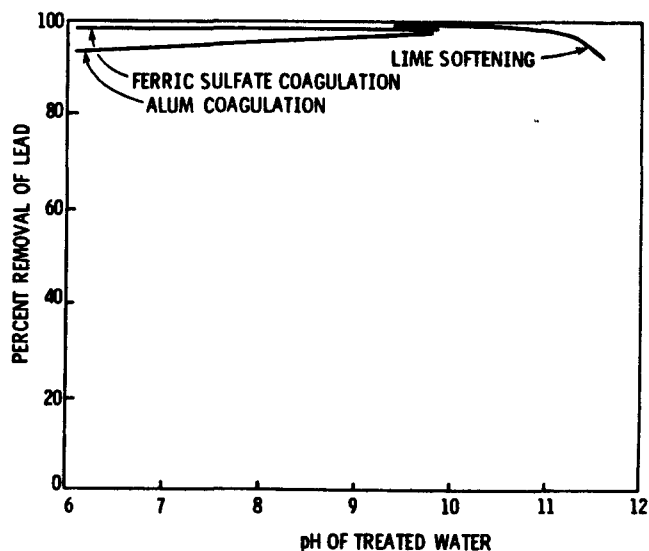

Date: 8/13/79

I.4.9-1

Date: 12/5/79

I.4.9-2

INDUSTRIAL OCCURRENCE OF LEAD^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	20	70	370 ^d	0	9.8	1.4
Textile mills	NA	750	35	0.00015	1.0	0.063
Explosives manufacture	ND	110	25	0	0.0087	0.00011
Timber products processing	1	91	16 ^d	0	0.74	0.0014
Petroleum refining	2	960	<60 ^d	0	5.6	0.35
Paint and ink formulation	BDL	900,000	86,000	0	3.9	0.14
Gum and wood chemicals	11	72	20	0.00018	0.15	0.033
Rubber processing	NA	390	120	2.4 x 10 ⁻⁵	0.10	0.0040
Pulp, paper and paperboard mills	<1	38	<6	0	NA	0.18
Auto and other laundries	ND	22,000	860	0.0007	1.2	0.18
Porcelain enameling	150	880,000	2,900	0.0019	1.2	0.23
Pharmaceutical manufacturing	ND	46	7.9	0	0.054	0.0073
Ore mining and dressing	<20	60	<45	0	NA	<1.7
Steam electric power generating (condenser cooling system)	BDL	800	13	0.00069	0.014	0.003
Steam electric power generating (water treatment)	NA	12,000 ^e	NA	4 x 10 ⁻⁵	360	0.9
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	<10	5,200	440	4 x 10 ⁻⁷	8.4	0.13
Steam electric power generating (ash handling)	BDL	70	30	0.0006	2.9	0.66
Steam electric power generating (air pollution control devices)	10	520	270	0.0003	15	0.97
Steam electric power generating (drainage)	NA	NA	30 ^e	0.00026 ^e	0.011 ^e	0.0006 ^e
Inorganic chemicals manufacturing	NA	160,000 ^f	NA	0	9,800	2,000
Coil coating	ND	2,100	230	0.011	0.414	0.11
Foundries	ND	140,000	7,700	0	5.1	21
Leather tanning and finishing	60	3,500	680	0	NA	1.0
Nonferrous metals manufacturing	ND	2.7 x 10 ⁷	960,000	0	NA	51,000
Iron and steel manufacturing	NA	25,000	3,100	0	NA	560

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dMedian, not average.

^eAverage of medians reported for various industry segments.

^fAverage of maximums reported for various industry segments.

Date: 12/5/79

I.4.9-3

INDUSTRIAL OCCURRENCE OF LEAD^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<20	270	<60 ^d	0	1.6	0.23
Textile mills	NA	120	46 ^d	0.00019	1.3	0.0072
Timber products processing	BDL	37	4 ^d	0	0.18	0.00034
Petroleum refining	1	107	28 ^d	0	2.6	0.16
Paint and ink formulation	BDL	40,000	670	0	0.031	0.0011
Gum and wood chemicals	BDL	19	11	0.000099	0.083	0.0017
Rubber processing	NA	9 ^e	9 ^e	1.8 x 10 ⁻⁶	0.0077	0.00030
Explosives manufacture	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	95	<14	0	NA	0.42
Auto and other industries	11	910	255	0.00023	0.36	0.054
Porcelain enameling	ND	3,000	700	0.00045	0.29	0.056
Pharmaceutical manufacturing	ND	10	2.0	0	0.014	0.0018
Ore mining and dressing	<0.01	560	<0.10	0	NA	0.0037
Foundries	10	8,500	840	0	5.6	2.3
Iron and steel manufacturing	NA	5,500	480	0	NA	86
Nonferrous metals manufacturing	ND	26,000	4,000	0	NA	210
Coil coating	ND	110	38	0.0019	0.068	0.018
Leather tanning and finishing	8	80	43	0	NA	0.065

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.2; where mean is not available, one-half the reported maximum was utilized.^dMedian, not average.^eOne sample.

Date: 12/5/79

I.4.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR LEAD^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	150	III.4.1
Gas flotation			49-82	110	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			97-98	150	III.4.5
Gas flotation with chemical addition (polymer)			15->29	<40	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			36->99	140	III.4.6
Sedimentation			69->99	420	III.4.6
Sedimentation with chemical addition (alum, lime)			50 ^d	<200 ^d	III.4.3
Sedimentation with chemical addition (lime, polymer)			>72-98	210	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			>40->96	<3	III.4.3
Sedimentation with chemical addition (sulfide)			>93-96	100	III.4.3
Sedimentation with chemical addition (polymer)			>52-97	77	III.4.3
Sedimentation with chemical addition (BaCl ₂)			42-83	40	III.4.3
Sedimentation with chemical addition (alum, polymer)			>74->96	<320	III.4.3
Sedimentation with chemical addition (alum)			6-18	120	III.4.3
Sedimentation with chemical addition (lime)			60-99	51	III.4.3
Tertiary polishing lagoons			>72 ^d	<10 ^d	III.5.3
Aerated lagoons			86-93	<50	III.5.3
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Ultrafiltration			>74->95	<1,000	III.4.7
Ozonation			>29 ^d	<22 ^d	III.6.14
Chemical oxidation			0 ^{d,e}	- ^e	III.6.3
Ion exchange			99 ^d	10 ^d	III.6.7
Activated sludge			49-99	40	III.5.1
Powdered activated carbon adsorption (with activated sludge)			39->78	<28	III.6.2
Granular activated carbon adsorption			14->72	46	III.6.1
Reverse osmosis			31->99	210	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 515.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 13-1 - 13-21.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-118.
4. Manual of Treatment Techniques for Meeting the Interim Primary Drinking Water Regulations. EPA-600/8-77-005, U.S. Environmental Protection Agency, Cincinnati, Ohio, May 1977. 73 pp.

Date: 8/13/79

I.4.9-5

Compound: Mercury

Formula: Hg

Alternate Names [1]: Quick silver; Liquid silver

CAS #: 7439-97-6

Physical, Chemical, and Biological Properties [2-4]

at. wt.: 200.6 m.p., °C: 38.9 b.p. (760 torr), °C: 357
vapor pressure (25°C), torr: 0.0012
solubility in water, mg/L: HgO, 53 at 25°C; HgS (α), 0.01 at 18°C;
HgS (β), insoluble; HgCl₂, 6.9×10^4 at 20°C
common oxidation states: +1, +2

Probable Fate [2]

photolysis: Breakdown of atmospheric dimethyl mercury to methyl mercury of slight importance

oxidation/reduction: Oxidation of metallic mercury forms ionic mercury (later adsorbed); reduction forms HgS precipitate

hydrolysis: Not important


volatilization: Metallic Hg, methylated Hg, and adsorbed Hg all volatilizable

sorption: Hg is adsorbed by most particles, buried in sediment, and reduced to HgS

biological processes: Bioaccumulated by all organisms and readily methylated metabolically

other reactions/interactions: Not important

Precipitation/Coagulation Properties [5]

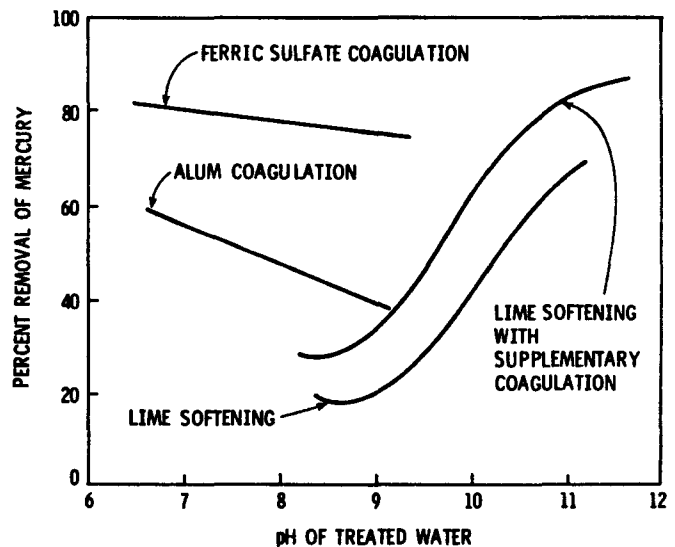

Date: 8/13/79

I.4.10-1

Date: 12/5/79

I.4.10-2

INDUSTRIAL OCCURRENCE OF MERCURY^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	0.003 ^d	0.003 ^d	0	7.9 x 10 ⁻⁵	1.1 x 10 ⁻⁵
Textile mills	NA	4	0.6 ^e	2.5 x 10 ⁻⁶	0.017	0.0011
Timber products processing	BDL	18	2 ^f	0	0.092	0.00017
Petroleum refining	<0.1	6	<0.5 ^e	0	0.046	0.0029
Paint and ink formulation	BDL	120,000	5,200	0	0.24	0.0083
Rubber processing	NA	720	120	2.4 x 10 ⁻⁵	0.10	0.0040
Pulp, paper, paperboard mills	<1	3	<1	0	NA	0.030
Auto and other laundries	ND	51	2	2 x 10 ⁻⁶	0.003	0.004
Porcelain enameling	1	1	1	6 x 10 ⁻⁷	0.0004	8 x 10 ⁻⁵
Pharmaceutical manufacturing	ND	1.3	0.15	0	0.001	0.001
Ore mining and dressing	<0.5	<84	<17	0	NA	0.63
Steam electric power generating (condenser cooling systems)	0.17	0.42	0.34	2 x 10 ⁻⁵	0.0004	0.001
Steam electric power generating (water treatment)	NA	NA	470 ^f	2.9	28	0.07
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	0.02	15,000	1	1 x 10 ⁻⁹	0.019	0.0003
Steam electric power generating (ash handling)	BDL	1.5	<0.5	9.6 x 10 ⁻⁶	0.050	0.011
Steam electric power generating (air pollution control devices)	0.1	70	35	3.3 x 10 ⁻⁵	2	0.13
Steam electric power generating (drainage)	NA	NA	1	8.6 x 10 ⁻⁶	2 x 10 ⁻⁵	0.00037
Coil coating	<10 ^d	<10 ^d	<10 ^d	<0.0005	<0.018	<0.0048
Foundries	ND	9	0.64	0	0.004	0.0017
Iron and steel manufacturing	NA	1,300	70	0	NA	13
Nonferrous metals manufacturing	ND	52	7.6	0	NA	0.40
Inorganic chemicals manufacturing	NA	3,500 ^g	NA	0	219	44

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.^dOne sample.^eMedian, not average.^fAverage of medians reported for various industry segments.^gAverage of maximums reported for various industry segments.

Date: 12/5/79

I.4.10-3

INDUSTRIAL OCCURRENCE OF MERCURY^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	0.001	<0.001 ^d	0	2.6 x 10 ⁻⁵	3.8 x 10 ⁻⁶
Textile mills	NA	0.7	0.4 ^d	1.7 x 10 ⁻⁶	0.011	0.00072
Timber products processing	BDL	2	1 ^d	0	0.046	8.6 x 10 ⁻⁵
Petroleum refining	<0.1	6	<0.5 ^d	0	0.046	0.0029
Paint and ink formulation	BDL	4,400	830	0	0.038	1.3 x 10 ⁻⁵
Rubber processing	NA	4.7	1.4	2.8 x 10 ⁻⁷	0.0012	4.6 x 10 ⁻⁵
Pulp, paper and paperboard mills	NA	1	<1	0	NA	0.030
Auto and other laundries	<0.2	5.6	1.7	1.5 x 10 ⁻⁶	0.0024	0.00036
Pharmaceutical manufacturing	ND	6.4	0.50	0	0.0034	0.00046
Ore mining and dressing	<0.001	28	<0.002	0	NA	7.4 x 10 ⁻⁵
Foundries	0.3	<20	6.4	0	0.043	0.017
Iron and steel manufacturing	NA	500	23	0	NA	4.1
Nonferrous metals manufacturing	ND	12	1.3	0	NA	0.07

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^dMedian, not average.

Date: 12/5/79

I.4.10-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR MERCURY^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	1.4	III.4.1
Gas flotation			0 ^{d,e}	- ^e	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			>68->90	<0.8	III.4.5
Gas flotation with chemical addition (alum, polymer)			33 ^d	1 ^d	III.4.5
Filtration			45-86	340	III.4.6
Sedimentation			50->99	6.1	III.4.2
Sedimentation with chemical addition (alum, lime)			71	2	III.4.3
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			>30->60	<0.2	III.4.3
Sedimentation with chemical addition (sulfide)			>99 ^d	20 ^d	III.4.3
Sedimentation with chemical addition (polymer)			>62-99	70	III.4.3
Sedimentation with chemical addition (BaCl ₂)			87 ^d	0.5 ^d	III.4.3
Sedimentation with chemical addition (alum, polymer)			71-88	5,200	III.4.3
Sedimentation with chemical addition (alum)			>34->62	<76	III.4.3
Sedimentation with chemical addition (lime)			35->96	1.4	III.4.3
Aerated lagoons			>99 ^d	0.1 ^d	III.5.3
Ultrafiltration			15-20	0.6	III.4.7
Activated sludge			30-87	<0.8	III.5.1
Powdered activated carbon adsorption			0 ^{d,e}	- ^e	III.6.2
Granular activated carbon adsorption			33->99	1.6	III.6.1
Reverse osmosis			22->60	0.5	III.6.9

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 526.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 14-1 - 14-13.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-120.
4. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. B-132.
5. Manual of Treatment Techniques for Meeting the Interim Primary Drinking Water Regulations. EPA-600/8-77-005, U.S. Environmental Protection Agency, Cincinnati, Ohio, May 1977. 73 pp.

Compound: Nickel

Formula: Ni

Alternate Names [1]: Nickel sponge, Pulverized nickel, Raney nickel,
Carbonyl nickel powder

CAS #: 7440-02-0

Physical, Chemical, and Biological Properties [2, 3]

at. wt.: 58.71 m.p., °C: 1,450 b.p. (760 torr), °C: 2,730
vapor pressure (25°C), torr: Negligible
solubility in water, mg/L: NiS, 3.6 at 18°C; NiCl₂, 6.42 x 10⁵ at 20°C
common oxidation states: +2

Probable Fate [2]

photolysis: Not important
oxidation: Under reducing conditions with sulfur, NiS is formed; otherwise
unimportant
hydrolysis: Hydrolysis under natural conditions removes no nickel from
solution
volatilization: Not important
sorption: Ni coprecipitates with hydrous metal oxides, and to a lesser degree
is adsorbed by organic matter and incorporated in crystalline
minerals
biological processes: Slightly bioaccumulated; no biotransformation noted
other reactions/interactions: Not important

Precipitation/Coagulation Properties: Not available

Date: 12/5/79

I.4.11-2

INDUSTRIAL OCCURRENCE OF NICKEL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<5	1,000	<550	0	14	2.1
Textile mills	NA	300	54 ^d	0.00023	1.6	0.097
Explosives manufacture	ND	100	50	0	0.017	0.00021
Timber products processing	3	270	15 ^e	0	0.69	0.0013
Petroleum refining	1	771	40 ^d	0	3.7	0.23
Paint and ink formulation	BDL	40,000	530	0	0.024	0.00085
Gum and wood chemicals	19	100	38	0.00034	0.29	0.063
Rubber processing	NA	590	210	4.2 x 10 ⁻⁵	0.18	0.0069
Pulp, paper, paperboard mills	<1	29	<5	0	NA	0.15
Auto and other laundries	ND	2,400	130	0.00011	0.027	0.027
Porcelain enameling	250	67,000	14,000	0.009	5.7	1.1
Pharmaceutical manufacturing	ND	200	35	0	0.24	0.032
Ore mining and dressing	<20	<75	<33	0	NA	1.2
Steam electric power generating (condenser cooling system)	4	200	22	0.0011	0.024	0.0053
Steam electric power generating (water treatment)	30	NA	6,600 ^e	0.00004	396	1.0
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	30	1.3 x 10 ⁻⁶	0.42	0.0045
Steam electric power generating (maintenance cleaning)	ND	900,000	89,000	8.9 x 10 ⁻⁵	1,691	26.7
Steam electric power generating (ash handling)	2.5	490	34	0.00065	3.3	0.75
Steam electric power generating (air pollution control device)	50	1,500	780	0.00074	44	2.8
Steam electric power generating (drainage)	ND	ND	ND	ND	ND	ND
Inorganic chemicals manufacturing	NA	110,000 ^f	NA	0	6,875	1,375
Coil coating	ND	3,200	400	0.02	0.72	0.19
Foundries	ND	NA	200	0	1.3	0.54
Leather tanning and finishing	5	100	52	0	NA	0.30
Iron and steel manufacturing	NA	120,000	5,000	0	NA	900
Nonferrous metals manufacturing	ND	3.1 x 10 ⁶	91,000	0	NA	4,800

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dMedian, not average.

^eAverage of medians reported for various industry segments.

^fAverage of maximums reported for various industry segments.

Date: 12/5/79

I.4.11-3

INDUSTRIAL OCCURRENCE OF NICKEL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<5	100	<14 ^d	0	0.37	0.053
Textile mills	NA	150	70 ^d	0.00029	2.0	0.13
Timber products processing	2	150	18 ^d	0	0.83	0.0015
Petroleum refining	<1	74	<15 ^d	0	1.4	0.087
Paint and ink formulation	BDL	80,000	1,800	0	0.083	0.0029
Gum and wood chemicals	43	1,100	380	0.0034	2.9	0.63
Explosives manufacture	NA	NA	NA	NA	NA	NA
Rubber processing	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	17	<6.3	0	NA	0.19
Auto and other laundries	23	330	76	6.8×10^{-5}	0.11	0.016
Porcelain enameling	ND	1,000	560	0.00036	0.23	0.045
Pharmaceutical manufacturing	ND	110	31	0	0.21	0.028
Ore mining and dressing	<0.05	2.4	<0.97	0	NA	0.036
Foundries	<20	130	41	0	0.27	0.11
Iron and steel manufacturing	NA	6,800	750	0	NA	140
Nonferrous metals manufacturing	ND	310,000	24,000	0	NA	1,300
Coil coating	ND	120	30	0.0015	0.054	0.014
Leather tanning and finishing	4	34	24	0	NA	0.035

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^dMedian, not average.

Date: 12/5/79

I.4.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR NICKEL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	69	III.4.1
Gas flotation			0 ^{d,e}	- ^e	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			>65->94	<73	III.4.5
Gas flotation with chemical addition (polymer)			0 ^e	- ^e	III.4.5
Gas flotation with chemical addition (alum, polymer)			41 ^d	270 ^d	III.4.5
Filtration			31->99	64	III.4.6
Sedimentation			59->99	<180	III.4.2
Sedimentation with chemical addition (alum, lime)			>83 ^d	<1 ^d	III.4.3
Sedimentation with chemical addition (lime, polymer)			86-96	240	III.4.3
Sedimentation with chemical addition (lime, polymer) Ni dissolved			99 ^d	2,500 ^d	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			>35->95	3	III.4.3
Sedimentation with chemical addition (sulfide)			>88-96	860	III.4.3
Sedimentation with chemical addition (polymer)			35 ^d	43 ^d	III.4.3
Sedimentation with chemical addition (alum, polymer)			35->97	17,000	III.4.3
Sedimentation with chemical addition (alum)			>27->56	<36	III.4.3
Sedimentation with chemical addition (lime)			40-99	540	III.4.3
Sedimentation with chemical addition (lime) Ni dissolved			>99 ^d	20 ^d	III.4.3
Aerated lagoons			17-50	34	III.5.3
Ultrafiltration			>32 ^d	<500	III.4.7
Ozonation			0 ^e	- ^e	III.6.14
Ion exchange			>99	<10	III.6.7
Activated sludge			29-92	78	III.5.1
Powdered activated carbon adsorption (with activated sludge)			19->58	<14	III.6.2
Granular activated carbon adsorption			17-68	110	III.6.1
Reverse osmosis			46->98	66	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 590.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 15-1 - 15-14.
3. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. p. B-123.

Compound: Selenium

Formula: Se

Alternate Names [1]: Selenium dust

CAS #: 7782-49-2

Physical, Chemical, and Biological Properties [2, 3]

at. wt.: 78.96 m.p., °C: 217 b.p. (760 torr), °C: 685
vapor pressure (25°C), torr: Negligible
solubility in water (14°C), mg/L: SeO_2 , 3.84×10^5 ; SeO_3 decomposes, very soluble
common oxidation states: 2, 0, +4, +6

Probable Fate [2]

photolysis: Not important

oxidation: In aerobic waters, soluble anions are formed; under reducing conditions, selenium or metal selenides (insoluble) go into sediment, possibly forming volatile H_2Se

hydrolysis: SeO_4^{2-} , SeO_3^{2-} , and HSeO_3^- (all soluble) are formed


volatilization: H_2Se can be formed; volatilization can also follow biomethylation

sorption: Adsorbed by hydrous metal oxides (strongly), clays, and organic chemicals, but only a small percentage of total Se is sorbed

biological processes: Bioaccumulation by many species; possible biological redox reactions, and some biomethylation

other reactions/interactions: Not important

Precipitation/Coagulation Properties [4]

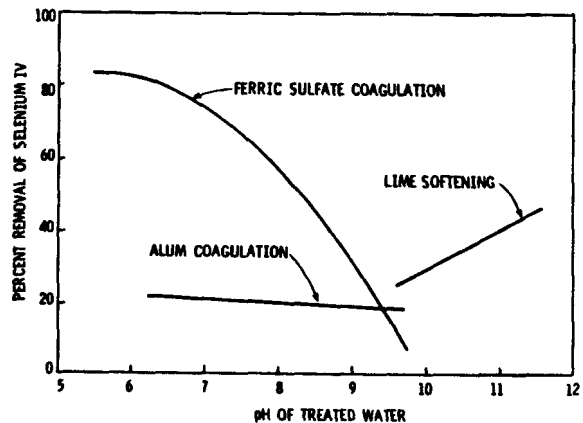

Date: 8/13/79

I.4.12-1

Date: 12/5/79

I.4.12-2

INDUSTRIAL OCCURRENCE OF SELENIUM^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	2	34	6 ^d	0	0.16	0.023
Textile mills	NA	740	35 ^d	0.00015	1.0	0.063
Timber products processing	BDL	53	3 ^e	0	0.14	0.00026
Petroleum refining	<1	<20	<8 ^d	0	0.74	0.046
Gum and wood chemicals	NA	11	11	9.9 x 10 ⁻⁵	0.083	0.018
Rubber processing	NA	20	11	2.2 x 10 ⁻⁶	0.0095	0.00036
Auto and other laundries	ND	120	5	4.5 x 10 ⁻⁶	0.007	0.001
Porcelain enameling	1	160,000	9,800	0.006	4	0.80
Pharmaceutical manufacturing	ND	60	6	0	0.041	0.005
Ore mining and dressing	<5	<30	<8.3	0	NA	0.30
Steam electric power generating (condenser cooling system)	<5	28	9	0.00048	0.010	0.0022
Steam electric power generating (water treatment)	NA	NA	58,000 ^e	0.00035	3,480	8.7
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaing)	<2	24	2	3 x 10 ⁻⁷	0.038	0.0006
Steam electric power generating (ash handling)	3	42	8	0.00015	0.78	0.18
Steam electric power generating (air pollution control devices)	<0.6	2,700	1,400	0.001	80	5
Steam electric power generating (drainage)	NA	NA	NA	NA	NA	NA
Inorganic chemicals manufacturing	NA	93 ^f	NA	0	5.9	1.1
Foundries	ND	NA	<8	0	<0.054	<0.022
Iron and steel manufacturing	NA	670	67	0	NA	12
Nonferrous metals manufacturing	ND	240,000	950	0	NA	50

^aInformation contained in this table was obtained from Volume IX of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dMedian, not average.

^eAverage of medians reported for various industry segments.

^fAverage of maximums reported for various industry segments.

Date: 12/5/79

I.4.12-3

INDUSTRIAL OCCURRENCE OF SELENIUM^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<2	20	<4 ^d	0	0.11	0.015
Textile mills	NA	97	47 ^d	0.00020	1.3	0.085
Timber products processing	BDL	39	1 ^d	0	0.046	8.6 x 10 ⁻⁵
Petroleum refining	<2	27	<16 ^d	0	1.5	0.093
Gum and wood chemicals	BDL	19	10	0.000096	0.076	0.016
Rubber processing	NA	24	13	2.6 x 10 ⁻⁶	0.011	0.00043
Auto and other laundries	<1.0	7.0	3.8	3.4 x 10 ⁻⁵	0.0053	0.00080
Porcelain enameling	ND	84	20	1.3 x 10 ⁻⁵	0.0082	0.0016
Pharmaceutical manufacturing	ND	310	34	0	0.23	0.031
Ore mining and dressing	<0.003	.15	<0.0050	NA	0.00020	
Foundries	9.5	<20	18.5	0	0.12	0.05
Iron and steel manufacturing	NA	630	45	0	NA	8.1
Nonferrous metals manufacturing	ND	2,300	180	0	NA	9.5

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.4.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR SELENIUM^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	20	III.4.1
Gas flotation			0 ^{d,e}	- ^e	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			0 ^{d,e}	- ^e	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			2-10	48	III.4.6
Sedimentation			60->99	<20	III.4.2
Sedimentation with chemical addition (lime, polymer)			0 ^e	- ^e	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			18-24	20	III.4.3
Sedimentation with chemical addition (BaCl ₂)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (lime)			0 ^e	- ^e	III.4.3
Tertiary polishing lagoons			44 ^d	18 ^d	III.5.3
Aerated lagoons			>50 ^d	<200 ^d	III.5.3
Activated sludge			0 ^{d,e}	- ^e	III.5.1
Powdered activated carbon adsorption (with activated sludge)			6->13	<30	III.6.2
Granular activated carbon adsorption			17->50	19	III.6.1
Reverse osmosis			>76-85	5.5	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 852.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 16-1 - 16-9.
3. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. B-46.
4. Manual of Treatment Techniques for Meeting the Interim Primary Drinking Water Regulations. EPA-600/8-77-005, U.S. Environmental Protection Agency, Cincinnati, Ohio, May 1977. 73 pp.

Compound: Silver

Formula: Ag

Alternate Names [1]: Argentium, Shell silver

CAS #: 7440-22-4


Physical, Chemical, and Biological Properties [2, 3]

at. wt.: 107.9 m.p., °C: 962 b.p. (760 torr), °C: 2,210
vapor pressure (25°C), torr: Negligible
solubility in water, mg/L: Ag₂O, 13 at 20°C; AgCl, 0.89 at 10°C
common oxidation states: +1 (principal state), +2, +3

Probable Fate [2]

photolysis: Not important in aquatic environment
oxidation: Ag and Ag⁺ compounds (most insoluble) only forms usually present
(both precipitate)
hydrolysis: Important only at high pH, where Ag₂O may precipitate
volatilization: Not important
sorption: Strongly sorbed by MnO₂, then released in saline water; some sorption
by clays and organic materials
biological processes: Bioaccumulated by many aquatic organisms
other reactions/interactions: Not important

Precipitation/Coagulation Properties [4]

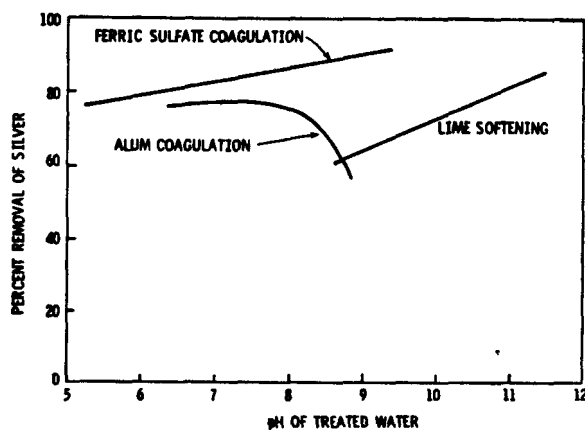

Date: 8/13/79

I.4.13-1

Date: 12/5/79

I.4.13-2

INDUSTRIAL OCCURRENCE OF SILVER^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<2	10	<6 ^d	0	0.16	0.023
Textile mills	NA	130	32 ^d	0.00013	0.92	0.058
Explosives manufacture	ND	2	1 ^{e,0}	0	0.00035	4.3 x 10 ⁻⁶
Timber products processing	BDL	7	1 ^e	0	0.046	0.000086
Petroleum refining	<1	<250	<25	0	2.3	0.14
Paint and ink formulation	BDL	200	12	0	0.00055	1.9 x 10 ⁻⁵
Auto and other laundries	ND	130	12	1.1 x 10 ⁻⁵	0.017	0.0025
Pharmaceutical manufacturing	NA	NA	NA	NA	NA	NA
Ore mining and dressing	<10	<50	<16	0	NA	<0.59
Steam electric power generating (condenser cooling system)	0.7	80	4	0.00021	0.0044	0.00096
Steam electric power generating (water treatment)	NA	NA	5,000 ^e	0.000030	300	0.75
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	10	70	25	2.5 x 10 ⁻⁹	0.48	0.008
Steam electric power generating (ash handling)	0.5	6	3.3	6.3 x 10 ⁻⁵	0.32	0.073
Steam electric power generating (air pollution control devices)	5	600	300	0.00029	17	1.1
Steam electric power generating (drainage)	NA	NA ^f	NA	NA	NA	NA
Inorganic chemicals manufacturin	NA	280 ^f	NA	0	18	3.5
Coil coating	20 ^g	20 ^g	20 ^g	0.001	0.036	0.010
Foundries	ND	NA	30	0	0.20	0.081
Iron and steel manufacturing	NA	670	48	0	NA	8.6
Nonferrous metals manufacturing	ND	4,700	320	0	NA	17

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^d Median, not average.

^e Average of medians reported for various industry segments.

^f Average of maximums reported for various industry segments.

^g One sample.

Date: 12/5/79

I.4.13-3

INDUSTRIAL OCCURRENCE OF SILVER^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	2	10	5 ^d	0	0.13	0.019
Textile mills	NA	140	25 ^d	0.00010	0.72	0.045
Timber products processing	BDL	4	BDL ^d	- ^e	- ^e	- ^e
Petroleum refining	<1	<25	<5 ^d	0	0.46	0.029
Paint and ink formulation	BDL	100,000	6,700	0	0.31	0.011
Explosives manufacture	NA	NA	NA	NA	NA	NA
Auto and other laundries	<1.0	7.0	4.0	0.0000036	0.0056	0.00084
Ore mining and dressing	<0.02	<0.02 ^f	<0.02 ^f	0	NA	7.4 x 10 ⁻⁵
Foundries	NA	<20 ^f	<20 ^f	0	0.13	0.054
Iron and steel manufacturing	NA	500	57	0	NA	10
Nonferrous metals manufacturing	ND	7,000	530	0	NA	28

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

^fOne sample.

Date: 12/5/79

I.4.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR SILVER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	120	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			24->48	<13	III.4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Gas flotation with chemical addition (alum, polymer)			44 ^d	66 ^d	III.4.5
Filtration			11->50	22	III.4.6
Sedimentation			78->99	<45	III.4.6
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			>79->97	12	III.4.3
Sedimentation with chemical addition (sulfide)			>90->99	<25	III.4.3
Sedimentation with chemical addition (BaCl ₂)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum, polymer)			21 ^d	11 ^d	III.4.3
Sedimentation with chemical addition (alum)			5-10	120	III.4.3
Sedimentation with chemical addition (lime)			24->80	<4	III.4.3
Ozonation			0 ^e	- ^e	III.6.14
Ion exchange			>99	<10	III.6.7
Activated sludge			31->96	32	III.5.1
Granular activated carbon adsorption			7-36	21	III.6.1
Reverse osmosis			31-92	25	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 858.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 17-1 - 17-9.
3. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. B-47.
4. Manual of Treatment Techniques for Meeting the Interim Primary Drinking Water Regulations. EPA-600/8-77-005, U.S. Environmental Protection Agency, Cincinnati, Ohio, May 1977. 73 pp.

Date: 8/13/79

I.4.13-5

Compound: Thallium

Formula: Tl

Alternate Names [1]: Thallium salt

CAS #: 7440-28-0

Physical, Chemical, and Biological Properties [2,3]

mol. wt.: 204.4 m.p., °C: 304 b.p. (760 torr), °C: 1,460
vapor pressure (25°C), torr: Negligible
solubility in water, mg/L: Tl₂S, 2.0×10^2 at 20°C; TlCl, 2.9×10^3 at 16°C
common oxidation states: +1, +3

Probable Fate [2]

photolysis: Not important
oxidation: Tl(III) present only in very oxidizing water; in reducing conditions, metallic Tl or sulfide may precipitate
hydrolysis: Hydrolysis of Tl³⁺ to insoluble Tl(OH)₃ unimportant because of low Tl³⁺ content of natural water
sorption: Tl⁺ adsorbed strongly by clay minerals and to a lesser degree by hydrous metal oxides
biological processes: Quickly bioaccumulated by aquatic organisms
other reactions/interactions: Not important

Precipitation/Coagulation Properties: Not available

Date: 12/5/79

I.4.14-2

INDUSTRIAL OCCURRENCE OF THALLIUM^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<5	15	<7 ^d	0	0.18	0.026
Textile mills	NA	9	3 ^e	1.3 x 10 ⁻⁵	0.087	0.0054
Timber products processing	BDL	10	1 ^e	0	0.046	8.6 x 10 ⁻⁵
Petroleum refining	<1	<15	<1 ^d	0	0.093	0.0058
Paint and ink formulation	BDL	200	10	0	0.00046	1.6 x 10 ⁻⁵
Auto and other laundries	ND	6	4	3.6 x 10 ⁻⁵	0.0056	0.00084
Pharmaceutical manufacturing	ND	24	3.0	0	0.020	0.0028
Ore mining and dressing	<100	<100	<100	0	NA	<3.7
Steam electric power generating (condenser cooling system)	BDL	13	2.5	0.00013	0.0028	0.00060
Steam electric power generating (water treatment)	NA	NA	5,000 ^e	3 x 10 ⁻⁵	300 ^e	0.75
Steam electric power generating (boiler or steam generator blowdown)	NA	NA	NA	NA	NA	NA
Steam electric power generating (maintenance cleaning)	NA	NA	NA	NA	NA	NA
Steam electric power generating (ash handling)	BDL	9	BDL	BDL	BDL	BDL
Steam electric power generating (air pollution control devices)	NA	NA	NA	NA	NA	NA
Steam electric power generating (drainage)	NA	NA ^f	NA	NA	NA	NA
Inorganic chemicals manufacturing	NA	150 ^f	NA	0	9.4	2.0
Iron and steel manufacturing	NA	NA	19	0	NA	3.4
Nonferrous metals manufacturing	ND	620	170	0	NA	33

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.^d Median, not average.^e Average of medians reported for various industry segments.^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.4.14-3

INDUSTRIAL OCCURRENCE OF THALLIUM^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<5	6	<5 ^d	0	0.13	0.019
Textile mills	NA	18	3 ^d	1.3 x 10 ⁻⁵ _e	0.087 _e	0.0054 _e
Timber products processing	BDL	7	BDL ^d			
Petroleum refining	<1	<15	<4 ^d	0	0.37	0.023
Paint and ink formulation	BDL	100	11	0	0.00051	1.8 x 10 ⁻⁵
Auto and other laundries	<1.0	<5.0	2.8	2.5 x 10 ⁻⁶	0.0039	0.00060
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Ore mining and dressing	<0.01	<0.05	<0.01	0	NA	<0.00037
Foundries	<20	<20	<20	0	0.13	0.054
Iron and steel manufacturng	NA	60	16	0	NA	2.9
Nonferrous metals manu- facturing	ND	800	140	0	NA	7.4

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.4.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR THALLIUM^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	2	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			0 ^{d,e}	- ^e	III.4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			>55 ^d	<10 ^d	III.4.6
Sedimentation			>55->83	<5	III.4.2
Sedimentation with chemical addition (Fe ²⁺ , lime)			>55->88	<4	III.4.3
Sedimentation with chemical addition (lime)			>52->88	3.4	III.4.3
Aerated lagoons			>44->80	<16	III.4.3
Activated sludge			38 ^d	29 ^d	III.5.1
Granular activated carbon adsorption					III.6.1
Reverse osmosis			70-89	3.5	III.6.9

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 891.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 18-1 - 18-7.
3. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. B-51.

Compound: Zinc

Formula: Zn

Alternate Names [1]: Blue powder, C.I. Pigment-black 16

CAS #: 7440-66-6

Physical, Chemical, and Biological Properties [2, 3]

mol. wt.: 65.38 m.p., °C: 420 b.p. (760 torr), °C: 907
vapor pressure (25°C), torr: Negligible
solubility in water, mg/L: ZnO, 1.6 at 29°C; ZnCl₂, 4.32 x 10⁶ at 25°C
common oxidation states: Always +2 in aqueous solution

Probable Fate

photolysis: Not important
oxidation: ZnS precipitates under reducing conditions; most redox conditions
do not affect Zn directly, but affect materials which sorb Zn
hydrolysis: Zn(OH)₂ and ZnO precipitate after formation by hydrolysis
volatilization: Not important
sorption: Dominant fate of Zn is sorption by hydrous metal oxides, clay
minerals, and organic materials
biological processes: Strongly bioaccumulated in all organisms and biotrans-
formed to many zinc-containing enzymes
other reactions/interactions: Not important

Precipitation/Coagulation Properties: Not available

Date: 12/5/79

I.4.15-2

INDUSTRIAL OCCURRENCE OF ZINC^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	60	5,300	1,700 ^d	0	45	6.4
Textile mills	NA	7,900	190 ^d	0.00080	0.29	0.34
Explosives manufacture	ND	1,400	550	0	0.19	0.0024
Timber products processing	120	78,000	480 ^e	0	22	0.041
Petroleum refining	24	760	250 ^d	0	23	1.4
Paint and ink formulation	BDL	900,000	44,000	0	2.0	0.070
Gum and wood chemicals	50	38,000	7,000	0.063	53	11
Rubber processing	NA	770	300	6 x 10 ⁻⁵	0.26	0.0099
Pulp, paper, and paperboard mills	2 ^d	66	18	0	NA	0.54
Auto and other laundries	ND	10,000	1,800	0.0016	2.5	0.38
Porcelain enameling	78	650,000	5,700	0.0037	2.3	0.46
Pharmaceutical manufacturing	ND	500	120	0	0.83	0.11
Ore mining and dressing	<20	40	<27	0	NA	<1.0
Steam electric power generating (condenser cooling system)	<5	780	127	0.0067	0.14	0.030
Steam electric power generating (water treatment)	20	NA	11,000	6.7 x 10 ⁻⁵	660	1.7
Steam electric power generating (boiler or steam generator blowdown)	10	50	20	8.4 x 10 ⁻⁹	0.28	0.003
Steam electric power generating (maintenance cleaning)	50	900,000	136,000	0.00014	2,600	41
Steam electric power generating (ash handling)	BDL	1,200	350	6.7 x 10 ⁻⁷	34	8.0
Steam electric power generating (air pollution control devices)	10	590	300	0.00029	17	1.1
Steam electric power generating (drainage)	4	23,000 ^f	540	0.0046	0.20	0.011
Inorganic chemicals manufacturing	NA	35,000 ^f	NA	0	2,200	438
Coil coating	12	340,000	11,000	0.55	20	5.3
Foundries	ND	350,000	49,000	0	328	328
Leather tanning and finishing	96	2,600	540	0	NA	0.81
Iron and steel manufacturing	NA	160,000	7,000	0	NA	1,300
Nonferrous metals manufacturing	ND	2 x 10 ⁻⁶	190,000	0	NA	10,070

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.^d Median, not average.^e Average of medians reported for various industry segments.^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.4.15-3

INDUSTRIAL OCCURRENCE OF ZINC^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	60	73	61 ^d	0	1.6	0.23
Textile mills	NA	38,000	200 ^d	0.00084	5.8	0.36
Timber products processing	47	41,000	250 ^d	0	11	0.021
Petroleum refining	<10	1,000	<70 ^d	0	6.5	0.41
Paint and ink formulation	BDL	100,000	4,800	0	0.22	0.0077
Gum and wood chemicals	37	450	190	0.0017	1.4	0.31
Rubber processing	NA	2,300	170	3.4 x 10 ⁻⁵	0.15	0.0056
Explosives manufacture	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	4	1,600	150	0	NA	4.5
Auto and other laundries	55	1,000	300	0.00027	0.42	0.063
Porcelain enameling	32	5,000	1,200	0.00077	0.49	0.096
Pharmaceutical manufacturing	ND	270	86	0	0.58	0.079
Ore mining and dressing	0.01	3,000	1.6	0	NA	0.060
Foundries	40	190,000	19,000	0	130	51
Iron and steel manufacturing	NA	36,000	1,700	0	NA	310
Nonferrous metals manufacturing	ND	100,000	10,400	0	NA	550
Coil coating	34	720	370	0.019	0.67	0.18
Leather tanning and finishing	49	170	91	0	NA	0.17

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^dMedian, not average.

Date: 12/5/79

I.4.15-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ZINC^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc, µg/L	Removal ^c range, %	Average achievable conc, µg/L	
Gravity oil separation			NA	390	III.4.1
Gas flotation			11-22	27,000	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			>95->99	150	III.4.5
Gas flotation with chemical addition (polymer)			>38->60	120	III.4.5
Gas flotation with chemical addition (alum, polymer)			10 ^d	2,300 ^d	III.4.5
Filtration			39->99	940	III.4.6
Sedimentation			71->99	2,600	III.4.2
Sedimentation with chemical addition (alum, lime)			55->99	3,400	III.4.3
Sedimentation with chemical addition (lime, polymer)			84->99	410	III.4.3
Sedimentation with chemical addition (Fe ²⁺ , lime)			>79->97	12	III.4.3
Sedimentation with chemical addition (sulfide)			>98->99	140	III.4.3
Sedimentation with chemical addition (polymer)			84-97	2,400	III.4.3
Sedimentation with chemical addition (BaCl ₂)			65-80	30	III.4.3
Sedimentation with chemical addition (alum, polymer)			69-83	660	III.4.3
Sedimentation with chemical addition (alum)			69-83	3,800	III.4.3
Sedimentation with chemical addition (lime)			77->99	640	III.4.3
Aerated lagoons			55->99	180	III.5.3
Ultrafiltration			>78-98	8,600	III.4.7
Ozonation			32-96	260	III.6.14
Ion exchange			97 ^d	400 ^d	III.6.7
Activated sludge			35-92	200	III.5.1
Powdered activated carbon adsorption			0 ^{d,e}	- ^e	III.6.2
Powdered activated carbon adsorption (with activated sludge)			58-98	110	III.6.2
Granular activated carbon adsorption			40->99	440	III.6.1
Reverse osmosis			83->99	530	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.


REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 963.
2. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume II, Metals and Inorganics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 19-1 - 19-23.
3. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. B-59.

Compound: Bis(chloromethyl) ether

Formula:

Alternate Names: BCME, Bis-CME,
sym-Dichloromethyl ether



CAS #: 542-88-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 115 m.p., °C: -41.5 b.p. (760 torr), °C: 104
vapor pressure (22°C), torr: 30
solubility in water (temp. unknown), mg/L: 22,000
log octanol/water partition coefficients: -0.38
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Does not occur
oxidation: Oxidation by hydroxyl radical can compete with hydrolysis in air
but not in water
hydrolysis: Very rapidly hydrolyzed, independent of pH
volatilization: Cannot compete with hydrolysis
sorption: Not important
biological processes: Not important
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

I.5.1-2

INDUSTRIAL OCCURRENCE OF BIS (CHLOROMETHYL) ETHER^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.5.1-3

INDUSTRIAL OCCURRENCE OF BIS(CHLOROMETHYL) ETHER^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.5.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BIS(CHLOROMETHYL) ETHER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	390	III.4.1
Activated sludge			>83 ^d	>10 ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 64-1 - 64-5.

Compound: Bis(2-chloroethyl) ether

Formula:



Alternate Names: 1,1'-Oxybis(2-chloroethane),
Bis(β -chloroethyl) ether,
Chlorex, 1-Chloro-2-
(β -chloroethoxy) ethane

CAS #: 111-44-4

Physical, Chemical, and Biological Properties [1]


mol. wt.: 143.0 m.p., °C: -46.8 b.p. (760 torr), °C: 178
vapor pressure (20°C), torr: 0.71
solubility in water (25°C), mg/L: 10,200
log octanol/water partition coefficients: 1.58
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Does not occur
oxidation: Photooxidation only in atmosphere
hydrolysis: Very slow, maybe significant, hydrolysis of carbon-chlorine bonds
volatilization: Importance unknown
sorption: Apparently unimportant
biological processes: No bioaccumulation noted; biodegradation not important
under natural conditions
other reactions/interactions: Not important; principle fate uncertain

Carbon Adsorption Data [2]

pH: 3.0, 7.0, 9.0
type of carbon: Not available
adsorbability: 860 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

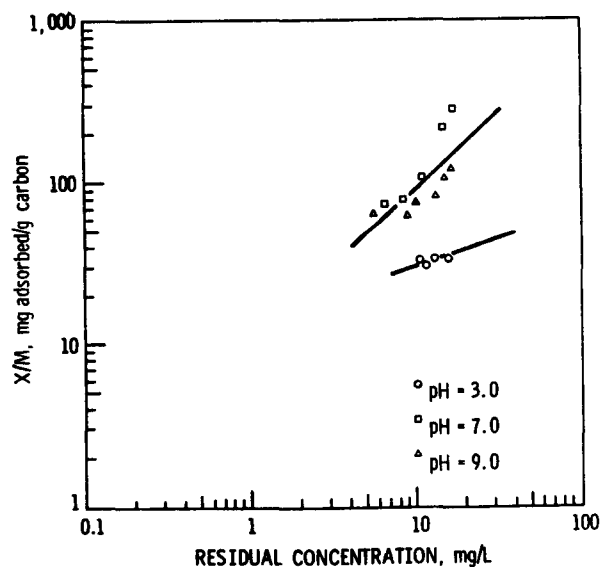

Date: 8/13/79

I.5.2-1

Date: 12/5/79

INDUSTRIAL OCCURRENCE OF BIS(2-CHLOROETHYL) ETHER^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND	170	19	0	0.13	0.017
Foundries	ND	NA	4.5	0	0.030	0.012

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

I.5.2-2

Date: 12/5/79

I.5.2-3

INDUSTRIAL OCCURRENCE OF BIS(2-CHLOROETHYL) ETHER^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND	110 _d	14 _d	0	0.10	0.013
Foundries	NA	8 _d	8 _d	0	0.054	0.0022

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.5.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BIS(2-CHLOROETHYL) ETHER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Activated sludge			>47 ^d	<10 ^d	III.5.1
Powdered activated carbon adsorption			53 ^d	44 ^d	III.6.2

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 65-1 - 65-7.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I.5.2-5

Date: 12/5/79

I.5.3-2

INDUSTRIAL OCCURRENCE OF BIS(2-CHLOROISOPROPYL) ETHER^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND ₃ ^d	ND ₃ ^d	ND ₃ ^d	₋ ^b	₋ ^b	₋ ^b
Foundries				0	0.020	0.010

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.5.3-3

INDUSTRIAL OCCURRENCE OF BIS(2-CHLOROISOPROPYL) ETHER^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND	ND	ND	_d	_d	_d

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.5.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT
ALTERNATIVE FOR BIS(2-CHLOROISOPROPYL) ETHER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Aerated lagoons			>0 ^d	<2 ^d	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 66-1 - 66-7.

Compound: 2-Chloroethyl vinyl ether

Formula:



Alternate Names: (2-Chloroethoxy) ethene,
Vinyl 2-chloroethyl ether

CAS #: 110-75-8

Physical, Chemical, and Biological Properties [1]

mol. wt.: 106.6 m.p., °C: Not available b.p. (760 torr), °C: 108
vapor pressure (20°C), torr: 26.75
solubility in water (temp. unknown), mg/L: 15,000
log octanol/water partition coefficients: 1.28
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Does not occur
oxidation: Atmospheric photooxidation after volatilization principal fate of
 $\text{ClCH}_2\text{CH}_2\text{OCHCH}_2$
hydrolysis: Of minor importance if compound is adsorbed by clays or fulvic
 acids
volatilization: High vapor pressure indicates strong volatilization
sorption: Probably adsorbed by clays and humic materials
biological processes: Insufficient data to reach conclusion
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

I.5.4-2

INDUSTRIAL OCCURRENCE OF 2-CHLOROETHYL VINYL ETHER^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.5.4-3

INDUSTRIAL OCCURRENCE OF 2-CHLOROETHYL VINYL ETHER^{a, b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, $^{\circ}\text{C kg/d}$		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Food processing	1.2	1.8	1.5	1.2	1.8	1.5
Textile	1.5	2.2	1.8	1.5	2.2	1.8
Chemical	1.8	2.5	2.1	1.8	2.5	2.1
Pharmaceutical	2.0	3.0	2.5	2.0	3.0	2.5
Pulp and paper	2.2	3.5	2.8	2.2	3.5	2.8
Metals	2.5	4.0	3.2	2.5	4.0	3.2
Automotive	2.8	4.5	3.6	2.8	4.5	3.6
Electronics	3.0	5.0	4.0	3.0	5.0	4.0
Plastics	3.2	5.5	4.3	3.2	5.5	4.3
Other	3.5	6.0	4.7	3.5	6.0	4.7

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.5.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2-CHLOROETHYL VINYL ETHER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal _c range, %	Average achievable conc., µg/L	Removal _c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 67-1 - 67-7.

Compound: 4-Chlorophenyl phenyl ether

Formula:



Alternate Names: 1-Chloro-4-phenoxybenzene,
p-Chlorophenyl phenyl ether,
4-Chlorodiphenyl ether,
4-Chlorophenyl ether

CAS #: 7005-72-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 203.7 m.p., °C: Not available b.p. (760 torr), °C: 284
vapor pressure (20°C), torr: 0.001
solubility in water (20°C), mg/L: 59
log octanol/water partition coefficients: 5.00
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Could be important if compound is adsorbed by humus containing sensitizers (polyfunctional aromatics)
oxidation: Not important
hydrolysis: Not important
volatilization: Although no data available, believed to be unimportant
sorption: Adsorption by humus certain; by clays probable
biological processes: Possible bioaccumulation; gradual biodegradation (t 1/2 ~250 days)
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.5.5-2

INDUSTRIAL OCCURRENCE OF 4-CHLOROPHENYL PHENYL ETHER^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	3.3	0.4	0	0.011	0.0015
Iron and steel manufacturing	NA	NA	210	0	NA	38

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.5.5-3

INDUSTRIAL OCCURRENCE OF 4-CHLOROPHENYL PHENYL ETHER^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dIndeterminate.

Date: 12/5/79

I.5.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 4-CHLOROPHENYL PHENYL ETHER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 68-1 - 68-6.

Compound: 4-Bromophenyl phenyl ether

Formula:



Alternate Names: 1-Bromo-4-phenoxybenzene,
p-Bromophenyl phenyl ether,
4-Bromodiphenyl ether,
4-Bromophenyl ether

CAS #: 101-55-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 249.1 m.p., °C: 18.7 b.p. (760 torr), °C: 310
vapor pressure (20°C), torr: 0.0015
solubility in water (20°C), mg/L: 38
log octanol/water partition coefficients: 5.15
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Could be important if adsorbed by sensitizer-containing humus
oxidation: Not important
hydrolysis: Not important
volatilization: Believed to be unimportant
sorption: Adsorption by humus certain; by clays probable
biological processes: Bioaccumulation possible; gradual biodegradation
 probable principle fate
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 9/13/79

I.5.6-2

INDUSTRIAL OCCURRENCE OF 4-BROMOPHENYL PHENYL ETHER^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.5.6-3

INDUSTRIAL OCCURRENCE OF 4-BROMOPHENYL PHENYL ETHER^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.5.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 4-BROMOPHENYL PHENYL ETHER^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Activated sludge			95 ^d	18 ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 69-1 - 69-5.

Compound: Bis(2-chloroethoxy)methane Formula:

Alternate Names: Dichlorodiethyl methylal,
Bis(β-chloroethyl) formal,
β,β-Dichlorodiethyl formal



CAS #: 111-91-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 173.1 m.p., °C: Not available b.p. (760 torr), °C: 218
vapor pressure (20°C), torr: <0.1
solubility in water (temp. unknown), mg/l: 81,000
log octanol/water partition coefficients: 1.26
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Not important
oxidation: Too slow to be important
hydrolysis: Gradual hydrolysis of carbon-chlorine bond probable principle
fate mechanism
volatilization: Not important
sorption: Possible importance as catalyst for hydrolysis
biological processes: Not enough data to draw conclusion
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 9/13/79

I.5.7-2

INDUSTRIAL OCCURRENCE OF BIS (2-CHLOROETHOXY)METHANE^{a,b,}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	50	11	0	0.29	0.041
Foundries	ND	NA	20	0	0.13	0.05

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

Date: 12/5/79

I.5.7-3

INDUSTRIAL OCCURRENCE OF BIS(2-CHLOROETHOXY)METHANE^a

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<5.7	0	0.15	0.021
Auto and other laundries	NA	11 ^d	11 ^d	1.0 x 10 ⁻⁵	0.015	0.0023

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample

Date: 12/5/79

I.5.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BIS(2-CHLOROETHOXY)METHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Aerated lagoons			>60 ^d	<10 ^d	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 70-1 - 70-6.

Compound: Dimethyl phthalate

Formula:

Alternate Names: DMP, 1,2-Benzenedicarboxylic acid, Dimethyl ester, Phthalic acid dimethyl ester, Methyl phthalate



CAS #: 131-11-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 194.2 m.p., °C: 0 b.p. (760 torr), °C: 282
vapor pressure (20°C), torr: <0.01
solubility in water (32°C), mg/L: 4,000
log octanol/water partition coefficients: 3.42
Henry's law constant: Not available
biodegradability: Not available


Probable Fate [1]

photolysis: No direct photolysis; indirect photolysis too slow to be important
oxidation: Not important
hydrolysis*: Too slow to be important under natural conditions
volatilization: Possible, but not important
sorption*: Sorption onto particles and Biota and complexation with humic substances principal transport mechanism
biological processes*: Bioaccumulation, biodegradation, and biotransformation by many organisms (including humans) are very important fates
other reactions/interactions: Not important

*Inferred from data on phthalate esters as a group.

Carbon Adsorption Data [2]

pH: 3.0, 7.0, 9.0
type of carbon: Not available
adsorbability: 93 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

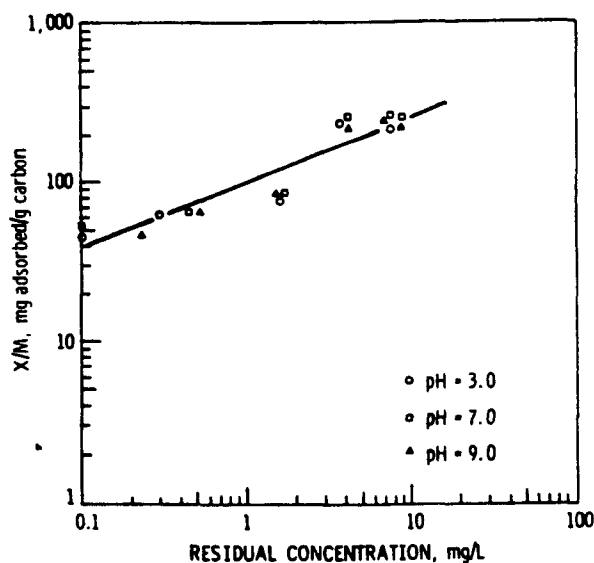

Date: 8/13/79

I.6.1-1

Date: 12/5/79

I.6.1-2

INDUSTRIAL OCCURRENCE OF DIMETHYL PHTHALATE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.5	0	0.013	0.0019
Textile mills	NA	14	12 ^d	5 x 10 ⁻⁵	0.35	0.22
Petroleum refining	NA	NA	NA	NA	NA	NA
Rubber processing	NA	14	5	1 x 10 ⁻⁶	0.0043	0.00016
Auto and other laundries	ND	≤5	1	9 x 10 ⁻⁷	0.001	0.00021
Ore mining and dressing	3.1	9.5	6.3	0	NA	0.23
Coil coating	ND	14	10	0.0005	0.018	0.005
Foundries	ND	2,200	72	0	0.19	0.48
Leather tanning and finishing	NA	NA	17	0	NA	0.026
Nonferrous metals manufacturing	ND	56	4.7	0	NA	0.25
Iron and steel manufacturing	NA	20	16	0	NA	2.9

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

Date: 12/5/79

I.6.1-3

INDUSTRIAL OCCURRENCE OF DIMETHYL PHTHALATE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	ND	ND	^d	^d	^d
Textile mills	NA	1.0 ^e	1.0 ^e	4.2 x 10 ⁻⁶	0.029	0.0018
Petroleum refining	NA	NA	3 ^f	0	0.28	0.017
Rubber processing	NA	14	7.5	1.5 x 10 ⁻⁶	0.0064	0.00025
Foundries	10	320	79	0	0.53	0.21
Iron and steel manufacturing	10	<10	0	NA	1.8	
Nonferrous metals manufacturing	ND	1,300	67	0	NA	3.6

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

^fMedian, not average.

Date: 12/5/79

I.6.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIMETHYL PHTHALATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Filtration			>98 ^d	<0.03 ^d	III.4.6
Sedimentation			49->99	42	III.4.2
Aerated lagoons			25 ^d	6 ^d	III.5.3
Activated sludge			58->99	19	III.5.1
Reverse osmosis			30-41	110	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 94-1 - 94-15.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Diethyl phthalate

Formula:

Alternate Names: DEP, Ethyl phthalate,
1,2-Benzendicarboxylic acid,
Diethyl ether



CAS #: 84-66-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 222.2 m.p., °C: -40.5 b.p. (760 torr), °C: 298
vapor pressure (70°C), torr: 0.05
solubility in water (32°C), mg/L: 1,000
log octanol/water partition coefficients: 4.42
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No direct photolysis; indirect photolysis too slow to be important
oxidation: Not important
hydrolysis*: No data, but believed to be too slow to be important under
 natural conditions
volatilization: Very little data, but volatilization is not considered as
 important as sorption
sorption*: Adsorption onto solids and particles and complexation with humic
 material (fulvic acid) are the principal transport for DEP
biological processes*: Bioaccumulation, biodegradation, and biotransformation
 by many organisms (including humans) are very important
 fates
other reactions/interactions: Not important

*Inferred from data on phthalate esters as a group.

Carbon Adsorption Data: Not available

Date: 12/5/79

I.6.2-2

INDUSTRIAL OCCURRENCE OF DIETHYL PHTHALATE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<3.7	0	0.098	0.023
Textile mills	NA	86 ^d	6.0 ^e	2.5 x 10 ⁻⁵	0.17	0.011
Petroleum refining	NA	12 ^d	12 ^d	0	1.1	0.070
Pulp, paper and paperboard mills	<1	29	<15	0	NA	0.45
Auto and other laundries	ND	25	4	3.6 x 10 ⁻⁶	0.0056	0.00084
Pharmaceutical manufacturing	ND	31	8	0	0.054	0.0074
Ore mining and dressing	ND	9.6	2.9	0	NA	0.11
Steam electric power generating (condenser cooling system)	10	11	11	0.00058	0.012	0.026
Steam electric power generating (ash handling)	NA	NA	NA	NA	NA	NA
Coil coating	ND	600	53	0.0097	0.095	0.025
Foundries	ND	730	58	0	0.39	0.16
Iron and steel manufacturing	NA	10	7	0	NA	1.3
Nonferrous metals manufacturing	ND	83	4.7	0	NA	0.25

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMedian, not average.

Date: 12/5/79

I.6.2-3

INDUSTRIAL OCCURRENCE OF DIETHYL PHTHALATE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<5.7	0	0.15	0.021
Textile mills	NA	9.4	1.5 ^d	6.3 x 10 ⁻⁶	0.043	0.0027
Petroleum refining	<10	30	<20 ^d	0	1.9	0.12
Pulp, paper and paperboard mills	<1	69	<24	0 ^e	NA ^e	0.72 ^e
Pharmaceutical manufacturing	ND	ND	ND	- ^e	- ^e	- ^e
Foundries	10	11,000	910	0	6.1	2.5
Iron and steel manufacturing	NA	14	10	0	NA	1.8
Nonferrous metals manufacturing	ND	82	6	0	NA	0.32

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e Mean pollutant concentration below detection limit.

Date: 12/5/79

I.6.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIETHYL PHTHALATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	12 ^d	III.4.1
Gas flotation			>17 ^d	ND	III.4.4
Filtration			37->99	2,000	III.4.6
Sedimentation			33->99	24	III.4.2
Sedimentation with chemical addition			>99 ^d	<10 ^d	III.4.3
Sedimentation with chemical addition			>98 ^d	<0.03 ^d	III.4.3
Aerated lagoons			0 ^{d,e}	- ^e	III.5.3
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Activated sludge			58->99	6	III.5.1
Granular activated carbon adsorption			0 ^e	- ^e	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U. S. Environmental Protection Agency, Washington, D.C., 1979. pp. 95-1 - 95-15.


Date: 8/13/79

I.6.2-5

Compound: Di-n-butyl phthalate

Formula:

Alternate Names: DBP, *o*-Benzenedicarboxylic acid, Dibutyl ester, Benzene-*o*-dicarboxylic acid, Di-n-butyl ester, n-Butyl phthalate, Dibutyl phthalate



CAS #: 84-74-2

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 278.3 m.p., °C: -35 b.p. (760 torr), °C: 340
vapor pressure (115°C), torr: 0.1
solubility in water (25°C), mg/L: 4,500
log octanol/water partition coefficients: >4.42 (exact value unknown due to molecular folding)
Henry's law constant: Not available
biodegradability: Aerobic degradation in freshwater hydrosol; 53% after 24-hr incubation, 98% after 5 days incubation


Probable Fate [1]

photolysis: No direct photolysis; indirect photolysis too slow to be environmentally important
oxidation: Not important
hydrolysis*: Hydrolysis (only in surface waters) believed to be too slow to be important
volatilization: Not likely to be an important transport process
sorption*: Sorption onto particulates and complexation with organics are dominant transport processes
biological processes*: Bioaccumulated in many organisms; biodegraded rapidly in natural soil; some biotransformation; all biological processes important fates
other reactions/interactions: Not important

*Inferred from data on phthalate esters as a group.

Carbon Adsorption Data [3]

pH: 3.0
type of carbon: Not available
adsorbability: 42 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

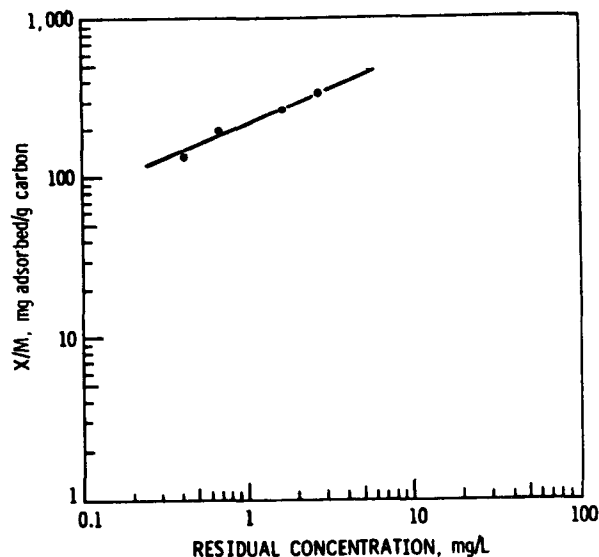

Date: 8/13/79

I.6.3-1

Date: 12/5/79

I.6.3-2

INDUSTRIAL OCCURRENCE OF DI-n-BUTYL PHTHALATE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	3.3	<10	<8.8	0	0.23	0.033
Textile mills	NA	67	16 ^e	6.7 x 10 ⁻⁵	0.46	0.029
Petroleum refining	NA	1.3 ^d	1.3 ^d	0	0.12	0.0075
Paint and ink formulation	ND	69,000	4,100	0	0.19	0.0066
Rubber processing	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills ^d	NA	<1	<1	0	NA	0.030
Auto and other laundries	ND	820	29	2.6 x 10 ⁻⁵	0.041	0.0061
Pharmaceutical manufacturing	ND	90	10	0	0.068	0.0092
Ore mining and dressing	ND	140	45	0	NA	1.7
Steam electric power generating (condenser cooling system)	<10	48	18	0.00095	0.020	0.0043
Steam electric power generating (ash handling)	7	48	32	0.00061	3.1	0.70
Coil coating	ND	160	10	0.0005	0.018	0.0048
Foundries	ND	5,400	160	0	1.1	0.43
Iron and steel manufacturing	NA	520	33	0	NA	5.9
Nonferrous metals manufacturing	ND	390	25	0	NA	1.3

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMedian, not average.

Date: 12/5/79

I.6.3-3

INDUSTRIAL OCCURRENCE OF DI-n-BUTYL PHTHALATE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	<3.3	10	<7.7 ^d	0	0.20	0.029
Textile mills	NA	3.6 ^d	3.6 ^d	1.5 x 10 ⁻⁵	0.10	0.0065
Petroleum refining	0.7	10	5.4 ^e	0	0.50	0.031
Paint and ink formulation	ND	1,300 ^d	160 ^d	0	0.0074	0.00026
Rubber processing	NA	36 ^d	36 ^d	7.2 x 10 ⁻⁶	0.031	0.0012
Pulp, paper and paperboard mills	<1	8	<3	0	NA	NA
Auto and other laundries	0.9	290	76	6.8 x 10 ⁻⁵	0.11	0.016
Pharmaceutical manufacturing	ND	12	0.86	0	0.0058	0.00079
Foundries	1.0	9,300	710	0	4.8	1.9
Iron and steel manufacturing	NA	420	35	0	NA	6.3
Noferrous metals manufacturing	ND	79	15	0	NA	0.80

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMedian, not average.

Date: 12/5/79

I.6.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DI-n-BUTYL PHTHALATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	1.3 ^d	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			39-79	150	III.4.5
Gas flotation with chemical addition (polymer)			>61->99	<5	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			16->99	910	III.4.6
Sedimentation			40->99	42	III.4.2
Sedimentation with chemical addition (alum, lime)			>99 ^d	<10 ^d	III.4.3
Sedimentation with chemical addition (lime, polymer)			99 ^d	1 ^d	III.4.3
Sedimentation with chemical addition (polymer)			50->99	<6.4	III.4.3
Sedimentation with chemical addition (alum, polymer)			>78->99	<8.5	III.4.3
Sedimentation with chemical addition (alum)			0 ^e	- ^e	III.4.3
Aerated lagoons			0 ^{d,e}	- ^e	III.5.3
Ozonation			77 ^d	2.7 ^d	III.6.14
Activated sludge			60->99	<9	III.5.1
Granular activated carbon adsorption			62->99	1.3	III.6.1
Reverse osmosis			59-83	0.9	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 96-1 - 96-16.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 222, 223.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Di-n-octyl phthalate

Formula:

Alternate Names: DOP, *o*-Benzenedicarboxylic acid,
Dioctyl ester, *n*-Dioctyl phthalate,
Octyl phthalate, Dioctyl-*o*-
benzenedicarboxylate



CAS #: 117-84-0

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 391.0 m.p., °C: -25 b.p. (760 torr), °C: 220
vapor pressure (150°C), torr: <0.2
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficients: >4.42 (exact value unknown because
of molecular folding)

Henry's law constant: Not available

biodegradability: Aerobic degradation in fresh water hydrosol; 50% after
14 days incubation

Probable Fate [1]

photolysis: No direct photolysis; indirect photolysis too slow to be important

oxidation: Not important

hydrolysis*: Hydrolysis only in surface waters but too slow to be important

volatilization: Not likely to be an important transport process

sorption*: Adsorption onto solids and particles and complexation with organics
are important transport processes

biological processes*: Bioaccumulation by many organisms, biodegradation, and
metabolization are all important fates

other reactions/interactions: Not important

*Inferred from data on phthalate esters as a group.

Carbon Adsorption Data: Not available

Date: 12/5/79

I.6.4-2

INDUSTRIAL OCCURRENCE OF DI-n-OCTYL PHTHALATE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.4	0	0.011	0.0015
Auto and other laundries	ND	410	24	2.2 x 10 ⁻⁵	0.034	0.005
Coil coating	ND	180	16	0.00080	0.0077	0.029
Foundries	ND	NA	710	0	4.8	1.9
Iron and steel manufacturing	NA	120	13	0	NA	2.3
Nonferrous metals manufacturing	ND	95	8.4	0	NA	0.44

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.6.4-3

INDUSTRIAL OCCURRENCE OF DI-n-OCTYL PHTHALATE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1	0	0.026	0.0038
Auto and other laundries	ND	4 ^d	2 ^d	2.0 x 10 ⁻⁶	0.0028	0.00042
Foundries	NA	73 ^d	73 ^d	0	0.49	0.02
Iron and steel manufacturing	NA	490	39	0	NA	7.0
Nonferrous metals manufacturing	ND	189	12	0	NA	0.64

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.6.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DI-n-OCTYL PHTHALATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gas flotation with chemical addition (calcium chloride, polymer)			78 ^d	33 ^d	III.4.5
Gas flotation with chemical addition (polymer)			61 ^d	11 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			>73->96	<1.5	III.4.6
Sedimentation			>49->99	<35	III.4.2
Sedimentation with chemical addition (alum, polymer)			92	5	III.4.3
Activated sludge			50->99	2,500	III.5.1
Granular activated carbon adsorption			76-96	110	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 97-1 - 97-16.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 279-281.

Date: 8/13/79

I.6.4-5

Compound: Bis(2-ethylhexyl) phthalate Formula:

Alternate Names: DEHP, Di(2-ethylhexyl) phthalate,
Bis(2-ethylhexyl) ester
phthalic acid, Di(2-ethylhexyl)
orthophthalate, Di-sec-octyl
phthalate, 2-Ethylhexyl phthalate,
1,2-Benzene dicarboxylic acid,
Bis(2-ethylhexyl) ester

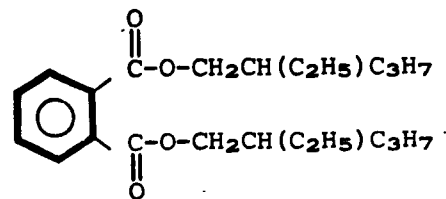

CAS #: 117-81-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 391.0 m.p., °C: -50 b.p. (760 torr), °C: 387
vapor pressure (25°C), torr: <0.01
solubility in water (25°C), mg/L: 50
log octanol/water partition coefficients: >4.42 (exact value unknown because
of molecular folding)
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No direct photolysis; indirect photolysis too slow to be important
oxidation: Not important
hydrolysis: Too slow to be important (half-life of several years)
volatilization: Not a likely transport process
sorption: Sorption onto particulates and biota and complexation with humic
materials are most important transport processes
biological processes: Bioaccumulation and metabolism by many organisms,
and biodegradation are all very important fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.6.5-2

INDUSTRIAL OCCURRENCE OF BIS(2-ETHYLHEXYL) PHTHALATE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	50	11	0	0.29	0.041
Textile mills	NA	860	26 ^e	0.00011	0.75	0.047
Explosives manufacture	NA	72 ^d	72 ^d	0	0.025	0.00031
Timber products processing	BDL	1,500	280 ^f	0	13	0.024
Petroleum refining	180	700	300 ^e	0	28	1.7
Paint and ink formulation	ND	87,000	7,300	0	0.33	0.012
Gum and wood chemicals	NA	NA	NA	NA	NA	NA
Rubber processing	NA	530	170	3.4 x 10 ⁻⁵	0.15	0.0056
Pulp, paper, paperboard mills	<1	66	<16	0	NA	0.48
Auto and other laundries	ND	18,000	1,000	0.0009	1.4	0.21
Pharmaceutical manufacturing	ND	170	38	0	0.26	0.035
Ore mining and dressing	0.004	50	12	0	NA	0.44
Steam electric power generating (condenser cooling system)	<10	36	27	0.0014	0.030	0.0065
Steam electric power generating (water treatment)	NA	NA	<1	6.1 x 10 ⁻⁹	<0.06	0.00015
Steam electric power generating (ash handling)	17	310	22	0.00040	2.2	0.48
Inorganic chemicals manufacturing	NA	120	NA	0	7.5	1.5
Coil coating	ND	1,100	75	0.0038	0.13	0.036
Foundries	ND	817,000	21,000	0	141	57
Leather tanning and finishing	NA	NA	25	0	NA	0.038
Iron and steel manufacturing	NA	10,000	451	0	NA	81
Nonferrous metals manufacturing	ND	7,000	237	0	NA	13

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

^e Median, not average.

^f Average of medians reported for various industry segments.

Date: 12/5/79

I.6.5-3

INDUSTRIAL OCCURRENCE OF BIS(2-ETHYLHEXYL) PHTHALATE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<5.7	0	0.15	0.021
Textile mills	NA	230	18 ^d	7.6 x 10 ⁻⁵	0.52	0.032
Timber products processing	BDL	350	9 ^d	0	0.41	0.00077
Petroleum refining	190	2,000	600 ^d	0	56	3.5
Paint and ink formulation	ND	160	22	0	0.0010	3.5 x 10 ⁻⁵
Gum and wood chemicals	NA	1,900 ^e	1,900 ^e	0.017	14	31
Rubber processing	NA	430	100	2.0 x 10 ⁻⁵	0.086	0.0033
Explosives manufacture	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	294	<30	0	NA	0.90
Auto and other laundries	ND	96	37	3.3 x 10 ⁻⁵	0.052	0.0078
Pharmaceutical manufacturing	ND	380	47	0	0.32	0.043
Foundries	2	16,000	1,600	0	11	4.3
Iron and steel manufacturing	ND	11,000	680	0	NA	120
Nonferrous metals manufacturing	ND	1,200	110	0	NA	5.8
Leather tanning and finishing	ND	34	11	0	NA	0.017

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eOne sample.

Date: 12/5/79

I.6.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BIS(2-ETHYLHEXYL) PHTHALATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	270	III.4.1
Gas flotation			0 ^d	- ^d	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			72-82	610	III.4.5
Gas flotation with chemical addition (polymer)			51-92	60	III.4.5
Gas flotation with chemical addition (alum, polymer)			25 ^e	90 ^e	III.4.5
Filtration			44-98	1,200	III.4.6
Sedimentation			33->99	24	III.4.2
Sedimentation with chemical addition (alum, lime)			0 ^{d,e}	- ^d	III.4.3
Sedimentation with chemical addition (lime, polymer)			49-99	22	III.4.3
Sedimentation with chemical addition (polymer)			>48->97	<10	III.4.3
Sedimentation with chemical addition (BaCl ₂)			48-95	9	III.4.3
Sedimentation with chemical addition (alum, polymer)			78 ^e	67 ^e	III.4.3
Sedimentation with chemical addition (alum)			0 ^d	- ^d	III.4.3
Tertiary polishing lagoons			>58-72	<11	III.5.3
Aerated lagoons			70-96	<11	III.5.3
Trickling filters			83 ^e	6 ^e	III.5.2
Ozonation			0 ^d	- ^d	III.6.14
Activated sludge			37->99	64	III.5.1
Powdered activated carbon adsorption			>97 ^e	<10 ^e	III.6.2
Granular activated carbon adsorption			18-66	65	III.6.1
Reverse osmosis			51-96	21	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dActual data indicate negative removal.

^eOnly one data point.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 98-1 - 98-16.

Compound: Butyl benzyl phthalate

Formula:

Alternate Names: BBP, Benzyl butyl phthalate

CAS #: 85-68-7



Physical, Chemical, and Biological Properties [1]

mol. wt.: 312.0 m.p., °C: -35

b.p. (760 torr), °C: 377

vapor pressure (25°C), torr: Not available

solubility in water (25°C), mg/L: Insoluble

log octanol/water partition coefficients: >4.42 (exact value unknown because of molecular folding)

Henry's law constant: Not available

biodegradability: Not available

Probable Fate [1]

photolysis: Direct photolysis improbable; indirect photolysis too slow to be important

oxidation: Not important

hydrolysis*: Too slow to be important

volatilization: Not a likely transport process

sorption*: Sorption onto particulates and complexation with organic substances are dominant transport processes

biological processes*: Bioaccumulated and metabolized by many organisms; biodegraded under natural conditions

other reactions/interactions: Not important

*Based on data for phthalate esters as a group.

Carbon Adsorption Data: Not available

Date: 12/5/79

I.6.6-2

INDUSTRIAL OCCURRENCE OF BUTYL BENZYL PHTHALATE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<3.3	0	0.087	0.012
Textile mills	NA	73	42 ^d	1.6 x 10 ⁻⁵	1.2	0.076
Pulp, paper, and paperboard mills	2	100	51	0	NA	1.5
Auto and other laundries	ND	1,500	34	3.1 x 10 ⁻⁵	0.048	0.0071
Pharmaceutical manufacturing	ND	360	33	0	0.22	0.030
Ore mining and dressing	ND	66	22	0	NA	0.81
Steam electric power generating (condenser cooling system)	NA	NA	10	0.00053	0.0024	0.011
Steam electric power generating (ash handling)	NA	NA	NA	NA	NA	NA
Coil coating	ND	300	57	0.0029	0.10	0.027
Foundries	ND	180	29	0	0.078	0.19
Iron and steel manufacturing	NA	340	34	0	NA	6.1
Nonferrous metals manufacturing	ND	98	11	0	NA	0.58

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.6.6-3

INDUSTRIAL OCCURRENCE OF BUTYL BENZYL PHTHALATE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<3.3	0	0.087	0.012
Textile mills	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	3	11	7	0	NA	0.21
Auto and other laundries	4	11	7.7	7 _d x 10 ⁻⁶	0.011 _d	0.0016 _d
Pharmaceutical manufacturing	ND	ND	ND	- _d	- _d	- _d
Foundries	2	49	23	0	0.15	0.062
Iron and steel manufacturing	NA	990	680	0	NA	120
Nonferrous metals manufacturing	ND	75	7.0	0	NA	0.37

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

Date: 12/5/79

I.6.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BUTYL BENZYL PHTHALATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gas flotation			>99 ^d	ND	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			>99 ^d	<0.03 ^d	III.4.5
Gas flotation with chemical addition (polymer)			>99 ^d	<0.03 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			76->99	2.2	III.4.6
Sedimentation			>48->99	<11	III.4.2
Sedimentation with chemical addition (lime, polymer)			>99 ^d	<10 ^d	III.4.3
Sedimentation with chemical addition (alum, polymer)			54	36	III.4.3
Aerated lagoons			0 ^{d,e}	- ^e	III.5.3
Trickling filters			25	6	III.5.2
Ozonation			>97 ^d	<0.03 ^d	III.6.14
Activated sludge			0 ^{d,e}	- ^e	III.5.1
Granular activated carbon adsorption			>83->99	5.7	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 99-1 - 99-15.

Date: 8/13/79

I.6.6-5

Compound: N-nitrosodimethylamine

Formula:



Alternate Names: N-methyl-N-nitrosomethanamine,
Dimethylnitrosoamine

CAS #: 62-75-9

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 74.08 m.p., °C: Not available b.p. (760 torr), °C: 151-153
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Miscible
log octanol/water partition coefficients: 0.06
Henry's law constant: Not available
biodegradability: Aerobic degradation in continuous activated sludge unit;
2 ppm concentration reduced to below 0.1 ppm

Probable Fate [1]

photolysis: Slow photolysis in aqueous solution (but fast in atmosphere) is
the principal fate
oxidation: Not important
hydrolysis: Does not occur under natural conditions
volatilization: Much too slow to be important
sorption: Does not occur
biological processes: No bioaccumulation; resistant to biodegradation under
natural conditions
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 9/13/79

I.7.1-2

INDUSTRIAL OCCURRENCE OF N-NITROSODIMETHYLAMINE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.1-3

INDUSTRIAL OCCURRENCE OF N-NITROSODIMETHYLAMINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR N-NITROSODIMETHYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Aerated lagoons			67 ^d	1 ^d	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 116-1 - 116-6.
2. Fochtman, E. G., and W. Eisenberg. Treatability of Carcinogenic and other Hazardous Organic Compounds. Illinois Institute of Technology Research Institute, Chicago, Illinois. 58 pp.

Compound: N-Nitrosodiphenylamine

Formula:

Alternate Names: N-nitroso-N-phenyl benzamine,
Diphenylnitrosoamine



CAS #: 86-30-6

Physical, Chemical, and Biological Properties [1]


mol. wt.: 198.2 m.p., °C: 66.5 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficients: 2.57
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Absorption maximum at 292 nm; exact fate unknown
oxidation: Not important
hydrolysis: Does not occur under natural conditions
volatilization: Not important
sorption: Probably adsorbed by organic materials but exact fate unknown
biological processes: Potential for bioaccumulation, biodegradation, and
biotransformation, but quantized data unavailable
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: 3.0, 7.0, 9.0
type of carbon: Not available
adsorbability: 42 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

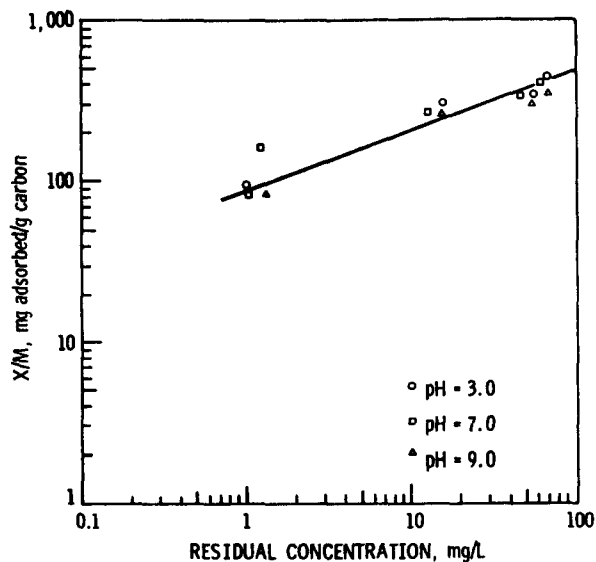

Date: 8/13/79

I.7.2-1

Date: 12/5/79

I.7.2-2

INDUSTRIAL OCCURRENCE OF N-NITROSODIPHENYLAMINE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	30	3.8	0	0.10	0.014
Textile mills	NA	72	15 ^d	6.3 x 10 ⁻⁵	0.43	0.027
Rubber processing	NA	53	35	7.0 x 10 ⁻⁶	0.030	0.0011
Auto and other laundries	ND	1,800	95	8.6 x 10 ⁻⁵	0.13	0.020
Pharmaceutical manufacturing	ND	12	30	0	0.020	0.0028
Foundries	ND	1,400	250	0	1.7	0.68
Leather tanning and finishing	ND	NA	36	0	NA	0.054

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.7.2-3

INDUSTRIAL OCCURRENCE OF N-NITROSODIPHENYLAMINE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	ND	ND	_d	_d	_d
Textile mills	NA	NA	NA	NA	NA	NA
Rubber processing	NA	NA	NA	NA	NA	NA
Auto and other laundries	NA	620 ^e	620 ^e	0.00056	0.87	0.13
Pharmaceutical manufacturing	ND	ND	ND	_d	_d	_d
Foundries	NA	190 ^e	190 ^e	0	1.3	0.51

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

Date: 12/5/79

I.7.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR N-NITROSODIPHENYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Gas flotation with chemical addition (calcium chloride, polymer)			66 ^d	620 ^d	III.4.5
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation			>77 ^d	<10 ^d	III.4.2
Activated sludge			84->99	<0.8	III.5.1
Granular activated carbon adsorption			>82 ^d	<0.07 ^d	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 117-1 - 117-5.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: N-nitroso-di-n-propylamine Formula:

Alternate Names: N-nitroso-N-propyl-1-propanamine,
Di-n-propylnitrosoamine



CAS #: 621-64-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 130.2 m.p., °C: Not available b.p. (760 torr), °C: 205
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: 9,900
log octanol/water partition coefficients: 1.31
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Photolysis is slow but is the principal fate of the compound
oxidation: Not important
hydrolysis: Not important
volatilization: No loss to volatilization reported
sorption: No specific data but moderate adsorption by organic matter is possible
biological processes: Not important
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.7.3-2

INDUSTRIAL OCCURRENCE OF N-NITROSODI-n-PROPYLAMINE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA
Foundries	ND	210	60	0	0.40	0.16

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available one-half the reported maximum was utilized.

Date: 12/5/79

I.7.3-3

INDUSTRIAL OCCURRENCE OF N-NITROSODI-n-PROPYLAMINE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	19 ^d	10 ^d	4.2 x 10 ⁻⁵	0.89	0.018
Foundries	NA	34 ^d	34 ^d	0	0.23	0.0071

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.7.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR N-NITROSO-DI-n-PROPYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Activated sludge			0 ^d	- ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 118-1 - 118-7.

Compound: Benzidine

Formula:



Alternate Names: 4,4'-Diaminobiphenyl,
4,4'-Biphenyldiamine,
(1,1'-Biphenyl)-4,4'-diamine

CAS #: 92-87-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 184.2 m.p., °C: 129 b.p. (760 torr), °C: 402
vapor pressure (25°C), torr: Not available
solubility in water (12°C), mg/L: 400
log octanol/water partition coefficients: 1.81
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Possible but actual significance uncertain
oxidation: Oxidation by metal cations very fast; also, reactions with oxygen
and/or hydroperoxy radical are very important
hydrolysis: Not important
volatilization: Not important
sorption: Very rapid adsorption by clay minerals
biological processes: No bioaccumulation; only slight biodegradation
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.7.4-2

INDUSTRIAL OCCURRENCE OF BENZIDINE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Leather tanning and finishing	NA	NA	4	0	NA	0.0060
Nonferrous metals manufacturing	ND	6	1.2	0	NA	0.064

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.4-3

INDUSTRIAL OCCURRENCE OF BENZIDINE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	NA	<20 ^d	<20 ^d	0	0.13	0.054

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.7.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZIDINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Aerated lagoons			41 ^d	7 ^d	III.5.3
Activated sludge			0 ^{d,e}	- ^e	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 119-1 - 11-97.

Compound: 3,3'-Dichlorobenzidine

Formula:

Alternate Names: 3,3'-Dichloro-4,4'-diamino-
(1,1'-biphenyl)

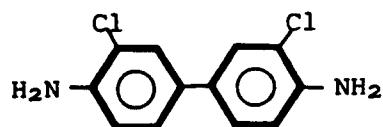

CAS #: 91-94-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 253.1 m.p., °C: 132 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficients: 3.02
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis*: Probable, but exact importance unknown
oxidation*: Oxidized (especially by metal cations) like benzidine but not quite as easily
hydrolysis: Probably not important
volatilization*: Not important
sorption*: Adsorption by clay minerals, possibly most important transport process
biological processes: No data available
other reactions/interactions: Not important

*Based on data for unsubstituted benzidine.

Carbon Adsorption Data: Not available

Date: 12/5/79

I.7.5-2

INDUSTRIAL OCCURRENCE OF 3,3'-DICHLOROBENZIDINE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	NA	ND	_d	_d	_d
Nonferrous metals manufacturing	ND	2	0.3	0	NA	0.016

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Mean pollutant concentration below detection limit.

Date: 12/5/79

INDUSTRIAL OCCURRENCE OF 3,3'-DICHLOROBENZIDINE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<0.4	0	0.011	0.0015

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.5-3

Date: 12/5/79

I.7.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 3,3'-DICHLOROBENZIDINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 120-1 - 120-7.

Date: 8/13/79

I.7.5-5

Compound: 1,2-Diphenylhydrazine

Formula:



Alternate Names: Hydrazobenzene, N,N'-bianiline

CAS #: 122-66-7

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 184.2 m.p., °C: 131 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficients: 3.03
Henry's law constant: Not available
biodegradability: No information for 1,2-Diphenylhydrazine; 1,1-Diphenylhydrazine reduced from 2 ppm to nondetectable levels during 7-day static biological test using activated sludge

Probable Fate [1]

photolysis: Slow photoreduction to aniline possibly leads to destruction of compound
oxidation: Reversible oxidation to azobenzene occurs; further oxidation unknown if any
hydrolysis: Only possible in bisulfite wastes of a paper mill or coal mine
volatilization: Not important
sorption: Sorption onto particulates is the main transport process for the compound
biological processes: No data, but bioaccumulation possible
other reactions/interactions: Intramolecular rearrangement to form benzidine occurs in acidic solution

Carbon Adsorption Data: Not available

Date: 8/13/79

I.7.6-1

Date: 12/5/79

I.7.6-2

INDUSTRIAL OCCURRENCE OF 1,2-DIPHENYLHYDRAZINE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.4	0	0.011	0.0015
Textile mills	NA	22 ^d	22 ^d	9.2 x 10 ⁻⁵	0.63	0.040
Pharmaceutical manufacturing	ND	10	2	0	0.014	0.0018
Iron and steel manufacturing	NA	NA	NA	NA	NA	NA

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, 1/2 the reported maximum was utilized.

^d One sample.

Date: 12/5/79

I.7.6-3

INDUSTRIAL OCCURRENCE OF 1,2-DIPHENYLHYDRAZINE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<0.6	0	0.016	0.0023
Textile mills	NA	NA ^d	NA ^d	NA	NA	NA
Auto and other laundries	NA	30 ^d	30 ^d	2.7 x 10 ⁻⁵	0.042	0.0063
Pharmaceutical manufacturing	ND	ND	ND	- ^e	- ^e	- ^e
Iron and steel manufacturing	NA	370	120	0	NA	22
Foundries	<20	180	73	0	0.49	0.20

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.7.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,2-DIPHENYLHYDRAZINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Aerated lagoons			0 ^{d,e}	- ^e	III.5.3
Activated sludge			0 ^{d,e}	- ^e	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 121-1 - 121-8.
2. Fochtman, E. G., and W. Eisenberg. Treatability of Carcinogenic and other Hazardous Organic Compounds. Illinois Institute of Technology Research Institute, Chicago, Illinois. 58 pp.

Compound: N-nitrosodimethylamine

Formula:



Alternate Names: N-methyl-N-nitrosomethanamine,
Dimethylnitrosoamine

CAS #: 62-75-9

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 74.08 m.p., °C: Not available b.p. (760 torr), °C: 151-153
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Miscible
log octanol/water partition coefficients: 0.06
Henry's law constant: Not available
biodegradability: Aerobic degradation in continuous activated sludge unit;
2 ppm concentration reduced to below 0.1 ppm

Probable Fate [1]

photolysis: Slow photolysis in aqueous solution (but fast in atmosphere) is
the principal fate
oxidation: Not important
hydrolysis: Does not occur under natural conditions
volatilization: Much too slow to be important
sorption: Does not occur
biological processes: No bioaccumulation; resistant to biodegradation under
natural conditions
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.7.7-2

INDUSTRIAL OCCURRENCE OF ACRYLONITRILE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	1,600 ^d	1,600 ^d	0.0067	46	2.9
Rubber processing	NA	23,000 ^d	23,000 ^d	0.0046	20	0.76
Iron and steel manufacturing	NA	21,000	6,900	0	NA	1,200

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, 1/2 the reported maximum was utilized.

^d One sample.

Date: 12/5/79

I.7.7-3

INDUSTRIAL OCCURRENCE OF ACRYLONITRILE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	400 ^d	400 ^d	0.0014	0.10	0.014
Rubber processing	NA	23,000 ^d	23,000 ^d	0.0046	20	0.76
Iron and steel manufacturing	NA	NA	3,000 ^d	0	NA	540
Foundries	NA	23 ^d	23 ^d	0	0.15	0.062

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.7.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ACRYLONITRILE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	30 ^d	III.4.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume III, Ethers, Phthalate Esters, and Nitrosamines. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 122-1 - 122-7.

Date: 8/13/79

I.7.7-5

Compound: Butylamine

Formula:



Alternate Names: 1-Aminobutane

CAS #: 109-73-9

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 73.14 m.p., °C: -49.1 b.p. (760 torr), °C: 77.8
vapor pressure (20°C), torr: 72
solubility in water (25°C), mg/L: NOT available
log octanol/water partition coefficients: Not available
Henry's law constant: Not available
biodegradability: Degradation by aerobacter at 3°C of 200 mg/L concentration
was 100% in 7 hours

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not adsorbed by activated carbon

I.7.8-2

INDUSTRIAL OCCURRENCE OF BUTYLAMINE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, $^{\text{c}}$ kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Aluminum	1.0	1.0	1.0	1.0	1.0	1.0
Chemical	1.0	1.0	1.0	1.0	1.0	1.0
Food	1.0	1.0	1.0	1.0	1.0	1.0
Pharmaceutical	1.0	1.0	1.0	1.0	1.0	1.0
Textile	1.0	1.0	1.0	1.0	1.0	1.0
Other	1.0	1.0	1.0	1.0	1.0	1.0

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.8-3

INDUSTRIAL OCCURRENCE OF BUTYLAMINE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BUTYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 144.

Date: 8/13/79

I.7.8-5

Compound: Diethylamine

Formula:



Alternate Names: None

CAS #: 109-89-7

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 73.14 m.p., °C: -48 to -50 b.p. (760 torr), °C: 56.3
vapor pressure (20°C), torr: 200
solubility in water (14°C), mg/L: 815,000
log octanol/water partition coefficients: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

I.7.9-2

INDUSTRIAL OCCURRENCE OF DIETHYLAMINE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.9-3

INDUSTRIAL OCCURRENCE OF DIETHYLAMINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIETHYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 242.
2. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-106.

Date: 8/13/79

I.7.9-5

Compound: Ethylenediamine

Formula:



Alternate Names: Diaminoethane,
1,2-Ethanediamine,
1,2-Diaminoethane

CAS #: 107-15-3

Physical, Chemical, and Biological Properties [1-3]

mol. wt.: 60.11 m.p., °C: 8.5 b.p. (760 torr), °C: 116
vapor pressure (20°C), torr: 116
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 98% ethylenediamine removal (measured as COD removal)
obtained at 20°C in activated sludge at a rate of 9.8 mg
COD/g dry inoculum/hr

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not adsorbed by activated carbon

I.7.10-2

INDUSTRIAL OCCURRENCE OF ETHYLENEDIAMINE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.10-3

INDUSTRIAL OCCURRENCE OF ETHYLENEDIAMINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.10-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ETHYLENEDIAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 317.
3. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.

Compound: Monoethylamine

Formula:



Alternate Names: Ethylamine, Aminoethane

CAS #: 75-04-7

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 45.09 m.p., °C: -81 b.p. (760 torr), °C: 16.6
vapor pressure (20°C), torr: 910
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.7.11-2

INDUSTRIAL OCCURRENCE OF MONOETHYLAMINE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.11-3

INDUSTRIAL OCCURRENCE OF MONOETHYLAMINE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR MONOETHYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal _c range, %	Average achievable conc., µg/L	Removal _c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 305.

Compound: Monomethylamine

Formula:



Alternate Names: Methylamine, Aminomethane,
Carbinamine, Mercurialin,
Methanamine

CAS #: 74-89-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 31.06 m.p., °C: -95.3 b.p. (760 torr), °C: -6.3
vapor pressure (25°C), torr: 1,520
solubility in water (25°C), mg/L: At 760 torr, 1 volume of water dissolves
959 volumes of gas
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.7.12-2

INDUSTRIAL OCCURRENCE OF MONOMETHYLAMINE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.12-3

INDUSTRIAL OCCURRENCE OF MONOMETHYLAMINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR MONOMETHYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part I, pp. 50, 51.

Date: 8/13/79

I.7-12-5

Compound: Triethylamine

Formula:



Alternate Names: None

CAS #: 121-44-8

Physical, Chemical, and Biological Properties [1]

mol. wt.: 101.2 m.p., °C: -115 b.p. (760 torr), °C: 90
vapor pressure (25°C), torr: 50
solubility in water (20°C), mg/L: 15,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Degradation by Aerobacter at 30°C of 200 mg/L concentration was 100% in 11 hours

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.7.13-2

INDUSTRIAL OCCURRENCE OF TRIETHYLAMINE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.13-3

INDUSTRIAL OCCURRENCE OF TRIETHYLAMINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TRIETHYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 616

Date: 8/13/79

I.7.13-5

Compound: Trimethylamine



Alternate Names: None

CAS #: 75-50-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 59.11 m.p., °C: -117 to -124 b.p. (760 torr), °C: 3.5
vapor pressure (20°C), torr: 1,440
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.7.14-2

INDUSTRIAL OCCURRENCE OF TRIMETHYLAMINE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.7.14-3

INDUSTRIAL OCCURRENCE OF TRIMETHYLAMINE^{a, b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.7.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TRIMETHYLAMINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 619.

Compound: Phenol

Formula:



Alternate Names: Carboic acid, Hydroxybenzene,
Phenyl hydroxide, Phenic acid,
Phenyl hydrate

CAS #: 108-95-2

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 94.11 m.p., °C: 40.9 b.p. (760 torr), °C: 182
vapor pressure (20°C), torr: 0.529*
solubility in water (25°C), mg/L: 93,000
log octanol/water partition coefficient: 1.46
Henry's law constant: Not available
biodegradability: 98% phenol removal (measured as COD removal) obtained at
20°C in activated sludge at a rate of 80 mg COD/g dry
innoculum/hr


*Vapor pressure of phenol as a supercooled liquid.

Probable Fate [1]

photolysis: Photooxidation of vitalized phenol and photolysis of phenolic
anion may both take place at moderate rates
oxidation: Metal-catalyzed oxidation may take place in highly aerated waters
hydrolysis: Not important
volatilization: Very little, if any, volatilization of phenol occurs
sorption: Not important
biological processes: No bioaccumulation, but very extensive biodegradation
in natural waters
other reactions/interactions: Chlorination of water may produce chlorophenols

Carbon Adsorption Data [3]

pH: 3.0, 7.0, 9.0
type of carbon: Not available
adsorbability: 430 mg/L; carbon dose re-
quired to reduce pollutant
concentration from 10 mg/L
to 1 mg/L at neutral pH

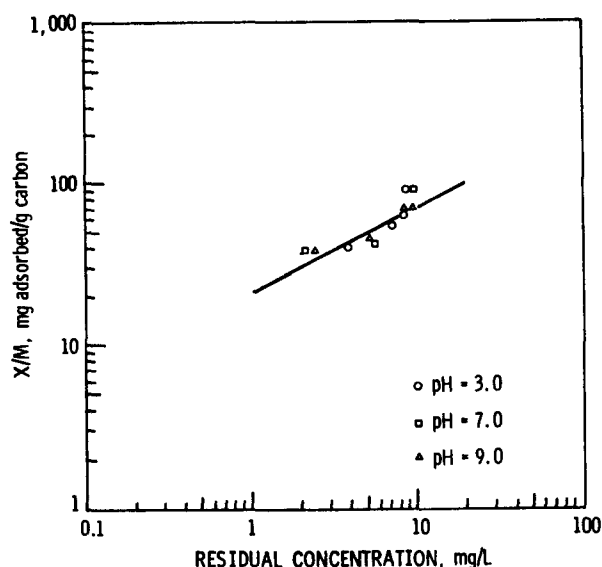

Date: 8/13/79

I.8.1-1

Date: 12/5/79

I.8.1-2

INDUSTRIAL OCCURRENCE OF PHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10,000	<2,100 ^d	0	56	7.9
Textile mills	NA	4,900	55 ^d	0.00023	1.6	0.099
Explosives manufacture	15	70	40	0	0.014	0.00017
Timber products processing	BDL	87,000	8,000 ^e	0	370	0.69
Petroleum refining	13	4,900	>245 ^d	0	23	1.4
Paint and ink formulation	ND	3,800	560	0	0.026	0.00090
Gum and wood chemicals	130	23,000	5,600	0.050	42	9.2
Rubber processing	NA	440	230	4.6 x 10 ⁻⁵	0.20	0.0076
Pulp, paper and paperboard mills	<1	58	<7	0	NA	0.21
Auto and other laundries	ND	840	28	2.5 x 10 ⁻⁵	0.039	0.0059
Pharmaceutical manufacturing	ND	17,000	1,400	0	9.5	1.3
Ore mining and dressing	66	210	140	0	NA	5.2
Steam electric power generators (condenser cooling system)	5	20	7.5	0.0004	8.2 x 10 ⁻³	0.0018
Steam electric power generators (water treatment)	NA	NA	20	1 x 10 ⁻⁷	1.2	0.003
Steam electric power generators (ash handling)	6	40 ^f	25	0.00048	2.5	0.55
Inorganic chemicals manufacturing	NA	160 ^f	NA	0	10	2
Coil coating	NA	16 ^g	16 ^g	0.0008	0.0029	0.0077
Foundries	ND	26,000	1,500	0	10	4.1
Leather tanning and finishing	10	NA	2,500	0	NA	3.8
Iron and steel manufacturing	NA	670,000	17,000	0	NA	3,100
Nonferrous metals manufacturing	ND	70	12	0	NA	0.64

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available, 1/2 the reported maximum was utilized.^d Median, not average^e Average of medians reported for various industry segments.^f Average of maximums reported for various industry segments.^g One sample.

Date: 12/5/79

I.8.1-3

INDUSTRIAL OCCURRENCE OF PHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10,000	<2,000 ^d	0	53	7.6
Textile mills	NA	50	14 ^d	5.9 x 10 ⁻⁵	0.40	0.025
Timber products processing	BDL	16,000	15 ^d	0	0.69	0.0012
Petroleum refining	NA	NA	59 ^d	0	5.5	0.34
Paint and ink formulation	ND	1,200	140	0	0.0064	0.00022
Gum and wood chemicals	NA	850 ^e	850 ^e	0.0076	6.4	1.4
Rubber processing	NA	12,000	3,000	0.00060	2.6	0.099
Explosives manufacture	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	72	<11	0	NA	0.33
Auto and other laundries	ND	120	38	3.4 x 10 ⁻⁵	0.053	0.0080
Pharmaceutical manufacturing	ND	17,000	1,700	0	12	1.6
Ore mining and dressing	<0.01	<0.01	<0.01	0	NA	<0.00037
Foundries	<10	34,000	6,100	0	41	16
Iron and steel manufacturing	NA	53,000	900	0	NA	160
Leather tanning and finishing	ND	1,400	320	0	NA	0.48

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^dMedian, not average.^eOne sample.

Date: 12/5/79

I.8.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	2,200	III.4.1
Gas flotation			26-51	1,200	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			46-80	87	III.4.5
Gas flotation with chemical addition (polymer)			36-72	18	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			26->93	3,400	III.4.6
Sedimentation			40->99	<21	III.4.2
Sedimentation with chemical addition (alum, lime)			48-96	25	III.4.3
Sedimentation with chemical addition (lime, polymer)			18->37	<10	III.4.3
Sedimentation with chemical addition (polymer)			14-29	37	III.4.3
Sedimentation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum)			>80->90	<5	III.4.3
Aerated lagoons			>55->99	<14	III.5.3
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Solvent extraction			65->99	2,200,000	III.5.6
Activated sludge			82->99	79	III.5.1
Powdered activated carbon adsorption			>83->85	95,000	III.6.2
Granular activated carbon adsorption			>60->96	0.7	III.6.1
Reverse osmosis			33-80	2.9	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 83-1 - 83-11.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: 2-Chlorophenol

Formula:



Alternate Names: o-Chlorophenol

CAS #: 95-57-8

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 128.6 m.p., °C: 8.4 b.p. (760 torr), °C: 176
vapor pressure (20°C), torr: 2.2 (calculated)
solubility in water (20°C), mg/L: 28,500
log octanol/water partition coefficient: 2.17
Henry's law constant: Not available
biodegradability: 96% 2-chlorophenol removal (measured as COD removal)
obtained at 20°C in activated sludge at a rate of 25 mg
COD/g dry inoculum/hr

Probable Fate [1]

photolysis: Photolysis occurs in aqueous alkali, but environmental importance is unknown
oxidation: Insufficient data
hydrolysis: Not important
volatilization: Probably occurs, but not fast enough to be important
sorption: Slight potential for adsorption by lipophilic materials
biological processes: No bioaccumulation; much more resistant to biodegradation than phenol
other reactions/interactions: Chlorination of water could further chlorinate 2-chlorophenol

Carbon Adsorption Data [3]

pH: 5.5
type of carbon: Filtrasorb-300
adsorbability: Not available

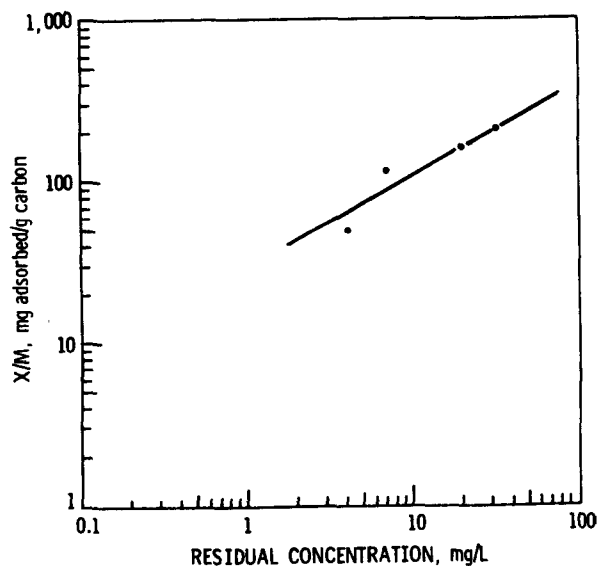

Date: 8/13/79

I.8.2-1

Date: 12/5/79

I.8.2-2

INDUSTRIAL OCCURRENCE OF 2-CHLOROPHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	86	12 ^d	0	0.32	0.045
Textile mills	NA	78 ^d	78 ^d	0.00033	2.2	0.14
Timber products processing	BDL	42	15 ^e	0	0.69	0.0013
Pulp, paper, paperboard mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	1	1	9 x 10 ⁻⁷	0.0014	0.00021
Pharmaceutical manufacturing	ND	22	2.4	0	0.016	0.0022
Steam electric power generators (water treatment)	NA	NA	27 ^f	2 x 10 ⁻⁷	1.6	0.004
Foundries	ND	210	53	0	0.35	0.14
Iron and steel manufacturing	NA	36,000	1,400	0	NA	250

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, 1/2 the reported maximum was utilized.

^dOne sample

^eMedian, not average.

^fAverage of medians reported for various industry segments.

Date: 12/5/79

I.8.2-3

INDUSTRIAL OCCURRENCE OF 2-CHLOROPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Textile mills	NA	5.9 ^e	5.9 ^e	2.5 x 10 ⁻⁵	0.17	0.011
Timber products processing	BDL	4	BDL	_d	_d	_d
Pulp, paper and paperboard mills	NA	9 ^e	9 ^e	0	NA	0.27
Auto and other laundries	NA	2 ^e	2 ^e	1.8 x 10 ⁻⁶	0.0028	0.00042
Pharmaceutical manufacturing	ND	55	6.	0	NA	0.0055
Foundries	8	40	22	0	0.15	0.059
Iron and steel manufacturing	NA	NA	11	0	NA	2.0

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

Date: 12/5/79

I.8.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2-CHLOROPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	33 ^d	III.4.1
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Sedimentation			44->88	<10	III.4.2
Sedimentation with chemical addition (lime, polymer)			0 ^d	<5 ^d	III.4.3
Activated sludge			46-92	5.5	III.5.1
Powdered activated carbon adsorption			81 ^d	190,000 ^d	III.6.2

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 84-1 - 84-8.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: 2,4-Dichlorophenol

Formula:

Alternate Names: 2,4-DCP

CAS #: 120-83-2



Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 163.0 m.p., °C: 45 b.p. (760 torr), °C: 210
vapor pressure (20°C), torr: 0.12 (calculated)
solubility in water (20°C), mg/L: 4,500
log octanol/water partition coefficient: 2.75
Henry's law constant: Not available
biodegradability: 98% 2,4-dichlorophenol removal (measured as COD removal)
obtained at 20°C in activated sludge at a rate of 10 mg
COD/g dry inoculum/hr

Probable Fate [1]

photolysis: Photolysis possible, but cannot compete with microbial
biodegradation
oxidation: Any oxidation which occurs is too slow to be important
hydrolysis: Not important
volatilization: No data, but not expected to be important
sorption: Sorption will not remove significant amounts of 2,4-Dichlorophenol
biological processes: Rapid microbial degradation is the principal fate of
2,4-DCP
other reactions/interactions: Chlorination of water may produce further
chlorination of 2,4-DCP

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

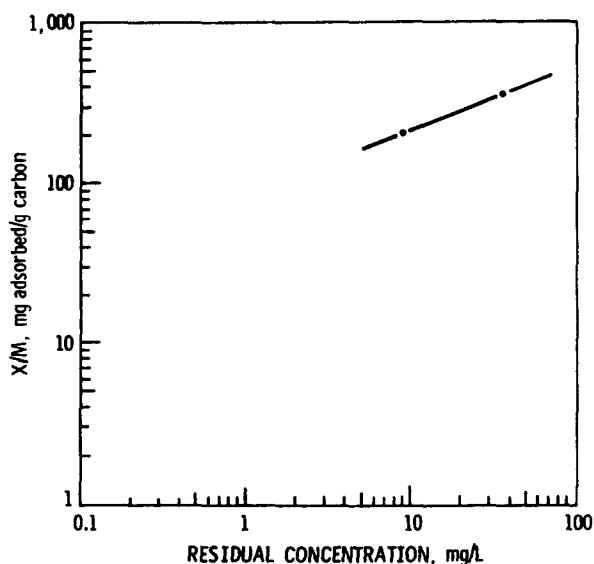

Date: 8/13/79

I.8.3-1

Date: 12/5/79

I.8.3-2

INDUSTRIAL OCCURRENCE OF 2,4-DICHLOROPHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	41 ^d	26 ^e	0.00011	0.75	0.047
Pulp, paper and paperboard mills	NA	2 ^d	2 ^d	0	NA	0.060
Auto and other laundries	ND	≤10	2	1.8 x 10 ⁻⁶	0.0028	0.00042
Pharmaceutical manufacturing	ND	5	1	0	0.0068	0.00092
Steam electric power generating (condenser cooling system)	NA	NA	NA	NA	NA	NA
Steam electric power generating (water treatment)	NA	NA	240 ^f	1.5 x 10 ⁻⁶	14	0.036
Steam electric power generating (ash handling)	NA	NA	83 ^f	1.8	8.1	0.0016
Leather tanning and finishing	ND	NA	16	0	NA	0.024
Iron and steel manufacturing	NA	NA	35	0	NA	6.3

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

^e Average of medians reported for various industry segments.

^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.8.3-3

INDUSTRIAL OCCURRENCE OF 2,4-DICHLOROPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	27 ^d	<7 ^d	0	NA	0.81
Auto and other laundries	NA	2 ^d	2 ^d	1.8×10^{-6}	0.0028	0.00042
Pharmaceutical manufacturing	ND	4.0	0.8	0	0.0054	0.00074
Foundries	<10	220	50	0	0.34	0.14
Iron and steel manufacturing	NA	NA	11	0	NA	2.0

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.8.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2,4-DICHLOROPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gas flotation with chemical addition (polymer)			0 ^{d,e}	-e	III.4.5
Filtration			0 ^{d,e}	-e	III.4.6
Sedimentation			33-98	29	III.4.2
Activated sludge			>25->50	<7	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 85-1 - 85-8.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: 2,4,6-Trichlorophenol

Formula:



Alternate Names: None

CAS #: 88-06-2

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 197.4 m.p., °C: 68 b.p. (760 torr), °C: 244
vapor pressure (76.5°C), torr: 1.0
solubility in water (25°C), mg/L: 800
log octanol/water partition coefficient: 3.38
Henry's law constant: Not available
biodegradability: 100% degradation of 200 mg/L solution by Pseudomonas at 30°C in 120 hr

Probable Fate [1]

photolysis: Reported in experiments, but environmental significance unknown
oxidation: Too slow to be important
hydrolysis: Not important
volatilization: Not important
sorption: High potential for sorption by organic materials; rate unknown
biological processes: Biodegradation very important, but exact rate uncertain due to variations between data
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

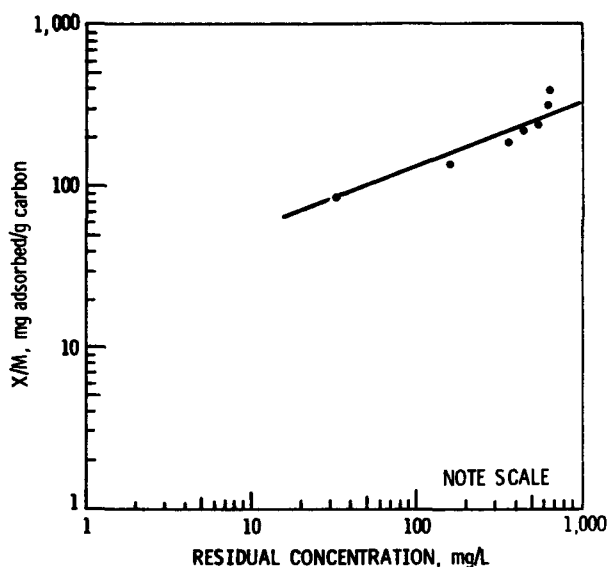

Date: 8/13/79

I.8.4-1

Date: 12/5/79

I.8.4-2

INDUSTRIAL OCCURRENCE OF 2,4,6-TRICHLOROPHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	27	20 ^d	8.4 x 10 ⁻⁵	0.58	0.036
Timber products processing	BDL	530	250 ^d	0	11	0.022
Rubber processing	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	5	<3	0	NA	0.09
Auto and other laundries	NA	NA	NA	NA	NA	NA
Pharmaceutical manufacturing	ND	7	1.4	0	0.0095	0.0013
Steam electric power generating (condenser cooling system)	NA	NA	30	0.0016	0.033	0.0072
Leather tanning and finishing	ND	25,000	3,000	0	NA	5.0
Foundries	ND	350	67	0	0.45	0.18
Iron and steel manufacturing	NA	NA	39	0	NA	7

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

Date: 12/5/79

I.8.4-3

INDUSTRIAL OCCURRENCE OF 2,4,6-TRICHLOROPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	19 ^d	19 ^d	8 _e x 10 ⁻⁵	0.55	0.034
Timber products processing	BDL	5	BDL	- _e	- _e	- _e
Rubber processing	NA	14,000 ^d	14,000 ^d	0.0028	12	0.46
Pulp, paper and paperboard mills	<1	72	<18	0	NA	0.54
Pharmaceutical manufacturing	ND	6	0.6	5 x 10 ⁻⁷	0.0041	0.00055
Foundries	2	600	110	0	0.74	0.30
Iron and steel manufacturing	NA	NA	11	0	NA	2.0
Leather tanning and finishing	ND	4,300	730	0	NA	1.1

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.8.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2,4,6-TRICHLOROPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gas flotation with chemical addition (calcium chloride, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			80 ^d	69 ^d	III.4.6
Sedimentation			0 ^e	- ^e	III.4.2
Aerated lagoons			>99 ^d	<10 ^d	III.5.3
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Activated sludge			36-98	450	III.5.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 86-1 - 86-8.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York 1977. p. 612.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: Pentachlorophenol

Formula:

Alternate Names: PCP, Chlorophen, Pentachlorol

CAS #: 87-86-5



Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 266.4 m.p., °C: 190 b.p. (760 torr), °C: 310
vapor pressure (20°C), torr: 0.00011 (calculated)
solubility in water (20°C), mg/L: 14
log octanol/water partition coefficient: 5.01
Henry's law constant: Not available
biodegradability: Decomposition rate in soil suspension, >72 days for complete disappearance

Probable Fate [1]

photolysis: Forms a variety of products; very important fate
oxidation: Not important
hydrolysis: Not important
volatilization: Not important
sorption: Sorption by organic materials provides storage and transport process
biological processes: Strongly bioaccumulated by many organisms; biodegraded gradually by microbes
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: 3.0, 7.0, 9.0
type of carbon: Not available
adsorbability: 62 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

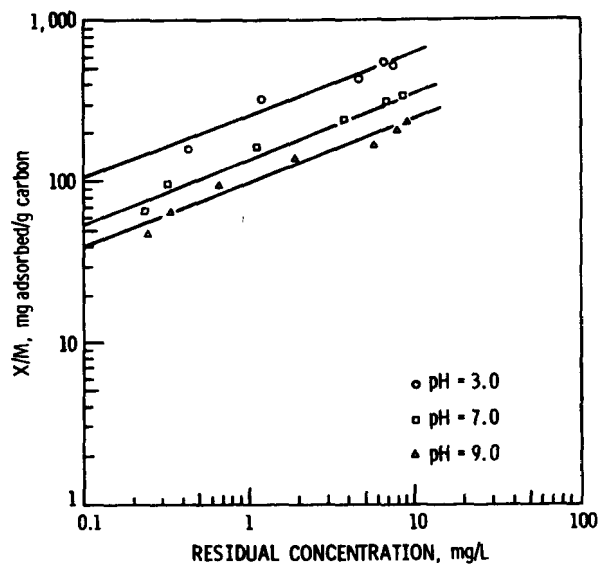

Date: 8/13/79

I.8.5-1

Date: 12/5/79

I.8.5-2

INDUSTRIAL OCCURRENCE OF PENTACHLOROPHENOL^{a,h}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND ^d	ND ^d	ND ^d	BDL	BDL	BDL
Textile mills	NA	940	52	0.00022	1.5	0.094
Timber products processing	90	310,000	13,000 ^e	0	600	1.1
Paint and ink formulation	ND	27,000	3,300	0	0.15	0.0053
Rubber processing	NA	31	17	3×10^{-6}	0.015	0.00056
Pulp, paper and paperboard mills	<1	9	<4	0	NA	0.12
Auto and other laundries	ND	9	3	2.7×10^{-6}	0.0042	0.00063
Pharmaceutical manufacturing	ND	62	4.4	0	0.030	4.04
Steam electric power generating (ash handling)	NA	NA	51	0.00097	5.0	1.1
Inorganic chemicals manufacturing	NA	NA	NA	NA	NA	NA
Foundries	ND	1,600	120	0	0.80	0.32
Leather tanning and finishing	ND	NA	1,700	0	NA	1.1×10^{-6}
Nonferrous metals manufacturing	ND	17	1.5	0	NA	0.079
Iron and steel manufacturing	NA	NA	76	0	NA	14

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^d One sample.^e Average of medians reported for various industry segments.

Date: 12/5/79

I.8.5-3

INDUSTRIAL OCCURRENCE OF PENTACHLOROPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.7 ^d	0	0.018	0.0026
Textile mills	NA	15	12 ^d	5.0 x 10 ⁻⁵	0.029	0.024
Timber products processing	32	130,000	910 ^d	0	42	0.078
Paint and ink formulation	ND	490	120	0	0.0055	0.00019
Rubber processing	NA	10 ^e	10 ^e	2.0 x 10 ⁻⁶	0.0086	0.00033
Pulp, paper and paperboard mills	<1	200	<25	0	NA	0.75
Auto and other laundries	10	58	34	3.1 x 10 ⁻⁵	0.0476	0.0071
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Foundries	12	140	49	0	0.33	0.13
Iron and steel manufacturing	NA	NA	10	0	NA	1.8
Leather tanning and finishing	ND	3,100	570	0	NA	0.86

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eOne sample.

Date: 12/5/79

I.8.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PENTACHLOROPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	330	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			0 ^{d,e}	- ^e	III.4.5
Gas flotation with chemical addition (polymer)			9-19	19	III.4.5
Filtration			29->87	7.5	III.4.6
Sedimentation			55 ^d	24 ^d	III.4.2
Sedimentation with chemical addition (alum, polymer)			>96 ^d	<0.4 ^d	III.4.3
Aerated lagoons			>71 ^d	<10 ^d	III.5.3
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Activated sludge			70->99	240	III.5.1
Granular activated carbon adsorption			63->97	13	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 87-1 - 87-12.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 511.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: 2-Nitrophenol

Formula:



Alternate Names: o-Nitrophenol, 2-Hydroxy-nitrobenzene

CAS #: 88-75-5

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 139.11 m.p., °C: 45.3 b.p. (760 torr), °C: 216
vapor pressure (49.3°C), torr: 1.0
solubility in water (20°C), mg/L: 2,100
log octanol/water partition coefficient: 1.76
Henry's law constant: Not available
biodegradability: 97% 2-nitrophenol removal (measured as COD removal)
obtained at 20% C in activated sludge at a rate of
14 mg COD/g dry inoculum/hr

Probable Fate [1]

photolysis: Slow photolysis is very probable fate
oxidation: Oxidation by hydroxy radical attack; no rate available
hydrolysis: Slight potential for hydrolysis after adsorption by clay materials
volatilization: Volatilization occurs, but is not important
sorption: Adsorbed to a moderate degree by clay minerals
biological processes: No bioaccumulation; very resistant to biodegradation
under natural conditions
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 9/13/79

I.8.6-2

INDUSTRIAL OCCURRENCE OF 2-NITROPHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	19	2.7	0	0.071	0.010
Textile mills	NA	NA	NA	NA	NA	NA
Rubber processing	NA	9.4 ^d	9.4 ^d	0.000002	0.0081	0.00031

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.8.6-3

INDUSTRIAL OCCURRENCE OF 2-NITROPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, mg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	^d	^d	^d
Textile mills	NA	4.1 ^e	4.1 ^e	1.7×10^{-5}	0.12	0.0074
Rubber processing	NA	4.9 ^e	4.9 ^e	9.8×10^{-7}	0.0042	0.00016
Pharmaceutical manufacturing	ND	4,100	290	0	2.0	0.27
Foundries	<20	40	30	0	0.20	0.081
Iron and steel manufacturing	NA	150	26	0	NA	4.7

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

Date: 12/5/79

I.8.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2-NITROPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	150 ^d	III.4.1
Sedimentation			>47 ^d	<10 ^d	III.4.2
Activated sludge			>99 ^d	<0.04 ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 88-1 - 88-9.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.

Compound: 4-Nitrophenol

Formula:



Alternate Names: p-Nitrophenol,
4-Hydroxynitrobenzene

CAS #: 100-07-7

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 139.1 m.p., °C: 115 b.p. (760 torr), °C: 279
vapor pressure (146°C), torr: 2.2
solubility in water (25°C), mg/L: 16,000
log octanol/water partition coefficient: 1.91
Henry's law constant: Not available
biodegradability: 95% 4-nitrophenol removal (measured as COD removal) obtained
at 20°C in activated sludge at a rate of 18 mg COD/g dry
innoculum/hr

Probable Fate [1]

photolysis: Photolysis is slow, but might be the only degradative process
which occurs
oxidation: Attack by hydroxy radicals at C-2 and C-4 positions occurs, but
no rate is available
hydrolysis: Slight possibility of hydrolysis to 1, 4-benzoquinone after
sorption by clay minerals
volatilization: Not important
sorption: Slight potential for irreversible sorption by clay minerals
biological processes: No bioaccumulation; resists biodegradation under
natural conditions and inhibits microbial growth
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

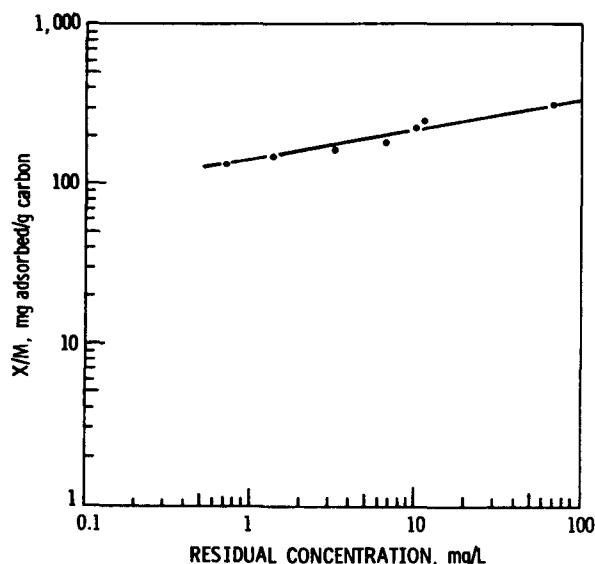

Date: 8/13/79

I.8.7-1

Date: 12/5/79

I.8.7-2

INDUSTRIAL OCCURRENCE OF 4-NITROPHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	15	13	1.1 x 10 ⁻⁵	0.018	0.0027
Pharmaceutical manufacturing	ND	3,500	400	0	2.8	0.37
Foundries	ND	NA	400	0	2.7	1.1

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

Date: 12/5/79

I.8.7-3

INDUSTRIAL OCCURRENCE OF 4-NITROPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	<10 ^d	<10 ^d	4.2 x 10 ⁻⁵	0.29	0.018
Auto and other laundries	NA	ND ^d	ND ^d	ND	ND	ND
Pharmaceutical manufacturing	ND	1,100	79	0	0.54	0.073
Foundries	6	20	13	0	0.087	0.035

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.8.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 4-NITROPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Sedimentation			0 ^{d,e}	- ^e	III.4.2
Sedimentation with chemical addition (lime, polymer)			>9 ^d	<10 ^d	III.4.3
Aerated lagoons			>23 ^d	<10 ^d	III.5.3
Activated sludge			>99 ^d	<0.9 ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 89-1 - 89-8.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: 2,4-Dinitrophenol

Formula:

Alternate Names: Aldifen, 2,4-DNP

CAS #: 51-28-5



Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 184.11 m.p., °C: 114 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (18°C), mg/L: 5,600
log octanol/water partition coefficient: 1.53
Henry's law constant: Not available
biodegradability: 85% 2,4-dinitrophenol removal (measured as COD removal)
obtained at 20°C in activated sludge at a rate of 6.0 mg
COD/g dry inoculum/hr

Probable Fate [1]

photolysis: Degradation by slow photolysis may be principal fate

oxidation: Oxidation by hydroxy radicals could occur, but no environmental
rate is available

hydrolysis: Slight possibility for hydrolysis after adsorption by clay
minerals

volatilization: Not important

sorption: Slight potential for sorption by clay minerals

biological processes: No bioaccumulation; uncertain amount of biodegradation
under natural conditions


other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: 3.0, 7.0, 9.0

type of carbon: Not available

adsorbability: 270 mg/L; carbon dose re-
quired to reduce pollutant
concentration from 10 mg/L
to 1 mg/L at neutral pH

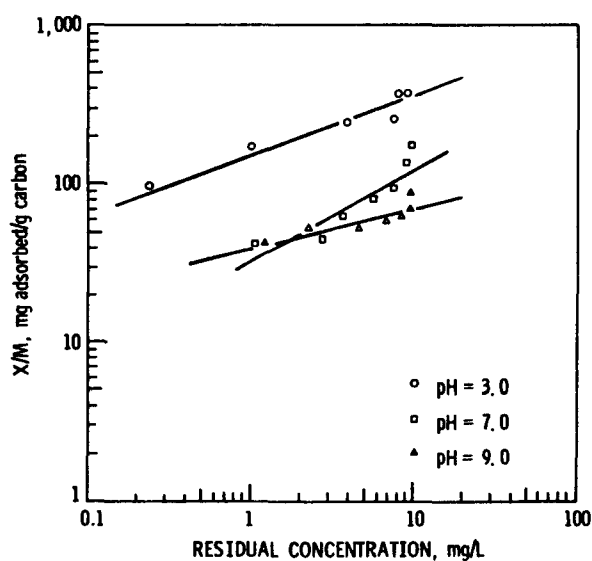

Date: 8/13/79

I.8.8-1

Date: 12/5/79

I.8.8-2

INDUSTRIAL OCCURRENCE OF 2,4-DINITROPHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	^d	^d	^d
Auto and other laundries	ND	19	19	1.7 x 10 ⁻⁵	0.027	0.004
Steam electric power generating (ash handling)	NA	NA	50 ^e	0.00095	4.9	1.1
Iron and steel manufacturing	NA	440	33	0	NA	5.9

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eAverage of medians reported for various industry segments.

Date: 12/5/79

I.8.8-3

INDUSTRIAL OCCURRENCE OF 2,4-DINITROPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3 _d ³	<0 _d ⁷	0 _e	0.018	0.0026
Auto and other laundries	NA	ND	ND	- _e	- _e	- _e
Iron and steel manufacturing	NA	130	53	0	NA	9.5

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.8.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2,4-DINITROPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 90-1 - 90-9.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I.8.8-5

Compound: Resorcinol

Formula:



Alternate Names: *m*-Hydroxyphenol,
1,3-Dihydroxybenzene,
1,3-Benzenediol, Resorcin

CAS #: 108-46-3

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 110.1 m.p., °C: 276-280 b.p. (760 torr), °C: Not available
vapor pressure (138°C), torr: 5
solubility in water (30°C), mg/L: 2,290,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 90% resorcinol removal (measured as COD removal) obtained
at 20°C in activated sludge at a rate of 58 mg COD/g dry
innoculum/hr

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrisorb-300
adsorbability: Not available

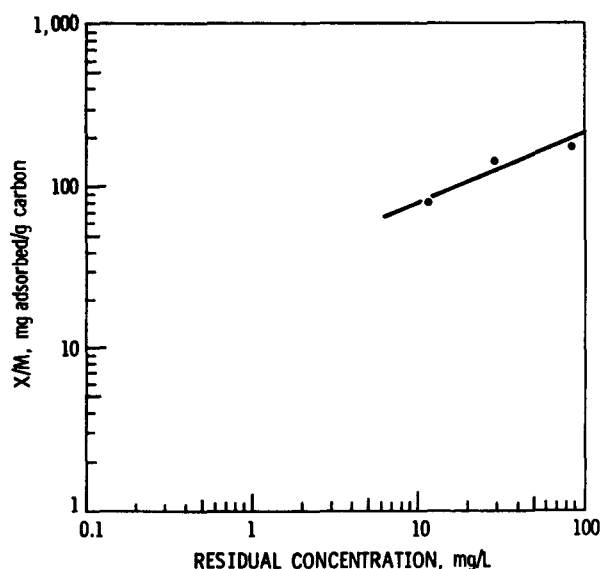

Date: 8/13/79

I.8.9-1

I.8.9-2

INDUSTRIAL OCCURRENCE OF RESORCINOL^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.8.9-3

INDUSTRIAL OCCURRENCE OF RESORCINOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.8.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR RESORCINOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 562.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. pp. 132.

Compound: 2,4-Dimethylphenol

Formula:

Alternate Names: 2,4-Xylenol,
1-Hydroxy-2,4-dimethylbenzene

CAS #: 105-67-9



Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 122.2 m.p., °C: 24.5 b.p. (760 torr), °C: 211
vapor pressure (20°C), torr: 0.0621*
solubility in water (160°C), mg/L: 17,000
log octanol/water partition coefficient: 2.50
Henry's law constant: Not available
biodegradability: 95% 2,4-dimethylphenol removed (measured as COD removal)
obtained at 20°C in activated sludge at a rate of 28 mg
COD/g dry inoculum/hr

*Vapor pressure as a supercooled liquid.

Probable Fate [1]

photolysis: Photooxidation definitely occurs, but rate and importance are unknown
oxidation: Metal-catalyzed oxidation may occur in aerated surface waters
hydrolysis: Not important
volatilization: Not important
sorption: Slight potential for adsorption onto organic materials
biological processes: Available data are conflicting and inconclusive, but biodegradation can occur
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.8.10-1

Date: 12/5/79

I.8.10-2

INDUSTRIAL OCCURRENCE OF 2,4-DIMETHYL PHENOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	22	4.8	0	0.074	0.010
Timber products processing	BDL	6,600	1,300 ^d	0	60	0.11
Petroleum refining	NA	NA	100	0	9.3	0.58
Textile mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	460	20	1.8 x 10 ⁻⁸	0.028	0.0042
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Ore mining and dressing	270	270	270	0	NA	10
Coil coating	21 ^e	21 ^e	21 ^e	0.001 ^e	0.038	0.010
Foundries	ND	1,100	81	0	0.54	0.22
Iron and steel manufacturing	NA	84,000	4,000	0	NA	720
Nonferrous metals manufacturing	ND	14	7	0	NA	0.37

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^dMedian, not average.

^eOne sample.

Date: 12/5/79

I.8.10-3

INDUSTRIAL OCCURRENCE OF 2,4-DIMETHYLPHENOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	- ^d	- ^d	- ^d
Textile mills	NA	8.0 ^e	8.0 ^e	3.4 x 10 ⁻⁵	0.23	0.014
Timber products processing	BDL	140	BDL	- ^d	- ^d	- ^d
Petroleum refining	NA	8 ^e	8 ^e	0	0.74	0.046
Auto and other laundries	NA	29 ^e	29 ^e	2.6 x 10 ⁻⁵	0.041	0.0061
Pharmaceutical manufacturing	ND	8.0	2.0	0	0.014	0.0018
Foundries	<10	490	120	0	0.80	0.32
Iron and steel manufacturing	NA	70	10	0	NA	1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

Date: 12/5/79

I.8.10-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2,4-DIMETHYLPHENOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	210	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			>99 ^d	<0.1 ^d	III.4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			0 ^e	- ^e	III.4.6
Sedimentation			18->55	<15	III.4.2
Sedimentation with chemical addition (lime, polymer)			76	<10	III.4.3
Activated sludge			32-95	<9	III.5.1
Granular activated carbon adsorption			>89 ^d	<0.1 ^d	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 91-1 - 91-9.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.


Date: 8/13/79

I.8.10-5

Compound: Total phenols

Formula: Derivatives of phenol

Alternate Names: Hydroxybenzenes,
Phenoyl hydroxides



CAS #: See sections on individual phenols

Physical, Chemical, and Biological Properties

See sections on individual phenols.

Probable Fate [1]

photolysis: Photooxidation is important only for phenol, pentachlorophenol,
nitrophenols, and possibly alkyl phenols

oxidation: Probably not important for any phenols

hydrolysis: Probably not important for any phenols

volatilization: Phenols are volatilized very little

sorption: Important for highly chlorinated phenols and possibly for
nitrophenols

biological processes: Biodegradation is very important for chlorophenols,
but not for nitrophenols

other reactions/interactions: Not important

Carbon Adsorption Data: See sections on individual phenols

Date: 12/5/79

I.8.11-2

INDUSTRIAL OCCURRENCE OF TOTAL PHENOLS^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	BDL	1,300	75 ^d	0	3.4	0.0064
Paint and ink formulation	NA	NA	NA	NA	NA	NA
Gum and wood chemicals	460	53,000	8,500	0.076	64	14
Ore mining and dressing	<0.002	0.22	<0.032	0	NA	<0.0012
Steam electric power generating (condenser cooling system)	<10	<100	50	0.0027	0.055	0.012
Steam electric power generating (water treatment)	NA	NA	20 ^d	1.0 x 10 ^{-7d}	1.2 ^d	0.003 ^d
Steam electric power generating (drainage)	NA	NA	500 ^d	0.0043 ^d	0.18 ^d	0.010 ^d
Leather tanning and finishing	110	110,000	1,800	0	NA	2.7
Nonferrous metals manufacturing	ND	28	0.98	0	NA	0.052

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, 1/2 the reported maximum was utilized.

^dAverage of medians reported for various industry segments.

Date: 12/5/79

I.8.11-3

INDUSTRIAL OCCURRENCE OF TOTAL PHENOLS^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	0.048	680	51	0	2.3	0.0044
Paint and ink formulation	BDL	1,900	130	0	0.0060	0.00021
Gum and wood chemicals	29	14,000	3,300	0.030	25	5.4
Auto and other laundries	<1.0	264	62	5.6 x 10 ⁻⁵	0.087	0.013
Nonferrous metals manufacturing	0.006	25	1.6	0	NA	0.085

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.8.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TOTAL PHENOLS^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	24,000	III.4.1
Gas flotation			4 ^d	23,000 ^d	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			48-96	410	III.4.5
Gas flotation with chemical addition (polymer)			36->50	210	III.4.5
Gas flotation with chemical addition (alum, polymer)			13 ^d	94 ^d	III.4.5
Filtration			15-65	65,000	III.4.6
Sedimentation			38-96	390	III.4.2
Sedimentation with chemical addition (alum, lime)			11-22	670	III.4.3
Sedimentation with chemical addition (sulfide)			29-58	190	III.4.3
Sedimentation with chemical addition (BaCl ₂)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum, polymer)			30-60	100	III.4.3
Sedimentation with chemical addition (alum)			17-31	56,000	III.4.3
Sedimentation with chemical addition (lime)			22-33	170	III.4.3
Tertiary polishing lagoons			23-46	40	III.5.3
Aerated lagoons			65->99	11	III.5.3
Trickling filters			79-81->99	72,000-79,000	III.5.2
Ultrafiltration			36-82	83,000	III.4.7
Solvent extraction			98->99		III.5.6
Ozonation			41->99	55	III.6.14
Activated sludge			61->99	<19,000	III.5.1
Powdered activated carbon adsorption (with activated sludge)			>99	23	III.6.2
Granular activated carbon adsorption			58-99	1,100	III.6.1
Reverse osmosis			27-81	13	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 84-1 - 93-8.

Date: 8/13/79

I.8.11-5

Compound: *p*-Chloro-*m*-cresol

Formula:



Alternate Names: 4-Chloro-*m*-cresol,
4-Chloro-3-methylphenol,
2-Chloro-5-hydroxytoluene

CAS #: 59-50-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 142 m.p., °C: 66 b.p. (760 torr), °C: 235
vapor pressure (25°C), torr: Not available
solubility in water (20°C), mg/L: 3,850
log octanol/water partition coefficient: 2.95
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Based on data for 4-chlorophenol, intramolecular photolysis
 may be a very important fate
oxidation: No data; probably not important
hydrolysis: Not important
volatilization: Not important
sorption: Data inconclusive, but potential for adsorption by organics exists
biological processes: No data on bioaccumulation; biodegradation data not
 applicable to environment
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.8.12-1

Date: 12/5/79

I.8.12-2

INDUSTRIAL OCCURRENCE OF *p*-CHLORO-*m*-CRESOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	168 ^d	168 ^d	0.00070	4.8	0.30
Petroleum refining	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	≤10	50	5 x 10 ⁻⁷	0.0007	0.0001
Foundries	ND	280	42	0	0.28	0.11
Iron and steel manufacturing	NA	4,300	200	0	NA	36

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.8.12-3

INDUSTRIAL OCCURRENCE OF *p*-CHLORO-*o*-CRESOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	32 ^d	32 ^d	0.00013	0.92	0.058
Petroleum refining	NA	0.2 ^d	0.2 ^d	0	0.019	0.0012
Foundries	<20	63	41	0	0.27	0.11
Iron and steel manufacturing	NA	NA	27	0	NA	4.9

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.8.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR *p*-CHLORO-*m*-CRESOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	120 ^d	III.4.1
Filtration			0 ^e	- ^e	III.4.6
Sedimentation with chemical addition (lime, polymer)			44 ^d	62 ^d	III.4.3
Activated sludge			65->98	<4	III.5.1
Granular activated carbon adsorption			>83 ^d	<0.1 ^d	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 92-1 - 92-7.

Date: 8/13/79


I.8.12-5

Compound: 4,6-Dinitro-*o*-cresol

Formula:

Alternate Names: DNOC, 2,4-Dinitro-6-methyl-phenol

CAS #: 534-52-1



Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 198.1 m.p., °C: 85.8 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: 2.85
Henry's law constant: Not available
biodegradability: 1% removal after 48 hours incubation for initial concentration of 207 mg/L

Probable Fate [1]

photolysis: Gradual photooxidation should occur, but relative importance uncertain
oxidation: Hydroxyl radicals may displace nitro groups
hydrolysis: Hydrolysis may occur after adsorption by clay minerals
volatilization: Not important
sorption: Adsorption by clay should be an important transport process
biological processes: Toxicity rules out bioaccumulation; biodegradation occurs in soil, possibly in water
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.8.13-2

INDUSTRIAL OCCURRENCE OF 4,6-DINITRO-*o*-CRESOL^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	194	28	0	0.74	0.10
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Foundries	ND	70	16	0	0.11	0.043
Iron and steel manufacturing	NA	970	130	0	NA	23

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

Date: 12/5/79

I.8.13-3

INDUSTRIAL OCCURRENCE OF 4,6-DINITRO-*o*-CRESOL^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	6.7	0.4 ^d	0	0.011	0.0015
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Foundries	7	80	45	0	0.30	0.12
Iron and steel manufacturing	NA	NA	110	0	NA	20

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.8.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 4,6-DINITRO-*o*-CRESOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Sedimentation			48->95	460	III.4.2
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 93-1 - 93-8.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 275.

Compound: Cresol

Formula:



Alternate Names: Cresylic acid, Cresylol,
Tricresol, Methylphenol,
Hydroxytoluene, Tokresol,
Bacillol

CAS #: 1319-77-3

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 108.1 m.p., °C: 10.9-35.5 b.p. (760 torr), °C: 185-205
vapor pressure (38-53°C), torr: 1
solubility in water (40°C), mg/L: 24,000-31,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 96% cresol removal (measured as COD removal) obtained at
20°C in activated sludge at a rate of 55 mg COD/g dry
innoculum/hr

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

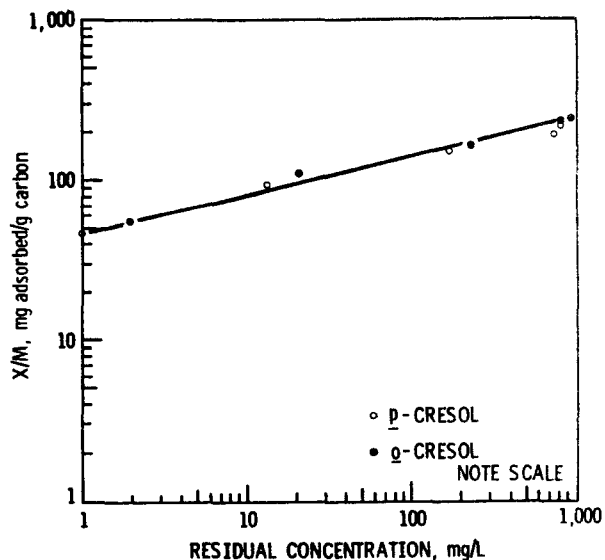

Date: 8/13/79

I.8.14-1

I.8.14-2

INDUSTRIAL OCCURRENCE OF CRESOL^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.8.14-3

INDUSTRIAL OCCURRENCE OF CRESOL^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.8.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CRESOL^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part I, pp. 89, 90.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: Benzene

Formula:



Alternate Names: Benzol, Cyclohexatriene

CAS #: 71-43-2

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 78.12 m.p., °C: 5.5 b.p. (760 torr), °C: 80.1
vapor pressure (25°C), torr: 95.2
solubility in water (25°C), mg/L: 1,780-1,800
log octanol/water partition coefficient: Conflicting data reported
Henry's law constant: Not available
biodegradability: 33% theoretical oxidation of 500 ppm benzene by
phenol-acclimated sludge after 12 hr aeration

Probable Fate [1]

photolysis: Photooxidation of volatilized benzene is the only form of
photolysis which occurs
oxidation: No aqueous oxidation occurs, but volatilized benzene is
photooxidized at a rapid rate
hydrolysis: Not important
volatilization: Rapid volatilization (half-life = 4.81 hr) is the primary
transport process for benzene
sorption: Benzene should be adsorbed by organic material
biological processes: Low potential for bioaccumulation; metabolized to
catechols by many organisms; biodegraded at a slow rate
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: 4.8-5.0
type of carbon: Not available
adsorbability: >10,000 mg/L; carbon dose
required to reduce pollut-
ant concentration from
10 mg/L to 1 mg/L at
neutral pH

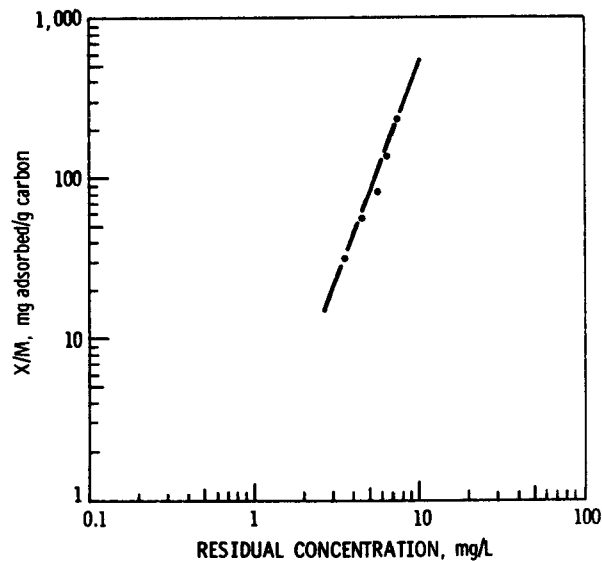

Date: 8/13/79

I.9.1-1

Date: 12/5/79

I.9.1-2

INDUSTRIAL OCCURRENCE OF BENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	15	2.6	0	0.069	0.0098
Textile mills	NA	200	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.0090
Timber products processing	BDL	2,800	350 ^e	0	16	0.030
Petroleum refining	NA	NA	>100	0	9.3	0.58
Paint and ink formulation	ND	9,900	1,200	0	0.055	0.0019
Gum and wood chemicals	BDL	710	180	0.0016	1.3	2.7
Rubber processing	NA	3,400	610	0.00012	0.52	0.020
Pulp, paper and paperboard mills	<1	3	<2	0	NA	0.060
Auto and other laundries	ND	23,000	840	0.00076	1.2	0.18
Pharmaceutical manufacturing	ND	2,100	220	0	0.18	0.20
Ore mining and dressing	ND	4.2	2.1	0	NA	0.078
Steam electric power generating (condenser cooling system)	NA	NA	45 ^d	0.0024	0.050	0.011
Steam electric power generating (water treatment)	NA	NA	2 ^d	1.2 x 10 ⁻⁸	0.12	0.0003
Inorganic chemicals manufacturing	NA	15 ^e	NA	0	0.94	0.19
Coil coating	<10	<10	<10	<0.0005	<0.018	<0.0048
Foundries	ND	NA	200	0	1.3	0.54
Leather tanning and finishing	ND	150	19	0	NA	0.029
Nonferrous metals manufacturing	ND	160	11	0	NA	0.58
Iron and steel manufacturing	NA	43,000	2,000	0	NA	360

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, 1/2 the reported maximum was utilized.^d Median, not average.^e Average of maximums reported for various industry segments.

Date: 12/5/79

I.9.1-3

INDUSTRIAL OCCURRENCE OF BENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<1 ^d	0	0.037	0.0053
Textile mills	NA	64	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.0090
Timber products processing	BDL	33	BDL	- ^e	- ^e	- ^e
Paint and ink formulation	ND	3,800	390	0	0.018	0.00062
Gum and wood chemicals	120	240	170	0.0015	1.2	0.28
Rubber processing	NA	100	29	5.8 x 10 ⁻⁶	NA	NA
Petroleum refining	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	12	<2	0	NA	0.06
Pharmaceutical manufacturing	ND	390	48	0	0.33	0.044
Foundries	<10	60	26	0	0.17	0.07
Iron and steel manufacturing	ND	120,000	1,800	0	NA	324
Nonferrous metals manufacturing	ND	59	4.2	0	NA	0.22
Leather tanning and finishing	ND	<10	<7	0	NA	0.011

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.9.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	>75	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			0 ^d	- ^d	III.4.5
Gas flotation with chemical addition (polymer)			33 ^e	12 ^e	III.4.5
Filtration			28->99	45	III.4.6
Sedimentation			23->63	85	III.4.2
Sedimentation with chemical addition (alum, lime)			50 ^e	46 ^e	III.4.3
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^d	III.4.3
Sedimentation with chemical addition (polymer)			0 ^{d,e}	- ^d	III.4.3
Sedimentation with chemical addition (alum, polymer)			49->97	160	III.4.3
Anaerobic lagoons			50 ^e	5,000 ^e	III.5.3
Aerated lagoons			56->95	<16	III.5.3
Solvent extraction			90-97	11,000	III.5.6
Activated sludge			49->99	4,100	III.5.1
Powdered activated carbon adsorption			95 ^d	20,000 ^d	III.6.2
Granular activated carbon adsorption			48->80	73	III.6.1
Reverse osmosis			43-80	1.5	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dActual data indicate negative removal.


^eOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 71-1 - 71-10.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 113-117.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Chlorobenzene

Formula:



Alternate Names: Monochlorobenzene,
Benzene chloride

CAS #: 108-90-7

Physical, Chemical, and Biological Properties [1]


mol. wt.: 112.6 m.p., °C: -45 b.p. (760 torr), °C: 132
vapor pressure (25°C), torr: Conflicting data reported
solubility in water (25°C), mg/L: 488
log octanol/water partition coefficient: 2.84
Henry's law constant: 3.56×10^{-3} atmos. m³/mole
biodegradability: Not available

Probable Fate [1]

photolysis: Lack of data probably indicates relative unimportance
oxidation: No data on aqueous oxidation; photooxidation of volatilized
 chlorobenzene is slower than photooxidation of benzene
hydrolysis: Not important
volatilization: Very rapid volatilization is the main transport process
sorption: Chlorobenzene is presumably sorbed by organic materials
biological processes: High potential for bioaccumulation and magnification;
 biodegradation very slow
other reactions/interactions: There is a low probability of further chlorinat-
 ing chlorobenzene by reaction with chlorine-
 containing water

Carbon Adsorption Data [2]

pH: 7.4
type of carbon: Not available
adsorbability: 97 mg/L; carbon dose re-
 quired to reduce pollutant
 concentration from 10 mg/L
 to 1 mg/L at neutral pH

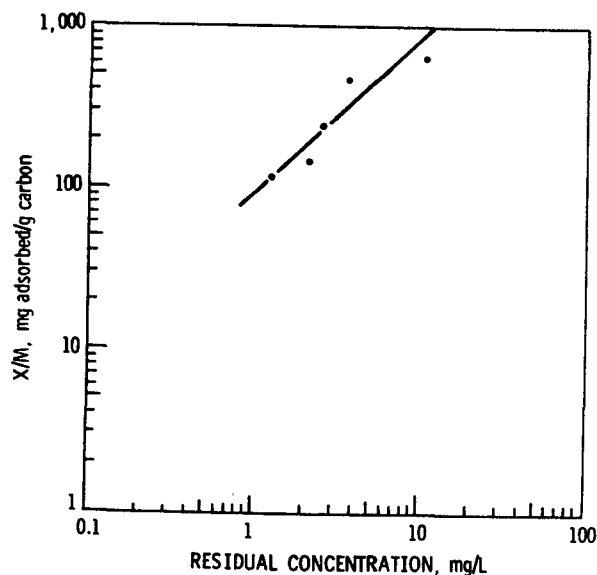

Date: 8/13/79

I.9.2-1

Date: 12/5/79

I.9.2-2

INDUSTRIAL OCCURRENCE OF CHLOROBENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	300	25 ^d	0.00010	0.72	0.045
Auto and other laundries	ND	12	6	5.4 x 10 ⁻⁶	0.0084	0.0013
Pharmaceutical manufacturing	ND	600	67	0	0.46	0.062
Leather tanning and finishing	ND	NA	1.4	0	NA	0.0021
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	40	3.9	0	NA	0.21

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available, 1/2 the reported maximum was utilized.

^d Median, not average.

Date: 12/5/79

I.9.2-3

INDUSTRIAL OCCURRENCE OF CHLOROBENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	3.5 ^d	3.5 ^d	1.5 x 10 ⁻⁵	0.10	0.0063
Pharmaceutical manufacturing	ND	200	22	0	0.15	0.020
Foundries	NA	470 ^d	470 ^d	0	3.10	1.3
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	65	4	0	NA	0.21

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.9.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHLOROBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Filtration			0 ^d	- ^d	III.4.6
Activated sludge			71->99	5	III.5.1
Granular activated carbon adsorption			>96 ^e	<0.2 ^e	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dActual data indicate negative removal.

^eOnly one data point.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 72-1 - 72-10.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I.9.2-5

Compound: 1,2-Dichlorobenzene

Formula:



Alternate Names: o-Dichlorobenzene,
Orthodichlorobenzene,
Dowtherm E

CAS #: 95-50-1

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 147.0 m.p., °C: -17.0 b.p. (760 torr), °C: 180
vapor pressure (25°C), torr: 1.5
solubility in water (25°C), mg/L: 145
log octanol/water partition coefficient: 3.38
Henry's law constant: 1.99×10^{-3} atmos. m³/mole
biodegradability: 100% decomposition by ring disruption by Pseudomonas of
200 mg/L solution in 72 hr

Probable Fate [1]

photolysis: Lack of data probably indicates relative unimportance
oxidation: Resistant to autooxidation by peroxy radical in water; oxidation
by hydroxy radicals occurs in atmosphere
hydrolysis: Not important
volatilization: Relatively rapid volatilization occurs; half-life is less
than nine hours
sorption: Significant amount of adsorption by organic materials should occur
in environment
biological processes: Bioaccumulated more than chlorobenzene; sufficiently
resistant to biodegradation to make volatilization more
important
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.9.3-2

INDUSTRIAL OCCURRENCE OF 1,2-DICHLOROBENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.2	0	0.032	0.0045
Textile mills	NA	280	2 ^d	8.4 x 10 ⁻⁶	0.58	0.0036
Auto and other laundries ^e	ND	1,100	30	2.7 x 10 ⁻⁵	0.042	0.0063
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Steam electric power generating (condenser cooling system) ^e	<10	26	20	0.0011	0.022	0.0040
Steam electric power generating (ash handling) ^e	NA	65	53	0.001	5.3 x 10 ⁻⁵	1.2
Leather Tanning and finishing	ND	200	69	0	NA	0.10

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available, 1/2 the reported maximum was utilized.

^d Median, not average.

^e Analytical method did not distinguish between dichlorobenzene isomers.

Date: 12/5/79

I.9.3-3

INDUSTRIAL OCCURRENCE OF 1,2-DICHLOROBENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<1.5 ^d	0	0.040	0.0057
Textile mills	NA	20	10 ^d	0.000042 ^e	0.029	0.018
Pharmaceutical manufacturing	ND	ND	ND	- ^e	- ^e	- ^e
Iron and steel manufacturing	NA	NA	15	0	NA	2.7
Leather tanning and finishing	ND	69	13	0	NA	0.020

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.9.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,2-DICHLOROBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gas flotation with chemical addition (calcium chloride, polymer)			76 ^d	260 ^d	III.4.5
Filtration			50->94	3.8	III.4.6
Sedimentation with chemical addition (alum, lime)			>99 ^d	<0.05 ^d	III.4.3
Sedimentation with chemical addition (alum)			25->50	<12	III.4.3
Aerated lagoons			>96 ^d	<10 ^d	III.5.3
Activated sludge			73->99	<8	III.5.1
Granular activated carbon adsorption			>99	<0.05	III.6.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.


^d Only one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 73-1 - 73-8.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 224, 225.

Compound: 1,3-Dichlorobenzene

Formula:



Alternate Names: *m*-Dichlorobenzene,
Metadichlorobenzene

CAS #: 541-73-1

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 147.0 m.p., °C: -24.7 b.p. (760 torr), °C: 173
vapor pressure (25°C), torr: 2.28
solubility in water (temp. unknown), mg/L: 123
log octanol/water partition coefficient: 3.38
Henry's law constant: 3.58×10^{-3} atmos. m³/mole
biodegradability: 100% degradation through ring disruption by *Pseudomonas*
at 30°C of a 200 mg/L solution in 96 hr

Probable Fate [1]

photolysis: Lack of information probably indicates relative unimportance

oxidation: No data on aqueous oxidation; oxidized by hydroxy radicals in
atmosphere

hydrolysis: Not important

volatilization: Volatilizes at a relatively rapid rate; half-life approxi-
mately ten hours

sorption: Presumably sorbed by organic materials

biological processes: Bioaccumulates more than chlorobenzene; too resistant
to biodegradation to compete with volatilization


other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: Not available

type of carbon: Filtrasorb-300

adsorbability: Not available

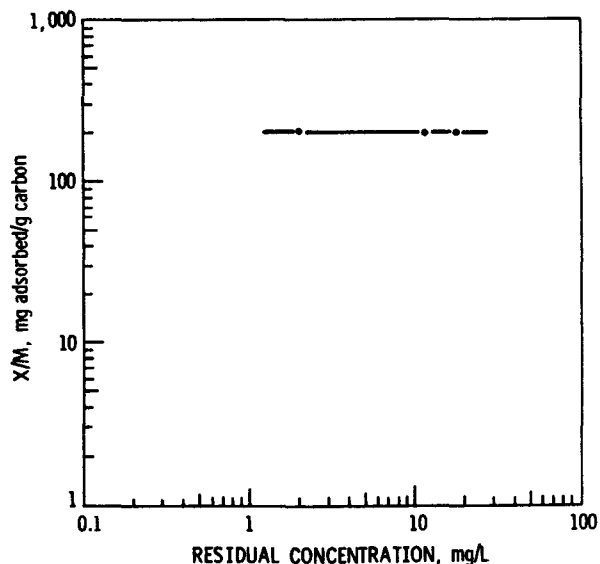

Date: 8/13/79

I.9.4-1

Date: 12/5/79

I.9.4-2

INDUSTRIAL OCCURRENCE OF 1,3-DICHLOROBENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Auto and other laundries ^d	ND	1,100	30	2.7×10^{-5}	0.042	0.0063
Steam electric power generating (condenser cooling system) ^d	<10	26	20	0.0011	0.022	0.0048
Steam electric power generating (water treatment)	NA	NA	1	6.1×10^{-9}	0.060	0.00015
Steam electric power generating (ash handling) ^d	NA	65	53	0.0010	5.2	1.2
Iron and steel manufacturing	NA	NA	79	0	NA	14

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available, 1/2 the reported maximum was utilized.

^dAnalytical method did not distinguish between the dichlorobenzene isomers.

Date: 12/5/79

I.9.4-3

INDUSTRIAL OCCURRENCE OF 1,3-DICHLOROBENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Iron and steel manufacturing	NA	NA	2	0	NA	0.36

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,3-DICHLOROBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	3 ^d	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			76 ^d	260 ^d	III.4.5

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 74-1 - 74-8.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 226.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.9.4-5

Compound: 1,4-Dichlorobenzene

Formula:



Alternate Names: p-Dichlorobenzene,
Paradichlorobenzene

CAS #: 106-46-7

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 147.0 m.p., °C: 53.1 b.p. (760 torr), °C: 174
vapor pressure (25°C), torr: 1.18 (calculated)
solubility in water (25°C), mg/L: 79
log octanol/water partition coefficient: 3.39
Henry's law constant: 2.88×10^{-3} atmos. m³/mole
biodegradability: 100% degradation through ring disruption by *Pseudomonas*
of a 200 mg/L solution at 30°C in 92 hr

Probable Fate [1]

photolysis: No data probably indicates relative unimportance
oxidation: Resistant to autooxidation by peroxy radical in water; oxidized
by hydroxy radicals in atmosphere
hydrolysis: Not important
volatilization: Volatilizes at a relatively rapid rate; half-life less than
12 hours
sorption: Presumably adsorbed by organic materials
biological processes: Bioaccumulates more than chlorobenzene; too resistant
to biodegradation to compete with volatilization
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

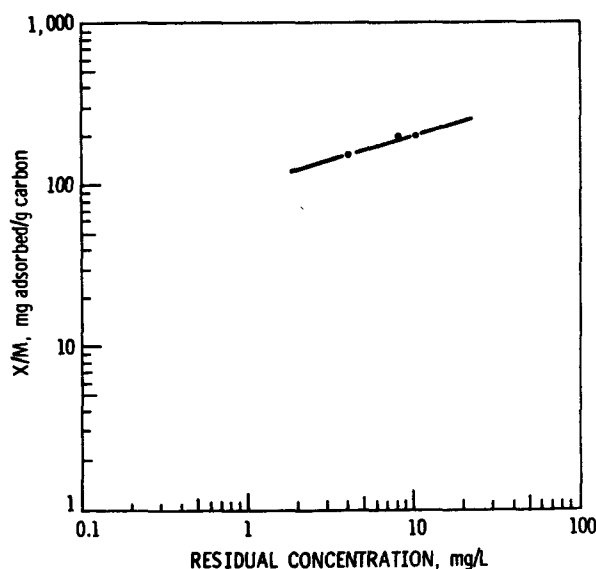

Date: 8/13/79

I.9.5-1

Date: 12/5/79

I.9.5-2

INDUSTRIAL OCCURENCE OF 1,4-DICHLOROBENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.1	0	0.029	0.0014
Textile mills	NA	220	110 ^d	0.00046	3.2	0.20
Auto and other laundries ^e	ND	1,100	30	2.7 x 10 ⁻⁵	0.042	0.0063
Pharmaceutical manufacturing	ND	5	0.55	0	0.0037	0.5
Steam electric power generating (condenser cooling system) ^e	<10	26	20	0.0011	0.022	0.0048
Steam electric power generating (ash handling) ^e	NA	65	53	0.001	5.2	0.0013
Leather tanning and finishing	NA	NA	15	0	NA	0.022
Nonferrous metals manufacturing	ND	26	4.3	0	NA	0.23

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e Analytical method did not distinguish between the dichlorobenzene isomers.

Date: 12/5/79

I.9.5-3

INDUSTRIAL OCCURRENCE OF 1,4-DICHLOROBENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.3	0	0.034	0.0049
Textile mills	NA	1.5	0.8 ^d	3.4 x 10 ⁻⁶	0.023	0.0014
Pharmaceutical manufacturing	ND	1.0	0.11	0	0.00075	0.00010
Iron and steel manufacturing	NA	NA	73	0	NA	13
Leather tanning and finishing	ND	21	5	0	NA	0.0075

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.9.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,4-DICHLOROBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gas flotation with chemical addition (calcium chloride, polymer)			76 ^d	260 ^d	III.4.5
Aerated lagoons			>81 ^d	<10 ^d	III.5.3
Activated sludge			>82->99	<5	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 75-1 - 75-2.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 226.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Formula:

Alternate Names: unsym-Trichlorobenzene

CAS #: 120-82-1



Physical, Chemical, and Biological Properties [1-3]

mol. wt.: 181.4 m.p., °C: 17.0 b.p. (760 torr), °C: 214
vapor pressure (25°C), torr: 0.42 (calculated)
solubility in water (temp. unknown), mg/L: 30
log octanol/water partition coefficient: 4.26
Henry's law constant: Not available
biodegradability: 92% ring disruption by *Pseudomonas* at 30°C of a 200 mg/L
solution in 120 hr

Probable Fate [1]

photolysis: Lack of data probably indicates relative unimportance
oxidation: Oxidized by hydroxy radicals after volatilization
hydrolysis: Not important
volatilization: Very rapid volatilization can be hindered by adsorption if organics are present
sorption: High potential for adsorption by organic materials
biological processes: High potential for bioaccumulation; very little, if any biodegradation due to volatilization and adsorption
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.9.6-2

INDUSTRIAL OCCURRENCE OF 1,2,4-TRICHLOROBENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	2,700	410 ^d	0.0017	12	0.74
Steam electric power generating (condenser cooling system)	NA	NA	10 ^e	5.3 x 10 ⁻⁴	0.011	0.0024
Foundries	ND	NA	7	0	0.047	0.0019
Nonferrous metals manufacturing	ND	260	22	0	NA	1.2

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e Average of medians reported for various industry segments.

Date: 12/5/79

I.9.6-3

INDUSTRIAL OCCURRENCE OF 1,2,4-TRICHLOROBENZENE^a

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	1,500	610	0.0026	18	1.1
Foundries	<20	570	290	0	1.9	0.78
Nonferrous metals manufacturing	ND	47	4.4	0	NA	0.0066

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,2,4-TRICHLOROBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Filtration			37 ^d	94 ^d	III.4.6
Sedimentation			0 ^{d,e}	- ^e	III.4.2
Sedimentation with chemical addition (alum, lime)			91 ^d	150 ^d	III.4.3
Sedimentation with chemical addition (alum)			90 ^d	150 ^d	III.4.3
Activated sludge			67->99	98	III.5.1
Granular activated carbon adsorption			>93 ^d	<0.04 ^d	III.6.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 76-1 - 76-10.
2. Spencer, W. F. and W. J. Farmer. Assessment of the Vapor Behavior of Toxic Organic Chemicals. Contribution of Federal Research, SEA, USDA, and the University of California, Riverside, California.
3. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 604.

Compound: Hexachlorobenzene

Formula:

Alternate Names: Perchlorobenzene, HCB

CAS #: 118-74-1



Physical, Chemical, and Biological Properties [1]


mol. wt.: 284.8 m.p., °C: 230 b.p. (760 torr), °C: 322
vapor pressure (20°C), torr: 1.09×10^{-5}
solubility in water (25°C), µg/L: 6
log octanol/water partition coefficient: 6.18
Henry's law constant: Not available
biodegradability: No degradation by Pseudomonas at 30°C in 120 hr

Probable Fate [1]

photolysis: Extremely slow under environmental conditions
oxidation: Not important
hydrolysis: Not important
volatilization: Data inconclusive
sorption: Strongly sorbed by particulate matter
biological processes: Strongly bioaccumulated by many organisms; extremely slow biodegradation
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

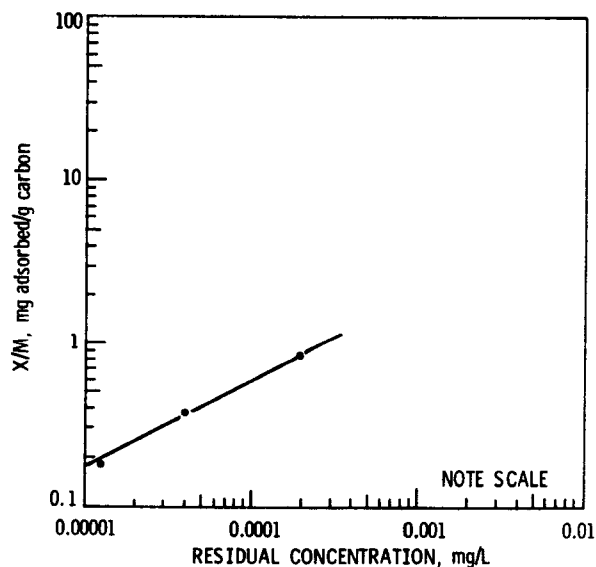

Date: 8/13/79

I.9.7-1

Date: 12/5/79

I.9.7-2

INDUSTRIAL OCCURRENCE OF HEXACHLOROBENZENE^{a, b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	2	1.3 ^d	5.5 x 10 ⁻⁶	0.037	0.0023
Nonferrous metals manufacturing	ND	5,000	220	0	NA	12

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.9.7-3

INDUSTRIAL OCCURRENCE OF HEXACHLOROBENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA
Iron and steel manufacturing	NA	NA	210	0	NA	38
Nonferrous metals manufacturing	ND	220	30	0	NA	1.6

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR HEXACHLOROBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Aerated lagoons			0 ^{d,e}	- ^e	III.5.3
Activated sludge			47->97	0.4	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 77-1 - 77-13.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79


I.9.7-5

Compound: Ethylbenzene

Formula: CH_2CH_3

Alternate Names: Phenylethane, Ethylbenzol

CAS #: 100-41-4



Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 106.2 m.p., °C: -94.9 b.p. (760 torr), °C: 136
vapor pressure (20°C), torr: 7
solubility in water (20°C), mg/L: 152
log octanol/water partition coefficient: 3.15
Henry's law constant: 6.44 atmos. m^3/mole
biodegradability: 27% theoretical oxidation of 500 ppm solution by phenol-acclimated activated sludge after 12 hr aeration

Probable Fate [1]

photolysis: Photooxidation after volatilization is the principal fate of ethylbenzene
oxidation: Not important other than in the case of photooxidation
hydrolysis: Not important
volatilization: Principal transport process for ethylbenzene
sorption: Probably adsorbed by organic materials
biological processes: Very little potential for bioaccumulation; can be used as sole carbon source by some microbes
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: 7.3
type of carbon: Not available
adsorbability: 170 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

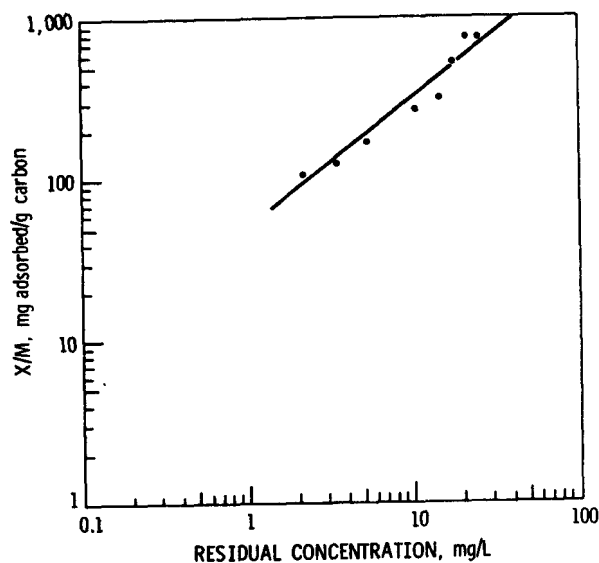

Date: 8/13/79

I.9.8-1

Date: 12/5/79

I.9.8-2

INDUSTRIAL OCCURRENCE OF ETHYLBENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<1 ^d	0	0.026	0.0038
Textile mills	NA	2,800	54 ^d	0.00023	1.6	0.097
Timber products processing	BDL	2,100	37 ^d	0	1.7	0.0032
Petroleum refining	NA	NA	>100 ^d	0	9.3	0.58
Paint and ink formulation	ND	15,000	3,400	0	0.16	0.0054
Gum and wood chemicals	20	28,000	4,700	0.042	35	7.7
Rubber processing	NA	500	1,500	0.00030	1.3	0.049
Pulp, paper and paperboard mills	NA	<1 ^e	<1 ^e	0	NA	0.030
Auto and other laundries	ND	17,000	550	0.00050	0.77	0.12
Pharmaceutical manufacturing	ND	86	16	0	1.1 x 10 ⁻¹	1.5 x 10 ⁻²
Ore mining and dressing	ND	8.8	4.4	0	NA	0.16
Steam electric power generating (water treatment)	NA	NA	3 ^f	1.8 x 10 ⁻⁸	0.18	0.00045
Coil coating	NA	<10 ^e	<10 ^e	0.00050	0.0048	0.018
Foundries	ND	NA	39	0	0.26	0.11
Leather tanning and finishing	ND	NA	65	0	NA	9.8 x 10 ⁻²
Nonferrous metals manufacturing	ND	21	2.5	0	NA	0.13
Iron and steel manufacturing	NA	39,000	61	0	NA	11

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^d Median, not average.^e One sample.^f Average of medians reported for various industry segments.

Date: 12/5/79

I.9.8-3

INDUSTRIAL OCCURRENCE OF ETHYLBENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, mg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<0.9 ^d	0	0.024	0.0034
Textile mills	NA	3,000	63 ^d	0.00026	1.8	0.11
Timber products processing	BDL	140	20 ^e	0	0.92	0.0017
Petroleum refining	NA	NA	NA	NA	NA	NA
Paint and ink formulation	ND	74,000 ^f	4,100 ^f	0	0.19	0.0066
Gum and wood chemicals	BDL	10 ^f	<10 ^f	9.0 x 10 ⁻⁵	0.076	0.016
Rubber processing	NA	>100	>26	5.2 x 10 ⁻⁶	0.022	0.00086
Pulp, paper and paperboard mills	<1	74	<16	0	NA	0.48
Auto and other laundries	NA	110 ^e	110 ^e	0.00010	0.154	0.023
Pharmaceutical manufacturing	ND	11	1.6	0	0.011	0.0015
Foundries	NA	<20 ^e	<20 ^e	0	0.13	0.054
Iron and steel manufacturing	NA	4,400	110	0	NA	20
Nonferrous metals manufacturing	ND	49	1.9	0	NA	0.10
Leather tanning and finishing	ND	12	5	0	NA	0.0075

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eAverage of medians reported for various industry segments.

^fOne sample.

Date: 12/5/79

I.9.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ETHYLBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	>50	III.4.1
Gas flotation			>99 ^d	ND	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			40->99	280	III.4.5
Gas flotation with chemical addition (polymer)			65 ^d	160 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			>75->99	<2.1	III.4.6
Sedimentation			47-78	1,000	III.4.6
Sedimentation with chemical addition (alum, lime)			>97-98	11	III.4.3
Sedimentation with chemical addition (polymer)			81 ^d	130 ^d	III.4.3
Sedimentation with chemical addition (alum, polymer)			>80->94	430	III.4.3
Sedimentation with chemical addition (alum)			0 ^e	- ^e	III.4.3
Aerated lagoons			>78->94	<10	III.5.3
Solvent extraction			97 ^d	4,000 ^d	III.5.6
Activated sludge			80->99	170	III.5.1
Powdered activated carbon adsorption			87 ^d	18,000	III.6.2
Granular activated carbon adsorption			0 ^{d,e}	- ^e	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 78-1 - 78-5.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 307-309.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Nitrobenzene

Formula:



Alternate Names: Nitrobenzol

CAS #: 98-95-3

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 123.1 m.p., °C: 5.6 b.p. (760 torr), °C: 211
vapor pressure (20°C), torr: 0.15
solubility in water (20°C), mg/L: 1,900
log octanol/water partition coefficient: 1.85
Henry's law constant: 1.53×10^{-5} atmos. m³/mole
biodegradability: 98% nitrobenzene removal (measured as COD removal) obtained
at 20°C in activated sludge at a rate of 14 mg COD/g dry
innoculum/hr

Probable Fate [1]

photolysis: Photoreduction could occur if nitrobenzene is adsorbed onto
humus particles
oxidation: Only important as method of destroying photoreduction products
hydrolysis: Not important
volatilization: Not fast enough to be important
sorption: Adsorbed by humus and probably by clay
biological processes: No bioaccumulation of any significance; biodegradation
is relatively slow
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: 7.5
type of carbon: Not available
adsorbability: 130 mg/L; carbon dose re-
quired to reduce pollutant
concentration from 10 mg/L
to 1 mg/L at neutral pH

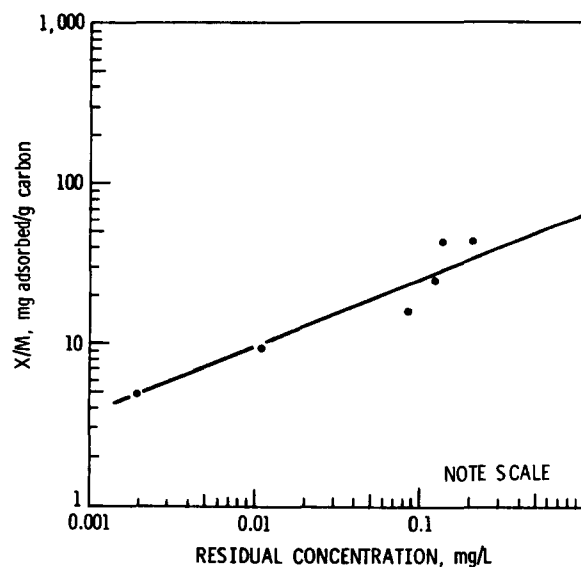

Date: 8/13/79

I.9.9-1

Date: 12/5/79

I.9.9-2

INDUSTRIAL OCCURRENCE OF NITROBENZENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	7	0.9	0	0.024	0.0034
Paint and ink formulation	ND	180	100	0	0.0046	0.00016
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Foundries	ND	280	94	0	0.063	0.25
Leather tanning and finishing	ND	NA	73	0	NA	0.11
Iron and steel manufacturing	NA	NA	1,400	0	NA	252
Nonferrous metals manufacturing	ND	160	11	0	NA	0.58

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.9-3

INDUSTRIAL OCCURRENCE OF NITROBENZENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	- ^d	- ^d	- ^d
Paint and ink formulation	ND	7,200	1,800	0	0.083	0.0029
Pharmaceutical manufacturing	ND	ND	ND	- ^d	- ^d	- ^d
Foundries	<20	<20	<20	0	0.13	0.054
Iron and steel manufacturing	NA	NA	6	0	NA	1.1
Nonferrous metals manufacturing	ND	5.5	2.8	0	NA	0.15

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

Date: 12/5/79

I.9.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR NITROBENZENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Sedimentation			>52 ^d	<10 ^d	III.4.2
Sedimentation with chemical addition (alum)			68 ^d	35 ^d	III.4.3
Aerated lagoons			>0 ^{d,e}	- ^e	III.5.3
Powdered activated carbon adsorption			79 ^d	67,000 ^d	III.6.2

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 79-1 - 79-8.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Toluene

Formula:



Alternate Names: Toluol, Phenylmethane,
Methylbenzene, Methylbenzol,
Methacide

CAS #: 108-88-3

Physical, Chemical, and Biological Properties [1]


mol. wt.: 92.13 m.p., °C: -95 b.p. (760 torr), °C: 111
vapor pressure (25°C), torr: 28.7
solubility in water (25°C), mg/L: 535
log octanol/water partition coefficient: 2.69
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Amount of dissociation to benzyl alcohol and benzaldehyde
 unknown; atmospheric photooxidation to benzaldehyde follows
 volatilization
oxidation: Only important as photooxidation
hydrolysis: Not important
volatilization: Volatilization occurs with a half-life of about five hours
sorption: Presumably adsorbed by organic materials
biological processes: Bioaccumulation not important; metabolism produces
 acids (acetic, pyruvic, and hippuric)
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

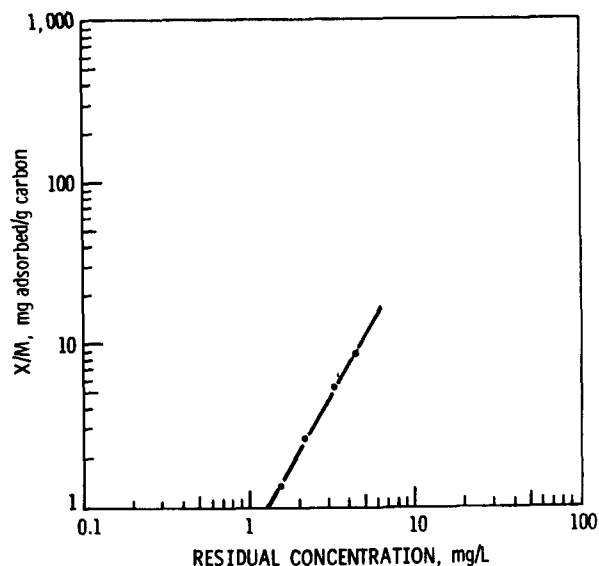

Date: 8/13/79

I.9.10-1

Date: 12/5/79

I.9.10-2

INDUSTRIAL OCCURRENCE OF TOLUENE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	8	1.1	0	0.029	0.0041
Textile mills	NA	620	26 ^d	0.00011	0.75	0.047
Timber products processing	BDL	3,200	180 ^e	0	8.3	0.015
Petroleum refining	NA	NA	>100 ^d	0	9.3	0.58
Paint and ink formulation	ND	260,000	10,000	0	0.46	0.016
Gum and wood chemicals	20	17,000	2,600	0.023	20	4.3
Rubber processing	0	350	77	1.5×10^{-5}	0.066	0.0025
Pulp, paper and paperboard mills	<1	14	<4	0	NA	0.12
Auto and other laundries	ND	51,000	1,300	0.0012	1.8	0.00021
Pharmaceutical manufacturing	ND	17,000	2,400	0	16.3	2.2
Ore mining and dressing	ND	0.64	0.36	0	NA	0.013
Steam electric power generators (water treatment)	NA	NA	98 ^e	6×10^{-7}	5.9	0.015
Coil coating	<10	<10	<10	<0.0005	<0.018	<0.0048
Foundries	ND	NA	120	0	0.80	0.32
Leather tanning and finishing	ND	400	67	0	NA	0.10
Nonferrous metals manufacturing	ND	55	6.9	0	NA	0.37
Iron and steel manufacturing	NA	17,000	590	0	NA	106

^a Information contained in this table was obtained from Volume II of the Treatability Manual.^b NA - not available; ND - not detected; BDL - below detection limit.^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^d Median, not average.^e Average of medians reported for various industry segments.

Date: 12/5/79

I.9.10-3

INDUSTRIAL OCCURRENCE OF TOLUENE^{a,b}

Industry	Treated wastewater					
	Concentration, mg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	7.3	1.7 ^d	0	0.045	0.0064
Textile mills	NA	1,400	14 ^d	5.9 x 10 ⁻⁵ _e	0.40 _e	0.025 _e
Timber products processing	BDL	33 ^f	BDL ^f			
Petroleum refining	NA	35 ^f	35 ^f	0	3.2	0.20
Paint and ink formulation	ND	1,100	590	0	0.027	0.00094
Gum and wood chemicals	10	2,000	660	0.0059	5.0	1.1
Rubber processing	NA	420	77	1.5 x 10 ⁻⁵	0.066	0.0025
Pulp, paper and paperboard mills	<1	55	<7	0	NA	0.21
Auto and other laundries	6	790	400	0.00036	0.56	0.084
Pharmaceutical manufacturing	ND	700	97	0	0.66	0.089
Foundries	<10	180	41	0	0.27	0.11
Iron and steel manufacturing	NA	NA	190	0	NA	34
Nonferrous metals manufacturing	ND	69	1.7	0	NA	0.09
Leather tanning and finishing	ND	<10	<8	0	NA	0.012

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

^fOne sample.

Date: 12/5/79

I.9.10-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TOLUENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	>65	III.4.1
Gas flotation			>92 ^d	ND	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			19-65	1,000	III.4.5
Gas flotation with chemical addition (polymer)			59 ^d	130 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)			10 ^d	4.5 ^d	III.4.5
Filtration			37->99	26	III.4.6
Sedimentation			23-76	290	III.4.2
Sedimentation with chemical addition (alum, lime)			76-96	43	III.4.3
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (polymer)			20-39	950	III.4.3
Sedimentation with chemical addition (alum, polymer)			18-73	990	III.4.3
Sedimentation with chemical addition (alum)			49-93	1,260	III.4.3
Sedimentation with chemical addition (lime)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			>72->95	<14	III.5.3
Steam stripping			95-96	1,950	III.5.6
Ozonation			15-31	1	III.6.14
Activated sludge			49->99	57	III.5.1
Granular activated carbon adsorption			38->99 ^d	80 ^d	III.6.1
Reverse osmosis			3.8-12	17.5	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 80-1 - 80-7.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: 2,4-Dinitrotoluene

Formula:



Alternate Names: Dinitrotoluol, DNT,
1-Methyl-2,4-dinitrotoluene

CAS #: 121-14-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 182.1 m.p., °C: 70 b.p. (760 torr), °C: 300
vapor pressure (59°C), torr: 0.0013
solubility in water (22°C), mg/L: 270
log octanol/water partition coefficient: 2.01
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Intramolecular photolysis could be an important fate
oxidation: Oxidation could follow adsorption onto clay particles
hydrolysis: Not important
volatilization: Too slow to be important
sorption: 2,4-Dinitrotoluene should be strongly sorbed by humus and clay
biological processes: Some bioaccumulation possible; biodegradation very slow
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.9.11-2

INDUSTRIAL OCCURRENCE OF 2,4-DINITROTOLUENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	6	0.8	0	0.021	0.0030
Pharmaceutical manufacturing	ND	49	12	0	0.082	0.011
Foundries	ND	<50	15	0	0.10	0.041
Iron and steel manufacturing	NA	NA	710	0	NA	0.13
Nonferrous metals manufacturing	ND	16	1.7	0	NA	0.090

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.11-3

INDUSTRIAL OCCURRENCE OF 2,4-DINITROTOLUENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	^d	^d	^d
Pharmaceutical manufacturing	ND	ND	ND	^d	^d	^d
Foundries	<17	300	160	0	1.1	0.43
Iron and steel manufacturing	NA	NA	22	0	NA	4.0
Nonferrous metals manufacturing	ND	7	0.9	0	NA	0.048

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

Date: 12/5/79

I.9.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2,4-DINITROTOLUENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Sedimentation			80 ^{d,e}	10 ^{d,e}	III.4.2
Aerated lagoons			0 ^{d,f}	- ^f	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eAnalytical method did not distinguish between 2,4-dinitrotoluene and 2,6-dinitrotoluene.

^fActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 81-1 - 81-8.

Date: 8/13/79

I.9.11-5

Compound: 2,6-Dinitrotoluene

Formula:



Alternate Names: Dinitrotoluol

CAS #: 606-20-2

Physical, Chemical, and Biological Properties [1]


mol. wt.: 182.1 m.p., °C: 65 b.p. (760 torr), °C: 285
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: 2.05
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Intramolecular photolysis could be very important
oxidation: Not important
hydrolysis: Not important
volatilization: Probably not an important transport process
sorption: 2,6-Dinitrotoluene should be strongly sorbed by humus and clay
biological processes: No data on bioaccumulation; biodegradation very slow
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

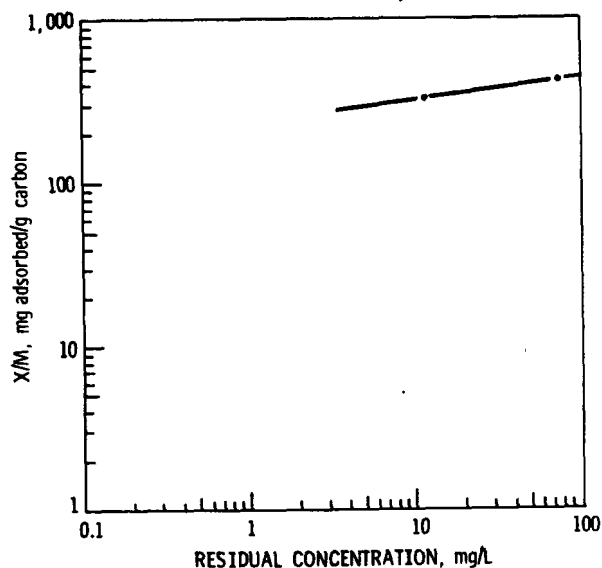

Date: 8/13/79

I.9.12-1

Date: 12/5/79

I.9.12-2

INDUSTRIAL OCCURRENCE OF 2,6-DINITROTOLUENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	54 ^d	54 ^d	0.00023	1.6	0.097
Foundries	ND	<50	17	0	0.11	0.046
Nonferrous metals manufacturing	ND	16	1.7	0	NA	0.090
Iron and steel manufacturing	NA	47	25	0	NA	4.5

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3, where mean is not available 1/2 the reported maximum was utilized.

^d One sample.

Date: 12/5/79

I.9.12-3

INDUSTRIAL OCCURRENCE OF 2,6-DINITROTOLUENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA
Foundries	<17	300	160	0	1.1	0.43
Iron and steel manufacturing	NA	NA	7	0	NA	1.3
Nonferrous metals manufacturing	ND	1.0	0.1	0	NA	0.0053

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2,6-DINITROTOLUENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Sedimentation			80 ^{d,e}	10 ^{d,e}	III.4.2
Sedimentation with chemical addition (lime)			>79 ^d	<10 ^d	III.4.3
Aerated lagoons			83 ^d	2 ^d	III.5.3
Activated sludge			0 ^{d,f}	- ^f	III.5.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Analytical method did not distinguish between 2,4-dinitrotoluene and 2,6-dinitrotoluene.

^f Actual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume VI, Phenols, Cresols, and Monocyclic Aromatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 82-1 - 82-9.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.9.12-5

Compound: Aniline

Formula:



Alternate Names: Amino benzene, Phenylamine

CAS #: 62-53-3

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 93.1 m.p., °C: -6 b.p. (760 torr), °C: 184
vapor pressure (20°C), torr: 0.3
solubility in water (temp. unknown), mg/L: 34,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 95% aniline removal (measured as COD removal) obtained at
20°C in activated sludge at a rate of 19 mg COD/g dry
innoculum/hr

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:


other reactions/interactions:

Carbon Adsorption Data [3]

pH: 7.1

type of carbon: Filtrasorb-400

adsorbability: Not available

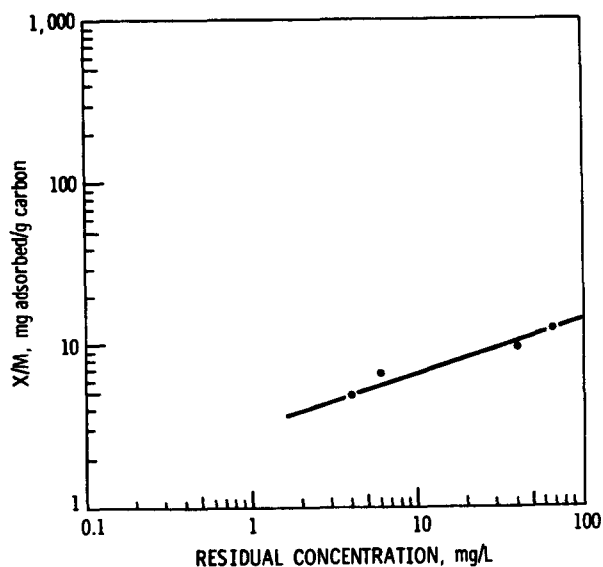

Date: 8/13/79

I.9.13-1

I.9.13-2

INDUSTRIAL OCCURRENCE OF ANILINE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.13-3

INDUSTRIAL OCCURRENCE OF ANILINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ANILINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 102.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.9.13-5

Compound: Benzoic acid

Formula:



Alternate Names: Benzenecarboxylic acid

CAS #: 62-53-3

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 122.1 m.p., °C: 122 b.p. (760 torr), °C: 249
vapor pressure (25°C), torr: Not available
solubility in water (temp. unknown), mg/L: 2,900
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 99% benzoic acid removal (measured as COD removal)
obtained at 20°C in activated sludge at a rate of
88 mg COD/g dry inoculum/hr

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:


other reactions/interactions:

Carbon Adsorption Data [3]

pH: 3.0, 7.0, 9.0

type of carbon: Not available

adsorbability: >10,000 mg/L; carbon dose
required to reduce pollut-
ant concentration from
10 mg/L to 1 mg/L at
neutral pH

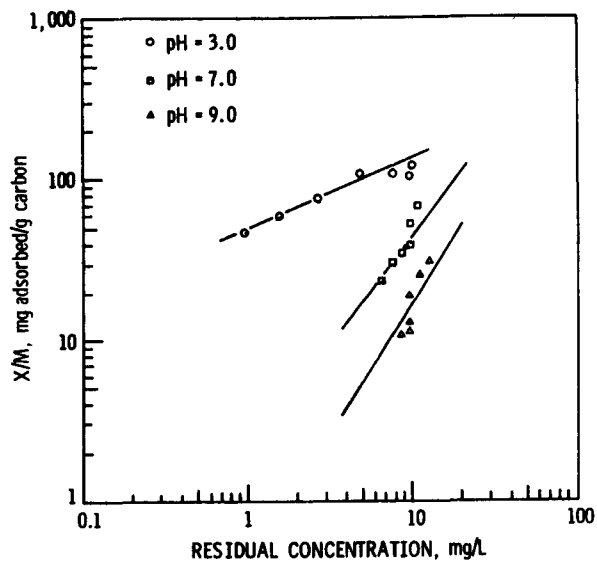

Date: 8/13/79

I.9.14-1

I.9.14-2

INDUSTRIAL OCCURRENCE OF BENZOIC ACID^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.14-3

INDUSTRIAL OCCURRENCE OF BENZOIC ACID^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZOIC ACID^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 120.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
3. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I.9.14-5

Compound: Benzylchloride

Formula:



Alternate Names: α-Chlorotoluene

CAS #: 100-44-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 126.6 m.p., °C: -41 to -43 b.p. (760 torr), °C: 179
vapor pressure (22°C), torr: 1
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.9.15-2

INDUSTRIAL OCCURRENCE OF BENZYL CHLORIDE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, $^{\text{C}}$ kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Food processing	10	100	30	10	100	30
Textile	10	100	30	10	100	30
Chemical	10	100	30	10	100	30
Pharmaceutical	10	100	30	10	100	30
Other	10	100	30	10	100	30

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.15-3

INDUSTRIAL OCCURRENCE OF BENZYL CHLORIDE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.15-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZYL CHLORIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 126.

Date: 8/13/79

I.9.15-5

Compound: Styrene

Formula:



Alternate Names: Vinylbenzene, Cinnamene,
Phenylethylene, Ethylbenzene

CAS #: 100-42-5

Physical, Chemical, and Biological Properties [1]


mol. wt.: 104.1 m.p., °C: -30.6 b.p. (760 torr), °C: 145
vapor pressure (20°C), torr: 5
solubility in water (20°C), mg/L: 300
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: 3.0, 7.0, 9.0
type of carbon: Not available
adsorbability: 74 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

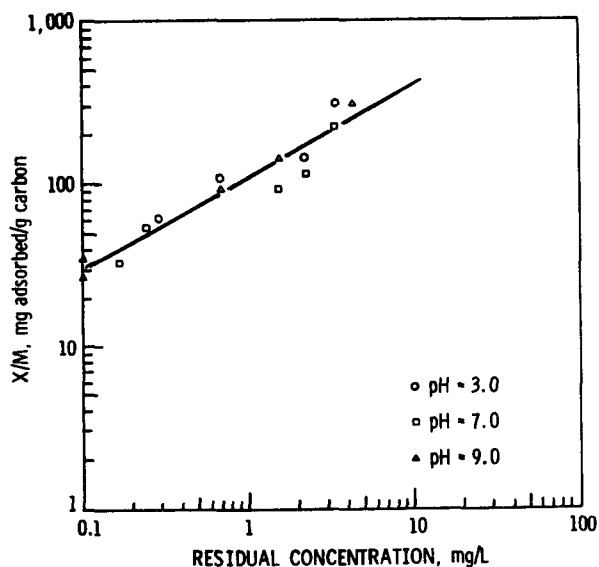

Date: 8/13/79

I.9.16-1

I.9.16-2

INDUSTRIAL OCCURRENCE OF STYRENE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.16-3

INDUSTRIAL OCCURRENCE OF STYRENE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.16-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR STYRENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Solvent extraction			>93 ^d	<1,000 ^d	III.5.6

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 567.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I-9.16-5

Compound: Quinoline

Formula:



Alternate Names: Benzo(b)pyridine, 1-Benzazine

CAS #: 91-22-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 129.2 m.p., °C: -19.5 b.p. (760 torr), °C: 238
vapor pressure (60°C), torr: 1
solubility in water (temp. unknown), mg/L: 60,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.9.17-2

INDUSTRIAL OCCURRENCE OF QUINOLINE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.17-3

INDUSTRIAL OCCURRENCE OF QUINOLINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.17-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR QUINOLINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 560.

Compound: Xylenes

Formula: $\text{CH}_3(\text{C}_6\text{H}_4)\text{CH}_3$ and various derivatives

Alternate Names: Dimethylbenzenes, Methyltoluenes

CAS #: Different for each compound; *o*-Xylene has CAS # 95-47-6

Physical, Chemical, and Biological Properties for *o*-Xylene [1]

mol. wt.: 106.2 m.p., °C: -25.2 b.p. (760 torr), °C: 144
vapor pressure (32°C), torr: 10
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:


other reactions/interactions:

Carbon Adsorption Data for *p*-Xylene [2]

pH: 7.3

type of carbon: Not available

adsorbability: 110 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

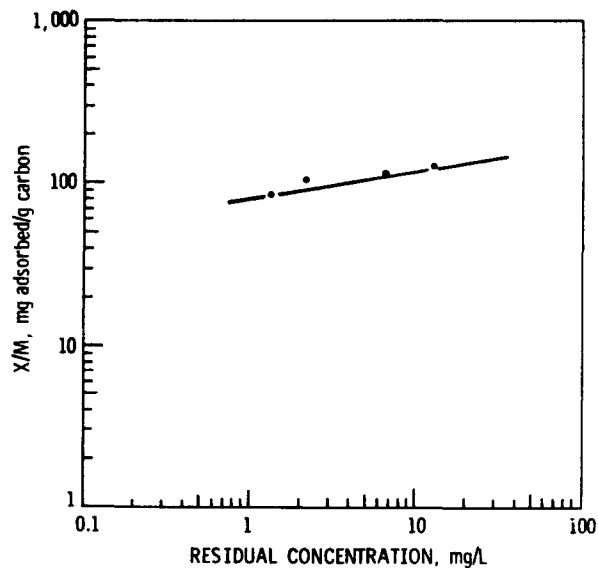

Date: 8/13/79

I.9.18-1

Date: 9/13/79

I.9.18-2

INDUSTRIAL OCCURRENCE OF XYLENES^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	3	8	5	0	NA	0.15

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.18-3

INDUSTRIAL OCCURRENCE OF XYLENES^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	<1	400	<76	0	NA	2.3

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.9.18-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR XYLENES^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Solvent extraction			97->98	<4,000	III.5.6
Activated sludge			0 ^{d,e}	- ^e	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 95, 96.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Formula:



Physical, Chemical, and Biological Properties [1, 2]

other reactions/interactions:

Carbon Adsorption Data: Not available

I.9.19-2

INDUSTRIAL OCCURRENCE OF NITROTOLUENE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.19-3

INDUSTRIAL OCCURRENCE OF NITROTOLUENE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.19-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR NITROTOLUENE^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 495, 496.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.

Date: 8/13/79

I.9.19-5

Compound: Naphthenic acid

Formula: Exact composition
unknown [1]

Alternate Names:

CAS #: 1338-24-5

Physical, Chemical, and Biological Properties: Not available

mol. wt.: m.p., °C: b.p. (760 torr), °C:
vapor pressure (25°C), torr:
solubility in water (25°C), mg/L:
log octanol/water partition coefficient:
Henry's law constant:
biodegradability:

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.9.20-1

I.9.20-2

INDUSTRIAL OCCURRENCE OF NAPHTHENIC ACID^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.20-3

INDUSTRIAL OCCURRENCE OF NAPHTHENIC ACID^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.9.20-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR NAPHTHENIC ACID^{a, b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 10.

Compound: 2-Chloronaphthalene

Formula:



Alternate Names: Halowax, B-Chloronaphthalene

CAS #: 91-58-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 162.6 m.p., °C: 61 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 0.017 (calculated)
solubility in water (25°C), mg/L: 6.74 (calculated)
log octanol/water partition coefficient: 4.12
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Some of the dissolved compound may be photolyzed
oxidation: Probably too slow to be important
hydrolysis: Not important
volatilization: No volatilization rate has been determined, but volatilization has been recorded
sorption: 2-Chloronaphthalene should be adsorbed onto particulates, especially organic matter
biological processes: Bioaccumulation occurs, but is probably short-term; biodegradation and metabolization are both fairly rapid
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.1-2

INDUSTRIAL OCCURRENCE OF 2-CHLORONAPHTHALENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.4	0	0.011	0.0015
Textile mills	NA	<10 ^d	<10 ^d	4.2 x 10 ⁻⁵	0.29	0.018
Auto and other laundries	ND	17	1	9 x 10 ⁻⁷	0.0014	0.00021
Steam electric power generating (condenser cooling system)	NA	NA	10 ^e	6 x 10 ⁻⁸	0.6	0.0015
Steam electric power generating (ash handling)	NA	NA	52 ^e	0.0010	5.1	1.1
Iron and steel manufacturing	NA	NA	22	0	NA	4.0
Nonferrous metals manufacturing	ND	3	0.3	0	NA	0.016

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.10.1-3

INDUSTRIAL OCCURRENCE OF 2-CHLORONAPHTHALENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Textile mills	NA	NA	NA	NA	NA	NA
Iron and steel mnufacturing	NA	NA	3,500	0	NA	630

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.10.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2-CHLORONAPHTHALENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gas flotation with chemical addition (alum, polymer)			3 ^d	16 ^d	III.4.5
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			>47 ^d	<10 ^d	III.5.3
Activated sludge			50 ^d	1 ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 37-1 - 37-8.

Compound: Benz(a)anthracene

Formula:



Alternate Names: 1,2-Benzanthracene,
Tetraphene, Naphthanthracene,
2,3-Benzophenanthrene

CAS #: 56-55-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 228.3 m.p., °C: 155-157 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 5×10^{-9}
solubility in water (25°C), mg/L: 0.014
log octanol/water partition coefficient: 5.61
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Photolysis to quinones is rapid, but is greatly hindered by adsorption
oxidation: Oxidation by alkyl peroxy radicals could compete with photolysis dissolved benz(a)anthracene
hydrolysis: Not important
volatilization: Too slow to compete with sorption as a transport process
sorption: Very strong adsorption by suspended solids is the principal transport process
biological processes: Short-term bioaccumulation is accompanied by metabolism; biodegradation is the principal fate
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.10.2-1

Date: 12/5/79

I.10.2-2

INDUSTRIAL OCCURRENCE OF BENZ(a)ANTHRACENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	35	9.2	0	0.24	0.035
Timber products processing	BDL	7,700	157 ^d	0	7.2	0.013
Auto and other laundries	ND	120	120	0.00011	17	0.025
Coil coating	ND	160	33	0.0016	0.059	0.016
Foundries	ND	NA	3,300	0	22	8.9
Iron and steel manufacturing	NA	2,000	90	0	NA	16
Nonferrous metals manufacturing	ND	180	13	0	NA	70

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.10.2-3

INDUSTRIAL OCCURRENCE OF BENZ(a)ANTHRACENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.2 ^d	0	0.0053	0.00076
Timber products processing	BDL	3,400	9 ^e	0 _f	0.41 _f	0.00077 _f
Auto and other laundries	NA	ND	ND			
Foundries	<20	7,300	1,200	0	8.0	3.2
Iron and steel manufacturing	NA	470,000	34	0	NA	6.1
Nonferrous metals manufacturing	ND	6.0	0.7	0	NA	0.04

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between benz(a)anthracene and chrysene.

^eMedian, not average.

^fIndeterminate.

Date: 12/5/79

I.10.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZ(a)ANTHRACENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	55 ^d	III.4.1
Sedimentation with chemical addition (lime, polymer)			>81 ^d	<10 ^d	III.4.3
Sedimentation with chemical addition (lime)			>92 ^d	<10 ^d	III.4.3
Granular activated carbon adsorption			>93 - >97	<0.02	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 103-1 - 103-15.

Compound: Benzo(b)fluoranthene

Formula:

Alternate Names: 2,3-Benzofluoranthene,
Benz(e)acephenanthrylene,
3,4-Benzofluoranthene, B(b)F



CAS #: 205-99-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 252.3 m.p., °C: 167-168 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 5×10^{-7} (calculated)
solubility in water (25°C), mg/L: 0.0012 (calculated)
log octanol/water partition coefficient: 6.57
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Dissolved portion should undergo direct photolysis to quinones
oxidation: Rapid oxidation by chlorine and ozone could occur when chlorine
 and ozone are available in sufficient quantity
hydrolysis: Not important
volatilization: Probably too slow to compete with adsorption as a transport
 process
sorption: Very strong adsorption onto suspended solids is the principal
 transport process
biological processes: Short-term bioaccumulation accompanied by metaboliza-
 tion; biodegradation is the principal fate
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.10.3-1

Date: 12/5/79

I.10.3-2

INDUSTRIAL OCCURRENCE OF BENZO(b)FLUORANTHENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining ^d	ND	12	3.6	0	0.095	0.014
Textile mills	NA	<10 ^e	<10 ^e	4.2 x 10 ⁻⁵	0.29	0.018
Timber products processing	BDL	1,680	87 ^f	0	4.0	0.0075
Foundries	ND	36	14	0	0.094	0.038
Coil coating	ND	35	18	0.0009	0.032	0.0086
Nonferrous metals manufacturing	ND	260	19	0	NA	1.0
Iron & steel manufacturing	NA	200	28	0	NA	5.0

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Analytical method did not distinguish between benzo(b)fluoranthene and benzo(k)fluoranthene.

^e One sample.

^f Median, not average.

Date: 12/5/79

I.10.3-3

INDUSTRIAL OCCURRENCE OF BENZO(k)FLUORANTHENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Timber products processing	BDL	210	37 ^e	0	1.7	0.0032
Textile mills	NA	NA	NA	NA_d	NA_d	NA_d
Auto and other laundries	NA	ND	ND	_d	_d	_d
Nonferrous metals manufacturing	ND	12	0.6	0	NA	0.032
Iron and steel manufacturing	NA	37	12	0	NA	2.2

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eMedian, not average.

Date: 12/5/79

I.10.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZO(b)FLUORANTHENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Sedimentation			83 ^d	6 ^d	III.4.2
Aerated lagoons			0.4	97	III.5.3
Ozonation			>80 ^d	<0.02 ^d	III.6.14

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 104-1 - 104-12.

Compound: Benzo(k)fluroanthene

Formula:

Alternate Names: 11, 12-Benzofluoranthene, B(k)F

CAS #: 207-08-9

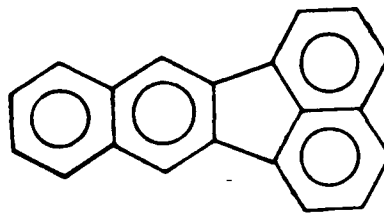

Physical, Chemical, and Biological Properties [1]

mol. wt.: 252.3 m.p., °C: 217 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 5×10^{-7} (calculated)
solubility in water (25°C), mg/L: 0.00055 (calculated)
log octanol/water partition coefficient: 6.84
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Dissolved portion may undergo photolysis to quinones
oxidation: If chlorine and/or ozone is present in sufficient quantity, rapid oxidation should occur
hydrolysis: Not important
volatilization: Probably too slow to compete with adsorption as a transport process; rate uncertain
sorption: Very strongly sorbed onto suspended solids; dominant transport process
biological processes: Bioaccumulation (short-term) accompanied by metabolism; biodegradation (microbial) dominant fate
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.4-2

INDUSTRIAL OCCURRENCE OF BENZO(k)FLUORANTHENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining ^d	ND	12	3.6	0	0.095	0.014
Textile mills ^e	NA	10 ^e	<10 ^e	4.2 x 10 ⁻⁵	0.29	0.018
Timber products processing	BDL	3,900	27 ^f	0	1.2	0.0023
Auto and other laundries	ND	120	120	0.00010	0.17	0.025
Foundries	ND	NA	6	0	0.040	0.016
Coil coating	ND	35	18	0.0009	0.032	0.0086
Iron & steel manufacturing	NA	360	40	0	NA	7.2
Nonferrous metals manufacturing	ND	210	20	0	NA	1.0

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Analytical method did not distinguish between benzo(b)fluoranthene and benzo(k)fluoranthene.

^e One sample.

^f Median, not average.

Date: 12/5/79

I.10.4-3

INDUSTRIAL OCCURRENCE OF BENZO(k)FLUORANTHENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	- ^d	- ^d	- ^d
Timber products processing	BDL	210	37 ^e	0	1.7	0.0032
Textile mills	NA	NA	NA	NA ^d	NA ^d	NA ^d
Auto and other laundries	NA	ND	ND	- ^d	- ^d	- ^d
Nonferrous metals manufacturing	ND	12	0.6	0	NA	0.032
Iron and steel manufacturing	NA	37	12	0	NA	2.2

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eMedian, not average.

Date: 12/5/79

I.10.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZO(k)FLUORANTHENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	150	III.4.1
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation			>57 - >97	<5	III.4.2
Granular activated carbon adsorption			>80 ^d	<0.02 ^d	III.6.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 105-1 - 105-12.

Compound: Benzo(a)pyrene

Formula:

Alternate Names: 3,4-Benzopyrene

CAS #: 50-32-8



Physical, Chemical, and Biological Properties [1]

mol. wt.: 252.3 m.p., °C: 179 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: 5×10^{-9}
solubility in water (25°C), mg/L: 0.0038
log octanol/water partition coefficient: 6.04
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Dissolved portion should undergo rapid photolysis to quinones
oxidation: Oxidation by chlorine and/or ozone could account for a small
 portion of the dissolved compound
hydrolysis: Not important
volatilization: Probably too slow to compete with adsorption as a transport
 process; rate uncertain
sorption: Very strong adsorption onto suspended solids is the dominant
 transport process
biological processes: Bioaccumulation is short-term; metabolization and
 microbial degradation principal fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.5-2

INDUSTRIAL OCCURRENCE OF BENZO(a)PYRENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	12	4.6 ^d	0	0.12	0.017
Timber products processing	BDL	2,700	420 ^d	0	19	0.036
Petroleum refining	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	120	120	0.00011	0.17	0.025
Foundries	ND	57	16	0	0.11	0.043
Coil coating	ND	<10	<10	<0.0005	<0.018	<0.0048
Nonferrous metals manufacturing	ND	570	17	0	NA	0.90
Iron & steel manufacturing	NA	510	21	0	NA	3.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

Date: 12/5/79

I.10.5-3

INDUSTRIAL OCCURRENCE OF BENZO(a)PYRENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Timber products processing	BDL	290	15 ^e	0	0.69	0.0013
Petroleum refining	1.3	2.9	2.1	0	0.19	0.012
Auto and other laundries	NA	17 ^g	17 ^g	1.5x10 ⁻⁵	0.024	0.0036
Iron and steel manufacturing	NA	130	9	0	NA	1.62
Nonferrous metals manufacturing	ND	9.0	4.2	0	NA	0.22
Foundries	<20 ^g	<20 ^g	<20 ^g	0	0.13	0.054

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eMedian, not average.

^fAnalytical method did not distinguish between benzo(a)pyrene and perylene.

^gOne sample.

Date: 12/5/79

I.10.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZO(a)PYRENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	15.5	III.4.1
Filtration			0 ^e	- ^e	III.4.6
Sedimentation			>70 - 98	<5.3	III.4.2
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (lime)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			33 ^d	2 ^e	III.5.3
Ozonation			>90 ^d	<0.02 ^d	III.6.14

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 107-1 - 107-19.

Compound: Indeno(1,2,3-cd)pyrene

Formula:

Alternate Names: 2,3-o-Phenylene-pyrene,
IP



CAS #: 193-39-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 276.3 m.p., °C: 162-164 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 10^{-10} (calculated)
solubility in water (25°C), mg/L: 0.062 (calculated)
log octanol/water partition coefficient: 7.66
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Insufficient data, but at best only a small portion of the compound would be available in dissolved form for photolysis
oxidation: Rapid oxidation by chlorine and/or ozone may compete for dissolved compound
hydrolysis: Not important
volatilization: Probably too slow to be important; rate uncertain
sorption: Very strong adsorption onto suspended solids should be the dominant transport process
biological processes: Bioaccumulation is short-term; metabolization and microbial biodegradation are the principal fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.6-2

INDUSTRIAL OCCURRENCE OF INDENO(1,2,3-cd)PYRENE^a

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<2.1	0	0.056	0.0079
Timber products processing	BDL	5,500	130 ^d	0	6.0	0.011
Iron and steel manufacturing	NA	NA	7	0	NA	
Nonferrous metals manufacturing	ND	350	18	0	NA	

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.10.6-3

INDUSTRIAL OCCURRENCE OF INDENO(1,2,3-cd)PYRENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	6.3	0.4 ^d	0	0.011	0.0015
Timber products processing	BDL	110	40 ^d	0	1.8	0.0034
Iron and steel manufacturing	NA	NA	8	0	NA	1.4
Nonferrous metals manufacturing	ND	8	0.4	0	NA	0.02

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.10.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR INDENO(1,2,3-cd)PYRENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	40 ^d	III.4.1
Activated sludge			>99 ^d	<0.02 ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 112-1 - 112-12.

Compound: Dibenz(ah)anthracene

Formula:

Alternate Names: DB(a,h)A, 1,2,5,6-Dibenz-anthracene, DBA



CAS #: 53-70-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 278.4 m.p., °C: 270 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 10^{-10} (calculated)
solubility in water (25°C), mg/L: 0.0005
log octanol/water partition coefficient: 5.97
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: The dissolved portion of the compound may undergo rapid photolysis to quinones
oxidation: Rapid oxidation by chlorine and/or ozone may compete for dissolved DBA
hydrolysis: Not important
volatilization: Probably too slow to be important; rate uncertain
sorption: Strong adsorption by suspended solids, especially organic particulates, should be the principal transport process
biological processes: Bioaccumulation is short-term; metabolization and microbial biodegradation are the principal fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.7-2

INDUSTRIAL OCCURRENCE OF DIBENZ(ah)ANTHRACENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.7	0	0.045	0.0064
Timber products processing	BDL	430	NA	0	9.9	0.018
Iron and steel manufacturing	NA	16	8	0	NA	1.4
Nonferrous metals manufacturing	ND	110	8.2	0	NA	0.43

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.10.7-3

INDUSTRIAL OCCURRENCE OF DIBENZ(ah)ANTHRACENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	8	0.5	0 _d	0.013 _d	0.0019 _d
Timber products processing	NA	BDL	BDL	-	-	-
Nonferrous metals manufacturing	ND	8	0.6	0	NA	0.032
Iron and steel manufacturing	NA	NA	8	0	NA	1.44

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

Date: 12/5/79

I.10.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIBENZ(ah)ANTHRACENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 109-1 - 109-12.

Compound: Benzo(ghi)perylene

Formula:

Alternate Names: 1,12-Benzoperylene

CAS #: 191-24-2



Physical, Chemical, and Biological Properties [1]

mol. wt.: 276 m.p., °C: 222 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 10^{-10} (calculated)
solubility in water (25°C), mg/L: 0.00026
log octanol/water partition coefficient: 7.23
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: The dissolved portion could undergo rapid photolysis, but very little of the compound is present in dissolved form
oxidation: Oxidation by chlorine and/or ozone could occur if enough chlorine or ozone is present; relatively unimportant
hydrolysis: Not important
volatilization: Probably too slow to compete with adsorption as a transport process; rate uncertain
sorption: Very strong adsorption onto suspended solids, especially organic matter, should be the dominant transport process
biological processes: Bioaccumulation is short-term; metabolization and microbial biodegradation are the principal fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.8-2

INDUSTRIAL OCCURRENCE OF BENZO(ghi)PERYLENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	12	3.6	0	0.095	0.014
Timber products processing	BDL	315	6 ^d	0	0.28	0.00052
Coil coating	ND	<10	<10	<0.0005	<0.018	<0.0048
Nonferrous metals manufacturing	ND	150	12	0	NA	0.64
Iron and steel manufacturing	NA	NA	16	0	NA	2.9

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

Date: 12/5/79

I.10.8-3

INDUSTRIAL OCCURRENCE OF BENZO(ghi)PERYLENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.2 ^d	0	0.0053	0.00076
Timber products processing	BDL	63	2	0	0.092	0.00017
Iron and steel manufacturing	NA	NA	6	0	NA	1.1
Nonferrous metals manufacturing	ND	11	0.2	0	NA	0.011

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.10.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BENZO(ghi)PERYLENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	550	III.4.1
Sedimentation			>17 ^d	<10 ^d	III.4.2

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 106-1 - 106-12.

Compound: Acenaphthene

Formula:



Alternate Names: None

CAS #: 83-32-9

Physical, Chemical, and Biological Properties [1]

mol. wt.: 154.2 m.p., °C: 96 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 0.02 (calculated)
solubility in water (25°C), mg/L: 3.47
log octanol/water partition coefficient: 4.33
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Photolysis should be an important fate in view of the relatively high solubility and the strong absorption above 300 nm
oxidation: Rapid oxidation by chlorine and ozone requires high concentrations of Cl or O₃
hydrolysis: Not important
volatilization: Cannot compete with adsorption as a transport process
sorption: Adsorption onto suspended solids, especially organic matter, should be dominant transport process
biological processes: Bioaccumulation is short-term; metabolization and biodegradation are principal fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.9-2

INDUSTRIAL OCCURRENCE OF ACENAPHTHENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.9 ^d	0	0.050	0.0072
Textile mills	NA	12	8.7 ^d	3.6 x 10 ⁻⁵	0.25	0.016
Timber products processing	BDL	55,000	170 ^d	0	7.8	0.015
Petroleum refining	37	522	280 ^d	0	26	1.6
Pharmaceutical manufacturing	ND	100	12	0	0.082	0.011
Foundries	ND	200	21	0	0.014	0.057
Leather tanning and finishing	ND	NA	5	0	NA	0.0075
Nonferrous metals manufacturing	ND	100	7.4	0	NA	0.39
Iron and steel manufacturing	NA	53	9	0	NA	1.6

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND- not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

Date: 12/5/79

I.10.9-3

INDUSTRIAL OCCURRENCE OF ACENAPHTHENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Textile mills	NA	0.5 ^e	0.5 ^e	2.0 x 10 ⁻⁶	0.014	0.0009
Timber products processing	BDL	18,000	90 ^f	0	4.1	0.0077
Petroleum refining	NA	0.6 ^e	0.6 ^e	0 _d	0.056 _d	0.0035 _d
Pharmaceutical manufacturing	ND	ND	ND	_d	_d	_d
Foundries	<10	39	21	0	0.14	0.057
Iron and steel manufacturing	NA	NA	11	0	NA	2.0
Nonferrous metals manufacturing	ND	36	5.1	0	NA	0.27

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

^fMedian, not average.

Date: 12/5/79

I.10.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ACENAPHTHENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	910	III.4.1
Filtration			73 ^d	0.6 ^d	III.4.6
Aerated lagoons			0 ^{d,e}	- ^e	III.5.6
Activated sludge			76 - >99	<1.5	III.5.1
Granular activated carbon adsorption			>93 ^d	<0.04 ^d	III.6.1
Reverse osmosis			76 - 99	1.5	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 100-1 - 100-12.

Date: 8/13/79

I.10.9-5

Compound: Acenaphthylene

Formula:



Alternate Names: None

CAS #: 208-96-8

Physical, Chemical, and Biological Properties [1]

mol. wt.: 152.2 m.p., °C: 92 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 0.029
solubility in water (25°C), mg/L: 3.93
log octanol/water partition coefficient: 4.07
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Rapid photolysis of dissolved acenaphthylene could be an important fate; data inconclusive
oxidation: No data on acenaphthylene, but in the presence of ozone and/or chlorine in large amounts, oxidation may occur
hydrolysis: Not important
volatilization: Probably too slow to compete with adsorption as a transport process, rate uncertain
sorption: Acenaphthylene should be adsorbed onto suspended solids, especially organic particulates
biological processes: Bioaccumulation is short-term; metabolization and biodegradation are the most important fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.10-2

INDUSTRIAL OCCURRENCE OF ACENAPHTHYLENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	8	1	0	0.026	0.0038
Timber products processing	BDL	2,060	930 ^d	0	43	0.080
Petroleum refining	4	87	46 ^d	0	4.3	0.27
Leather tanning and finishing	ND	NA	2	0	NA	0.003
Coil coating	<10	<10	<10	<0.0005	<0.018	<0.0048
Foundries	ND	62	15	0	0.10	0.040
Iron and steel manufacturing	NA	6,400	290	0	NA	52
Nonferrous metals manufacturing	ND	120	8.2	0	NA	0.43

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.10.10-3

INDUSTRIAL OCCURRENCE OF ACENAPHTHYLENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Timber products processing	BDL	190	4 ^e	0	0.18	0.00034
Petroleum refining	NA	NA	NA	NA	NA	NA
Nonferrous metals manufacturing	ND	36	1.3	0	NA	0.069
Iron and steel manufacturing	NA	1,600	28	0	NA	5.0
Foundries	<10	500	69	0	0.46	0.19

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eMedian, not average.

Date: 12/5/79

I.10.10-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ACENAPHTHYLENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	40	III.4.1
Sedimentation			>17 ^d	<10 ^d	III.4.2
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			0 ^{d,e}	- ^e	III.5.3
Activated sludge			0 ^{d,e}	- ^e	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 101-1 - 101-12.

Date: 8/13/79

I.10.10-5

Compound: Anthracene

Formula:



Alternate Names: Paranaphthalene, Green oil,
Tetra Olive NZG

CAS #: 120-12-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 178.2 m.p., °C: 216 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 1.95×10^{-4}
solubility in water (25°C), mg/L: 0.073
log octanol/water partition coefficient: 4.45
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Rapid photolysis occurs only for dissolved portion; thus,
 increased adsorption greatly decreases photolysis
oxidation: Ozone and chlorine in sufficient quantities can oxidize dissolved
 anthracene
hydrolysis: Not important
volatilization: Volatilization is hindered by adsorption and is significant
 only in shallow, clear, well mixed streams
sorption: Adsorption by suspended solids and sediments is the primary
 transport process
biological processes: Short-term bioaccumulation; metabolization and
 biodegradation are the ultimate fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.11-2

INDUSTRIAL OCCURRENCE OF ANTHRACENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining ^d	ND	132	23	0	0.61	0.087
Textile mills	NA	0.1 ^e	0.1 ^e	4.2 x 10 ⁻⁷	0.0029	0.00018
Petroleum refining ^d	46	1,100	170 ^f	0	16	0.99
Timber products processing	NA	NA	NA	NA	NA	NA
Auto and other laundries ^g	ND	470	23	2.1 x 10 ⁻⁵	0.032	0.0048
Pharmaceutical manufacturing	ND	7	1.8	0	0.012	0.0017
Coil coating	ND	1,400	28	0.0014	0.050	0.013
Foundries	ND	470	64	0	0.43	0.17
Leather tanning and finishing ^g	ND	140	62	0	NA	0.093
Nonferrous metals manufacturing	ND	3,000	43	0	NA	2.2
Iron and steel manufacturing	NA	2,800	91	0	NA	16

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, 1/2 the reported maximum was utilized.

^d Analytical method did not distinguish between anthracene and phenanthrene.

^e One sample.

^f Median, not average.

^g Analytical method did not distinguish between anthracene/phenanthrene.

Date: 12/5/79

1.10.11-3

INDUSTRIAL OCCURRENCE OF ANTHRACENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining ^d	ND	<10	<1.4	0	0.037	0.0053
Textile mills	NA	4.4 ^e	4.4 ^e	1.8 x 10 ⁻⁵	1.3	0.0079
Timber products processing	BDL	37,000	59 ^f	0	2.7	0.0051
Petroleum refining ^d	Trace	<10	<0.8 ^f	0	0.074	0.0046
Auto and other laundries ^g	2	12	5.0	4.5 x 10 ⁻⁶	0.007	0.001
Pharmaceutical manufacturing	ND	ND	ND	ND	ND	ND
Foundries	<4	3,200	480	0	3.2	1.3
Iron and steel manufacturing	NA	2,300	59	0	NA	11
Nonferrous metals manufacturing	ND	140	6.6	0	NA	0.35
Leather tanning and finishing	ND ^d	<10 ^d	4.1 ^d	0	NA	0.0062

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between anthracene and phenanthrene.

^eOne sample.

^fMedian, not average.

Date: 12/5/79

I.10.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ANTHRACENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	3 ^d	III.4.1
Gas flotation			45 ^{d,f}	~600 ^{d,f}	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			83 ^{d,f}	66 ^{d,f}	III.4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e,f}	- ^{e,f}	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e,f}	- ^{e,f}	III.4.5
Filtration			40-70 ^f	400 ^f	III.4.6
Sedimentation			55-92 ^f	<14 ^f	III.4.2
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e,f}	- ^{e,f}	III.4.3
Sedimentation with chemical addition (polymer)			0 ^{d,e,f}	- ^{e,f}	III.4.3
Sedimentation with chemical addition (alum)			0 ^{d,e,f}	- ^{e,f}	III.4.3
Ozonation			48->97 ^f	0.2 ^f	III.6.14
Activated sludge			57->97 ^f	<2.5 ^f	III.5.1
Granular activated carbon adsorption			>63->97 ^f	0.12 ^f	III.6.1
Reverse osmosis			77 ^{d,f}	0.7 ^{d,f}	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal

^fAnalytical method did not distinguish between anthracene and phenanthrene.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 102-1 - 102-12.

Date: 8/13/79

I.10.11-5

Compound: Chrysene

Formula:



Alternate Names: 1,2-Benzophenanthrene,
Benz(a)phenanthrene,
1,2,5,6-Dibenzonaphthalene

CAS #: 218-01-9

Physical, Chemical, and Biological Properties [1]

mol. wt.: 228.3 m.p., °C: 256 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 6.3×10^{-7} (calculated)
solubility in water (25°C), mg/L: 0.002
log octanol/water partition coefficient: 5.61
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Very little specific data, but photolysis may claim some dissolved chrysene
oxidation: Chlorine and/or ozone in sufficient quantities may oxidize dissolved chrysene
hydrolysis: Not important
volatilization: Probably too slow to compete with adsorption as a transport process; rate undetermined
sorption: Adsorption onto suspended solids and sediment is the dominant transport process
biological processes: Short-term bioaccumulation; metabolization and biodegradation are the principal fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.12-2

INDUSTRIAL OCCURRENCE OF CHRYSENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining ^d	ND	35	9.2	0	0.24	0.035
Timber products processing	BDL	4,700	98 ^e	0	4.5	0.0084
Petroleum refining	5.5	20	13 ^e	0	1.2	0.075
Coil coating	ND	160	17	0.00085	0.031	0.008
Foundries	57	13,000	1,100	0	7.4	3.0
Iron and steel manufacturing	NA	2,200	94	0	NA	17
Nonferrous metals manufacturing	ND	10,000	160	0	NA	8.5

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between benz(a)anthracene and chrysene.

^eMedian, not average.

Date: 12/5/79

I.10.12-3

INDUSTRIAL OCCURRENCE OF CHRYSENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining ^d	ND	<3.3	<0.2	0 _e	0.0053	0.0076
Timber products processing	BDL	19,000	BDL	- _e	- _e	- _e
Petroleum refining	0.3	1.4	0.8 ^f	0	0.074	0.0046
Foundries	13	<20	17	0	0.11	0.046
Iron and steel manufacturing	NA	530	18	0	NA	3.2
Nonferrous metals manufacturing	ND	140	3.8	0	NA	0.20

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between benz(a)anthracene and chrysene.

^eMean pollutant concentration below detection limit.

^fMedian, not average.

Date: 12/5/79

I.10.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHRYSENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	11	III.4.1
Sedimentation			0 ^{d,e}	- ^e	III.4.2
Sedimentation with chemical addition (lime, polymer)			99 ^d	10 ^d	III.4.3
Sedimentation with chemical addition (lime)			>92 ^d	<10 ^d	III.4.3

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 108-1 - 108-12.

Compound: Fluoranthene

Formula:

Alternate Names: Benzo(j,k)fluorene,
Idryl



CAS #: 206-44-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 202.3 m.p., °C: 111 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 6×10^{-6} (calculated)
solubility in water (25°C), mg/L: 0.26
log octanol/water partition coefficient: 5.33
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Insufficient data, but photolysis may be very important
oxidation: Chlorine and/or ozone in sufficient quantities may oxidize
fluoranthene
hydrolysis: Not important
volatilization: Not an important transport process
sorption: Adsorption onto suspended solids and sediments is probably the
dominant transport process
biological processes: Short-term bioaccumulation; biodegradation is a very
important fate
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.13-2

INDUSTRIAL OCCURRENCE OF FLUORANTHENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	16	4	0	0.11	0.015
Timber products processing	BDL	35,000	1,600 ^d	0	74	0.14
Petroleum refining	NA	270 ^e	270 ^e	0	25	1.6
Auto and other laundries	ND	14	7	6.3 x 10 ⁻⁶	0.0098	0.0015
Coil coating	ND	130	20	0.001	0.028	0.0096
Foundries	ND	390	40	0	0.27	0.11
Leather tanning and finishing	ND	NA	0.3	0	NA	0.00045
Iron and steel manufacturing	NA	3,100	110	0	NA	20
Nonferrous metals manufacturing	ND	3,000	55	0	NA	2.9

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eOne sample.

Date: 12/5/79

I.10.13-3

INDUSTRIAL OCCURRENCE OF FLUORANTHENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<0.4	0	0.011	0.0015
Timber products processing	BDL	17,000	110 ^d	0 ^e	5.1 ^e	0.0095 ^e
Petroleum refining	NA	NA	BDL	- ^e	- ^e	- ^e
Auto and other laundries	ND	0.4	0.2	2 x 10 ⁻⁷	0.00028	4.2 x 10 ⁻⁵
Foundries	6	97	35	0	0.23	0.095
Iron and steel manufacturing	ND	860	39	0	NA	7.0
Nonferrous metals manufacturing	ND	200	13	0	NA	0.69

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.10.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR FLUORANTHENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	60	III.4.1
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			29-50	0.11	III.4.6
Sedimentation			17->64	<17	III.4.2
Sedimentation with chemical addition (lime, polymer)			>97 ^d	<10 ^d	III.4.3
Ozonation			50 ^d	0.1 ^d	III.6.14
Activated sludge			0 ^{d,e}	- ^e	III.5.1
Granular activated carbon adsorption			>82->90	<0.02	III.6.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.


^e Actual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 110-1 - 110-13.

Compound: Fluorene

Formula:



Alternate Names: 2,3-Benzidene,
Diphenylenemethane

CAS #: 86-73-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 116.2 m.p., °C: 116-117 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 1.3×10^{-2} (calculated)
solubility in water (25°C), mg/L: 1.98
log octanol/water partition coefficient: 4.18
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Inconclusive data; photolysis may be important, but is probably
impeded by adsorption

oxidation: Chlorine and/or ozone in sufficient quantities may oxidize
fluorene

hydrolysis: Not important

volatilization: Probably not an important transport process

sorption: Adsorption onto particles, biota, and sediments is probably the
dominant transport process

biological processes: Bioaccumulation is short-term; metabolism and
biodegradation are very important fates

other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.14-2

INDUSTRIAL OCCURRENCE OF FLUORENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	47	8	0	0.21	0.030
Textile mills	NA	15	NA ^e	_d	_d	_d
Timber products processing	BDL	48,000 _f	2,300 _f	0	100	0.20
Petroleum refining	NA	270 _f	270 _f	0	25	1.6
Pharmaceutical manufacturing	ND	14	3.5	0	0.024	0.0032
Foundries	ND	800	66	0	0.44	0.18
Coil coating	ND	300	17	0.00085	0.031	0.032
Nonferrous metals manufacturing	ND	94	5	0	NA	0.27
Iron and steel manufacturing	NA	2,500	85	0	NA	15

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Mean pollutant concentration below detection limit.

^e Median, not average.

^f One sample.

Date: 12/5/79

I.10.14-3

INDUSTRIAL OCCURRENCE OF FLUORENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Timber products processing	BDL	16,000	36 ^e	0	1.6	0.0031
Petroleum refining	NA	NA	NA	NA	NA	NA
Textile mills	NA	NA	NA	NA _d	NA _d	NA _d
Pharmaceutical manufacturing	ND	ND	ND	_d	_d	_d
Foundries	5	10,000	1,300	0	8.7	3.5
Iron and steel manufacturing	NA	500	17	0	NA	3.1
Nonferrous metals manufacturing	ND	100	8.7	0	NA	0.46

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eMedian, not average.

Date: 12/5/79

I.10.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR FLUORENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	140	III.4.1
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation			>79 ^d	<10 ^d	III.4.2
Sedimentation with chemical addition (lime, polymer)			50->99	<7.5	III.4.3
Aerated lagoons			99 ^d	0.2 ^d	III.5.3
Ozonation			67 ^d	0.1 ^d	III.6.14
Activated sludge			>99	<0.02	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 111-1 - 111-12.

Compound: Naphthalene

Formula:



Alternate Names: Moth balls, Tar Camphor,
Naphthene

CAS #: 91-20-3

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 128.2 m.p., °C: 80.6 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 0.0492
solubility in water (25°C), mg/L: 34.4
log octanol/water partition coefficient: 3.37
Henry's law constant: Not available
biodegradability: Readily degraded in static biological test using acclimated
seed from an activated sludge plant; reduced from 2 ppm to
nondetectable during 7-day test

Probable Fate [1]

photolysis: Relatively high solubility could make photolysis an important
fate; data inconclusive
oxidation: Chlorine and/or ozone in sufficient quantities may oxidize
naphthalene
hydrolysis: Not important
volatilization: Rate uncertain; could be very important
sorption: Relatively low partition coefficient makes adsorption less dominant
but sorption is still a competitive transport process
biological processes: Short-term bioaccumulation; biodegradation and
metabolization are the ultimate fates
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

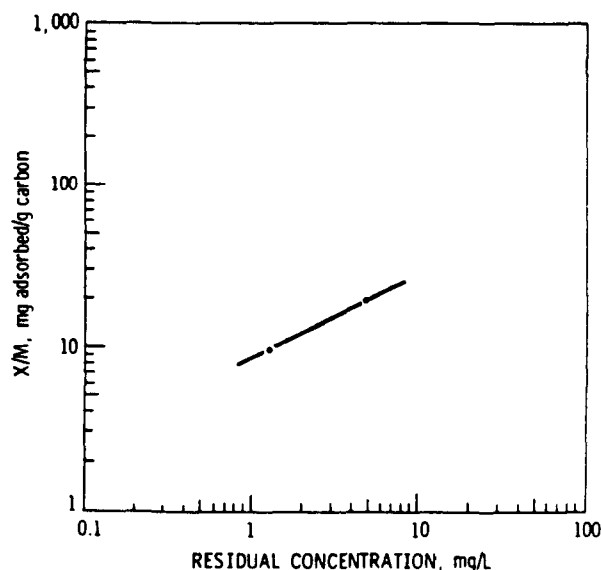

Date: 8/13/79

I.10.15-1

Date: 12/5/79

I.10.15-2

INDUSTRIAL OCCURRENCE OF NAPHTHALENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	402	57	0	1.5	0.21
Textile mills	NA	110	44 ^d	0.00018	1.3	0.079
Timber products processing	BDL	45,000	3,500 ^d	0	160	0.30
Petroleum refining	~68	~1,000	~400 ^d	0	~37	~2.3
Paint and ink formulation	ND	18,000	1,500	0	0.069	0.0024
Pulp, paper and paperboard mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	4,800	240	0.00022	0.34	0.050
Pharmaceutical manufacturing	ND	14	2.8	0	0.019	0.0026
Coil coating	ND	35	<10	<0.0005	<0.018	<0.005
Foundries	ND	160	27	0	0.18	0.073
Leather tanning and finishing	ND	67	26	0	NA	0.039
Nonferrous metals manufacturing	ND	5,000	110	0	NA	5.8
Iron and steel manufacturing	NA	29,000	2,300	0	NA	414

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

Date: 12/5/79

I.10.15-3

INDUSTRIAL OCCURRENCE OF NAPHTHALENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<0.6 ^d	0	0.016	0.0023
Textile mills	NA	255	22 ^d	9.2 x 10 ⁻⁵	0.63	0.040
Petroleum refining	NA	0.1 ^e	0.1 ^e	0	0.0093	0.00058
Timber products processing	NA	NA	NA	NA	NA	NA
Paint and ink formulation	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	NA	6 ^e	6 ^e	0	NA	0.18
Auto and other laundries	0.9	520	200	0.00018	0.28	0.042
Pharmaceutical manufacturing	ND	7	1.4	0	0.0095	0.0013
Foundries	3	270	44	0	0.29	0.12
Iron and steel manufacturing	NA	5,900	200	0	NA	36
Leather tanning and finishing	ND	15	4.3	0	NA	0.0064
Nonferrous metals manufacturing	ND	930	17	0	NA	0.90

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eOne sample.

Date: 12/5/79

I.10.15-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR NAPHTHALENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references. Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	410	III.4.1
Gas flotation			~18-36	~380	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			54-82	700	III.4.5
Gas flotation with chemical addition (polymer)			>65->96	<5	III.4.5
Gas flotation with chemical addition (alum, polymer)			52	11	III.4.5
Filtration			>78-86	<5.8	III.4.6
Sedimentation			>50->98	<22	III.4.2
Sedimentation with chemical addition (alum, lime)			70 ^d	16 ^d	III.4.3
Sedimentation with chemical addition (lime, polymer)			49-98	6.5	III.4.3
Tertiary polishing lagoons			>82 ^d	<10 ^d	III.5.3
Aerated lagoons			>28->58	<5.5	III.5.3
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Activated sludge			66->99	17	III.5.1
Powdered activated carbon adsorption			>96 ^d	<10 ^d	III.6.2

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 113-1 - 113-12.
2. Fochtman, E. G., and W. Eisenberg. Treatability of Carcinogenic and other Hazardous Organic Compounds. Illinois Institute of Technology Research Institute, Chicago, Illinois. 58 pp.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 12/5/79

I.10.16-2

INDUSTRIAL OCCURRENCE OF PHENANTHRENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	BDL	39,000	3,800 ^d	0	170	0.33
Petroleum refining	NA	NA	NA	NA	NA	NA
Auto and other laundries ^e	ND	470	28	2.1 x 10 ⁻⁵	0.032	0.0048
Pharmaceutical manufacturing	ND	7	1.8	0	0.012	0.0016
Coil coating	ND	1,400	28	0.0014	0.050	0.013
Foundries	ND	470	63	0	0.42	0.11
Leather tanning and finishing	ND	140	62	0	NA	0.093
Nonferrous metals manufacturing	ND	3,000	46	0	NA	2.4
Iron and steel manufacturing	NA	2,800	99	0	NA	18

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Median, not average.

^d Average of medians reported for various industry segments.

^e Analytical method did not distinguish between anthracene/phenanthrene.

Date: 12/5/79

I.10.16-3

INDUSTRIAL OCCURRENCE OF PHENANTHRENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	BDL	36,000	33 ^d	0	1.5	0.0028
Petroleum refining	BDL	<10	<0.8 ^d	0 _f	0.074 _f	0.0046 _f
Auto and other laundries	ND	ND	ND	- _f	- _f	- _f
Pharmaceutical manufacturing	ND	ND	ND	- _f	- _f	- _f
Foundries	<4	3,200	480	0	3.2	1.3
Iron and steel manufacturing	NA	2,300	67	0	NA	12
Nonferrous metals manufacturing	ND	140	4.6	0	NA	0.24
Leather tanning and finishing ^e	ND	<10	4.1	0	NA	0.0062

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eAnalytical method did not distinguish between anthracene and phenanthrene.

^fMean pollutant concentration below detection limit.

Date: 12/5/79

I.10.16-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PHENANTHRENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	3	III.4.4
Gas flotation			45	~600	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			83	66	III.4.5
Gas flotation with chemical addition (polymer)			0	-	III.4.5
Gas flotation with chemical addition (alum, polymer)			0	-	III.4.5
Filtration			40-70	400	III.4.6
Sedimentation			55-92	<14	III.4.2
Sedimentation with chemical addition (lime, polymer)			0	-	III.4.3
Sedimentation with chemical addition (polymer)			0	-	III.4.3
Sedimentation with chemical addition (alum)			0	-	III.4.3
Aerated lagoons			0 ^{d,e}	- ^e	III.5.3
Ozonation			48->97 ^f	0.2 ^f	III.6.14
Activated sludge			57->97 ^f	<2.5 ^f	III.5.1
Granular activated carbon adsorption			>63->97 ^f	0.12 ^f	III.6.1
Reverse osmosis			77	0.7	III.6.9


^aSee Volume III for detailed information.^bNA - Not available, ND - not detected, BDL - below detection limit.^cAverage and maximum removals reported.^dOnly one data point^eActual data indicate negative removal^fAnalytical method did not distinguish between anthracene and phenanthrene

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 114-1 - 114-12.

Compound: Pyrene

Formula:



Alternate Names: Benzo(def)phenanthrene

CAS #: 129-00-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 202 m.p., °C: 150 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 6.85×10^{-7}
solubility in water (25°C), mg/L: 0.14
log octanol/water partition coefficient: 5.32
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Low solubility probably hinders photolysis; relatively unimportant fate

oxidation: Chlorine and/or ozone in sufficient quantities can oxidize dissolved pyrene

hydrolysis: Not important

volatilization: Probably not as important as adsorption as a transport process; rate uncertain

sorption: Adsorption onto suspended particles, biota, and sediment is probably the dominant transport process

biological processes: Short-term bioaccumulation; metabolism and microbial degradation are the principal fates

other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.10.17-2

INDUSTRIAL OCCURRENCE OF PYRENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	19	4	0	0.11	0.015
Textile mills	NA	0.9 ^d	0.9 ^d	3.8 x 10 ⁻⁶	0.026	0.0016
Timber products processing	BDL	22,000	1,000 ^e	0	46	0.086
Petroleum refining ^f	~30	~40	~35	0	~3.2	~0.20
Petroleum refining ^f	NA	16	16	0	1.5	0.093
Auto and other laundries	ND	11	6	5.4 x 10 ⁻⁶	0.0084	0.0013
Leather tanning and finishing	ND	NA	0.14	0	NA	0.00021
Foundries	ND	1,100	44	0	0.30	0.12
Coil coating	ND	50	13	0.00065	0.023	0.0062
Nonferrous metals manufacturing	ND	7,000	130	0	NA	6.9
Iron and steel manufacturing	NA	26,000	79	0	NA	14

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMedian, not average.

^fAnalytical method did not distinguish between pyrene and fluoranthene.

Date: 12/5/79

I.10.17-3

INDUSTRIAL OCCURRENCE OF PYRENE^a

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.2 ^d	0	0.0053	0.00076
Textile mills	NA	0.3	0.2 ^d	8.4 x 10 ⁻⁷	0.0058	0.00036
Timber products processing	BDL	9,400	77 ^d	0	3.5	0.0066
Petroleum refining	BDL	7	7 ^d	0	0.65	0.041
Auto and other laundries	ND	0.3	0.15	1.0 x 10 ⁻⁷	0.00021	3.2 x 10 ⁻⁵
Foundries	12	3,200	290	0	1.9	0.78
Iron and steel manufacturing	NA	1,100	43	0	NA	7.70
Nonferrous metals manufacturing	ND	180	11	0	NA	0.58

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

Date: 12/5/79

I.10.17-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PYRENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	37	III.4.1
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			0 ^e	- ^e	III.4.6
Sedimentation			54-79	<18	III.4.2
Sedimentation with chemical addition (lime, polymer)			70->87	<10	III.4.3
Sedimentation with chemical addition (lime)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			67 ^d	1 ^d	III.5.3
Activated sludge			16-78	2	III.5.1
Granular activated carbon adsorption			>83->97	<0.01	III.6.1
Reverse osmosis			0 ^{d,e}	- ^e	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 115-1 - 115-12.

Compound: Aroclor 1016

Formula: A mixture of mono, di, and trichloro isomers of the polychlorinated biphenyls (PCB's)

Alternate Names: None

CAS #: Not assigned

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 257.9* m.p., °C: Not available b.p. (760 torr), °C: 325-356
vapor pressure (25°C), torr: 4×10^{-4} (estimated)
solubility in water (temp. unknown), mg/L: 0.34 (estimated)
log octanol/water partition coefficient: 3.48 (estimated)
Henry's law constant: Not available
biodegradability: Aerobic degradation in semicontinuous activated sludge process; 30% degradation of <1 mg/L concentration after 48 hours incubation

*Average.

Probable Fate [1]

photolysis: Not important
oxidation: Not important
hydrolysis: Not important
volatilization: Slow volatilization is the cause of global distribution of PCB's, but is inhibited by adsorption
sorption: PCB's are rapidly adsorbed onto solids especially organic matter, and are often immobilized in sediments, but may reenter solution
biological processes: Strong bioaccumulation; mono-, di- and tri-chlorinated biphenyls are gradually biodegraded
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.11.1-2

INDUSTRIAL OCCURRENCE OF AROCLOR 1016^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining	1.8	1.9	1.9 ^d	0	0.18	0.011
Foundries ^e	ND	830	57	0	0.38	0.15
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e Analytical method did not distinguish between Aroclor 1016, 1232, 1248, and 1260.

Date: 12/5/79

I.11.1-3

INDUSTRIAL OCCURRENCE OF AROCLOR 1016^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining ^d	NA	NA	NA	NA	NA	NA
Foundries	<5	480	64	0	0.43	0.17
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between Aroclor 1016, 1232, 1248, and 1260.

Date: 12/5/79

I.11.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AROCLOR 1016^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	1.3	III.4.1
Gas flotation			0 ^{d,e}	- ^e	III.4.4

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 36-1 - 36-17.
2. Tucker, E. S., V. W. Saeger, and O. Hicks. Activated Sludge Primary Biodegradation of Polychlorinated Biphenyls. Monsanto Company, St. Louis, Missouri, March 1975. 9 pp.

Compound: Aroclor 1221

Formula: A mixture of polychlorinated biphenyls which is approximately 21% chlorine by weight

Alternate Names: None

CAS #: 111-042-82

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 200.7* m.p., °C: Not available b.p. (760 torr), °C: 275-320
vapor pressure (25°C), torr: 6.7×10^{-3} (estimated)
solubility in water (25°C), mg/L: 15 (estimated)
log octanol/water partition coefficient: 2.81 (estimated)
Henry's law constant: Not available
biodegradability: Aerobic degradation in semicontinuous activated sludge process; 80% degradation of <5 mg/L concentration after 48 hour incubation

*Average.

Probable Fate [1]

photolysis: Not important
oxidation: Not important
hydrolysis: Not important
volatilization: Slow volatilization distributes PCB's globally, but is inhibited by adsorption
sorption: PCB's are rapidly adsorbed onto solids, especially organic matter, and are often immobilized in sediment, but may reenter solution
biological processes: Strong bioaccumulation; mono-, di-, and tri-chlorinated biphenyls are gradually biodegraded
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.11.2-1

Date: 12/5/79

I.11.2-2

INDUSTRIAL OCCURRENCE OF AROCLOR 1221^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining	0.1	<5	<3 ^d	0	0.28	0.017
Foundries ^e	ND	1,400	79	0	0.53	0.21
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e Analytical method did not distinguish between Aroclor 1221 and Aroclor 1254.

Date: 12/5/79

I.11.2-3

INDUSTRIAL OCCURRENCE OF AROCLOR 1221^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining	NA	<5 ^d	<5 ^d	0	0.46	0.029
Foundries ^e	<5	650	78	0	0.52	0.21
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eAnalytical method did not distinguish between Aroclor 1221 and Aroclor 1254.

Date: 12/5/79

I.11.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AROCLOR 1221^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	0.1 ^d	III.4.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 36-1 - 36-17.
2. Tucker, E. S., V. W. Saeger, and O. Hicks. Activated Sludge Primary Biodegradation of Polychlorinated Biphenyls. Monsanto Company, St. Louis, Missouri, March 1975. 9 pp.

Compound: Aroclor 1232

Formula: A mixture of polychlorinated biphenyls which is approximately 32% chlorine by weight

Alternate Names: None

CAS #: 111-411-65

Physical, Chemical, and Biological Properties [1]

mol. wt.: 232.2* m.p., °C: Not available b.p. (760 torr), °C: 290-325
vapor pressure (25°C), torr: 4.06×10^{-3} (estimated)
solubility in water (25°C), mg/L: 1.45 (estimated)
log octanol/water partition coefficient: 3.22 (estimated)
Henry's law constant: Not available
biodegradability: Not available

*Average.

Probable Fate [1]

photolysis: Not important
oxidation: Not important
hydrolysis: Not important
volatilization: Slow volatilization distributes PCB's globally, but is inhibited by adsorption
sorption: PCB's are rapidly adsorbed onto solids, especially organic matter, and are often immobilized in sediment, but may reenter solution
biological processes: Strong bioaccumulation, mono-, di-, and tri-chlorinated biphenyls are gradually biodegraded
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.11.3-1

Date: 12/5/79

I.11.3-2

INDUSTRIAL OCCURRENCE OF AROCLOR 1232^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum	0.5	0.9	0.7 ^d	0	0.065	0.0041
Pulp, paper and paperboard mills	NA	<1 ^e	<1 ^e	0	NA	0.030
Foundries ^f	ND	830	57	0	0.38	0.15
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e One sample.

Date: 12/5/79

I.11.3-3

INDUSTRIAL OCCURRENCE OF AROCLOR 1232^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	NA	NA	NA	NA	NA	NA
Foundries ^d	<5	480	64	0	0.43	0.17
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between Aroclor 1016, 1232, 1248, and 1260.

Date: 12/5/79

I.11.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AROCLOR 1232^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	0.63	III.4.1
Filtration			16 ^d	480 ^d	III.4.6

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 36-1 - 36-17.

Date: 8/13/79

I.11.3-5

Compound: Aroclor 1242

Formula: A mixture of polychlorinated biphenyls which is approximately 42% chlorine by weight

Alternate Names: None

CAS #: 534-692-19

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 266.5* m.p., °C: Not available b.p. (760 torr), °C: 325-366
vapor pressure (25°C), torr: 4.06×10^{-4}
solubility in water (25°C), mg/L: 0.24
log octanol/water partition coefficient: 3.54 (estimated)
Henry's law constant: 5.7×10^{-4} atmos. $\text{m}^3 \text{mole}^{-1}$
biodegradability: Aerobic degradation in semicontinuous activated sludge process; 26% degradation of <1 mg/L concentration after 48 hour incubation

*Average.

Probable Fate [1]

photolysis: Inhibited by presence of oxygen, but possibly the only degradative pathway for highly-chlorinated PCB's
oxidation: Not important
hydrolysis: Not important
volatilization: Slow volatilization causes global dispersion of PCB's, but is inhibited by adsorption
sorption: PCB's are rapidly adsorbed onto solids, especially organic matter, and are often immobilized in sediment, but may reenter solution
biological processes: Strong bioaccumulation; mono-, di-, and tri-chlorinated biphenyls are gradually biodegraded
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.11.4-1

Date: 12/5/79

I.11.4-2

INDUSTRIAL OCCURRENCE OF AROCLOR 1242^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining	NA	0.5 ^d	0.5 ^d	0	0.046	0.0029
Pulp, paper and paperboard mills	NA	2 ^d	2 ^d	0	NA	0.060
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

Date: 12/5/79

I.11.4-3

INDUSTRIAL OCCURRENCE OF AROCLOR 1242^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Petroleum refining	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	NA	NA	NA	NA	NA	NA
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.11.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AROCLOR 1242^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	3.6	III.4.1
Gas flotation			0 ^{d,e}	- ^e	III.4.4
Filtration			16 ^d	480 ^d	III.4.6

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 36-1 - 36-17.
2. Tucker, E. S., V. W. Saeger, and O. Hicks. Activated Sludge Primary Biodegradation of Polychlorinated Biphenyls. Monsanto Company, St. Louis, Missouri, March 1975. 9 pp.

Date: 8/13/79

I.11.4-5

Compound: Aroclor 1248

Formula: A mixture of polychlorinated biphenyls which is approximately 48% chlorine by weight

Alternate Names: None

CAS #: 126-722-96

Physical, Chemical, and Biological Properties [1]

mol. wt.: 299.5* m.p., °C: Not available b.p. (760 torr), °C: 340-375
vapor pressure (25°C), torr: 4.94×10^{-4}
solubility in water (25°C), mg/L: 0.054
log octanol/water partition coefficient: 3.80 (estimated)
Henry's law constant: 3.5×10^{-3} atmos. m³ mole⁻¹
biodegradability: Not available

*Average.

Probable Fate [1]

photolysis: Inhibited by presence of oxygen, but possibly the only degradative pathway for highly-chlorinated PCB's
oxidation: Not important
hydrolysis: Not important
volatilization: Slow volatilization causes global dispersion of PCB's but is inhibited by adsorption
sorption: PCB's are rapidly adsorbed onto solids, especially organic matter and are often immobilized in sediment, but may reenter solution
biological processes: Strong bioaccumulation
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.11.5-2

INDUSTRIAL OCCURRENCE OF AROCLOR 1248^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	NA	18 ^d	18 ^d	0	NA	0.54
Foundries ^e	ND	830	57	0	0.381	0.15
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	32	0.7	0	NA	0.037

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

^e Analytical method did not distinguish between Aroclor 1016, 1232, 1248, and 1260.

Date: 12/5/79

I.11.5-3

INDUSTRIAL OCCURRENCE OF AROCLOR 1248^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	0	<1 ^d	<1 ^d	0	NA	0.030
Foundries ^e	<5	480	64	0	0.43	0.17
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	9.8	1.1	0	NA	0.06

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eAnalytical method did not distinguish between Aroclor 1016, 1232, 1248, and 1260.

Date: 12/5/79

I.11.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AROCLOR 1248^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Filtration			16 ^d	480 ^d	III.4.6

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 36-1 - 36-17.

Compound: Aroclor 1254

Formula: A mixture of polychlorinated biphenyls which is approximately 54% chlorine by weight

Alternate Names: None

CAS #: 110-976-91

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 328.4* m.p., °C: Not available b.p. (760 torr), °C: 365-390
vapor pressure (25°C), torr: 7.71×10^{-5}
solubility in water (25°C), mg/L: 0.012
log octanol/water partition coefficient: 4.07 (estimated)
Henry's law constant: 2.8×10^{-3} atmos. $\text{m}^3 \text{mole}^{-1}$
biodegradability: Aerobic degradation in semicontinuous activated sludge process; 15% degradation of <1 mg/L concentrations after 48 hour incubation


*Average.

Probable Fate [2]

photolysis: Suppressed by presence of oxygen, but possibly the only degradative mechanism for highly-chlorinated PCB's
oxidation: Not important
hydrolysis: Not important
volatilization: Slow volatilization distributes PCB's globally, but is inhibited by adsorption
sorption: PCB's are rapidly adsorbed onto solids, especially organic matter, and are often immobilized in sediment, but may reenter solution
biological processes: Strong bioaccumulation
other reactions/interactions: Not important

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

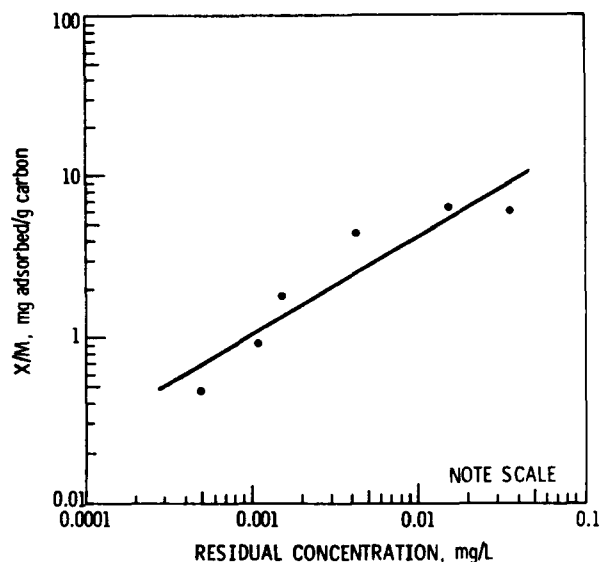

Date: 8/13/79

I.11.6-1

Date: 12/5/79

I.11.6-2

INDUSTRIAL OCCURRENCE OF AROCLOR 1254^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	NA	<1 ^d	1	0	NA	0.030
Foundries ^e	ND	1,400	79	0	0.53	0.21
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	52	1.1	0	NA	0.058

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

^e Analytical method did not distinguish between Aroclor 1221 and Aroclor 1254.

Date: 12/5/79

I.11.6-3

INDUSTRIAL OCCURRENCE OF AROCLOR 1254^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	<1	2	<1	0	NA	0.030
Foundries ^d	<5	650	78	0	0.52	0.21
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	7.0	0.8	0	NA	0.042

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between Aroclor 1221 and Aroclor 1254.

Date: 12/5/79

I.11.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AROCLOR 1254^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Filtration			20 ^d	650 ^d	III.4.6

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 36-1 - 36-17.
2. Tucker, E. S., V. W. Saeger, and O. Hicks. Activated Sludge Primary Biodegradation of Polychlorinated Biphenyls. Monsanto Company, St. Louis, Missouri, March 1975. 9 pp.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.11.6-5

Compound: Aroclor 1260

Formula: A mixture of polychlorinated biphenyls which is approximately 60% chlorine by weight

Alternate Names: None

CAS #: 110-968-25

Physical, Chemical, and Biological Properties [1]

mol. wt.: 375.7* m.p., °C: Not available b.p. (760 torr), °C: 385-420
vapor pressure (25°C), torr: 4.05×10^{-5}
solubility in water (25°C), mg/L: 0.0027
log octanol/water partition coefficient: 4.34 (estimated)
Henry's law constant: 7.1×10^{-3} atmos. $\text{m}^3 \text{mole}^{-1}$
biodegradability: Not available


*Average.

Probable Fate [1]

photolysis: Inhibited by presence of oxygen, but possibly the only degradative mechanism for highly-chlorinated PCB's
oxidation: Not important
hydrolysis: Not important
volatilization: Slow volatilization distributes PCB's globally, but is inhibited by adsorption
sorption: PCB's are rapidly adsorbed onto solids, especially organic matter and are often immobilized in sediment, but may reenter solution
biological processes: Strong bioaccumulation
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

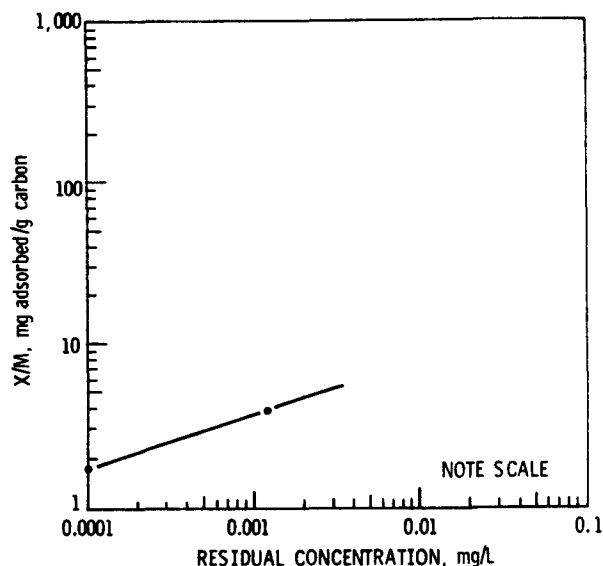

Date: 8/13/79

I.11.7-1

Date: 12/5/79

I.11.7-2

INDUSTRIAL OCCURRENCE OF AROCLOR 1260^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries ^d	ND	830	57	0	0.38	0.15
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between Aroclor 1016, 1232, 1248, and 1260.

Date: 12/5/79

I.11.7-3

INDUSTRIAL OCCURRENCE OF AROCLOR 1260^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries ^d	<5	480	64	0	0.43	0.17
Iron and steel manufacturing	NA	<10	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAnalytical method did not distinguish between Aroclor 1016, 1232, 1248, and 1260.

Date: 12/5/79

I.11.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AROCLOR 1260^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Filtration			16 ^d	480 ^d	III.4.6

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume V, Polycyclic Aromatic Hydrocarbons, PCB's and Related Compounds. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 36-1 - 36-17.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.11.7-5

Compound: Methyl chloride

Formula:



Alternate Names: Chloromethane,
Monochloromethane

CAS #: 74-87-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 50.59 m.p., °C: -97.7 b.p. (760 torr), °C: -24.2
vapor pressure (20°C), torr: 3,760
solubility in water (20°C), mg/L: 6,450-7,250
log octanol/water partition coefficient: 0.91
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Information lacking, probably unimportant; appreciable photo-dissociation may occur in stratosphere
oxidation: Information lacking, probably unimportant; in troposphere oxidation by hydroxyl radicals for formyl chloride and other products important fate
hydrolysis: Slow hydrolysis, unimportant in comparison to volatilization
volatilization: Volatilization to the atmosphere is rapid and is a major transport process for removal of methyl chloride
sorption: No data available, sorption onto sediments and suspended particulates probably unimportant
biological processes: Data lacking, biodegradation and bioaccumulation are not expected to be important fates
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.1-2

INDUSTRIAL OCCURRENCE OF METHYL CHLORIDE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	<5 ^d	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.0090
Timber products processing	BDL	2,600	77 ^e	0	3.5	0.0066
Pharmaceutical manufacturing	ND	1,500	300	0	2	0.28
Ore mining and dressing	ND	ND	ND	- ^d	- ^d	- ^d

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMedian, not average.

Date: 12/5/79

I.12.1-3

INDUSTRIAL OCCURRENCE OF METHYL CHLORIDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	13	1,900	140 ^d	0	6.4	0.012
Textile mills	NA	NA	NA	NA ^e	NA ^e	NA ^e
Pharmaceutical manufacturing	ND	ND	ND	- ^e	- ^e	- ^e

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR METHYL CHLORIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			>87 ^d	<0.4 ^d	III.4.6
Sedimentation			59->99	64	III.4.2
Aerated lagoons			>91 ^d	<5 ^d	III.5.3
Reverse osmosis			0 ^{d,e}	- ^e	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 38-1 - 38-9.

Date: 8/13/79

I.12.1-5

Compound: Methylene chloride

Formula:



Alternate Names: Dichloromethane, Methylene
dichloride, Methane dichloride,
Methylene bichloride

CAS #: 74-09-2

Physical, Chemical, and Biological Properties [1]


mol. wt.: 84.94 m.p., °C: -95 b.p. (760 torr), °C: 39.8
vapor pressure (20°C), torr: 362
solubility in water (25°C), mg/L: 13,200-20,000
log octanol/water partition coefficient: 1.25
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Photochemical reactions in aqueous media are probably unimportant
slow photodecomposition in troposphere in the presence of nitrogen oxides is possible, appreciable photodissociation may occur in stratosphere
oxidation: Information lacking, probably unimportant; in troposphere oxidation by hydroxyl radicals to carbon dioxide, carbon monoxide, and phosgene is important fate mechanism
hydrolysis: Not important fate process
volatilization: Due to high vapor pressure, volatilization to the atmosphere is rapid and is a major transport process
sorption: Data lacking, sorption by inorganic and organic materials not expected to be important fate mechanism
biological processes: Data lacking, bioaccumulation not expected, biodegradation may be possible
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

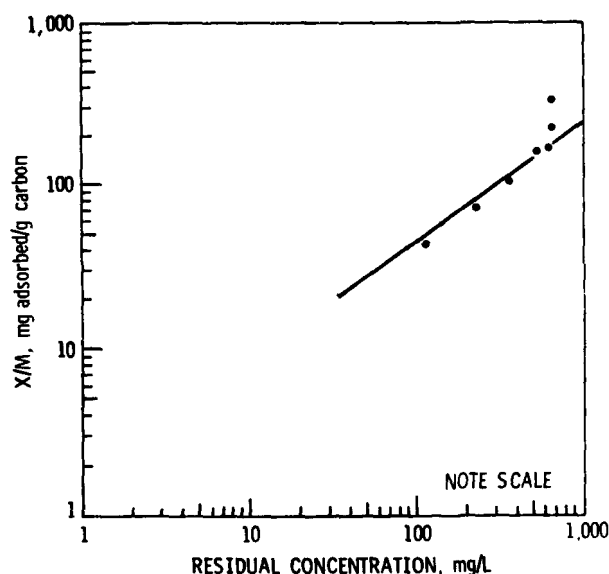

Date: 8/13/79

I.12.2-1

Date: 12/5/79

I.12.2-2

INDUSTRIAL OCCURRENCE OF METHYLENE CHLORIDE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	82	14	0	0.37	0.053
Textile mills	NA	110	47	0.00020	1.3	0.085
Timber products processing	BDL	20	NA	0	0.46	0.00086
Petroleum refining	>30	>90	>45 ^d	0	4.2	0.26
Paint and ink formulation	ND	210,000	17,000	0	0.78	0.027
Gum and wood chemicals	190	16,000	4,000	0.036	30	6.6
Rubber processing	NA	70	19	3.8×10^{-6}	0.016	0.00063
Pulp, paper and paperboard mills	<1	4	<1.9	0	NA	0.057
Auto and other laundries	ND	640	64	5.8×10^{-5}	0.09	0.013
Pharmaceutical manufacturing	ND	20,000	2,600	0	17.7	2.4
Ore mining and dressing	2.5	8	5.3	0	NA	0.2
Steam electric power generating (condenser cooling system)	65	9,400	2,300	0.12	2.5	0.55
Steam electric power generating (water treatment)	NA	NA	1.2 ^e	7.3×10^{-9}	0.072	180
Steam electric power generating (ash handling)	>140	>9,400	3,300	0.063	320	73
Inorganic chemicals manufacturing	NA	NA	NA	NA	NA	NA
Coil coating	<10	<10	<10	<0.0005	<0.018	<0.0048
Foundries	ND	2,400	100	0	0.67	0.27
Nonferrous metals manufacturing	ND	88,000	680	0	NA	36
Iron and steel manufacturing	NA	140	50	0	NA	9

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e Average of medians reported for various industry segments.

^f One sample.

Date: 12/5/79

I.12.2-3

INDUSTRIAL OCCURRENCE OF METHYLENE CHLORIDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	21	6	0	0.16	0.023
Textile mills	NA	<5	<5	2.1 x 10 ⁻⁵	0.14	0.0090
Timber products processing	BDL	23	BDL	- ^d	- ^d	- ^d
Petroleum refining	50	>60	>50 ^e	0	4.6	0.29
Paint and ink formulation	ND	3,100	5,600	0	0.26	0.0090
Gum and wood chemicals	85	2,400	1,000	0.0090	7.6	1.6
Rubber processing	NA	520	170	3.4 x 10 ⁻⁵	0.15	0.0056
Pulp, paper and paperboard mills	<1	270	<19	0	NA	0.57
Auto and other laundries	ND	1,200	440	0.00040	0.616	0.092
Pharmaceutical manufacturing	ND	850,000	75,000	0	510	69
Foundries	<5	2,500	270	0	1.8	0.73
Nonferrous metals manufacturing	ND	4,300	140	0	NA	7.4
Iron and steel manufacturing	NA	270	37	0	NA	6.7

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eMedian, not average.

Date: 12/5/79

I.12.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR METHYLENE CHLORIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	>42	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			2-7	2,200	III.4.5
Gas flotation with chemical addition (polymer)			61 ^d	22 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)		t	84 ^d	8 ^d	III.4.5
Filtration			14-62	2,400	III.4.6
Sedimentation			38-88	530	III.4.2
Sedimentation with chemical addition (alum, lime)			13 ^d	2,000 ^d	III.4.3
Sedimentation with chemical addition (lime, polymer)			0 ^e	- ^e	III.4.3
Sedimentation with chemical addition (polymer)			0 ^e	- ^e	III.4.3
Sedimentation with chemical addition (alum, polymer)			56-98	5,600	III.4.3
Sedimentation with chemical addition (alum)			>78->99	<40	III.4.3
Aerated lagoons			65-97	390	III.5.3
Steam stripping			75-87	160,000	III.5.5
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Ozonation			0 ^e	- ^e	III.6.14
Activated sludge			21-99	95	III.5.1
Granular activated carbon adsorption			31-92	140	III.6.1
Reverse osmosis			21-64	5	III.6.9

^aSee Volume III for detailed information.^bNA - Not available, ND - not detected, BDL - below detection limit.^cAverage and maximum removals reported.^dOnly one data point.^eActual data indicate negative removal

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp 39-1 - 39-11.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.12.2-5

Compound: Chloroform

Formula:



Alternate Names: Trichloromethane

CAS #: 67-66-3

Physical, Chemical, and Biological Properties [1]


mol. wt.: 119.4 m.p., °C: -63.5 b.p. (760 torr), °C: 61.7
vapor pressure (20°C), torr: 150
solubility in water (20°C), mg/L: 8,200
log octanol/water partition coefficient: 1.97
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Little data available, probably unimportant; photodissociation can occur in stratosphere
oxidation: Information lacking, probably unimportant in aqueous medium; in troposphere oxidation by hydroxyl radicals to phosgene and chlorine oxide is important fate mechanism
hydrolysis: Not important fate process
volatilization: Volatilization is a major transport process for removal of chloroform from aqueous mediums
sorption: Data lacking, sorption by inorganic and organic materials not expected to be important fate mechanism
biological processes: Data lacking; some bioaccumulation is indicated, biodegradation may be possible
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: 7.3
type of carbon: Not available
adsorbability: 820 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

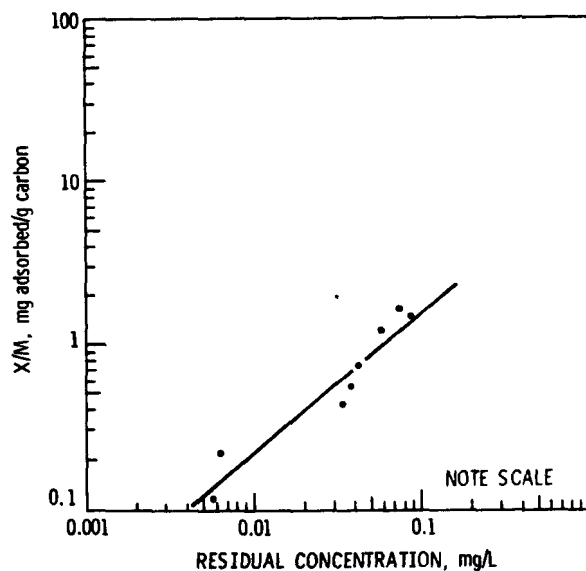

Date: 8/13/79

I.12.3-1

Date: 12/5/79

I.12.3-2

INDUSTRIAL OCCURRENCE OF CHLOROFORM^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<1	0	0.026	0.0038
Textile mills	NA	640	48 ^d	0.00020	1.4	0.086
Timber products processing	BDL	20	NA	0	0.46	0.00086
Paint and ink formulation	ND	900	120	0	0.0055	0.00019
Gum and wood chemicals	<10	1,400	<680	0.0061	5.1	1.1
Rubber processing	NA	270	27	5.4 x 10 ⁻⁶	0.023	0.00089
Petroleum refining	10	15	13 ^d	0	1.2	0.11
Pulp, paper and paperboard mills	<1	17	<6	0	NA	0.18
Auto and other laundries	ND	35,000	780	0.0007	1.1	0.16
Pharmaceutical manufacturing	ND	1,600	300	0	2	0.28
Ore mining and dressing	1.1	4.6	2.9	0	NA	0.11
Steam electric power generating (water treatment)	NA	NA	14 ^e	6.1 x 10 ⁻⁹	0.84	0.0021
Inorganic chemicals manufacturing	NA	690 ^f	NA	0	43	8.6
Leather tanning and finishing	ND	41	15	0	NA	0.023
Iron and steel manufacturing	NA	1,400	64	0	NA	3.4
Nonferrous metals manufacturing	ND	1,800	61	0	NA	11

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Median, not average.

^e Average of medians reported for various industry segments.

^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.12.3-3

INDUSTRIAL OCCURRENCE OF CHLOROFORM^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<2.4	0	0.064	0.0091
Textile mills	NA	58	8.5	0.000036	0.24	0.015
Petroleum refining	NA	NA	NA	NA	NA	NA
Paint and ink formulation	ND	4,700	390	0	0.018	0.00062
Gum and wood chemicals	10	1,400	670	0.0060	5.1	1.1
Timber products processing	NA	NA	NA	NA	NA	NA
Rubber processing	NA	100	4.7	9.4×10^{-7}	0.0040	0.00015
Pulp, paper and paperboard mills	<1	430	<46	0	NA	1.4
Auto and other laundries	8	44	18	7.2×10^{-6}	0.025	0.0038
Pharmaceutical manufacturing	ND	1,400	150	0	1.0	0.14
Foundries	7	500	85	0	0.57	0.23
Iron and steel manufacturing	NA	280	31	0	NA	5.6
Nonferrous metals manufacturing	ND	2,900	98	0	NA	5.2
Leather tanning and finishing	ND	10	5	0	NA	0.0075

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHLOROFORM^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	58	III.4.1
Gas flotation			0 ^{d,e}	- ^e	III.4.4
Gas flotation with chemical addition (calcium chloride, polymer)			31-74	59	III.4.5
Gas flotation with chemical addition (polymer)			41 ^d	24 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			0 ^e	- ^e	III.4.6
Sedimentation			16->81	110	III.4.2
Sedimentation with chemical addition (alum, lime)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (lime, polymer)			26->78	<9	III.4.3
Sedimentation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum, polymer)			27->94	140	III.4.3
Sedimentation with chemical addition (alum)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			36->57	340	III.5.3
Steam stripping			89->99	13,000	III.5.5
Trickling filters			0 ^{d,e}	- ^e	III.5.2
Activated sludge			63->99	<13	III.5.1
Granular activated carbon adsorption			>67->99	<11	III.6.1
Reverse osmosis			20-79	16	III.6.9

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 40-1 - 40-11.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I.12.3-5

Compound: Carbon tetrachloride

Formula:



Alternate Names: Tetrachloromethane, Methane
tetrachloride, Perchloromethane,
Benzinoform

CAS #: 56-23-5

Physical, Chemical, and Biological Properties [1]


mol. wt.: 153.8 m.p., °C: -22.9 b.p. (760 torr), °C: 76.5
vapor pressure (20°C), torr: 90
solubility in water (20°C), mg/L: 785
log octanol/water partition coefficient: 2.64
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No information available pertaining to the rate of photolysis in aqueous environment; in the stratosphere photodissociation occurs to eventually form phosgene as the principal product
oxidation: No information available; in troposphere it exhibits an extremely slow rate of reaction with hydroxyl radicals
hydrolysis: Data unavailable
volatilization: Volatilization is rapid and is an important transport process for the removal of tetrachloromethane from aquatic systems
sorption: Little data available, but adsorption onto sediments rich in organic material possible
biological processes: Little data available, some bioaccumulation and biodegradation possible
other reactions/interactions: Unknown

Carbon Adsorption Data [2]

pH: 7.3
type of carbon: Not available
adsorbability: 225 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

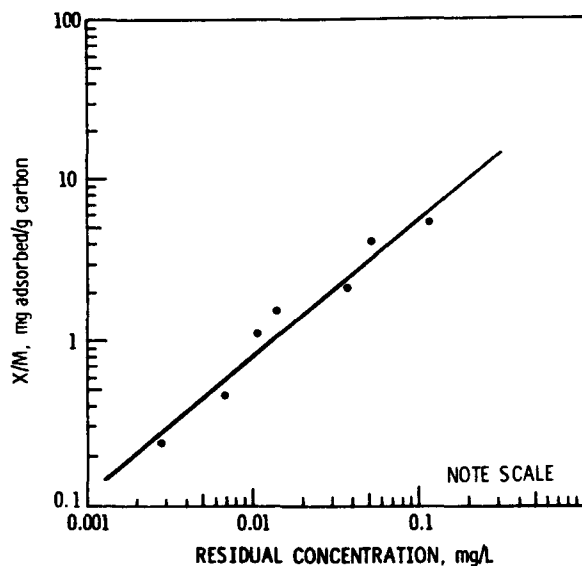

Date: 8/13/79

I.12.4-1

Date: 12/5/79

I.12.4-2

INDUSTRIAL OCCURRENCE OF CARBON TETRACHLORIDE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.4	0	0.037	0.0053
Paint and ink formulation	ND	30,000	1,900	0	0.087	0.0030
Rubber processing	NA	350	180	3.6×10^{-5}	0.15	0.0059
Auto and other laundries	ND	1,700	95	8.6×10^{-5}	0.13	0.02
Pharmaceutical manufacturing	ND	6,000	460	0	3.1	0.42
Ore mining and dressing	ND	ND	ND	- ^e	- ^e	- ^e
Inorganic chemicals manufacturing	NA	200 ^d	NA	0	13	2.5
Foundries	ND	480	45	0	0.3	0.12
Iron and steel manufacturing	NA	NA	40	0	NA	7.2
Nonferrous metals manufacturing	ND	2,300	81	0	NA	4.3

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Average of maximums reported for various industry segments.

^e Mean pollutant concentration below detection limit.

Date: 12/5/79

I.12.4-3

INDUSTRIAL OCCURRENCE OF CARBON TETRACHLORIDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<0.5	0	0.013	0.0019
Paint and ink formulation	ND	1,800	640	0	0.029	0.0010
Rubber processing	NA	1,400	700	0.00014	0.60	0.023
Pharmaceutical manufacturing	ND	300	21	0	0.14	0.02
Foundries	<10	39	22	0	0.15	0.059
Iron and steel manufacturing	NA	NA	8	0	NA	1.4
Nonferrous metals manufacturing	ND	1,700	88	0	NA	0.13

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CARBON TETRACHLORIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	1 ^d	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			50 ^d	1 ^d	III.4.5
Gas flotation with chemical addition (alum, polymer)			76 ^d	410 ^d	III.4.5
Filtration			>73-93	<32	III.4.6
Sedimentation with chemical addition (alum, lime)			>17 ^d	<10 ^d	III.4.3
Sedimentation with chemical addition (alum, polymer)			94 ^d	1,800 ^d	III.4.3
Activated sludge			0 ^{d,e}	- ^e	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


^eActual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 41-1 - 41-9.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Chloroethane

Formula:



Alternate Names: Ethyl chloride, monochloroethane, Hydrochloric ether, Muriatic ether

CAS #: 75-00-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 64.52 m.p., °C: -136 b.p. (760 torr), °C: 12.3
vapor pressure (20°C), torr: 1,000
solubility in water (20°C), mg/L: 5,740
log octanol/water partition coefficient: 1.54
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No information available pertaining to rate of photodissociation in aqueous environment; photodissociation to formyl chloride may occur in stratosphere
oxidation: No data available
hydrolysis: Data unavailable, hydrolysis suggested as an important fate process
volatilization: Some volatilization occurs, importance as a fate mechanism unknown
sorption: No data available
biological processes: No data available, biodegradation and bioaccumulation are not expected to be important fate
other reactions/interactions: Unknown

Carbon Adsorption Data: Not available

Date: 9/13/79

I.12.5-2

INDUSTRIAL OCCURRENCE OF CHLOROETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Gum and wood chemicals	BDL	520	170	0.0015	1.3	0.38
Rubber processing	NA	4,900 ^d	4,900 ^d	0.00098	4.2	0.16

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.12.5-3

INDUSTRIAL OCCURRENCE OF CHLOROETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Gum and wood chemicals	NA	NA	NA	NA	NA	NA
Rubber processing	NA	NA	NA	NA	NA	NA

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHLOROETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Granular activated carbon adsorption			58->99	71,000	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 42-1 - 42-9.

Date: 8/13/79

I.12.5-5

Compound: 1,1-Dichloroethane

Formula:



Alternate Names: Ethylidene chloride,
Ethylidene dichloride

CAS #: 75-34-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 98.96 m.p., °C: -97.0 b.p. (760 torr), °C: 57.3
vapor pressure (25°C), torr: 234
solubility in water (20°C), mg/L: 5,500
log octanol/water partition coefficient: 1.79
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Information lacking; photodissociation to chloroacetyl chloride in stratosphere is predicted
oxidation: Information lacking; indirect evidence from similar compounds suggests little potential for oxidation in aquatic systems, in troposphere 1,1-dichloroethane is probably oxidized at a slow rate in a similar fashion to 1,2-dichloroethane
hydrolysis: No information available
volatilization: Due to high vapor pressure, volatilization to the atmosphere should be major transport process
sorption: No data available
biological processes: Data lacking; bioaccumulation not expected, biodegradation may be possible
other reactions/interactions: Unknown

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.6-2

INDUSTRIAL OCCURRENCE OF 1,1-DICHLOROETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills ^d	NA	14	14	5.9 x 10 ⁻⁵	0.40	0.025
Paint and ink formulation	ND	33 ^d	10 ^d	0	0.00046	1.6 x 10 ⁻⁵
Rubber processing	NA	<2 ^d	<2 ^d	4.0 x 10 ⁻⁷	0.0017	6.6 x 10 ⁻⁵
Pharmaceutical manufacturing	ND	ND	ND	_{-e}	_{-e}	_{-e}
Leather tanning and finishing	ND ^d	NA ^d	<3 ^d	0	NA	<0.0045
Foundries	55 ^d	55	55 ^d	0	0.37	0.14
Coil coating	ND	18	18	0.0009	0.032	0.0086
Nonferrous metals manufacturing	ND	180	20	0	NA	1.1
Iron and steel manufacturing	NA	NA	8	0	NA	1.4

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.6-3

INDUSTRIAL OCCURRENCE OF 1,1-DICHLOROETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Paint and ink formulation	ND	180	95	0	0.0044	0.00015
Textile mills	NA	NA	NA	NA	NA	NA
Rubber processing	NA	110	56	1.1 x 10 ⁻⁵	0.048	0.0018
Pharmaceutical manufacturing	ND	28	7	0	0.048	0.0064
Iron and steel manufacturing	NA	NA	7	0	NA	1.3
Nonferrous metals manufacturing	ND	7	0.6	0	NA	0.032

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,1-DICHLOROETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gravity oil separation			NA	1 ^d	III.4.1
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation			>0 ^d	<10 ^d	III.4.2
Activated sludge			>9->18	<3.5	III.5.1
Granular activated carbon adsorption			>89->99	8,100	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 43-1 - 43-9.

Date: 8/13/79

I.12.6-5

Compound: 1,2-Dichloroethane

Formula:



Alternate Names: Ethylene dichloride,
Glycol dichloride

CAS #: 107-06-2

Physical, Chemical, and Biological Properties [1]


mol. wt.: 98.98 m.p., °C: -35.4 b.p. (760 torr), °C: 83.5
vapor pressure (20°C), torr: 61
solubility in water (20°C), mg/L: 8,690
log octanol/water partition coefficient: 1.48
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Information not available; photodissociation in stratosphere to chloroacetyl chloride is expected
oxidation: Information not available pertaining to oxidation in aqueous environment; in troposphere oxidation by hydroxyl radicals to chloroacetyl chloride is expected
hydrolysis: Hydrolysis is probably too slow to be an important process for removal of 1,2-dichloroethane
volatilization: Due to high vapor pressure, volatilization to the atmosphere is rapid and is major transport process
sorption: Information not available
biological processes: Information not available
other reactions/interactions: Unknown

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

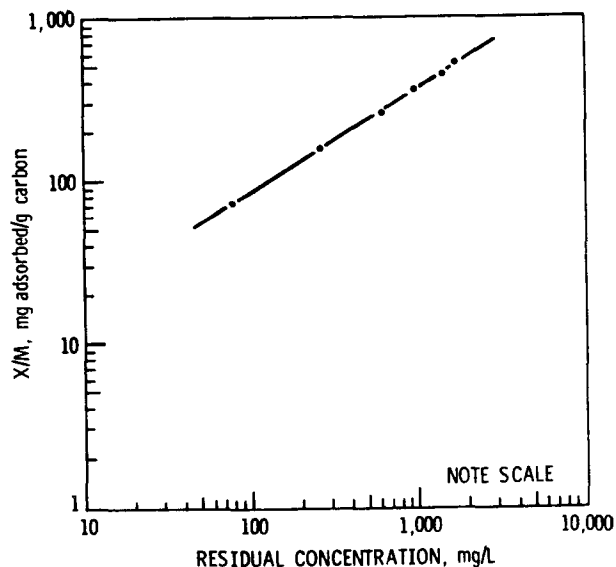

Date: 8/13/79

I.12.7-1

Date: 12/5/79

I.12.7-2

INDUSTRIAL OCCURRENCE OF 1,2-DICHLOROETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND ^d	ND ^d	^e	^e	^e
Textile mills	NA	<5 ^d	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.0090
Paint and ink formulation	ND	420 ^d	100 ^d	0	0.0046	0.00016
Rubber processing	NA	93 ^d	93 ^d	0.000018	0.080	0.0031
Pulp, paper and paperboard mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	500	250	0.00023	0.35	0.052
Pharmaceutical manufacturing	ND	74	8.7	0	0.059	0.0074
Steam electric power generating (condenser cooling system)	NA	NA	44 ^f	0.0023	0.048	0.011
Steam electric power generating (ash handling)	NA	NA	27 ^f	0.00051	2.6	0.59
Inorganic chemical manufacturing	NA	620 ^g	NA	0	39	7.8
Foundries	NA	170	83	0	0.56	0.24
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	180	20	0	NA	1.1

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

^fAverage of medians reported for various industry segments.

^gAverage of maximums reported for various industry segments.

Date: 12/5/79

I.12.7-3

INDUSTRIAL OCCURRENCE OF 1,2-DICHLOROETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.2	0	0.0053	0.0007
Paint and ink formulation	ND	170	70	0	0.0032	0.00011
Textile mills	NA	NA	NA	NA	NA	NA
Rubber processing	NA	4 ^d	3 ^d	6 x 10 ⁻⁷	0.0026	9.9 x 10 ⁻⁵
Pulp, paper and paperboard mills	NA	<1 ^d	<1 ^d	0	NA	0.030
Pharmaceutical manufacturing	ND	7,000	500	0	3.4	0.46
Foundries	<20	<20	<20	0	0.13	0.054
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	240	11	0	NA	0.58

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.12.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,2-DICHLOROETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation			>70 ^d	<10 ^d	III.4.2
Sedimentation with chemical addition (alum, polymer)			30->60	<50	III.4.3
Sedimentation with chemical addition (alum)			0 ^{d,e}	- ^e	III.4.3
Steam stripping			97->99	33,000	III.5.5
Solvent extraction			87->99	84,000	III.5.6
Powdered activated carbon adsorption			81 ^d	190,000 ^d	III.6.2
Granular activated carbon adsorption			>86->99	230,000	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 44-1 - 44-9.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.12.7-5

Compound: 1,1,1-Trichloroethane

Formula:



Alternate Names: Methyl chloroform,
Chlorotene, Genklene,
Baltana

CAS #: 71-55-6

Physical, Chemical, and Biological Properties [1]

mol. wt.: 133.4 m.p., °C: -30.4 b.p. (760 torr), °C: 74.1
vapor pressure (20°C), torr: 96.0
solubility in water (20°C), mg/L: 480-4,400
log octanol/water partition coefficient: 2.17
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Information lacking, does not appear to be a major aquatic fate;
photodissociation to chlorine atoms and chlorine oxides in
stratosphere is predicted
oxidation: Information lacking, probably not important aquatic fate; slow
photooxidation in troposphere to trichloroacetaldehyde and sub-
sequently trichloroacetic acid reported
hydrolysis: Slow hydrolysis to acetic and hydrochloric acids and vinylidene
chloride suggested
volatilization: Volatilization to the atmosphere is rapid and is a major
transport process
sorption: Information lacking, may be important fate mechanism
biological processes: Information lacking, some bioaccumulation and biodegra-
dation indicated
other reactions/interactions: Unknown

Carbon Adsorption Data: Not available

Date: 8/13/79

I.12.8-1

Date: 12/5/79

I.12.8-2

INDUSTRIAL OCCURRENCE OF 1,1,1-TRICHLOROETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<2.5 ^d	0	0.066	0.0094
Textile mills	NA	17	7.8 ^d	0.00033	0.22	0.014
Timber products process	BDL	90	30 ^e	0	1.4	0.0026
Paint and ink formulation	ND	1,000	350	0	0.016	0.00056
Gum and wood chemicals ^f	BDL	830	280	0.0025	2.1	0.46
Rubber processing	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1	414	<106	0	NA	3.2
Auto and other laundries	ND	6,600	520	0.00047	0.73	0.11
Pharmaceutical manufacturing	ND	130	10	0	0.068	0.0092
Ore mining and dressing	0.63	0.63	0.63	0	NA	0.023
Steam electric power generating (condenser cooling system)	13	26	15	0.0008	0.017	0.0036
Coil coating	ND	1,300	12	0.0006	0.022	0.0022
Foundries	ND	16,000	1,400	0	9.4	3.8
Leather tanning and finishing	ND	NA	1.4	0	NA	0.0021
Iron and steel manufacturing	NA	420	44	0	NA	7.9
Nonferrous metals manufacturing	ND	40	3.6	0	NA	0.19

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.^bNA - not available; ND - not detected; BDL - below detection limit.^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.^dOne sample.^eAverage of medians reported for various industry segments.

Date: 12/5/79

I.12.8-3

INDUSTRIAL OCCURRENCE OF 1,1,1-TRICHLOROETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10 ^d	<3 ^{d1}	0	0.082	0.012
Textile mills	NA	5 ^d	5 ^{d1}	2.1 x 10 ⁻⁵	0.14	0.00090
Paint and ink formulation	ND	560	89	0	0.0041	0.00014
Gum and wood chemicals	NA	NA	NA	NA	NA	NA
Timber products processing	NA	7,100	7,100	0.0014	6.1	0.23
Rubber processing	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	<1 ^d	4 ^d	<2 ^d	0 ^e	NA ^e	0.060 ^e
Auto and other laundries	ND	ND	ND	- ^e	- ^e	- ^e
Pharmaceutical manufacturing	ND	360,000	25,800	0	180	24
Nonferrous metals manufacturing	ND	10	1.5	0	NA	0.08
Iron and steel manufacturing	NA	50	10	0	NA	1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,1,1-TRICHLOROETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	50 ^d	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			22 ^d	14 ^d	III.4.5
Gas flotation with chemical addition (polymer)			>4->9	<6	III.4.5
Gas flotation with chemical addition (alum, polymer)			74 ^d	860 ^d	III.4.5
Filtration			67-94	710	III.4.6
Sedimentation			30->57	<19	III.4.2
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum, polymer)			46-93	69	III.4.3
Aerated lagoons			96 ^d	22 ^d	III.5.3
Steam stripping			9 ^d	42,000 ^d	III.5.5
Activated sludge			74->99	<2.4	III.5.1
Granular activated carbon adsorption			>99 ^d	<10 ^d	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected,
BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 45-1 - 45-12.

Date: 8/13/79

I.12.8-5

Compound: 1,1,2-Trichloroethane

Formula:



Alternate Names: Vinyl trichloride

CAS #: 79-00-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 133.4 m.p., °C: -36.5 b.p. (760 torr), °C: 134
vapor pressure (20°C), torr: 19
solubility in water (20°C), mg/L: 4,500
log octanol/water partition coefficient: 2.17
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No data available pertaining to rate of photolysis in aquatic environment; photodissociation in stratosphere expected to be important fate
oxidation: Oxidation in aquatic systems not expected to be important fate; in troposphere slow reaction with hydroxyl radicals
hydrolysis: By analogy with 1,1,1-trichloroethane, a structural isomer, slow hydrolysis in aqueous mediums is suggested
volatilization: Some volatilization occurs, importance as a fate mechanism unknown
sorption: Information lacking, may be important fate mechanism
biological processes: Information unavailable
other reactions/interactions: Information unavailable

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.9-2

INDUSTRIAL OCCURRENCE OF 1,1,2-TRICHLOROETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	BDL	BDL	BDL
Paint and ink formulation	ND	2,800	290	0	0.013	0.00046
Rubber processing	NA	<0.1 ^d	<0.1 ^d	2×10^{-8}	8.6×10^{-5}	3.3×10^{-6}
Auto and other laundries	ND	3,000	1,500	0.0014	2.1	0.32
Pharmaceutical manufacturing	ND	1,300	95	0	0.65	0.087
Leather tanning and finishing	ND	NA	1.4	0	NA	0.0021
Foundries	ND	NA	10	0	0.067	0.027
Nonferrous metals manufacturing	ND	29	1.2	0	NA	0.064

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.12.9-3

INDUSTRIAL OCCURRENCE OF 1,1,2-TRICHLOROETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.2	0	0.0053	0.00076
Paint and ink formulation	ND	2,100	93	0	0.0043	0.00015
Rubber processing	NA	<1	<0.55	1.1 x 10 ⁻⁷	0.00047	1.8 x 10 ⁻⁵
Pharmaceutical manufacturing	ND	890	64	0	0.43	0.06
Nonferrous metals manufacturing	ND	8.5	1.7	0	NA	0.09

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,1,2-TRICHLOROETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.3
Steam stripping			>99	<48	III.5.5
Solvent extraction			90-95	16,000	III.5.6
Activated sludge			>9 ^d	<10 ^d	III.5.1
Granular activated carbon adsorption			>99 ^d	<10 ^d	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 46-1 - 46-9.

Date: 8/13/79

I.12.9-5

Compound: 1,1,2,2-Tetrachloroethane

Formula:



Alternate Names: sym-Tetrachloroethane,
Acetylene tetrachloride

CAS #: 79-34-5

Physical, Chemical, and Biological Properties [1]


mol. wt.: 167.8 m.p., °C: -36 b.p. (760 torr), °C: 146
vapor pressure (20°C), torr: 5
solubility in water (20°C), mg/L: 2,900
log octanol/water partition coefficient: 2.56
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Information not available pertaining to the rate of photolysis
in aquatic environment; photodissociation in stratosphere is
expected
oxidation: Information not available
hydrolysis: Data lacking, slow hydrolysis expected
volatilization: Some volatilization occurs, importance as a fate mechanism
unknown
sorption: Information not available
biological processes: Information not available
other reactions/interactions: Unknown

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

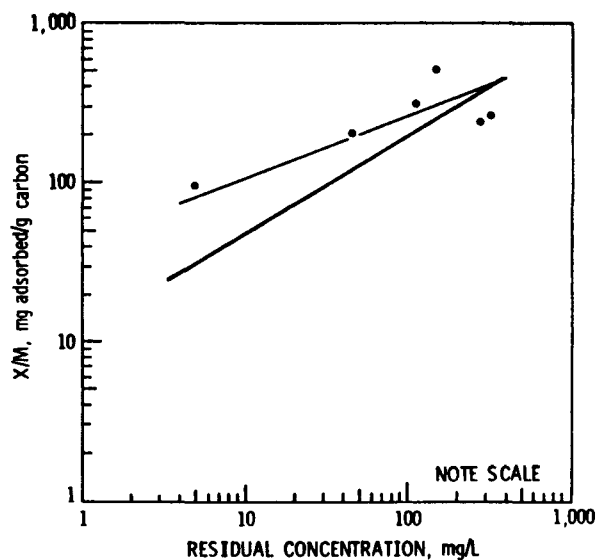

Date: 8/13/79

I.12.10-1

Date: 12/5/79

I.12.10-2

INDUSTRIAL OCCURRENCE OF 1,1,2,2-TETRACHLOROETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	BDL	BDL	BDL
Rubber processing	NA	1.5 ^d	1.5 ^d	3 x 10 ⁻⁷	0.0013	4.9 x 10 ⁻⁵
Pharmaceutical manufacturing	ND	10	2	0	0.014	0.0018
Foundries	ND	NA	18	0	0.12	0.049
Leather tanning and finishing	ND	NA	5.4	0	NA	0.0081
Nonferrous metals manufacturing	ND	35	2.8	0	NA	0.15

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, 1/2 the reported maximum was utilized.

^d One sample.

Date: 12/5/79

I.12.10-3

INDUSTRIAL OCCURRENCE OF 1,1,2,2-TETRACHLOROETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.2	0	0.0053	0.00076
Rubber processing	NA	4	1.7	3.4×10^{-7}	0.0015	5.6×10^{-5}
Auto and other laundries	0.7	9	5	4.5×10^{-6}	0.007 _d	0.0010 _d
Pharmaceutical manufacturing	ND	ND	ND	- _d	- _d	- _d
Foundries	18	<20	19	0	0.13	0.051
Iron and steel manufacturing	NA	<10	<10	0 _d	NA _d	<1.8 _d
Leather tanning and finishing	ND	ND	ND	- _d	- _d	- _d
Nonferrous metals manufacturing	ND	190	10	0	NA	0.53

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.10-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,1,2,2-TETRACHLOROETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation			0 ^{d,e}	- ^e	III.4.2
Sedimentation with chemical addition (alum, lime)			30 ^d	35 ^d	III.4.3
Steam stripping			40->99	32,000	III.5.5
Solvent extraction			91-99	4,200	III.5.6
Activated sludge			>22->44	<9	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 47-1 - 47-9.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.12.10-5

Compound: Hexachloroethane

Formula:



Alternate Names: Perchloroethane,
Carbon hexachloride

CAS #: 67-72-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 236.7 m.p., °C: 187 (sublimes) b.p. (777 torr), °C: 186
vapor pressure (20°C), torr: 0.4
solubility in water (22°C), mg/L: 50
log octanol/water partition coefficient: 3.34
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No data available
oxidation: No data available
hydrolysis: No data available
volatilization: Some volatilization occurs, importance as a fate mechanism
unknown
sorption: No data available
biological processes: No data available
other reactions/interactions: Unknown

Carbon Adsorption Data: Not available

Date: 8/13/79

I.12.11-1

Date: 12/5/79

I.12.11-2

INDUSTRIAL OCCURRENCE OF HEXACHLOROETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	BDL	BDL	BDL
Inorganic chemicals manufacturing	NA	90 ^d	NA	0	5.6	1.1
Nonferrous metals manufacturing	ND	23	1.5	0	NA	0.080

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Average of maximums reported for various industry segments.

Date: 12/5/79

I.12.11-3

INDUSTRIAL OCCURRENCE OF HEXACHLOROETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<0.4	0	0.011	0.0015

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR HEXACHLOROETHANE^{a, b}

[illegible]

^aSee Volume III for detailed information.


^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 48-1 - 48-8.

Compound: Vinyl chloride



Alternate Names: Chloroethene, Monochloro-
ethylene, Monovinylchloride,
MVC, Chloroethylene

CAS #: 75-01-4

Physical, Chemical, and Biological Properties [1]

mol. wt.: 62.50 m.p., °C: -154 b.p. (760 torr), °C: -13.4
vapor pressure (25°C), torr: 2,660
solubility in water (25°C), mg/L: 1.1
log octanol/water partition coefficient: 0.60
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Light-induced transformations of vinyl chloride can occur through indirect photolysis in water containing photosensitizers, direct photolysis insignificant
oxidation: Experiments indicate that vinyl chloride is decomposed in water by reactive radicals, when present in sufficient concentration; in the troposphere rapid oxidation by hydroxyl radicals occurs yielding as end-products hydrogen chloride and carbon monoxide
hydrolysis: Due to rapid volatilization, hydrolysis should not be a significant aquatic fate
volatilization: Volatilization to the atmosphere is rapid and is a major transport process
sorption: Sorption by inorganic and organic materials not expected to be important fate mechanism
biological processes: Biodegradation and bioaccumulation are not believed to be important fate processes
other reactions/interactions: Vinyl chloride could be converted to more highly chlorinated compounds in aqueous environment where high concentrations of chlorine/chloride exist

Carbon Adsorption Data: Not available

Date: 9/13/79

I.12.12-2

INDUSTRIAL OCCURRENCE OF VINYL CHLORIDE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	11 ^d	11 ^d	0.000046	0.32	0.020

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.12.12-3

INDUSTRIAL OCCURRENCE OF VINYL CHLORIDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR VINYL CHLORIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Granular activated carbon adsorption			0 ^{d,e}	- ^e	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 49-1 - 49-10.

Date: 8/13/79

I.12.12-5

Formula:

Alternate Names: Propylene chloride,
Propylene dichloride



CAS #: 78-87-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 113.0 m.p., °C: -100 b.p. (760 torr), °C: 96.8
vapor pressure (20°C), torr: 42
solubility in water (20°C), mg/L: 2,700
log octanol/water partition coefficient: 2.28
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No data available
oxidation: No data available
hydrolysis: Information lacking, may be an important aquatic fate
volatilization: Some volatilization occurs, importance as a fate mechanism unknown
sorption: Importance unknown, may be important fate mechanism
biological processes: Importance unknown, this compound can be used as a carbon source by several soil bacteria
other reactions/interactions: Unknown

Carbon Adsorption Data: Not available

Date: 9/13/79

I.12.13-2

INDUSTRIAL OCCURRENCE OF 1,2-DICHLOROPROPANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	100 ^d	100 ^d	0.00042	2.9	0.18
Paint and ink formulation	ND	970	180	0	0.0083	0.00029

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

Date: 12/5/79

I.12.13-3

INDUSTRIAL OCCURRENCE OF 1,2-DICHLOROPROPANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Paint and ink formulation	ND	400	210	0	0.0097	0.00034
Textile mills	NA	NA	NA	NA	NA	NA

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,2-DICHLOROPROPANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Filtration			0 ^{d,e}	- ^e	III.4.6
Sedimentation with chemical addition (alum, lime)			59 ^d	400 ^d	III.4.3
Activated sludge			>68->82	<5.4	III.5.1
Powdered activated carbon adsorption			93 ^d	70,000 ^d	III.6.2
Granular activated carbon adsorption			>64->99	5.4	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES



1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 54-1 - 54-5.

Date: 8/13/79

I.12.13-5

Compound: 1,3-Dichloropropene

Formula:



Alternate Names: 1,3-Dichloropropylene

CAS #: 542-75-6

(*trans*)

(*cis*)

Physical, Chemical, and Biological Properties [1]

mol. wt.: 110.98 m.p., °C: Not available b.p. (760 torr), °C: 104 (*cis* isomer); 112 (*trans* isomer)

vapor pressure (20°C), torr: 25

solubility in water (25°C), mg/L: 2,700 (*cis* isomer); 2,800 (*trans* isomer)

log octanol/water partition coefficient: 1.98

Henry's law constant: Not available

biodegradability: Not available

Probable Fate [1]

photolysis: No data available; direct photolysis of this compound in water expected to be slow

oxidation: No data available

hydrolysis: Slow hydrolysis to 3-chloroallyl alcohol occurs

volatilization: Volatilization to the atmosphere should be a major transport process

sorption: Information not available

biological processes: Biodegradation of this compound is possible; amount of bioaccumulation unknown

other reactions/interactions: Unknown

Carbon Adsorption Data: Not available

Date: 8/13/79

I.12.14-1

Date: 12/5/79

I.12.14-2

INDUSTRIAL OCCURRENCE OF 1,3-DICHLOROPROPENE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND	ND	ND	₋ ^d	₋ ^d	₋ ^d
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Mean pollutant concentration below detection limit.

Date: 12/5/79

I.12.14-3

INDUSTRIAL OCCURRENCE OF 1,3-DICHLOROPROPENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND	ND	ND	_d	_d	_d

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,3-DICHLOROPROPENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Activated sludge			0 ^{d,e}	- ^e	III.5.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.


^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 55-1 - 55-6.

Compound: Hexachlorobutadiene

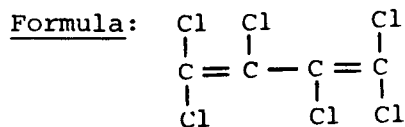

Alternate Names: HCBD, Hexachloro-
1,3-butadiene

CAS #: 87-68-3

Physical, Chemical, and Biological Properties [1]


mol. wt.: 260.8 m.p., °C: -21 b.p. (760 torr), °C: 215
vapor pressure (20°C), torr: 0.15
solubility in water (20°C), mg/L: 2
log octanol/water partition coefficient: 3.74
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Absorption of sunlight too weak to make photolysis important
oxidation: Lack of information probably indicates unimportance
hydrolysis: Lack of information probably indicates unimportance
volatilization: Low vapor pressure precludes volatilization as an important
transport process
sorption: Adsorbed by organic materials very strongly
biological processes: Bioaccumulation occurs in some aquatic organisms;
no information on biodegradation
other reactions/interactions: Unknown

Carbon Adsorption Data [2]

pH: 7.3
type of carbon: Not available
adsorbability: 25 mg/L carbon dose re-
quired to reduce pollutant
concentration from 10 mg/L
to 1 mg/L at neutral pH

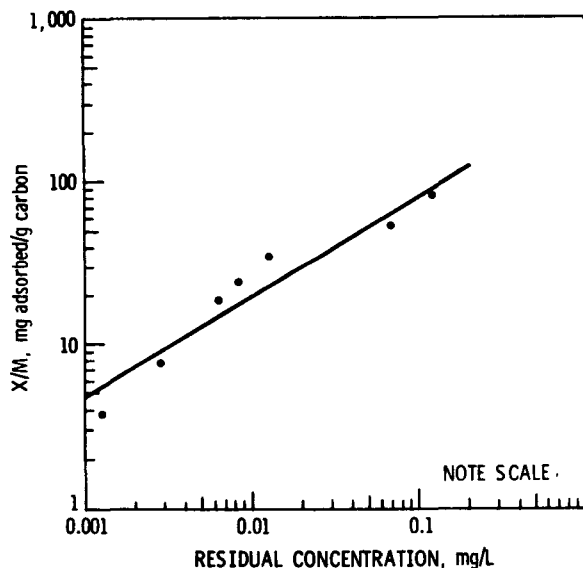

Date: 8/13/79

I.12.15-1

I.12.15-2

INDUSTRIAL OCCURRENCE OF HEXACHLOROBUTADIENE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.15-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.15-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR HEXACHLOROBUTADIENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 56-1 - 56-6.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I.12.15-5

Compound: Hexachlorocyclopentadiene

Formula:



Alternate Names: HCCPD, Perchlorocyclopentadiene

CAS #: 77-47-4

Physical, Chemical, and Biological Properties [1]


mol. wt.: 272.8 m.p., °C: -9.9 b.p. (760 torr), °C: 239
vapor pressure (25°C), torr: 0.081
solubility in water (temp. unknown), mg/L: 0.805
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No data, but dimerization and addition of HCCPD to aromatic groups of humus could be photolytically catalyzed
oxidation: Lack of data probably indicates unimportance
hydrolysis: Acid-catalyzed hydrolysis to tetrachlorocyclopentadienone could occur only if HCCPD is adsorbed onto clay surface
volatilization: Extremely low vapor pressure precludes volatilization
sorption: Based on data for hexachlorobutadiene, adsorption onto organic matter may be important
biological processes: Bioaccumulated in many organisms/Weak biodegradation to tetrachlorocyclopentadienone hydrate
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

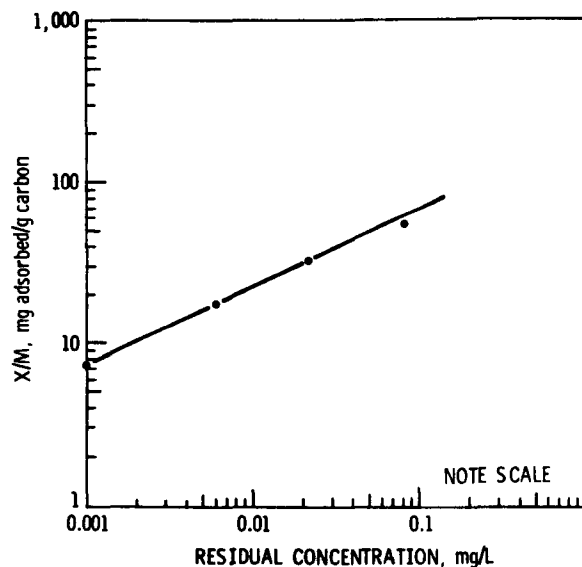

Date: 8/13/79

I.12.16-1

I.12.16-2

INDUSTRIAL OCCURRENCE OF HEXACHLOROCYCLOPENTADIENE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.16-3

INDUSTRIAL OCCURRENCE OF HEXACHLOROCYCLOPENTADIENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	NA	<20 ^d	<20 ^d	0	0.13	0.054

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

I.12.16-4

	<u>Synthetic wastewater</u>		<u>Actual wastewater</u>		
Treatment process ^a	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	Volume III references, Section numbers

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 57-1 - 57-5.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.12.16-5

Compound: Methyl bromide

Formula:



Alternate Names: Bromomethane, Terabol,
Monobromomethane,
Embafume

CAS #: 74-83-9

Physical, Chemical, and Biological Properties [1]

mol. wt.: 94.94 m.p., °C: -93.6 b.p. (760 torr), °C: 4.6
vapor pressure (20°C), torr: 1,420
solubility in water (20°C), mg/L: 900
log octanol/water partition coefficient: 1.1
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Volatilized methyl bromide should photodissociation
above the ozone layer
oxidation: Atmospheric photooxidation by hydroxyl radicals releases
inorganic bromide which is carried down by rain
hydrolysis: Unvolatilized methyl bromide should undergo hydrolysis with
a half-life of less than 20 days
volatilization: Rapid volatilization is the dominant transport process
sorption: Too slow to compete with volatilization
biological processes: Not expected to be important/very little data
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 8/13/79

I.12.17-1

Date: 12/5/79

I.12.17-2

INDUSTRIAL OCCURRENCE OF METHYL BROMIDE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND	15	3	0	0.02	0.0028

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.17-3

INDUSTRIAL OCCURRENCE OF METHYL BROMIDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pharmaceutical manufacturing	ND	ND	ND	_d	_d	_d

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

I.12.17-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR METHYL BROMIDE^{a, b}

[illegible]

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 58-1 - 58-7.

Date: 8/13/79

I.12.17-5

Formula:



CAS #: 75-27-4

mol. wt.: 163.8 m.p., °C: -57.1 b.p. (760 torr), °C: 90
vapor pressure (20°C), torr: 50
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: 1.88
Henry's law constant: Not available
biodegradability: Not available

photolysis: No information
oxidation: No information, but probably not important
hydrolysis: Too slow to be important
volatilization: Volatilization has been demonstrated, but the rate is unknown
sorption: No information, but adsorption onto activated carbon has been demonstrated
biological processes: Moderate potential for bioaccumulation/Metabolization by some aquatic species is known to occur
other reactions/interactions: Dichlorobromomethane may be formed by a haloform reaction following chlorination of drinking water if sufficient bromide is present

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.18-2

INDUSTRIAL OCCURRENCE OF DICHLOROBROMOMETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	6 _d 6 ^d	6 _d 6 ^d	2.8×10^{-5}	0.19	0.012
Petroleum refining	NA	110 ^d	110 ^d	0	10	0.64
Paint and ink formulation	ND	27 ^e	27 ^e	0	0.0012	4.3×10^{-5}
Pulp, paper and paperboard mills	NA	6 ^d	6 ^d	0	NA	0.18
Auto and other laundries	ND	33	10	9.0×10^{-5}	0.014	0.0021
Pharmaceutical manufacturing	NA	NA	NA	NA	NA	NA
Ore mining and dressing	0.02	0.02	0.02	0	NA	740
Inorganic chemicals manufacturing	NA	310 ^f	NA	0	19	3.9
Leather tanning and finishing	ND	NA	<3	0	NA	0.0045
Iron and steel manufacturing	NA	NA	NA	NA	NA	NA

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d One sample.

^e Detected in only one sample.

^f Average of maximums reported for various industry segments.

Date: 12/5/79

I.12.18-3

INDUSTRIAL OCCURRENCE OF DICHLOROBROMOMETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Paint and ink formulation	NA	ND	ND	_d	_d	_d
Textile mills	NA	NA	NA	NA	NA	NA
Petroleum refining	NA	NA	NA	NA	NA	NA
Pulp, paper and paperboard mills	0	<1 ^e	<1 ^e	0	NA	0.030
Auto and other laundries	ND	1.0	0.5	0.45	0.0007	0.00011
Nonferrous metals manufacturing	ND	18	3	0	NA	0.16
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Foundries	NA	23 ^e	23 ^e	0	0.15	0.062

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

Date: 12/5/79

I.12.18-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DICHLOROBROMOMETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gas flotation with chemical addition (alum, polymer)			>85 ^d	<0.9 ^d	III.4.5
Activated sludge			0 ^e	- ^e	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 59-1 - 59-6.

Date: 8/13/79

I.12.18-5

Formula:



Alternate Names: Dibromochloromethane

CAS #: 124-48-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 208.3 m.p., °C: <-20 b.p. (748 torr), °C: 119-120
vapor pressure (10.5°C), torr: 15
solubility in water, (temp. unknown), mg/L: Not available
log octanol/water partition coefficient: 2.09
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No information
oxidation: No information, but probably not important
hydrolysis: Too slow to be important
volatilization: Volatilization has been demonstrated, but the rate is unknown
sorption: No information, but adsorption onto activated carbon has been demonstrated
biological processes: Moderate potential for bioaccumulation/biodegradation occurs in some organisms
other reactions/interactions: May be formed by haloform reaction after chlorination of water if sufficient bromide is present

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.19-2

INDUSTRIAL OCCURRENCE OF CHLORODIBROMOMETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Paint and ink formulation ^d	ND	43	43	0	0.0020	6.9 x 10 ⁻⁵
Timber products processing	NA	NA	NA	NA	NA	NA
Petroleum refining	NA	NA	110 ^e	0	10	0.93
Auto and other laundries	ND	12	6	5.4 x 10 ⁻⁶	0.0084	0.0013
Steam electric power generating (condenser cooling system)	NA	NA	59	0.0031	0.065	0.014
Nonferrous metals manufacturing	ND	81	5.4	0	NA	0.29

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^d Detected in only one sample.

^e Median, not average.

Date: 12/5/79

I.12.19-3

INDUSTRIAL OCCURRENCE OF CHLORODIBROMOMETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	BDL	30	BDL	_d	_d	_d
Petroleum refining	NA	NA	NA	NA_d	NA_d	NA_d
Paint and ink formulation	NA	ND	ND	_d	_d	_d
Auto and other laundries	ND ^e	ND ^e	ND ^e	_d	_d	_d
Nonferrous metals manufacturing	ND	2,800	252	0	NA	13

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

Date: 12/5/79

I.12.19-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHLORODIBROMOMETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Sedimentation			>77 ^d	<10 ^d	III.4.2
Sedimentation with chemical addition			>50 ^d	<0.3 ^d	III.4.3

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 60-1 - 60-7.

Date: 8/13/79

I.12.19-5

Compound: Bromoform



Alternate Names: Tribromomethane,
Methenyl tribromide

CAS #: 75-25-2

Physical, Chemical, and Biological Properties [1]


mol. wt.: 252.8 m.p., °C: 8.3 b.p. (760 torr), °C: 150
vapor pressure (34°C), torr: 10
solubility in water, mg/L: 3,010 at 15°C; 3,190 at 30°C
log octanol/water partition coefficient: 2.30
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: No information
oxidation: Atmospheric photooxidation by hydroxyl radicals to COBr_2 is relatively rapid
hydrolysis: Too slow to be important
volatilization: Volatilization has been demonstrated, but the rate is unknown
sorption: No information
biological processes: Slight potential for bioaccumulation/Metabolization is known to occur in some organisms
other reactions/interactions: Possibly produced by haloform reaction

Carbon Adsorption Data [2]

pH: 7.3
type of carbon: Not available
adsorbability: 45 mg/L; carbon dose required to reduce pollutant concentration from 10 mg/L to 1 mg/L at neutral pH

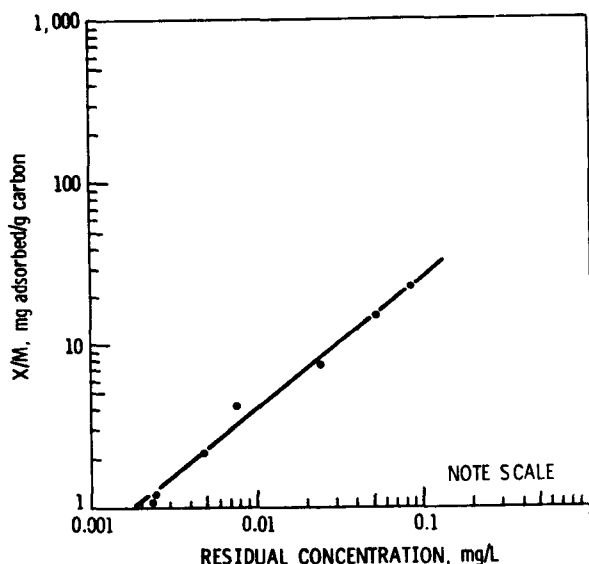

Date: 8/13/79

I.12.20-1

Date: 12/5/79

I.12.20-2

INDUSTRIAL OCCURRENCE OF BROMOFORM^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	NA	14 ^d	14 ^d	0	NA ^e	0.42
Pharmaceutical manufacturing	ND	ND	ND	- ^e	- ^e	- ^e
Steam electric power generating (condenser cooling system)	13	580	210	0.011	0.23	0.05
Nonferrous metals manufacturing	ND	65	6.8	0	NA	0.36

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.20-3

INDUSTRIAL OCCURRENCE OF BROMOFORM^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Pulp, paper and paperboard mills	NA	3 ^d	<3 ^d	0 ^e	NA ^e	0.090 ^e
Pharmaceutical manufacturing	ND	ND	ND	- ^e	- ^e	- ^e
Nonferrous metals manufacturing	ND	44	2.1	0	NA	0.11
Leather tanning and finishing	ND	<10	<5	0	NA	<0.0075

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.20-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BROMOFORM^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Activated sludge			0 ^{d,e}	- ^e	III.5.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.


^e Actual data indicate negative removal.

REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 61-1 - 61-7.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Dichlorodifluoromethane

Formula:



Alternate Names: Fluorocarbon-12,
Freon-12

CAS #: 75-71-8

Physical, Chemical, and Biological Properties [1]

mol. wt.: 129.9 m.p., °C: -158 b.p. (760 torr), °C: -29.8
vapor pressure (20°C), torr: 4,310
solubility in water (25°C), mg/L: 280
log octanol/water partition coefficient: 2.16
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Volatilized dichlorodifluoromethane is photodissociated to
CF₂O and Cl₂ in the stratosphere
oxidation: No information; probably unimportant
hydrolysis: Not important under environmental conditions
volatilization: Very rapid volatilization removes most of the compound
from water
sorption: Some potential for adsorption exists, but is greatly inhibited
by volatilization
biological processes: Potential for bioaccumulation and transformation
is offset by volatilization
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

I.12.21-2

INDUSTRIAL OCCURRENCE OF DICHLORODIFLUOROMETHANE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.21-3

INDUSTRIAL OCCURRENCE OF DICHLORODIFLUOROMETHANE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.21-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DICHLORODIFLUOROMETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 62-1 - 62-8.

Date: 8/13/79

I.12.21-5

Compound: Trichlorofluoromethane

Formula:



Alternate Names: Fluorocarbon-11, Freon-11

CAS #: 75-69-4

Physical, Chemical, and Biological Properties [1]

mol. wt.: 137.4 m.p., °C: -111 b.p. (760 torr), °C: 23.8

vapor pressure (20°C), torr: 667

solubility in water (temp. unknown), mg/L: 1,100

log octanol/water partition coefficient: 2.53

Henry's law constant: Not available

biodegradability: Not available

Probable Fate [1]

photolysis: Volatilized trichlorofluoromethane is eventually photodissociated to CFC10 and Cl₂ in the stratosphere

oxidation: No information; not expected to be important

hydrolysis: Not important under environmental conditions

volatilization: Rapid volatilization is the major transport process

sorption: Potential for adsorption is greatly hindered by volatilization

biological processes: Rapid volatilization precludes bioaccumulation
or degradation

other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.22-2

INDUSTRIAL OCCURRENCE OF TRICHLOROFLUOROMETHANE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	2,100	<5	2.1 x 10 ⁻⁵	0.14	0.0090
Auto and other laundries	ND	120	120	0.00011	0.17	0.025
Pharmaceutical manufacturing	ND	ND	ND	0	NA	- ^e
Nonferrous metals manufacturing	ND	100	12	0	NA	0.64

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.22-3

INDUSTRIAL OCCURRENCE OF TRICHLOROFLUOROMETHANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	5	150	78	7×10^{-5}	0.11	0.016
Pharmaceutical manufacturing	ND	80	5.7	0	0.0052	0.039

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.22-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TRICHLOROFLUOROMETHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gas flotation with chemical addition (alum, polymer)			>50 ^d	<2 ^d	III.4.5
Filtration			0 ^{d,e}	- ^e	III.4.6
Tertiary polishing lagoons			>79 ^d	<10 ^d	III.5.3
Activated sludge			19-96	<450	III.5.1
Granular activated carbon adsorption			0 ^{d,e}	- ^e	III.6.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 63-1 - 63-8.

Date: 8/13/79

I.12.22-5

Compound: Trichloroethylene



Alternate Names: Trichloroethene,
Ethylene trichloride,
Ethynyl trichloride,
Tri-clene

CAS #: 79-01-6

Physical, Chemical, and Biological Properties [1]


mol. wt.: 131.4 m.p., °C: -73 b.p. (760 torr), °C: 87
vapor pressure (20°C), torr: 57.9
solubility in water (20°C), mg/L: 1,100
log octanol/water partition coefficient: 2.29
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Tropospheric photooxidation of volatilized trichloroethylene
by hydroxyl radicals to phosgene and dichloroacetyl chloride
is very rapid
oxidation: Not important except for photooxidation
hydrolysis: Not important under environmental conditions
volatilization: Rapid volatilization is the major transport process
sorption: Cannot compete with volatilization as a transport process
biological processes: Evidence of bioaccumulation, but not magnification,
exists; possible metabolism by higher organisms
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: 7.3
type of carbon: Not available
adsorbability: 430 mg/L; carbon dose re-
quired to reduce pollutant
concentration from 10 mg/L
to 1 mg/L at neutral pH

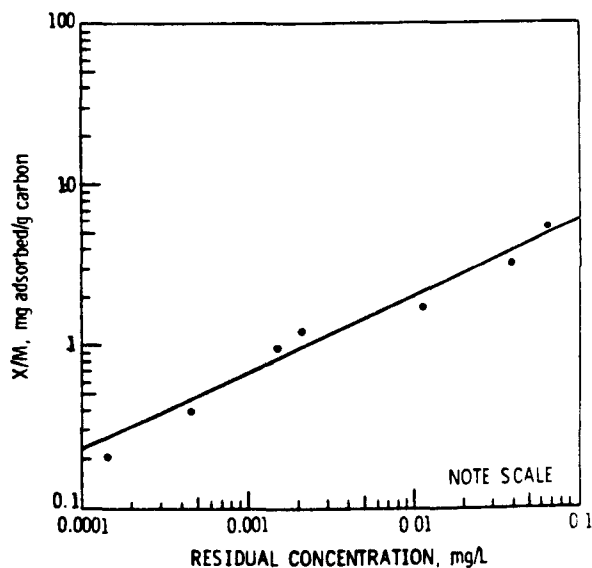

Date: 8/13/79

I.12.23-1

Date: 12/5/79

I.12.23-2

INDUSTRIAL OCCURRENCE OF TRICHLOROETHYLENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.4	0	0.037	0.0053
Textile mills	NA	840	47	0.00020	1.3	0.085
Paint and ink formulation	ND	5,000	960	0	0.044	0.0015
Rubber processing	NA	<0.1 ^d	<0.1 ^d	2 x 10 ⁻⁸	8.6 x 10 ⁻⁵	3.3 x 10 ⁻⁶
Pulp, paper and paperboard mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	800	90	9.1 x 10 ⁻⁵	0.13	0.019
Pharmaceutical manufacturing	ND	62	8	0	0.054	0.0074
Foundries	ND	280	109	0	0.73	0.29
Leather tanning and finishing	ND	NA	2	0	0.003	NA
Coil coating	ND	310	<10	<0.0005	<0.018	<0.0018
Nonferrous metals manufacturing	ND	900	59	0	NA	3.1
Iron and steel manufacturing	NA	NA	13	0	NA	2.3

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.12.23-3

INDUSTRIAL OCCURRENCE OF TRICHLOROETHYLENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.1	0	0.029	0.0041
Textile mills	NA	87	4.9	2.0×10^{-5}	0.14	0.0088
Paint and ink formulation	ND	300	78	0	0.0036	0.00012
Rubber processing	NA	1,600	550	0.00011	0.47	0.018
Pulp, paper and paperboard mills	<1	6	<3	0	NA	0.090
Auto and other laundries	ND	30	11	1.0×10^{-5}	0.015	0.0023
Pharmaceutical manufacturing	ND	7	0.78	0	0.0053	0.00072
Iron and steel manufacturing	NA	NA	11	0	NA	2.0
Nonferrous metals manufacturing	ND	330	18	0	NA	0.95

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 52-1 - 52-13.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Date: 8/13/79

I.12.23-5

Compound: 1,1-Dichloroethylene



Alternate Names: 1,1-Dichloroethene,
Vinylidene chloride,
Vinylidene chloride,
1,1-DCE

CAS #: 75-35-4

Physical, Chemical, and Biological Properties [1]

mol. wt.: 96.94 m.p., °C: -122 b.p. (760 torr), °C: 37
vapor pressure (25°C), torr: 591
solubility in water (20°C), mg/L: 400
log octanol/water partition coefficient: 1.48
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Aquatic photodissociation is precluded by volatilization;
tropospheric photooxidation precludes stratospheric photo-
dissociation
oxidation: Tropospheric photooxidation by hydroxyl radicals is rapid and
yields a variety of products
hydrolysis: Too slow to be important
volatilization: Rapid volatilization is the main transport process
sorption: Probably cannot compete with volatilization as a transport process
biological processes: Very low potential for bioaccumulation; biodegradation
probably too slow to be important
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.24-2

INDUSTRIAL OCCURRENCE OF 1,1-DICHLOROETHYLENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.4	0	0.037	0.0053
Textile mills	NA	<5 ^d	<5 ^d	2.1 x 10 ⁻⁵	0.14	0.0090
Paint and ink formulation	ND	620	76	0	0.0035	0.00012
Auto and other laundries	ND	23	12	1.1 x 10 ⁻⁵	0.017	0.0025
Pharmaceutical manufacturing	ND	95	8.9	0	0.061	0.0082
Steam electric power generating (condenser cooling system)	NA	NA	16 ^c	0.00084	0.018	0.0039
Coil coating	ND	240	15	0.00075	0.027	0.0072
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	6,100	200	0	NA	11

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eAverage of medians reported for various industry segments.

Date: 12/5/79

I.12.24-3

INDUSTRIAL OCCURRENCE OF 1,1-DICHLOROETHYLENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.6	0	0.042	0.0060
Paint and ink formulation	ND	44	20	0	0.00092	3.2 x 10 ⁻⁵
Textile mills	NA	NA	NA	NA	NA	NA
Pharmaceutical manufacturing	ND	370	27	0	0.18	0.025
Nonferrous metals manufacturing	ND	4,100	86	0	NA	4.6

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.24-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,1-DICHLOROETHYLENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Filtration			>52 ^d	<2 ^d	III.4.6
Sedimentation			0 ^e	- ^e	III.4.2
Sedimentation with chemical addition (alum, polymer)			>98 ^d	<10 ^d	III.4.3

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.

REFERENCES


1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 50-1 - 50-10.

Date: 8/13/79

I.12.24-5

Compound: 1,2-*Trans*-dichloroethylene

Formula:



Alternate Names: *Trans*-1,2-dichloroethene,
Trans-acetylene dichloride,
Dioform

CAS #: 540-59-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 96.94 m.p., °C: -50 b.p. (760 torr), °C: 47.5
vapor pressure (14°C), torr: 200
solubility in water (20°C), mg/L: 600
log octanol/water partition coefficient: 1.48
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Not important except as photooxidation (below)
oxidation: Tropospheric photooxidation by hydroxyl radicals is very
 rapid and yields a variety of products
hydrolysis: No information; probably too slow to be important
volatilization: Rapid volatilization is the major transport process
sorption: No information; probably too slow to compete with volatilization
 as a transport process
biological processes: Very low potential for bioaccumulation; biodegradation
 probably too slow to be important
other reactions/interactions: Not important

Carbon Adsorption Data: Not available

Date: 12/5/79

I.12.25-2

INDUSTRIAL OCCURRENCE OF 1,2-*trans*-DICHLOROETHYLENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Paint and ink formulation	ND	260	72	0	0.0033	0.00011
Rubber processing	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	460	230	0.00021	0.32	0.048
Pharmaceutical manufacturing	ND	ND	ND	- ^e	- ^e	- ^e
Steam electric power generating (condenser cooling system)	NA	NA	11 ^d	0.00058	0.012	0.0026
Coil coating	ND	82	<10	<0.0005	<0.018	<0.0048
Foundries	ND	NA	<6	0	<0.75	<0.15
Leather tanning and finishing	ND	NA	6	0	NA	0.009
Iron and steel manufacturing	ND	<10	8	0	NA	1.4
Nonferrous metals manufacturing	ND	480	17	0	NA	0.90

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dAverage of medians reported for various industry segments.

^eMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.25-3

INDUSTRIAL OCCURRENCE OF 1,2-*trans*-DICHLOROETHYLENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Paint and ink formulation	ND	190 ^d	50 ^d	0	0.0023	8.0 x 10 ⁻⁵
Rubber processing	NA	16 ^d	16 ^d	3.2 x 10 ⁻⁶	0.014	0.00053
Pharmaceutical manufacturing	ND	550 ^d	140 ^d	0	0.95	0.13
Foundries	NA	<20 ^d	<20 ^d	0	<0.13	<0.054
Nonferrous metals manufacturing	ND	7.5	4.4	0	NA	0.23
Iron and steel manufacturing	NA	<10	8	0	NA	1.4

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.12.25-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 1,2-*trans*-DICHLOROETHYLENE ^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	~20 ^d	III.4.1
Filtration			0 ^{d,e}	- ^e	III.4.1
Sedimentation			0 ^e	- ^e	III.4.2
Sedimentation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum, polymer)			28 ^d	190 ^d	III.4.3
Steam stripping			76->99	340,000	III.5.5
Ozonation			0 ^{d,e}	- ^e	III.6.14

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 51-1 - 51-10.

Date: 8/13/79

I.12.25-5

Compound: Tetrachloroethylene



Alternate Names: Tetrachloroethene,
Ethylene tetrachloride,
Perchloroethylene

CAS #: 127-18-4

Physical, Chemical, and Biological Properties [1]


mol. wt.: 165.8 m.p., °C: -22.7 b.p. (760 torr), °C: 121
vapor pressure (20°C), torr: 14
solubility in water (20°C), mg/L: 150-200
log octanol/water partition coefficient: 2.88
Henry's law constant: Not available
biodegradability: Not available

Probable Fate [1]

photolysis: Not important except as photooxidation (below)
oxidation: Tropospheric photooxidation by hydroxyl radicals yields
Trichloroacetyl chloride and phosgene
hydrolysis: Probably too slow to be important
volatilization: Rapid volatilization is the primary transport process
sorption: Too slow to compete with volatilization
biological processes: Moderate potential for bioaccumulation; possible
biodegradation by higher organisms
other reactions/interactions: Not important

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

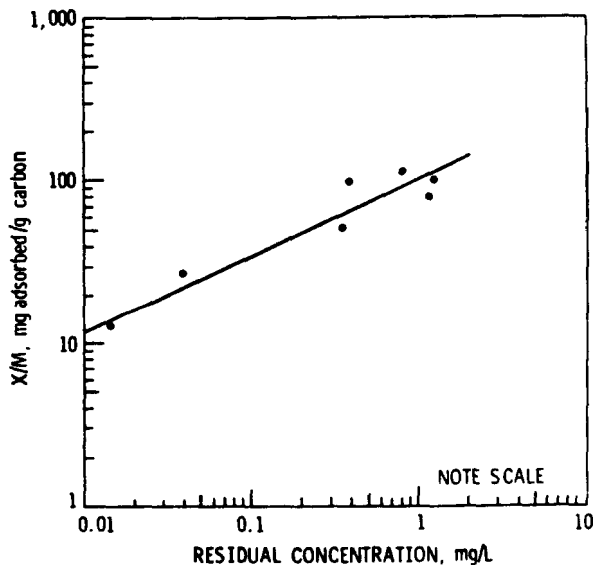

Date: 8/13/79

I.12.26-1

Date: 12/5/79

I.12.26-2

INDUSTRIAL OCCURRENCE OF TETRACHLOROETHYLENE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	BDL	BDL	BDL
Textile mills	NA	2,100	<5	2.1 x 10 ⁻⁵	0.14	0.0090
Petroleum refining	NA	>50 ^d	>50 ^d	0	4.6	0.29
Paint and ink formulation	ND	4,900	920	0	0.042	0.0015
Pulp, paper and paperboard mills	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	93,000	9,600	0.0086	13	2.1
Pharmaceutical manufacturing	ND	36	3.5	0	0.024	0.0032
Ore mining and dressing	ND	ND	ND	BDL	BDL	BDL
Steam electric power generating (condenser cooling)	NA	NA	78 ^e	0.0041	0.086	0.019
Inorganic chemicals manufacturing	NA	196 ^f	NA	0	2.5	12
Coil coating	<10 ^d	<10 ^d	<10 ^d	0.0005	0.018	0.0048
Foundries	ND	370	70	0	0.47	0.032
Leather tanning and finishing	ND	NA	12	0	NA	0.018
Nonferrous metals manufacturing	ND	310	14	0	NA	0.74
Iron and steel manufacturing	NA	1,100	42	0	NA	7.6

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

^eAverage of medians reported for various industry segments.

^fAverage of maximum reported for various industry segments.

Date: 12/5/79

I.12.26-3

INDUSTRIAL OCCURRENCE OF TETRACHLOROETHYLENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.2 ^d	0	0.0053	0.00076
Textile mills	NA	17	11 ^d	4.6 x 10 ⁻⁵	0.32	0.020
Petroleum refining	NA	10 ^e	10 ^e	0	0.93	0.058
Paint and ink formulation	ND	700	190	0	0.0087	0.00030
Pulp, paper and paperboard mills	<1	4	<2	0	NA	0.060
Auto and other laundries	2	1,000	340	0.00030	0.476	0.071
Pharmaceutical manufacturing	ND	ND	ND	- ^f	- ^f	- ^f
Foundries	1.0	210	54	0	0.36	0.15
Iron and steel manufacturing	NA	51	16	0	NA	2.9
Nonferrous metals manufacturing	ND	190	15	0	NA	0.80

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMedian, not average.

^eOne sample.

^fMean pollutant concentration below detection limit.

Date: 12/5/79

I.12.26-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TETRACHLOROETHYLENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	>40	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			23-94	580	III.4.5
Gas flotation with chemical addition (polymer)			0 ^{d,e}	- ^e	III.4.5
Gas flotation with chemical addition (alum, polymer)			>10 ^d	<0.9 ^d	III.4.5
Filtration			30->99	49	III.4.6
Sedimentation			34-76	<23	III.4.2
Sedimentation with chemical addition (alum, lime)			95 ^d	13 ^d	III.4.3
Sedimentation with chemical addition (lime, polymer)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (alum, polymer)			15->44	270	III.4.3
Sedimentation with chemical addition (alum)			0 ^{d,e}	- ^e	III.4.3
Sedimentation with chemical addition (lime)			0 ^{d,e}	- ^e	III.4.3
Aerated lagoons			>60 ^d	<10 ^d	III.5.3
Steam stripping			78->99	2,300	III.5.5
Activated sludge			75->99	<7	III.5.1
Granular activated carbon adsorption			68 ^d	32 ^d	III.6.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

^e Actual data indicate negative removal.


REFERENCES

1. Versar, Inc. Water-Related Environmental Fate of 129 Priority Pollutants, Volume IV, Halogenated Aliphatics. U.S. Environmental Protection Agency, Washington, D.C., 1979. pp. 53-1 - 53-13.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.12.26-5

Compound: Allyl chloride



Alternate Names: Chloroallylene, 3-Chloro-1-propene, 3-Chloropropylene, 2-Propenyl chloride

CAS #: 107-05-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 76.53 m.p., °C: -134 b.p. (760 torr), °C: 44-45
vapor pressure (25°C), torr: 368
solubility in water (25°C), mg/L: Slightly soluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.12.27-2

INDUSTRIAL OCCURRENCE OF ALLYL CHLORIDE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.27-3

INDUSTRIAL OCURRENCE OF ALLYL CHLORIDE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.27-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ALLYL CHLORIDE^{a, b}

[illegible]

^aSee Volume III for detailed information.


^b NA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 88, 89.

Compound: 2,2-Dichloropropionic acid Formula:



Alternate Names: 2,2-Dichloropropanoic acid

CAS #: 75-99-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 143 m.p., °C: Not available b.p. (760 torr), °C: 185-190
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Very soluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.12.28-2

INDUSTRIAL OCCURRENCE OF 2,2-DICHLOROPROPIONIC ACID^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.28-3

INDUSTRIAL OCCURRENCE OF 2,2-DICHLOROPROPIONIC ACID^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.28-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 2,2-DICHLOROPROPIONIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. P. C-454.

Date: 8/13/79

I.12.28-5

Compound: Phosgene

Formula:



Alternate Names: Chloroformyl chloride,
Carbonyl chloride,
Carbonic acid dichloride

CAS #: 75-44-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 98.92 m.p., °C: -118 b.p. (760 torr), °C: 8.1
vapor pressure (20°C), torr: 1,220
solubility in water (25°C), mg/L: Not available, compound decomposes
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.12.29-2

INDUSTRIAL OCCURRENCE OF PHOSGENE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.29-3

INDUSTRIAL OCCURRENCE OF PHOSGENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.29-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PHOSGENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 534.

Date: 8/13/79

I.12.29-5

Compound: Ethylene dibromide

Formula:



Alternate Names: Ethylene bromide,
1,2-Dibromoethane,
Glycoldibromide

CAS #: 106-93-4

Physical, Chemical, and Biological Properties [1]

mol. wt.: 187.9 m.p., °C: 9.97 b.p. (760 torr), °C: 132
vapor pressure (20°C), torr: 11
solubility in water (30°C), mg/L: 4,310
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.12.30-1

I.12.30-2

INDUSTRIAL OCCURRENCE OF ETHYLENE DIBROMIDE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.30-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.30-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ETHYLENE DIBROMIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.


^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 316.

Compound: Epichlorohydrin



Alternate Names: 3-Chloro-1,2-epoxy-
propane, (Chloromethyl)
ethylene oxide

CAS #: 106-89-8

Physical, Chemical, and Biological Properties [1]

mol. wt.: 92.53 m.p., °C: -48.0 b.p. (760 torr), °C: 116
vapor pressure (16.6°), torr: 10
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.12.31-2

INDUSTRIAL OCCURRENCE OF EPICHLOROHYDRIN^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.12.31-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.12.31-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR EPICHLOROHYDRIN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 121-123.

Compound: α -Endosulfan

Formula:

Alternate Names: 6,7,8,9,10,10-Hexachloro-
1,5,5a,6,9,9a-hexahydro-
6,9-methano-2,4,3-benzo(e)-
dioxathiepin-3-oxide

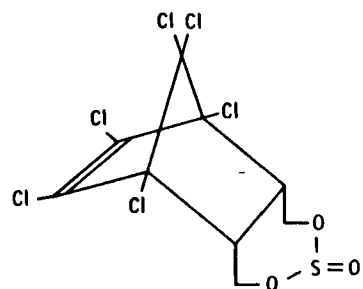

CAS #: 115-29-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 407 m.p., °C: 108 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.1-2

INDUSTRIAL OCCURRENCE OF α -ENDOSULFAN^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<1	0	0.029	0.0041
Foundries	ND	NA	2.5	0	0.017	0.007
Iron and steel manufacturing	NA	NA	<10	0	ND	<1.8
Nonferrous metal manufacturing	ND	15	11	0	ND	0.58

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.1-3

INDUSTRIAL OCCURRENCE OF α -ENDOSULFAN^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Foundries	<5	<5	<5	0	<0.034	<0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.6	0.2	0	NA	0.011

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

Date: 12/5/79

I.13.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR α -ENDOSULFAN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., $\mu\text{g/L}$	Removal range, ^c %	Average achievable conc., $\mu\text{g/L}$	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. p. D 106.

Date: 8/13/79

I.13.1-5

Compound: Endosulfan sulfate

Formula: Not available

Alternate Names: None

CAS #: None assigned

Physical, Chemical, and Biological Properties: Not available

mol. wt.: m.p., °C: b.p. (760 torr), °C:
vapor pressure (25°C), torr:
solubility in water (25°C), mg/L:
log octanol/water partition coefficient:
Henry's law constant:
biodegradability:

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.2-2

INDUSTRIAL OCCURRENCE OF ENDOSULFAN SULFATE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	ND	NA	<1.3	0	<0.0087	<0.0035
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metal manufacturing	ND	0.03 ^d	0.03 ^d	0	NA	0.0016

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges are reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.2-3

INDUSTRIAL OCCURRENCE OF ENDOSULFAN SULFATE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	<5	<5	<5	0	<0.034	<0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.2	0.1	0	NA	0.011

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ENDOSULFAN SULFATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.


^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

Compound: β -Endosulfan

Formula:

Alternate Names: 6,7,8,9,10,10-Hexachloro-
1,5,5a,6,9,9a-hexahydro-
6,9-methano-2,4,3-benzo(e)-
dioxathiepin-3-oxide



CAS #: 115-29-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 407 m.p., °C: 206 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.3-2

INDUSTRIAL OCCURRENCE OF β -ENDOSULFAN^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<1.1	0	0.029	0.0041
Foundries	ND	NA	<1.7	0	<0.011	<0.0046
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	15	1.6	0	NA	0.085

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.3-3

INDUSTRIAL OCCURRENCE OF β -ENDOSULFAN^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Foundries	<5	<5	<5	0	<0.034	<0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.2	0.1	0	NA	0.011

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR β -ENDOSULFAN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., $\mu\text{g/L}$	Removal range, ^c %	Average achievable conc., $\mu\text{g/L}$	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. p. D 106.

Date: 8/13/79


I.13.3-5

Compound: α -BHC

Formula:

Alternate Names: Hexachlorocyclohexane,
Lindane, Benzenehexachloride,
HCCH, HCH, TBH

CAS #: None assigned

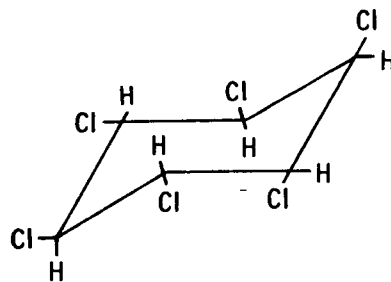

Physical, Chemical, and Biological Properties [1]

mol. wt.: 290.8 m.p., °C: 157 b.p. (760 torr), °C: Decomposes at 288
vapor pressure (25°C), torr: Not available
solubility in water, mg/L: 10
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.4-2

INDUSTRIAL OCCURRENCE OF α -BHC^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	BDL	BDL	BDL
Timber products processing	0.001	0.186	NA	0	0.0043	8×10^{-6}
Ore mining and dressing	ND	ND	ND	BDL	BDL	BDL
Foundries	ND	NA	7.2	0	0.019	0.048
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metal manufacturing	ND	0.6	0.23	0	NA	0.012

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.4-3

INDUSTRIAL OCCURRENCE OF α -BHC^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	0.02 ^d	0.02 ^d	8.4×10^{-8}	0.00058	3.6×10^{-5}
Timber products processing	NA	NA	NA	NA	NA	NA
Foundries	<5	6	5.2	0	0.035	0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.7	0.1	0	NA	0.0053

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.13.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR α -BHC^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., μ g/L	Removal range, %	Average achievable conc., μ g/L	
Filtration			38-77	4	III.4.6
Granular activated carbon adsorption			>47	<1	III.6.1

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 365.

Date: 8/13/79


I.13.4-5

Compound: β -BHC

Formula:

Alternate Names: Lindane, Hexachlorocyclohexane,
Benzene hexachloride, HCCH, HCH,
TBH

CAS #: None assigned

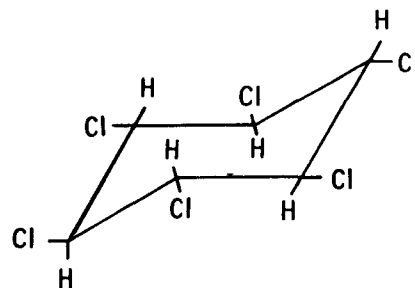

Physical, Chemical, and Biological Properties [1]

mol. wt.: 290.8 m.p., °C: 297 b.p. (760 torr), °C: sublimes
vapor pressure (25°C), torr: Not available
solubility in water, mg/L: 5
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.5-1

Date: 12/5/79

I.13.5-2

INDUSTRIAL OCCURRENCE OF β -BHC^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	0.001	0.186	NA	0	0.0043	8×10^{-6}
Ore mining and dressing	ND	ND	ND	ND	ND	ND
Foundries	ND	NA	25	0	0.17	0.067
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metal manufacturing	ND	4.5	0.16	0	NA	0.0085

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.5-3

INDUSTRIAL OCCURRENCE OF β -BHC^{a,b}

Industry	Treated wastewater					
	Concentration, μ g/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	NA	NA	NA	NA	NA	NA
Foundries	<5	55	12	0	0.08	0.03
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.3	0.1	0	NA	0.0053

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR β -BHC^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., μ g/L	Removal range, ^c %	Average achievable conc., μ g/L	
Filtration			21 ^d	55 ^d	III.4.6

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 365.

Date: 8/13/79


I.13.5-5

Compound: δ -BHC

Formula:

Alternate Names: Benzenehexachloride,
Lindane, Hexachlorocyclohexane,
HCCH, HCH, TBH

CAS #: None assigned

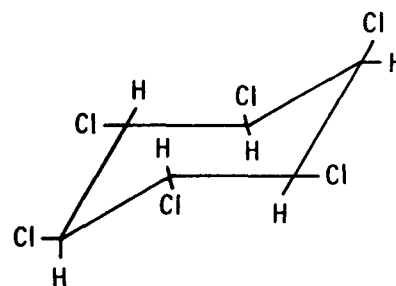

Physical, Chemical, and Biological Properties [1]

mol. wt.: 290.8 m.p., °C: 129 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water, mg/L: 10
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.6-2

INDUSTRIAL OCCURRENCE OF δ -BHC^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	NA	NA	NA
Timber products processing	0.001	0.186	NA	0	0.0043	8×10^{-6}
Foundries	ND	NA	9.3	0	0.062	0.0025
Nonferrous metal manufacturing	ND	4.0	0.24	0	NA	0.013
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.6-3

INDUSTRIAL OCCURRENCE OF δ -BHC^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	0.05 ^d	0.05 ^d	2.1×10^{-7}	0.0014	9.0×10^{-5}
Timber products processing	NA	NA	NA	NA	NA	NA
Foundries	<5	<20	<10	0	<0.067	<0.027
Nonferrous metals manufacturing	ND	0.5	0.2	0	NA	0.011
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.13.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR δ -BHC^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal _c range, %	Average achievable conc., μ g/L	Removal _c range, %	Average achievable conc., μ g/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 365.

Compound: γ -BHC

Formula:

Alternate Names: Hexachlorocyclohexane,
Lindane, Benzenehexachloride,
HCCH, HCH, TBH

CAS #: None assigned

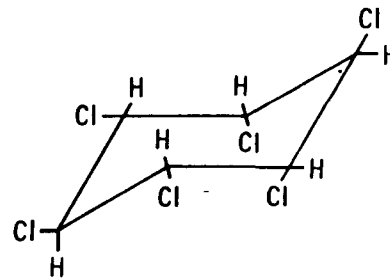

Physical, Chemical, and Biological Properties [1]

mol. wt.: 290.8 m.p., °C: 112 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water, mg/L: 10
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.7-2

INDUSTRIAL OCCURRENCE OF γ -BHC^{a,b}

Industry	Raw wastewater					
	Concentration, μ g/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	<10	<1.7	0	0.045	0.006
Timber products processing	0.001	0.186	NA	0	0.0043	8×10^{-6}
Ore mining and dressing	ND	ND	ND	BDL	BDL	BDL
Foundries	ND	NA	7	0	0.047	0.020
Nonferrous metals manufacturing	ND	0.2	0.06	0	NA	0.003
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.7-3

INDUSTRIAL OCCURRENCE OF γ -BHC^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<10	<1.1	0	0.029	0.0041
Timber products processing	NA	NA	NA	NA	NA	NA
Foundries	<5	<20	<6.4	0	<0.043	<0.017
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.1	NA	0	NA	0.0027

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR γ -BHC^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., μ g/L	Removal range, ^c %	Average achievable conc., μ g/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 365.

Compound: Aldrin

Formula:

Alternate Names: 1,2,3,4,10,10-Hexachloro-
1,4,4a,5,8,8a-hexahydro-*oxo*-1,4-
endo-5,8-dimethanonaphthalene

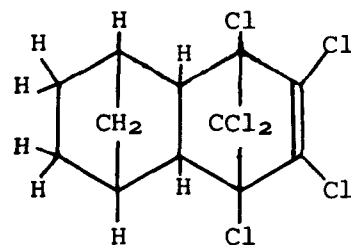

CAS #: 309-00-2

Physical, Chemical, and Biological Properties [1]


mol. wt.: 364.9 m.p., °C: 104 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water, mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

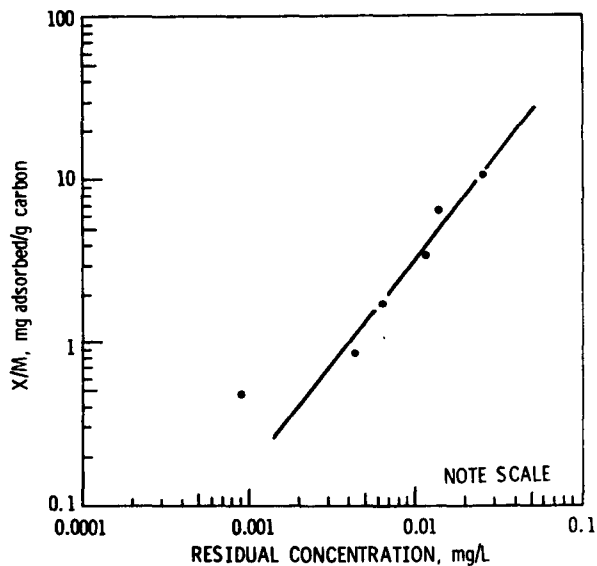

Date: 8/13/79

I.13.8-1

Date: 12/5/79

I.13.8-2

INDUSTRIAL OCCURRENCE OF ALDRIN^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND ^d	BDL	BDL	BDL
Timber products processing	NA	0.001 ^d	0.001 ^d	0	4.6 x 10 ⁻⁵	8.5 x 10 ⁻⁸
Ore mining and dressing	<10	<10	<10	0	NA	<0.37
Foundries	ND	NA	<2.5	0	<0.017	<0.0088
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	7	0.6	0	NA	0.032

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.13.8-3

INDUSTRIAL OCCURRENCE OF ALDRIN^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<3.3	<0.3	0	0.0079	0.0011
Timber products processing	NA	NA	NA	NA	NA	NA
Foundries	<5	<20	<7	0	<0.047	<0.019
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.5	0.2	0	NA	0.011

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ALDRIN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	3 ^{d,e}	III.4.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eAnalytical method did not distinguish between aldrin and dieldrin.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-104.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.


Date: 8/13/79

I.13.8-5

Compound: Dieldrin

Formula:

Alternate Names: HEOD; 1,2,3,4,10,10-Hexachloro-6,7,-epoxy-1,4,4a,5,6,7,8,8a-octahydro-1,4-*endo*, *exo*-5,8-dimethanonaphthalene



CAS #: 60-57-1

Physical, Chemical, and Biological Properties [1]


mol. wt.: 381 m.p., °C: 175 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

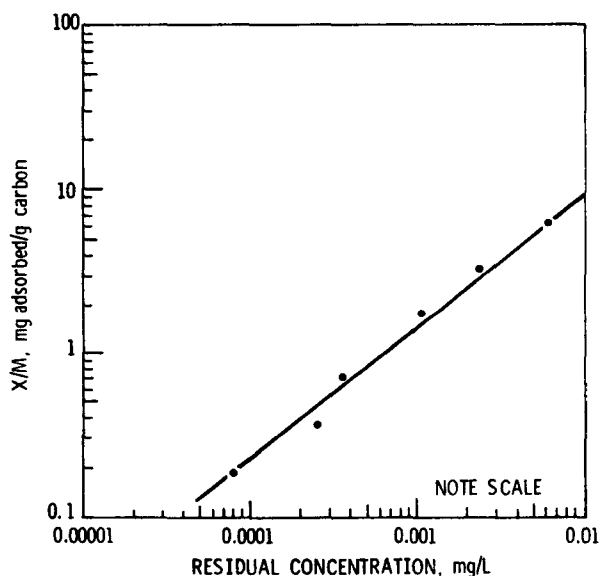

Date: 8/13/79

I.13.9-1

Date: 12/5/79

I.13.9-2

INDUSTRIAL OCCURRENCE OF DIELDRIN^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	NA	NA	NA	NA	NA
Foundries	ND	NA	4	0	0.027	0.011
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.2	0.05	0	NA	0.0026

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.9-3

INDUSTRIAL OCCURRENCE OF DIELDRIN^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	0.2 ^d	0.2 ^d	8.4×10^{-7}	0.0058	0.00036
Foundries	<5	<20	<8	0	<0.054	<0.022
Iron and steel manufacturing	NA	NA	<10	0	NA	1.8
Nonferrous metals manufacturing	ND	0.4	0.1	0	NA	0.0053

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIELDRIN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	3 ^{d,e}	III.4.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eAnalytical method did not distinguish between aldrin and dieldrin.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 241.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.13.9-5

Compound: 4,4'-DDE

Formula:



Alternate Names: Dichlorodiphenyl
dichloroethylene,
1,1-Dichloro-2,2-
bis(p-chlorophenyl)-ethylene

CAS #: 72-55-9

Physical, Chemical, and Biological Properties:


mol. wt.: 318 m.p., °C: Not available b.p. (760 torr), °C: Not Available
(calculated)
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [1]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

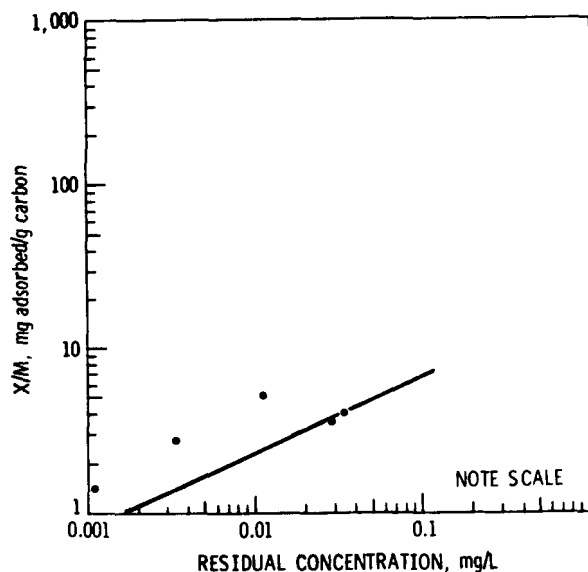

Date: 8/13/79

I.13.10-1

Date: 12/5/79

I.13.10-2

INDUSTRIAL OCCURRENCE OF 4,4'-DDE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Auto and other laundries	ND	≤3.0	NA	1.4 x 10 ⁻⁶	<0.0021	<0.00032
Foundries	ND	NA	10	0	0.067	0.027
Nonferrous metals manufacturing	ND	0.4	0.06	0	NA	0.032
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.10-3

INDUSTRIAL OCCURRENCE OF 4,4'-DDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	<5	20	7	0	0.047	0.019
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.2	0.06	0	NA	0.0032

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.10-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 4,4'-DDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.13.10-5

Compound: 4,4'-DDT

Formula:



Alternate Names: Dichloro-diphenyl-
trichloroethane, Chloro-
phenotane, Dicophane,
1,1,1-Trichloro-2,2,-
bis(*p*-chlorophenyl)ethane

CAS #: 50-29-3

Physical, Chemical, and Biological Properties [1]


mol. wt.: 354.5 m.p., °C: 108-109 b.p. (760 torr), °C: 260
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

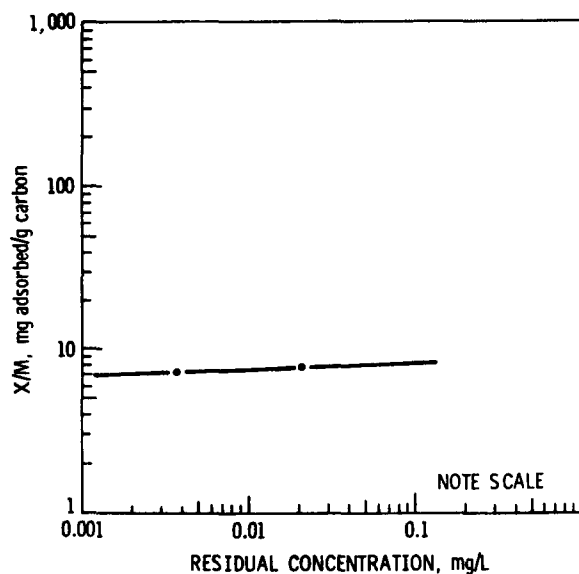

Date: 8/13/79

I.13.11-1

Date: 12/5/79

I.13.11-2

INDUSTRIAL OCCURRENCE OF 4,4-DDT^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Auto and other laundries	ND	≤3.0	NA	<1.4 x 10 ⁻⁶	<0.0021	<0.00032
Foundries	ND	NA	6	0	0.04	0.016
Nonferrous metals manufacturing	ND	1.0	0.04	0	NA	0.0021
Iron and steel manufacturing	NA	NA	<10	0	ND	<1.8
Textile mills	NA	NA	NA	NA	NA	NA

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.11-3

INDUSTRIAL OCCURRENCE OF 4,4'-DDT^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Textile mills	NA	0.5 ^d	0.5 ^d	2.1 x 10 ⁻⁶	0.014	0.00090
Foundries	<5	<20	<6	0	0.04	0.016
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.4	0.07	0	NA	0.0037

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dOne sample.

Date: 12/5/79

I.13.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 4,4'-DDT^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Sedimentation with chemical addition (alum, lime)			>52 ^d	<1 ^d	III.4.3

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

^d Only one data point.

REFERENCES


1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-291.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.13.11-5

Compound: 4,4'-DDD

Formula:

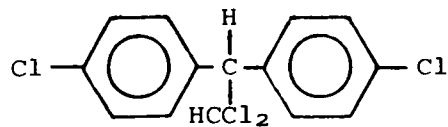

Alternate Names: 1,1-Dichloro-2,2-
bis(p-chlorophenyl)
ethane

CAS #: 72-54-8

Physical, Chemical, and Biological Properties [1]


mol. wt.: 320.0 m.p., °C: 109-110 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

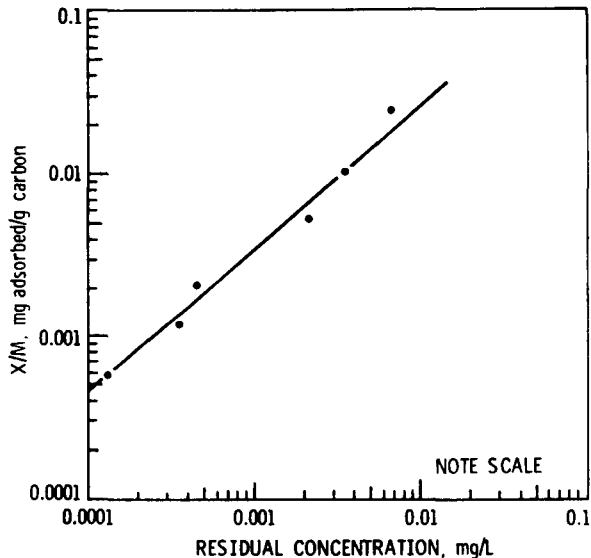

Date: 8/13/79

I.13.12-1

Date: 12/5/79

I.13.12-2

INDUSTRIAL OCCURRENCE OF 4,4'-DDD^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	ND	NA	9	0	0.06	0.024
Nonferrous metals manufacturing	ND	0.1	0.1	0	NA	0.0053
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.12-3

INDUSTRIAL OCCURRENCE OF 4,4'-DDD^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	<5	<5	<5	0	<0.034	<0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.2	0.1	0	NA	0.0053

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR 4,4'-DDD^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-291.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.


Date: 8/13/79

I.13.12-5

Compound: Endrin

Formula:

Alternate Names: 1,2,3,4,10,10-Hexachloro-
6,7-epoxy-1,4,4a,5,6,7,8,8a-
octahydro-1,4-*endo,endo*-5,8-
dimethanonaphthalene



CAS #: 72-20-8

Physical, Chemical, and Biological Properties [1]


mol. wt.: 380.9 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

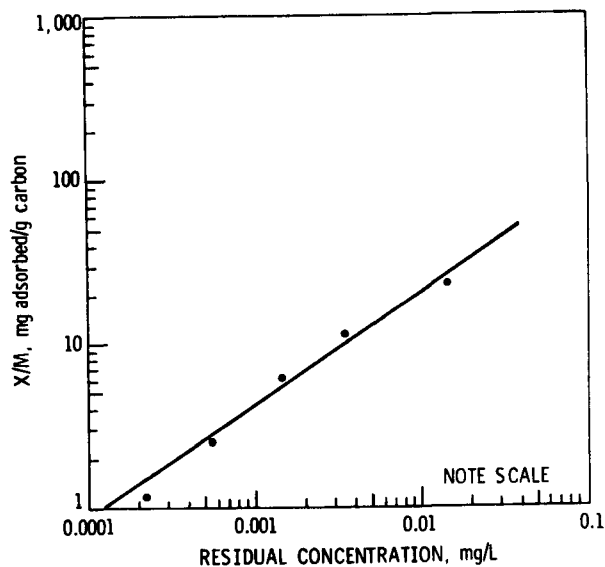

Date: 8/13/79

I.13.13-1

Date: 12/5/79

I.13.13-2

INDUSTRIAL OCCURRENCE OF ENDRIN^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	ND	NA	<1.3	0	<0.0087	<0.0035
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	5.4	0.46	0	NA	0.024

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.13-3

INDUSTRIAL OCCURRENCE OF ENDRIN^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	NA	0.2	0.1	0	NA	0.0053

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eMedian, not average.

^fAnalytical method did not distinguish between benzo(a)pyrene and perylene.

Date: 12/5/79

I.13.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ENDRIN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. pp. 366.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.13.13-5

Compound: Kelthane

Formula:



Alternate Names: Kelthanethanol, Difocol,
2,2,2-Trichloro-1,1-di-
(4-chlorophenyl) ethanol

CAS #: 115-32-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 370.5 m.p., °C: Not available b.p. (760 torr), °C: 77-78
vapor pressure (25°C), torr: Not available
solubility in water: Almost totally insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.14-2

INDUSTRIAL OCCURRENCE OF KELTHANE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.14-3

INDUSTRIAL OCCURRENCE OF KELTHANE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR KELTHANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 71, 72, 73.

Compound: Naled

Formula:

Alternate Names: Bromex; Orthodibrom;
Phosphoric acid,
1,2-dibromo-2,2-Dichloroethyl
dimethyl ester



CAS #: 300-76-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 476.9 m.p., °C: 26 b.p. (0.5 torr), °C: 110
vapor pressure (20°C), torr: 2×10^3
solubility in water: Almost totally insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.15-2

INDUSTRIAL OCCURRENCE OF NALED^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.15-3

INDUSTRIAL OCCURRENCE OF NALED^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.15-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR NALED^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 16, 17, 18.

Compound: Dichlone

Formula:

Alternate Names: Phygon, US Rubber 604,
2,3-Dichloro-1,4-naphthoquinone,
Sanquinon



CAS #: 117-80-6

Physical, Chemical, and Biological Properties [1]

mol. wt.: 227.0 m.p., °C: 195 b.p. (2 torr), °C: 275
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.16-2

INDUSTRIAL OCCURRENCE OF DICHLONE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.16-3

INDUSTRIAL OCCURRENCE OF DICHLONE^{a, b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.16-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DICHLONE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 81, 82.

Compound: Kepone

Formula:

Alternate Names: 1,1a,3,3a,4,5,5,5a,5b
6-Decachlorooctahydro-1,3
4-metheno-2H-cyclobuta(cd)
pentalen-2-one; Merex;
Decachloroketone



CAS #: 143-50-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 490.6 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.17-2

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.17-3

INDUSTRIAL OCCURRENCE OF KEPONE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.17-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR KEPONE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.


^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 549.

Compound: Diuron



Alternate Names: 3-(3,4-Dichlorophenyl)-
1-dimethylurea

CAS #: 330-54-1

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 233.1 m.p., °C: 158-159 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (temp. unknown), mg/L: 42
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.18-2

INDUSTRIAL OCCURRENCE OF DIURON^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.18-3

INDUSTRIAL OCCURRENCE OF DIURON^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.18-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIURON^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 948.
2. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. pp. D96, D97.

Date: 8/13/79

I.13.18-5

Compound: Endrin aldehyde

Formula: Not available

Alternate Names: None

CAS #: None assigned

Physical, Chemical, and Biological Properties: Not available

mol. wt.: m.p., °C: b.p. (760 torr), °C:
vapor pressure (25°C), torr:
solubility in water (25°C), mg/L:
log octanol/water partition coefficient:
Henry's law constant:
biodegradability:

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.19-1

Date: 12/5/79

I.13.19-2

INDUSTRIAL OCCURRENCE OF ENDRIN ALDEHYDE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	ND	20	5.2	0	0.035	0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.9	0.15	0	NA	0.0080

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.19-3

INDUSTRIAL OCCURRENCE OF ENDRIN ALDEHYDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Foundries	<5	<20	<9	0	0.06	0.024
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.5	0.15	0	NA	0.08

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.19-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ENDRIN ALDEHYDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.


^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

Compound: Heptachlor

Formula:

Alternate Names: 1,4,5,6,7,8,8-Heptachloro-
3a,4,7,7a, tetrahydro-4,7-
methanoindene



CAS #: 76-44-8

Physical, Chemical, and Biological Properties [1, 2]


mol. wt.: 373.3 m.p., °C: 95-96 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [3]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

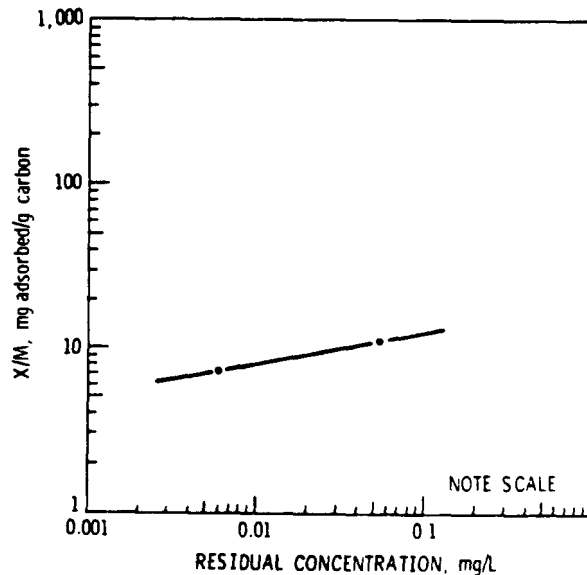

Date: 8/13/79

I.13.20-1

Date: 12/5/79

I.13.20-2

INDUSTRIAL OCCURRENCE OF HEPTACHLOR^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	BDL	BDL	BDL
Timber products processing	0.001	0.684	NA	0	0.016	2.9 x 10 ⁻⁵
Auto and other laundries	ND	≤3.0	NA	<1.4 x 10 ⁻⁶	<0.0021	<0.00032
Foundries	ND	NA	<7.5	0	<0.05	<0.02
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.5	0.08	0	NA	0.0042

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.20-3

INDUSTRIAL OCCURRENCE OF HEPTACHLOR^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<0.8	0	0.021	0.0030
Timber products processing	NA	NA	NA	NA	NA	NA
Foundries	<5	<5	<5	0	0.034	0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.7	0.1	0	NA	0.0053

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.20-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR HEPTACHLOR^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Activated sludge			76 ^d	1.5 ^d	III.5.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.


REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. pp. 547.
2. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. p. D 132.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: Heptachlor epoxide

Formula:

Alternate Names: 1,4,5,6,7,8,8-Heptachloro-
2,3-epoxy-2,3,3a,4,7,7a-
hexahydro-4,7-methanoindene



CAS #: 1024-57-3

Physical, Chemical, and Biological Properties [1]

mol. wt.: 389.3 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.21-2

INDUSTRIAL OCCURRENCE OF HEPTACHLOR EPOXIDE^{a,b}

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	BDL	BDL	BDL
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.2	0.07	0	NA	0.0037

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.21-3

INDUSTRIAL OCCURRENCE OF HEPTACHLOR EPOXIDE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	<6.7	<0.6	0	0.016	0.0023
Foundries	<5	<5	<5	0	0.034	0.014
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.7	0.1	0	NA	0.0053

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.21-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR HEPTACHLOR EPOXIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Sedimentation with chemical addition (alum, lime)			>29 ^d	<1 ^d	III.4.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


^dOnly one data point.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 547.

Compound: Carbofuran

Formula:



Alternate Names: [1] 2,3-Dihydro-2,2-dimethyl-7-benzofuranol methyl-carbamate, Methyl carbamic acid, 2,3-Dihydro-2,2-dimethyl-7-benzofuranyl ester

CAS #: 156-36-62

Physical, Chemical, and Biological Properties [1]

mol. wt.: 221.3 m.p., °C: 150-153 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.22-1

I.13.22-2

INDUSTRIAL OCCURRENCE OF CARBOFURAN^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.22-3

INDUSTRIAL OCCURRENCE OF CARBOFURAN^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.22-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CARBOFURAN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Merck and Co., Inc. The Merck Index, Ninth Edition. Rahway, New Jersey, 1976. pp. 1808, 1809.

Date: 8/13/79


I.13.22-5

Compound: Mercaptodimethur

Formula:

Alternate Names: Methiocarb

CAS #: 2032-65-7



Physical, Chemical, and Biological Properties [1]

mol. wt.: 225.3 m.p., °C: 117-118 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Negligible
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.23-2

INDUSTRIAL OCCURRENCE OF MERCAPTODIMETHUR^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.23-3

INDUSTRIAL OCCURRENCE OF MERCAPTODIMETHUR^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.23-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR MERCAPTODIMETHUR^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 54, 55.

Compound: Chlordane

Formula:

Alternate Names: 1,2,4,5,6,7,8,8-Octachloro-
3a,4,7,7a-tetrahydro-4,7-
methanoindane



CAS #: 57-74-9

Physical, Chemical, and Biological Properties [1]


mol. wt.: 409.8 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: 1×10^5
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

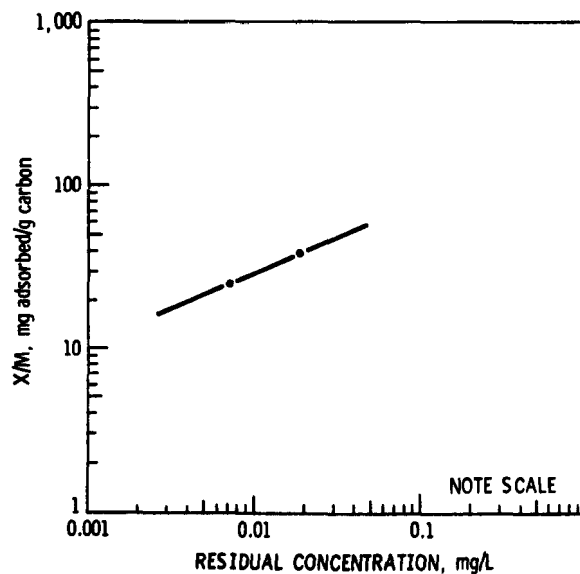

Date: 8/13/79

I.13.24-1

Date: 12/5/79

I.13.24-2

INDUSTRIAL OCCURRENCE OF CHLORDANE^{a,b}

	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Auto and other laundries	ND	≤3.0	NA	<1.4 x 10 ⁻⁶	<0.0021	<0.00032
Foundries	ND	NA	12	0	0.08	0.032
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	1.2	0.15			
Timber products processing	<0.001	0.035	NA	0	0.00078	1 x 10 ⁻⁶

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.24-3

INDUSTRIAL OCCURRENCE OF CHLORDANE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Timber products processing	NA	NA	NA	NA	NA	NA
Foundries	<5	24	8	0	0.054	0.022
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	31	1.1	0	NA	0.058

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.24-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHLORDANE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	3 ^d	III.4.1
Filtration			37 ^d	24 ^d	III.4.6

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES


1. Ouellette, R. P., and J. A. King. Chemical Week Pesticides Register. McGraw-Hill Book Company, New York, New York, 1977. p. 159.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Compound: Toxaphene

Formula:

Alternate Names: Polychlorocamphene

CAS #: 8001-35-2



Physical, Chemical, and Biological Properties [1]

mol. wt.: 414 m.p., °C: 70-90 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: 0.2-0.4
solubility in water (25°C), mg/L: 0.5
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.13.25-2

INDUSTRIAL OCCURRENCE OF TOXAPHENE^a

Industry	Raw wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Iron and steel manufacturing	NA	NA	<10	0	NA	<1.8
Nonferrous metals manufacturing	ND	0.4	0.25	0	NA	<0.013

^a Information contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.25-3

INDUSTRIAL OCCURRENCE OF TOXAPHENE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Iron and steel manufacturing	NA	NA	2	0	NA	0.36

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.25-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TOXAPHENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Gravity oil separation			NA	3 ^d	III.4.1

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

REFERENCES

1. Guyer, G. E., et al. Toxaphene Status Report. U.S. Environmental Protection Agency, Washington, D.C., 1971. p. 10.


Date: 8/13/79

I.13.25-5

Compound: Captan

Formula:

Alternate Names: N(trichloromethylthio-4-cyclohexene-1,2,-dicarboxylic acid,imide



CAS #: 133-06-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 300.6 m.p., °C: 172-173 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: <0.01
solubility in water (25°C), mg/L: <0.5
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.26-2

INDUSTRIAL OCCURRENCE OF CAPTAN^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.26-3

INDUSTRIAL OCCURRENCE OF CAPTAN^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.26-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CAPTAN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 46, 47.

Compound: Carbaryl

Formula:



Alternate Names: 1-Naphthyl methylcarbamate;
Methylcarbamic acid, 1-naphthyl
ester; Sevin

CAS #: 63-25-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 201.2 m.p., °C: 142 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: <0.005
solubility in water (30°C), mg/L: 40
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.27-1

I.13.27-2

INDUSTRIAL OCCURRENCE OF CARBARYL^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.27-3

INDUSTRIAL OCCURRENCE OF CARBARYL^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.27-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CARBARYL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part II, pp. 36, 37.

Compound: Coumaphos

Formula:

Alternate Names: 0-(3-Chloro-4-methyl-
2-oxo-2H-1-benzopyran-
7-yl),0,0-diethyl phosphoro-
thioate, Co-Ral



CAS #: 56-72-4

Physical, Chemical, and Biological Properties [1]

mol. wt.: 353 m.p., °C: 90-92 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.28-1

I.13.28-2

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.28-3

INDUSTRIAL OCCURRENCE OF COUMAPHOS^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.28-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR COUMAPHOS^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. p. D 67.


Date: 8/13/79

I.13.28-5

Compound: Diazinon

Formula:

Alternate Names: 0,0-Diethyl-O-(2-isopropyl-6-methyl-4-pyrimidinyl) phosphorothioate

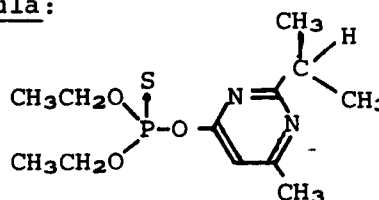

CAS #: 333-41-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 304.4 m.p., °C: Not available b.p. (2×10^{-3} torr), °C: 83-84
vapor pressure (20°C), torr: 1.4×10^{-4}
solubility in water (20°C), mg/L: 40
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.29-2

INDUSTRIAL OCCURRENCE OF DIAZINON^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.29-3

INDUSTRIAL OCCURRENCE OF DIAZINON^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.29-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIAZINON^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 83-85.


Date: 8/13/79

I.13.29-5

Compound: Dicamba

Formula:

Alternate Names: Banvel, 3,6-Dichloro-o-anisic acid



CAS #: 1918-00-9

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 221.0 m.p., °C: 114-116 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.30-2

INDUSTRIAL OCCURRENCE OF DICAMBA^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.30-3

INDUSTRIAL OCCURRENCE OF DICAMBA^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.30-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DICAMBA^{a, b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 189.
2. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. p. D 28.


Date: 8/13/79

I.13.30-5

Compound: Dichlobenil

Formula:

Alternate Names: Casoron 113, 2,6-
Dichlorobenzonitrile



CAS #: 1194-65-6

Physical, Chemical, and Biological Properties [1]

mol. wt.: 172 m.p., °C: 139-145 b.p. (760 torr), °C: 270
vapor pressure (20°C), torr: 5.5×10^{-4}
solubility in water (20°C), mg/L: 25
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.31-1

I.13.31-2

INDUSTRIAL OCCURRENCE OF DICHLOBENIL^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.31-3

INDUSTRIAL OCCURRENCE OF DICHLOBENIL^{a,b}

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.31-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DICHLOBENIL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. Ouellette, R. P., and J. A. King. Chemical Week Pesticides Register. McGraw-Hill Book Company, New York, New York, 1977. p. 178.

Compound: Malathion

Formula:

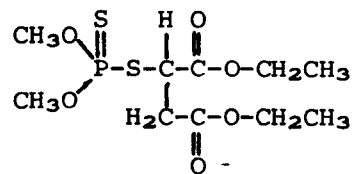

Alternate Names: Diethyl mercaptosuccinate,
s-ester with 0,0-dimethyl
phosphorodithioate

CAS #: 121-75-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 330 m.p., °C: 2.85 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: 4×10^{-5}
solubility in water (temp. unknown), mg/L: 145
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.32-1

I.13.32-2

INDUSTRIAL OCCURRENCE OF MALATHION^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.32-3

INDUSTRIAL OCCURRENCE OF MALATHION^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.32-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR MALATHION^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. pp. D 153 - D 154.


Date: 8/13/79

I.13.32-5

Compound: Methyl parathion

Formula:

Alternate Names: 0,0-Dimethyl-0-p-nitrophenyl
phosphorothioate



CAS #: 298-00-0

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 263.2 m.p., °C: 35-36 b.p. (760 torr), °C: Thermally unstable
vapor pressure (20°C), torr: 0.97×10^{-5}
solubility in water (25°C), mg/L: 55-60
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:


other reactions/interactions:

Carbon Adsorption Data [3]

pH: Not available

type of carbon: Filtrasorb-300

adsorbability: Not available

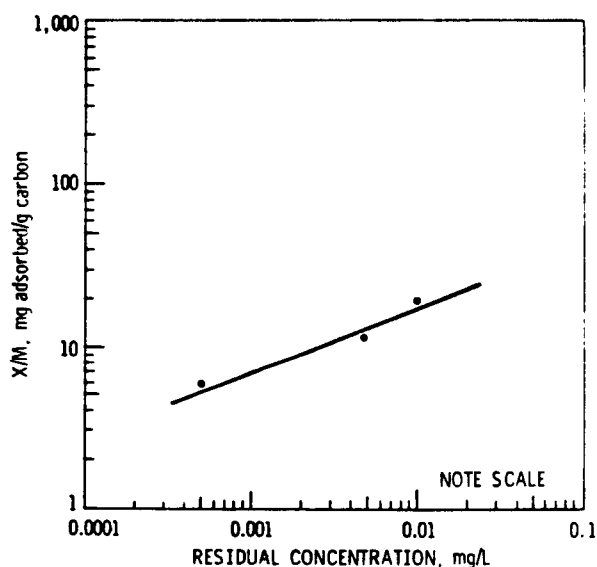

Date: 8/13/79

I.13.33-1

I.13.33-2

INDUSTRIAL OCCURRENCE OF METHYL PARATHION^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.33-3

INDUSTRIAL OCCURRENCE OF METHYL PARATHION^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.33-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR METHYL PARATHION^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Initial Scientific and Minieconomic Review of Methyl Parathion, Criteria and Evaluation Division, Office of Pesticide Programs, U.S. Environmental Protection Agency, Washington, D.C., February 1975. pp. 14, 17.
2. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. p. D 166.
3. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.


Date: 8/13/79

I.13.33-5

Compound: Parathion

Formula:

Alternate Names: 0,0-Diethyl-0-p-nitrophenyl phosphorothioate



CAS #: 56-38-2

Physical, Chemical, and Biological Properties [1]


mol. wt.: 291.3 m.p., °C: 6.1 b.p. (760 torr), °C: 375
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
type of carbon: Filtrasorb-300
adsorbability: Not available

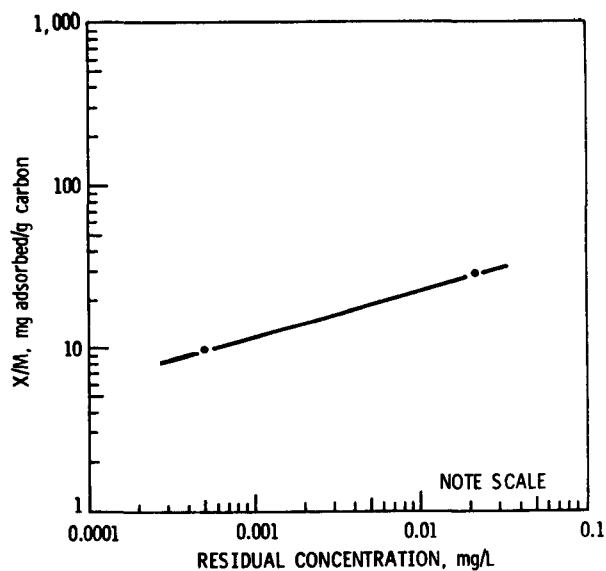

Date: 8/13/79

I.13.34-1

I.13.34-2

INDUSTRIAL OCCURRENCE OF PARATHION^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.34-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.34-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PARATHION^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-411.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.


Date: 8/13/79

I.13.34-5

Compound: Guthion

Formula:

Alternate Names: Azinphos-methyl,
Benzotriazinedithiophos-
phoric acid dimethoxy ester

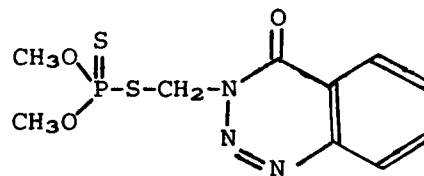

CAS #: 86-50-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 317.3 m.p., °C: 73-74 b.p. (760 torr), °C: Not available
vapor pressure (20°C), torr: $<3.8 \times 10^{-4}$
solubility in water (25°C), mg/L: 33
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.35-2

INDUSTRIAL OCCURRENCE OF GUTHION^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.35-3

INDUSTRIAL OCCURRENCE OF GUTHION^a

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.35-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR GUTHION^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 20-22.

Compound: Ethion

Formula:

Alternate Names: O,O,O',O'-Tetraethyl-
S,S'-methylene-bisphosphoro-
dithioate



CAS #: 563-12-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 384.5 m.p., °C: -12 to -13 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: 1.5×10^{-6}
solubility in water: Slightly soluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.13.36-1

I.13.36-2

INDUSTRIAL OCCURRENCE OF ETHION^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.36-3

INDUSTRIAL OCCURRENCE OF ETHION^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.36-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ETHION^{a, b}

[illegible]

^aSee Volume III for detailed information.


^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 63-66.

Compound: Isoprene



Alternate Names: 2-Methyl-1,3-butadiene

CAS #: 78-79-5

Physical, Chemical, and Biological Properties [1]

mol. wt.: 68.13 m.p., °C: ~-120 b.p. (760 torr), °C: 34.1
vapor pressure (15.4°C), torr: 400
solubility in water (25°C), mg/L: Almost totally insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.37-2

INDUSTRIAL OCCURRENCE OF ISOPRENE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.37-3

INDUSTRIAL OCCURRENCE OF ISOPRENE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.37-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ISOPRENE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 59, 60.

Compound: Chlorpyrifos

Formula:

Alternate Names: Dursban, O,O-Diethyl-O-(3,5,6-trichloro-2-pyridyl)-phosphorothioate, Lorsban

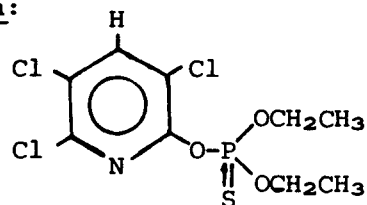

CAS #: 2921-88-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 350.6 m.p., °C: 41-42 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: 1.8×10^{-5}
solubility in water (35°C), mg/L: 2
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.38-2

INDUSTRIAL OCCURRENCE OF CHLORPYRIFOS^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.38-3

INDUSTRIAL OCCURRENCE OF CHLORPYRIFOS^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.38-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CHLORPYRIFOS^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES


1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 74-76.

Date: 8/13/79

I.13.38-5

Compound: Dichlorvos

Formula:



Alternate Names: 2,2-Dichlorovinyl-
O,O-dimethyl phosphate

CAS #: 62-73-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 221 m.p., °C: Not available b.p. (0.05 torr), °C: 35
vapor pressure (20°C), torr: 1.2×10^{-2}
solubility in water (20°C), mg/L: 10,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.39-2

INDUSTRIAL OCCURRENCE OF DICHLORVOS^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.39-3

INDUSTRIAL OCCURRENCE OF DICHLORVOS^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.39-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DICHLORVOS^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Ouellette, R. P., and J. A. King. Chemical Week Pesticides Register. McGraw-Hill Book Company, New York, New York, 1977. p. 178.


Date: 8/13/79

I.13.39-5

Compound: Diquat

Formula:

Alternate Names: Usually exists as Diquat dibromide



CAS #: 85-00-7 (Diquat dibromide)

Physical, Chemical, and Biological Properties of Disquat dibromide [1]

mol. wt.: 344.1 m.p., °C: 335-340 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (20°C), mg/L: 700,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.40-2

INDUSTRIAL OCCURRENCE OF DIQUAT^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.40-3

INDUSTRIAL OCCURRENCE OF DIQUAT^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.40-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR DIQUAT^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 118, 119.

I.13.41-2

INDUSTRIAL OCCURRENCE OF DISULFOTON^{a,b}

[illegible]


^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Compound: Disulfoton

Formula:



Alternate Names: O,O-Diethyl S-[2-ethylthio)ethyl] phosphorodithioate

CAS #: 298-04-4

Physical, Chemical, and Biological Properties [1]

mol. wt.: 274.4 m.p., °C: >-25 b.p. (1.5 torr), °C: 132-133
vapor pressure (20°C), torr: 1.8×10^{-4}
solubility in water (23°C), mg/L: 25
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate : Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.41-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.41-4

[illegible]

^b NA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 135-137.

Compound: Mevinphos

Formula:



Alternate Names: Phosdrin, 2-Methoxycarbonyl-
1-methylvinyl dimethyl
phosphate

CAS #: 7786-34-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 224.2 m.p., °C: Not available b.p. (1 torr), °C: 106-108
vapor pressure (21°C), torr: 2.9×10^3
solubility in water (25°C), mg/L: Miscible
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.42-2

INDUSTRIAL OCCURRENCE OF MEVINPHOS^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.42-3

INDUSTRIAL OCCURRENCE OF MEVINPHOS^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.42-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR MEVINPHOS^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 43-45.

Compound: Mexacarbate

Formula:

Alternate Names: Zectran, 4-Dimethylamino-
3,5-xylyl N-methylcarbamate

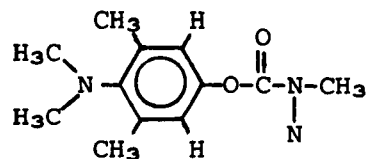

CAS #: 315-18-4

Physical, Chemical, and Biological Properties [1]

mol. wt.: 222.3 m.p., °C: 85 b.p. (760 torr), °C: Not available
vapor pressure (139°C), torr: <0.1
solubility in water (25°C), mg/L: Almost totally insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate : Not available]

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.43-2

INDUSTRIAL OCCURRENCE OF MEXACARBATE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.43-3

INDUSTRIAL OCCURRENCE OF MEXACARBATE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.43-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR MEXACARBATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 29, 30.

Date: 8/13/79

I.13.43-5

Compound: Trichlorfon

Formula:



Alternate Names: Dylox, Dimethyl (2,2,2-trichloro-1-hydroxyethyl) phosphonate

CAS #: 52-68-6

Physical, Chemical, and Biological Properties [1]

mol. wt.: 257 m.p., °C: 81-82 b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: 120,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.44-2

INDUSTRIAL OCCURRENCE OF TRICHLORFON^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.44-3

INDUSTRIAL OCCURRENCE OF TRICHLORFON^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.44-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR TRICHLORFON^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Meister Publishing Co. 1976 Farm Chemicals Handbook. Willoughby, Ohio, 1976. p. D 103.


Date: 8/13/79

I.13.44-5

Compound: Propargite

Formula:

Alternate Names: Omite, 2-(*p*-*tert*-Butylphenoxy)
cyclohexyl-2-propynyl sulfite

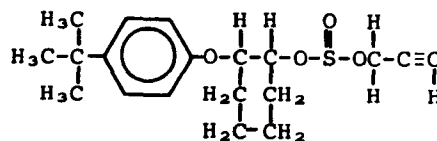

CAS #: 2312-35-8

Physical, Chemical, and Biological Properties [1]

mol. wt.: 350 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Insoluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data:

Date: 8/13/79

I.13.45-1

I.13.45-2

INDUSTRIAL OCCURRENCE OF PROPARGITE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.45-3

INDUSTRIAL OCCURRENCE OF PROPARGITE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.45-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PROPARGITE^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Ouellette, R. P., and J. A. King. Chemical Week Pesticides Register. McGraw-Hill Book Company, New York, New York, 1977. p. 242.

Date: 8/13/79

I.13.45-5

Compound: Carbon disulfide

Formula: S=C=S

Alternate Names: Dithiocarbonic anhydride

CAS #: 75-15-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 76.14 m.p., °C: -111 b.p. (760 torr), °C: 46.3
vapor pressure (25°C), torr: 360
solubility in water (20°C), mg/L: 2,940
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.13.46-2

INDUSTRIAL OCCURRENCE OF CARBON DISULFIDE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.13.46-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.13.46-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CARBON DISULFIDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal _c range, %	Average achievable conc., µg/L	Removal _c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 109, 110.

Compound: Acetaldehyde

Formula:



Alternate Names: Ethanal, Ethyl aldehyde

CAS #: 75-07-0

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 44.05 m.p., °C: -124 b.p. (760 torr), °C: 21
vapor pressure (20°C), torr: 740
solubility in water (25°C), mg/L: Miscible
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 93% acetaldehyde removal (measured as BOD) obtained in
5-day static activated sludge test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.1-2

INDUSTRIAL OCCURRENCE OF ACETALDEHYDE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.1-3

INDUSTRIAL OCCURRENCE OF ACETALDEHYDE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ACETALDEHYDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	
Anaerobic lagoons			58-67	28	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 145-147.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 57-59.

Compound: Acetic acid

Formula:



Alternate Names: Ethanoic acid, Methane
carboxylic acid, Vinegar
acid

CAS #: 64-19-7

Physical, Chemical, and Biological Properties [1]


mol. wt.: 60.05 m.p., °C: 16.7 b.p. (760 torr), °C: 118
vapor pressure (20°C), torr: 11.4
solubility in water (20°C), mg/L: 38
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 50% theoretical oxidation of 500 ppm acetic acid by
phenol acclimated sludge after 12 hr aeration

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: 4.0
type of carbon: Filtrasorb-400
adsorbability: Not available

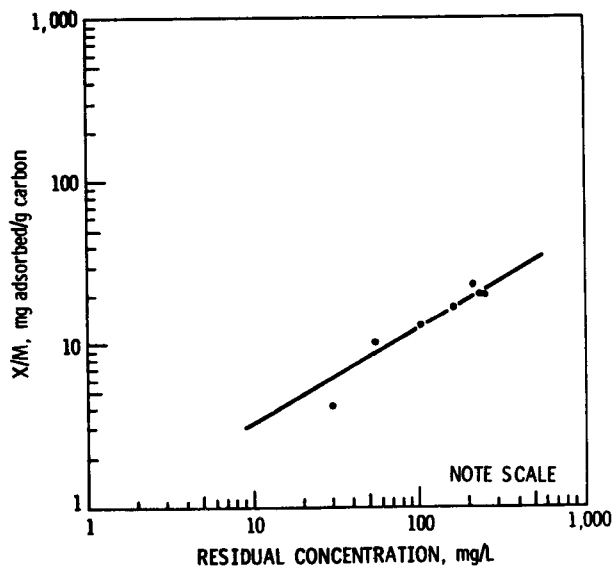

Date: 8/13/79

I.14.2-1

I.14.2-2

INDUSTRIAL OCCURRENCE OF ACETIC ACID^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.2-3

INDUSTRIAL OCCURRENCE OF ACETIC ACID^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ACETIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Anaerobic lagoons			0 ^d	- ^d	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dActual data indicate negative removal.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 74.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.

Date: 8/13/79

I.14.2-5

Compound: Allyl alcohol

Formula:



Alternate Names: 2-Propenol

CAS #: 107-18-6

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 58.08 m.p., °C: -50 b.p. (760 torr), °C: 96-97
vapor pressure (25°C), torr: 23.8
solubility in water, mg/L: Soluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 57% allyl alcohol removal (measured in BOD removal)
obtained in 10-day static activated sludge test for
initial allyl alcohol concentrations of 1,000 mg/L

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data:

Date: 8/13/79

I.14.3-1

I.14.3-2

INDUSTRIAL OCCURRENCE OF ALLYL ALCOHOL^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.3-3

INDUSTRIAL OCCURRENCE OF ALLYL ALCOHOL^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ALLYL ALCOHOL^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 94, 95.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 83-85.

Date: 8/13/79

I.14.3-5

Compound: Amyl acetate

Formula:



Alternate Names: Isoamyl acetate,
Acetic acid 3-
methylbutyl ester

CAS #: 123-92-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 130.1 m.p., °C: -78.5 b.p. (760 torr), °C: 142
vapor pressure (25°C), torr: 6
solubility in water (25°C), mg/L: 2,500
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.4-2

INDUSTRIAL OCCURRENCE OF AMYL ACETATE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.4-3

INDUSTRIAL OCCURRENCE OF AMYL ACETATE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR AMYL ACETATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 1, 2.

Compound: Butyl acetate

Formula:



Alternate Names: Acetic acid, butyl
ester; Butyl ethanoate

CAS #: 123-86-4

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 116.2 m.p., °C: -77.9 b.p. (760 torr), °C: 125-126
vapor pressure (25°C), torr: 15
solubility in water (25°C), mg/L: Slight
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 7% of theoretical oxygen demand removed in 5-day BOD test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.5-2

INDUSTRIAL OCCURRENCE OF BUTYL ACETATE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.5-3

INDUSTRIAL OCCURRENCE OF BUTYL ACETATE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BUTYL ACETATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 164, 165.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 141-143.

Compound: Butyric acid

Formula:



Alternate Names: Butanoic acid, Ethylacetic acid, Propylformic acid

CAS #: 107-92-6

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 88.12 m.p., °C: -7.9 b.p. (760 torr), °C: 164
vapor pressure (20°C), torr: 0.84
solubility in water (25°C), mg/L: Soluble in all proportions
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 25% of theoretical oxygen demand removed in 12 hr static
activated sludge test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.14.6-1

I.14.6-2

INDUSTRIAL OCCURRENCE OF BUTYRIC ACID^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.6-3

INDUSTRIAL OCCURRENCE OF BUTYRIC ACID^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.6-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR BUTYRIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	
Anaerobic lagoons			0 ^d	- ^d	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dActual data indicate negative removal.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, p. 39.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. pp. 158.

Compound: Formaldehyde

Formula:



Alternate Names: Methanal, Formalin,
Oxomethane

CAS #: 50-00-0

Physical, Chemical, and Biological Properties [1]

mol. wt.: 30.0 m.p., °C: -118 to -92 b.p. (760 torr), °C: -21 to -19
vapor pressure (-88°C), torr: 10
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 60% of theoretical oxygen demand removed in 5-day BOD test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.7-2

INDUSTRIAL OCCURRENCE OF FORMALDEHYDE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.7-3

INDUSTRIAL OCCURRENCE OF FORMALDEHYDE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.7-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR FORMALDEHYDE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 342.

Date: 8/13/79

I.14.7-5

Compound: Formic acid

Formula:



Alternate Names: Methanoic acid, Hydrogen
carboxylic acid, Formic
acid

CAS #: 64-18-6

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 46.03 m.p., °C: 8.4 b.p. (760 torr), °C: 101
vapor pressure (24°C), torr: 40
solubility in water (25°C), mg/L: Soluble in all proportions
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 70% of theoretical oxygen demand removed in 24 hr
static activated sludge test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.14.8-1

I.14.8-2

INDUSTRIAL OCCURRENCE OF FORMIC ACID^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.8-3

INDUSTRIAL OCCURRENCE OF FORMIC ACID^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.8-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR FORMIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.


^cAverage and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 11-13.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 346.

Compound: Fumaric acid

Formula:



Alternate Names: *Trans*-1,2-ethylenedicarboxylic acid, *Trans*-butenedioic acid, Allomaleic acid

CAS #: 110-17-8

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 116.1 m.p., °C: 300 to 302 b.p. (1.7 torr), °C: Sublimes at 165
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: 7,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 1.7% of theoretical oxygen demand removed after 24 hr
static activated sludge test

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.14.9-1

I.14.9-2

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.9-3

INDUSTRIAL OCCURRENCE OF FUMARIC ACID^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.9-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR FUMARIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, p. 52.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977.

Compound: Maleic acid

Formula:

Alternate Names: *Cis*-1,2-ethylenedicarboxylic acid,
Toxic acid, *Cis*-butenedioic acid



CAS #: 110-16-7

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 116.1 m.p., °C: 130.5 b.p. (760 torr), °C: Decomposes at 135
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Freely soluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 4.5% of theoretical oxygen demand removed after 12 hr
static activated sludge test

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.10-2

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.10-3

INDUSTRIAL OCCURRENCE OF MALEIC ACID^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.10-4

[illegible]

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 56, 57.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 420.

Compound: Methyl methacrylate

Formula: $\text{CH}_2=\underset{\text{CH}_3}{\text{C}}-\overset{\text{O}}{\underset{\parallel}{\text{C}}}-\text{O}-\text{CH}_3$

Alternate Names: 2-Methyl-propenoic
acid, methyl ester

CAS #: 80-62-6

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 100.1 m.p., °C: -48 b.p. (760 torr), °C: 100-101
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Slightly soluble
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 47% theoretical oxidation of 10 mg/L methyl methacrylate
observed in 10-day static activated sludge test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.11-2

INDUSTRIAL OCCURRENCE OF METHYL METHACRYLATE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.11-3

INDUSTRIAL OCCURRENCE OF METHYL METHACRYLATE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.11-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR METHYL METHACRYLATE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-465.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 464.

Compound: Propionic acid

Formula:



Alternate Names: Propanoic acid

CAS #: 79-09-4

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 74.08 m.p., °C: -20.8 b.p. (760 torr), °C: 141
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Soluble in all proportions
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 40% of theoretical oxygen demand removed after 24 hr
static activated sludge test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.14.12-1

I.14.12-2

INDUSTRIAL OCCURRENCE OF PROPIONIC ACID^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.12-3

INDUSTRIAL OCCURRENCE OF PROPIONIC ACID^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^CPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.12-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PROPIONIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Anaerobic lagoons			0 ^d	- ^d	III.5.3

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


^dActual data indicate negative removal.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-451.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 548.

Compound: Vinyl acetate

Formula:



Alternate Names: Acetic acid, ethenyl ester;
1-Acetoxyethylene

CAS #: 108-05-4

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 86.10 m.p., °C: -93.2 b.p. (760 torr), °C: 72.2-72.3
vapor pressure (21°C), torr: 100
solubility in water (20°C), mg/L: 20,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 42% theoretical oxidation of 10 mg/L vinyl acetate
observed in 10-day static activated sludge test

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.13-2

INDUSTRIAL OCCURRENCE OF VINYL ACETATE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.13-3

INDUSTRIAL OCCURRENCE OF VINYL ACETATE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.13-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR VINYL ACETATE^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 158, 159.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 634.

Compound: Adipic acid

Formula:



Alternate Names: 1,6-Hexanedioic acid,
1,4-Butanedicarboxylic
acid

CAS #: 124-04-9

Physical, Chemical, and Biological Properties [1]


mol. wt.: 146.1 m.p., °C: 153 b.p. (760 torr), °C: 338
vapor pressure (159°C), torr: 1
solubility in water (25°C), mg/L: 14,400
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: 3.0, 7.0, 9.0
type of carbon: Not available
adsorbability: 450 mg/L; carbon dose re-
quired to reduce pollutant
concentration from 10 mg/L
to 1 mg/L at neutral pH

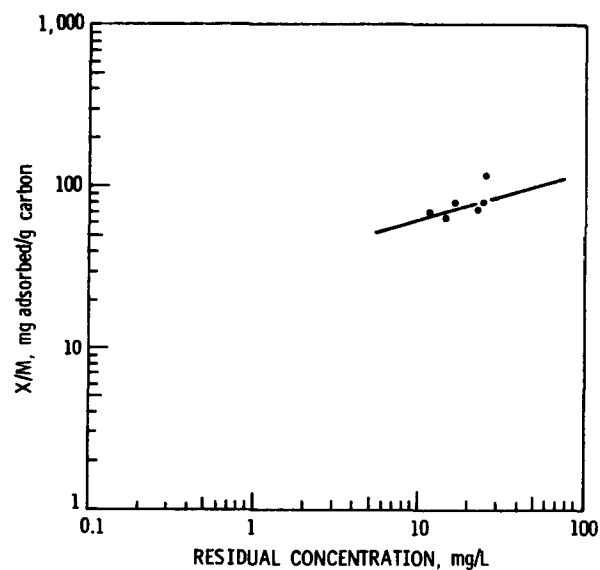

Date: 8/13/79

I.14.14-1

I.14.14-2

INDUSTRIAL OCCURRENCE OF ADIPIC ACID^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.14-3

Industry	Treated wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.14-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ADIPIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 104, 105.
2. Dobbs, R. A., R. J. Middendorf, and J. M. Cohen. Carbon Adsorption Isotherms for Toxic Organics. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

Compound: Crotonaldehyde

Formula:



Alternate Names: 2-Butenal

CAS #: 123-73-9

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 70.09 m.p., °C: -74 b.p. (760 torr), °C: 104-105
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Slight
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 37% of theoretical oxygen demand removed in 5-day BOD test

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.14.15-1

I.14.15-2

INDUSTRIAL OCCURRENCE OF CROTONALDEHYDE^{a,b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.15-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.15-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CROTONALDEHYDE^{a, b}

[illegible]

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-229.
2. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 201.

Compound: Acrolein

Formula: $\text{H}_2\text{C}=\text{CH}-\underset{\text{O}}{\underset{\text{||}}{\text{C}}}-\text{H}$

Alternate Names: Aqualin, Acrylaldehyde,
2-Propenal

CAS #: 107-02-8

Physical, Chemical, and Biological Properties [1]


mol. wt.: 56.1 m.p., °C: -87.7 b.p. (760 torr), °C: 52.5
vapor pressure (20°C), torr: 220
solubility in water (20°C), mg/L: 671
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data [2]

pH: Not available
Type of carbon: Filtrasorb - 300
Absorbability: Not available

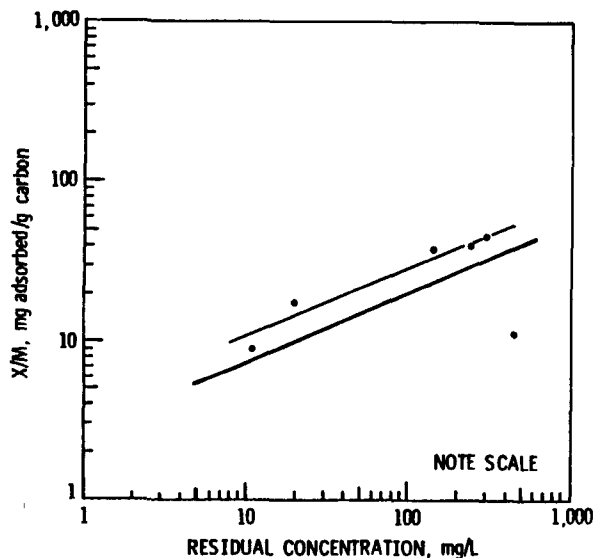

Date: 8/13/79

I.14.16-1

I.14.16-2

INDUSTRIAL OCCURRENCE OF ACROLEIN^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.16-3

[illegible]

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.14.16-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ACROLEIN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, % ^c	Average achievable conc., µg/L	Removal range, % ^c	Average achievable conc., µg/L	
Gas flotation with chemical addition (alum, polymer)			0 ^{d,e}	- ^e	III.4.5
Filtration			>86 ^d	<100 ^d	III.4.6
Powdered activated carbon adsorption			30 ^d	700,000 ^d	III.6.2

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 74.
2. Report on visit of D. Stephan and W. Cawley, U.S. Environmental Protection Agency, to Calgon Environmental Systems Division, Calgon Corporation, Pittsburgh, Pennsylvania, 9 April 1979. 132 pp.


Date: 8/13/79

I.14.16-5

Compound: Furfural

Formula:

Alternate Names: Furfurole, 2-Furancarboxyl,
2-Furaldehyde, Fural,
Furfuraldehyde, Furole



CAS #: 98-01-1

Physical, Chemical, and Biological Properties [1-4]

mol. wt.: 96.09 m.p., °C: -38.7 b.p. (760 torr), °C: 162
vapor pressure (25°C), torr: ~1.65
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 96% furfural removal (measured as COD removal) obtained
at 20°C in activated sludge at a rate of 37 mg COD/g dry
innoculum/hr

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.14.17-1

I.14.17-2

INDUSTRIAL OCCURRENCE OF FURFURAL^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.17-3

INDUSTRIAL OCCURRENCE OF FURFURAL^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.17-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR FURFURAL^{a, b}

[illegible]

^aSee Volume III for detailed information.


^b NA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-314.
2. Jordan, T. E. Vapor Pressure of Organic Compounds. Interscience Publishers, Inc., New York, New York, 1954. p. 104.
3. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.
4. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 349.

Compound: Propylene oxide

Formula: $\text{CH}_3\text{CH}-\text{CH}_2$


Alternate Names: 1,2-Epoxy-propane, Methyloxiron

CAS #: 75-56-9

Physical, Chemical, and Biological Properties [1-3]

mol. wt.: 58.08 m.p., °C: -104 b.p. (760 torr), °C: 34.3
vapor pressure (25°C), torr: ~530
solubility in water, mg/L: 650,000 at 30°C; 405,000 at 20°C
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 75% propylene oxide removal (measured as BOD removal)
obtained in 5-day static activated sludge test on a
333 mg/L solution

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

I.14.18-2

INDUSTRIAL OCCURRENCE OF PROPYLENE OXIDE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.18-3

INDUSTRIAL OCCURRENCE OF PROPYLENE OXIDE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.14.18-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR PROPYLENE OXIDE^{a, b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.

REFERENCES


1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 544.
2. CRC Press, Inc. CRC Handbook of Chemistry and Physics, 58th Edition. Cleveland, Ohio, 1977. p. C-448.
3. Jordan, T. E. Vapor Pressure of Organic Compounds. Interscience Publishers, Inc., New York, New York, 1954. p. 118, plate 2.
4. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 544.

Date: 8/13/79

I.14.18-5

Compound: Methyl mercaptan

Formula:



Alternate Names: Methanethiol, Mercaptomethane,
Methyl sulfhydrate, Thiomethyl
alcohol

CAS #: 74-93-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 48.10 m.p., °C: -123 b.p. (760 torr), °C: 5.95
vapor pressure (25°C), torr: Not available
solubility in water (20°C), mg/L: 23,330
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.15.1-2

INDUSTRIAL OCCURRENCE OF METHYL MERCAPTAN^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.15.1-3

INDUSTRIAL OCCURRENCE OF METHYL MERCAPTAN^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.15.1-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR METHYL MERCAPTAN^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^a See Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.


^c Average and maximum removals reported.

REFERENCES

1. Off-line Bibliographic Citation List Generated from the Toxicology Data Bank by MEDLARS II, National Library of Medicine's National Interactive Retrieval Service, Bethesda, Maryland, 11 June 1979. Part III, pp. 130, 131.

Compound: Dodecyl benzenesulfonic acid Formula:

Alternate Names: Benzenesulfonic acid, dodecyl ester; Dodecylbenzenesulfonate



CAS #: 1886-81-3

Physical, Chemical, and Biological Properties [1, 2]

mol. wt.: 326.5 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: 99% removal (measured as COD removal) obtained at 20°C
in activated sludge as a rate of 11 mg COD/g dry
innoculum/hr

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.15.2-2

INDUSTRIAL OCCURRENCE OF DODECYL BENZENE SULFONIC ACID^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.15.2-3

INDUSTRIAL OCCURRENCE OF DODECYL BENZENE SULFONIC ACID^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.15.2-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE
FOR DODECYLBENZENE SULFONIC ACID^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal ^c range, %	Average achievable conc., µg/L	Removal ^c range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 165.
2. Pitter, P. Determination of Biological Degradability of Organic Substances. Water Research, 10:1-5, 1976.

Compound: Cyclohexane

Formula:

Alternate Names: Hexahydrobenzene,
Hexamethylene,
Hexanaphthene



CAS #: 110-82-7

Physical, Chemical, and Biological Properties [1]

mol. wt.: 84.16 m.p., °C: 6.3 b.p. (760 torr), °C: 81
vapor pressure (20°C), torr: 77
solubility in water (20°C), mg/L: 55
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.15.3-2

INDUSTRIAL OCCURRENCE OF CYCLOHEXANE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^C Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.15.3-3

INDUSTRIAL OCCURRENCE OF CYCLOHEXANE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.15.3-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR CYCLOHEXANE^{a, b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, ^c %	Average achievable conc., µg/L	Removal range, ^c %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 204.


Date: 8/13/79

I.15.3-5

Compound: Isophorone

Formula:

Alternate Names: Trimethylcyclohexenone,
Isooctaphenone, 3,5,5-
Trimethyl-2-cyclohexene-1-one



CAS #: 78-59-1

Physical, Chemical, and Biological Properties [1]

mol. wt.: 138.2 m.p., °C: -8 b.p. (760 torr), °C: 215
vapor pressure (20°C), torr: 0.38
solubility in water (temp. unknown), mg/L: 12,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 12/5/79

I.15.4-2

INDUSTRIAL OCCURRENCE OF ISOPHORONE^{a,b}

Industry	Raw wastewater					
	Concentration, $\mu\text{g/L}$			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	ND	307	44	0	1.2	0.17
Paint and ink formulation	ND	44,000 ^d	NA	0	1.0	0.035
Rubber processing	NA	NA	NA	NA	NA	NA
Auto and other laundries	ND	190	10	9.0×10^{-6}	0.014	0.0021
Coil coating	ND	600	300	0.015	0.54	0.14
Iron and steel manufacturing	NA	NA	4,000	0	NA	720
Nonferrous metals manufacturing	ND	29	1.6	0	NA	0.085

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.15.4-3

INDUSTRIAL OCCURRENCE OF ISOPHORONE^{a,b}

Industry	Treated wastewater					
	Concentration, µg/L			Loading, ^c kg/d		
	Minimum	Maximum	Mean	Minimum	Maximum	Mean
Coal mining	NA	ND	ND	_d	_d	_d
Paint and ink formulation	ND	200	78	0	0.0036	0.00012
Rubber processing	NA	<7 ^e	<7 ^e	1.4 x 10 ⁻⁶	0.0062	0.00023
Auto and other laundries	ND ^e	ND ^e	ND ^e	_d	_d	_d
Pharmaceutical manufacturing	ND	ND	ND	_d	_d	_d
Foundries	<20	<20	<20	0	<0.13	<0.054
Iron and steel manufacturing	NA	NA	95	0	NA	17
Nonferrous metals manufacturing	ND	6	3	0	NA	0.16

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^bNA - not available; ND - not detected; BDL - below detection limit.

^cPollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

^dMean pollutant concentration below detection limit.

^eOne sample.

Date: 12/5/79

I.15.4-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR ISOPHORONE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	
Gravity oil separation			NA	6 ^d	III.4.1
Gas flotation with chemical addition (calcium chloride, polymer)			>95 ^d	ND	III.4.5
Sedimentation			49->97	<23	III.4.2
Aerated lagoons			33 ^d	2 ^d	III.5.3
Activated sludge			0 ^{d,e}	- ^e	III.5.1
Powdered activated carbon adsorption			97 ^d	30,000 ^d	III.6.2

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.

^dOnly one data point.

^eActual data indicate negative removal.

REFERENCES

1. Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York, 1977. p. 404.

Date: 8/13/79


I.15.4-5

Compound: Strychnine

Formula:

Alternate Names:

CAS #: 57-24-9



Physical, Chemical, and Biological Properties [1]

mol. wt.: 334.4 m.p., °C: 268-290 b.p. (760 torr), °C: 270
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

Date: 8/13/79

I.15.5-1

I.15.5-2

INDUSTRIAL OCCURRENCE OF STRYCHNINE^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.15.5-3

INDUSTRIAL OCCURRENCE OF STRYCHNINE^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

Date: 12/5/79

I.15.5-4

POLLUTANT REMOVABILITY/TREATABILITY WASTEWATER TREATMENT ALTERNATIVE FOR STRYCHNINE^{a,b}

Treatment process ^a	Synthetic wastewater		Actual wastewater		Volume III references, Section numbers
	Removal range, %	Average achievable conc., µg/L	Removal range, %	Average achievable conc., µg/L	

^aSee Volume III for detailed information.

^bNA - Not available, ND - not detected, BDL - below detection limit.

^cAverage and maximum removals reported.


REFERENCES

1. The Chemical Rubber Company. Handbook of Chemistry and Physics, 48th Edition. Cleveland, Ohio, 1967. pp. C-546, 547.

Date: 8/13/79

I.15.5-5

Compound: 2,3,7,8-Tetrachlorodibenzo-
p-dioxin



Alternate Names: TCDD

CAS #: 1746-01-6

Physical, Chemical, and Biological Properties [1]

mol. wt.: 322 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (25°C), mg/L: Not available
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: No specific data, but TCDD is extremely toxic and very
resistant to all forms of degradation

photolysis:
oxidation:
hydrolysis:
volatilization:
sorption:
biological processes:
other reactions/interactions:

Carbon Adsorption Data: Not available

I.15.6-2

INDUSTRIAL OCCURRENCE OF 2,3,7,8-TETRACHLORODIBENZO-*p*-DIOXIN^{a,b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.15.6-3

INDUSTRIAL OCCURRENCE OF 2,3,7,8-TETRACHLORODIBENZO-*p*-DIOXIN^{a, b}

[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.

I.15.6-4

FOR 2,3,7,8-TETRACHLORODIBENZO-*p*-DIOXIN^{a,b}

[illegible]

^aSee Volume III for detailed information.

^b NA - Not available, ND - not detected, BDL - below detection limit.

^c Average and maximum removals reported.


REFERENCES

1. Fairchild, E. J., R. J. Lewis, Sr., and R. L. Tatken. Registry of Toxic Effects of Chemical Substances, Volume II. NIOSH-78-104B, National Institute for Occupational Safety and Health, Cincinnati, Ohio, 1977. p. 358.

Compound: Zinc phenol sulfonate

Formula:

Alternate Names: Zinc salt of 4-Hydroxy-
benzenesulfonic acid



CAS #: 127-82-2

Physical, Chemical, and Biological Properties [1]

mol. wt.: 411.7 m.p., °C: Not available b.p. (760 torr), °C: Not available
vapor pressure (25°C), torr: Not available
solubility in water (temp. unknown), mg/L: 625,000
log octanol/water partition coefficient: Not available
Henry's law constant: Not available
biodegradability: Not available

Probable Fate: Not available

photolysis:

oxidation:

hydrolysis:

volatilization:

sorption:

biological processes:

other reactions/interactions:

Carbon Adsorption Data: Not available

I.15.7-2

INDUSTRIAL OCCURRENCE OF ZINC PHENOL SULFONATE^{a, b}[illegible]

^aInformation contained in this table was obtained from Volume II of the Treatability Manual.

^b NA - not available; ND - not detected; BDL - below detection limit.

^c Pollutant loadings determined by multiplying mean pollutant concentration by industry wastewater discharges as reported in Section I.3; where mean is not available, one-half the reported maximum was utilized.