

A STUDY OF EMISSIONS FROM
LIGHT DUTY VEHICLES IN LOS ANGELES

by

Robert A. Cassidy
Linda S. Kingston

Automotive Environmental Systems
Division of Clayton Manufacturing Company
7300 Bolsa Avenue
Westminster, California 92683

Contract No. 68-03-3023

Prepared for

Environmental Protection Agency
Office of Air and Water Management
Office of Mobile Source Air Pollution Control
Emission Control Technology Division
Ann Arbor, Michigan 48105

September 1981

This report is issued by the Environmental Protection Agency to report technical data of interest to a limited number of readers. Copies are available free of charge to Federal employees, current contractors and grantees, and nonprofit organizations - in limited quantities - from the EPA Library, 2565 Plymouth Road, Ann Arbor, Michigan 48105; or, for a fee, from the National Technical Information Service, 585 Port Royal Road, Springfield, Virginia 22161.

This report was furnished to the Environmental Protection Agency by Automotive Environmental Systems, Westminster, California 92683, in fulfillment of Contract No. 68-03-3023. The contents of this report are reproduced herein as received from Automotive Environmental Systems. The opinions, findings, and conclusions expressed are those of the author and not necessarily those of the Environmental Protection Agency. Mention of company or product names is not to be considered as an endorsement by the Environmental Protection Agency.

ABSTRACT

This report presents and summarizes exhaust emissions test data and other related information obtained in the testing and inspection of in-use passenger cars. The test fleet consisted of 1978-81 automobiles and trucks. The test vehicles were obtained randomly from private owners in the Los Angeles and Orange County areas. The testing was completed September 15, 1981.

Each vehicle was tested in as-received condition and given an underhood emissions control component inspection. The test sequence consisted of the 1975 Federal Test Procedure, a Highway Fuel Economy test, a Bagged Idle test, a 50 MPH Cruise test, a Four-Speed Idle test and a Loaded Two-Mode test. One hundred twenty-five 1980-81 vehicles received an evaporative emissions test using the SHED technique. Twenty-two of the 292 vehicles received restorative maintenance repairs and additional testing. Four 1981 vehicles were specially selected throttle body injection vehicles (TBI) which received a baseline emission test and four (4) additional disablement Cold Start sequences.

Nine 1980-81 vehicles that specifically failed the California VIP State Lane Emission test underwent a Cold Start test sequence, received an R-M tune-up, and then received an additional Cold Start test sequence.

ACKNOWLEDGEMENTS

Automotive Environmental Systems, a Division of Clayton Manufacturing Company, wishes to extend its appreciation and special thanks to Mr. John Shelton, Project Officer, for providing counsel, technical guidance, and understanding throughout the program.

We also wish to recognize the assistance of the manufacturers of the automobiles which were tested in this project.

CONTENTS

Abstract.	iii
Acknowledgements.	iv
1. Introduction.	1
2. Technical Discussion.	3
2.1 Program Objectives.	3
2.2 Program Design.	3
2.3 Test Vehicle Procurement.	3
2.3.1 Test Vehicle Selection.	3
2.3.2 Sample Vehicle Control Log.	4
2.3.3 Incentives for Participation.	4
2.3.4 Test Vehicle Handling	4
2.4 Facilities and Equipment.	4
2.4.1 Test Location	4
2.4.2 Constant Volume Sampler	5
2.4.3 Emission Analysis Console	5
2.4.4 Sealed Housing for Evaporative Determination. . .	6
2.4.5 Chassis Dynamometer	7
2.4.6 Data Acquisition System	7
2.4.7 Driver's Aid.	7
2.4.8 Miscellaneous Equipment	8
2.5 Equipment Qualification, Calibration and Crosscheck	8
2.5.1 Constant Volume Sampler	8
2.5.2 Emission Analysis Console	9
2.5.3 Sealed Housing for Evaporative Determination. . .	11
2.5.4 ECE-50 Chassis Dynamometer.	11
2.5.5 Data Acquisition System	12
2.5.6 Miscellaneous Equipment	12
2.6 Test Procedure.	12
2.6.1 Vehicle Preparation	12
2.6.2 Equipment Preparation	12
2.6.3 Federal Exhaust Emission Test Procedure	13
2.6.4 Bagged Idle	13
2.6.5 50 MPH Cruise	13
2.6.6 Highway Fuel Economy Test	14
2.6.7 Four-Speed Idle Test.	14
2.6.8 Loaded Two Mode Test.	14
2.6.9 After-Test Procedures	15
2.6.10 State Lane Inspection	15
2.6.11 Restorative Maintenance	15
2.6.12 Selective Malperformance.	16
2.6.13 Daily Test Schedule	16

2.7	Data Handling	16
2.7.1	Data Collection	16
2.7.2	Data Processing	16
2.7.3	Quality Control	17
List of Figures	19
Figure 1	Vehicle Procurement Flow Chart.	21
Figure 2	Testing Flow Chart.	25
Figure 3	Propane Test Procedure and Sample Test Data Sheet	29
Figure 4	One-Step Restorative Maintenance Testing Flow Chart.	35
Figure 5	TBI Selective Malperformance Testing Flow Chart .	39
Figure 6	Data Forms.	43
Figure 7	Quality Assurance Activity.	95

SECTION 1

INTRODUCTION

The U.S. Environmental Protection Agency (EPA), through authority provided by the Clean Air Act, is responsible for the control and prevention of air pollution. As provided by the Act, one of the charges of the EPA is the design, conduct and promotion of surveys and studies of the sources of air pollution. The Emission Control Technology Division (ECTD) of the EPA develops, implements and administers a national program to characterize, quantify and reduce the air pollution caused by mobile sources. Included in the division's responsibilities is the collection of emissions data from in-use vehicles and the development and evaluation of alternatives for the control of vehicle emissions. These in-use vehicle data are utilized by the EPA in calculating and projecting motor vehicle emissions from light duty vehicles. The emission factors generated by this process are also used in developing transportation control procedures and contingency programs to cover emergency situations. Outside of the EPA, these data and the emission control alternatives are used by various state and local agencies in their air pollution control programs. In carrying out its responsibilities, the EPA regularly conducts in-use vehicle emission factors programs and emission control alternative studies. In order to support the States in their efforts to implement their air quality programs, the Emission Control Technology Division will use the data generated by this project to assess the effectiveness of new technology vehicle exhaust emissions systems in Los Angeles.

This report describes a program conducted by Automotive Environmental Systems (AESi) to gather information on light duty vehicles in the Los Angeles area. The testing was performed from December, 1980 through September, 1981.

Section 2 of this report describes the objectives, design, and conduct of the program. Section 3 presents a list of figures outlining the important phases of the testing project. Data packets with EPA-defined data formats were submitted to the Project Officer.

SECTION 2

TECHNICAL DISCUSSION

2.1 PROGRAM OBJECTIVES

This report describes a program conducted by Automotive Environmental Systems (AESi), a Division of Clayton Manufacturing Company, to gather information on passenger cars and light duty trucks in the Los Angeles area. The testing was conducted between December, 1980 and September, 1981.

2.2 PROGRAM DESIGN

Each vehicle received a Federal Test Procedure (FTP) test, a Highway Fuel Economy test (HFET), a Bagged Idle test, a 50 MPH Cruise test, a Four-Speed Idle test and a Loaded Two Mode test. A total of 125 vehicles received an Evaporative Emissions test.

2.3 TEST VEHICLE PROCUREMENT

EPA provided a vehicle matrix which specified test vehicle make, model, year and in some cases, engine size. The procurement effort focused on two important aspects for the selection and processing of test vehicles; procedures were utilized to secure an unbiased random sample and also, all mailing contacts were further explored by a series of follow-up phone calls to improve the response rate.

2.3.1 Test Vehicle Selection

In efforts to secure an unbiased random sample of vehicles that would be representative of Los Angeles, AESi contacted a marketing firm which could provide a vehicle registration list (a subset) that was proportional to the universe of vehicle registrations in their files. This subset was a random selection of vehicles within each segment (Chevrolet, Pontiac, etc.) of the vehicle matrix.

For 1981 vehicles, the use of rental and leased vehicles was held well below 20 percent. The use of these vehicles was required to satisfy the new model year matrix requirements when the registration lists failed to produce a sufficient number of vehicles. All other model years completely utilized the randomized candidate lists.

2.3.2 Sample Vehicle Control Log

A sample vehicle control log was used to monitor the results of the mailings made with the randomized vehicle registration lists.

Each mailing candidate was assigned a number which was entered by his/her name in both the control log and the business reply post card which the candidate received. The disposition of each mailing candidate was noted in the control log. Following initial mail response, up to 2 follow-up phone calls were made to secure the candidate vehicle for testing. The results of these calls were also entered in the control log.

2.3.3 Incentives for Participation

The owner of a suitable test vehicle was provided the following incentives for his participation:

A \$100 U.S. Savings Bond. Bonds were mailed to participants within one month following the test on their vehicle.

The use of a late-model, fully insured loaner automobile during the time their vehicle was undergoing testing.

The owner's automobile was returned with a full tank of fuel.

2.3.4 Test Vehicle Handling

In most cases, the vehicle was scheduled to be delivered to AESi in Westminster by appointment. In some cases, vehicles were picked up and/or delivered at a participant's home or place of business. An inspection was performed to ensure proper vehicle match and to establish the physical condition of the vehicle. A loan vehicle exchange agreement, the savings bond application and the Vehicle Owner Use Questionnaire were also completed at this time. The vehicle is accepted or rejected for testing according to the sequence illustrated in Figure 1.

2.4 FACILITIES AND EQUIPMENT

2.4.1 Test Location

All tests were performed at AESi's test facility at 7300 Bolsa Avenue in Westminster, California. The facility is located approximately 25 miles south of downtown Los Angeles at an elevation of 45 feet above sea level.

The test facility environment, including test and vehicle soak areas, was maintained within the requirements of the contract. A permanent record was maintained for the ambient temperature in the soak and

test areas for all phases of testing. The vehicle soak area is inside the same building as is the test area and is free from precipitation.

2.4.2 Constant Volume Sampler

A positive displacement pump type constant volume sampler (CVS) built by AESi was used in this program. This CVS meets or exceeds all specifications defined in the Code of Federal Regulations Title 40, Part 86, Subparts A and B (40 CFR Part 86). The system contains six bags switched by computer in sample/background pairs for all dilute exhaust sample testing.

All plumbing in the sampling, analytical and calibration systems is either stainless steel or teflon. This includes all sample, calibration and zero gas lines and the valves and regulators for NO gases. Leak-tight stainless steel convoluted tubing is used between the CVS and the vehicle tail pipe for exhaust gas sampling. An appropriate leak-tight boot was used to connect the tail pipe to the convoluted tubing. A stainless steel heat exchanger with a temperature controlled cold water inlet was used to provide essentially a constant exhaust gas temperature throughout the entire test.

The sample and dilution air bags are made of Dupont Tedlar material. The sample and background bags are of a volume compatible with the CVS unit (i.e., no pressure build up in the bag when filling with sample or background gas).

2.4.3 Emission Analysis Console

An AESi exhaust gas analytical system meeting or exceeding the specifications of 40 CFR Part 86, was used for dilute gas measurements. Similar laboratory type instrumentation, with additional ranges, was used for analysis of raw NO and CO₂ gas. In addition, a Chrysler Model III garage-type analyzer was used for measurement of raw HC and CO. The console contains the following instrument types and ranges:

<u>Analyzer</u>	<u>Ranges</u>
Bendix Model 8501-5C NDIR (Lo CO - Dilute Exhaust)	0-100, 0-500 ppm (11 1/4" Cell Length)
Beckman 315B NDIR (Hi CO - Dilute Exhaust)	0-.3% (5 1/4" Cell Length) 0-3% (1.8" Cell Length)
Beckman 315B NDIR (CO ₂ - Dilute Exhaust)	0-2.5%, 0-4% (1/8" Cell Length)
Beckman 315B NDIR (CO ₂ - Raw Exhaust)	0-15% (1/8" Cell Length)

Beckman 400 FID (Lo HC - Dilute Exhaust)	0-50, 0-100, 0-300 ppm Carbon
Beckman 400 FID (Hi HC - Dilute Exhaust)	0-1,000, 0-3,000 ppm Carbon
Teco 10AR Chemiluminescent (NOx - Dilute Exhaust)	0-100, 0-250, 0-1,000, 0-2,500 ppm
Teco 10AR Chemiluminescent (NO - Raw Exhaust)	0-100, 0-1,000, 0-2,500, 0-4,000 ppm
Chrysler Model III Garage (HC - Raw Exhaust)	0-300, 0-2,000 ppm Hexane Equivalent
(CO - Raw Exhaust)	0.5%, 0-10%

2.4.3.1 Laboratory Standard Calibration & Working Gases

Laboratory standard calibration gases, previously approved by EPA, were used for defining instrument calibration curves and assigning concentration values for the working gases. Each cylinder of standard gas and each working gas cylinder was equipped with its own pressure regulator as specified by the contract. All gases were plumbed to a quick-disconnect panel for ease in selecting the gas desired during calibration and testing.

Calibration gases for each range of the HC and NOx analyzers were chosen such that three points were used across the curve (zero and approximately 45% and 90% of full scale concentration). CO and CO₂ calibration points were at zero and approximately 15, 30, 45, 60, 75 and 90 percent of full scale. All span gases were 80-100 percent of full scale.

The diluents used in the calibration and working gases are:

HC, ppmC	Propane in HC free air
NOx, ppm	In zero grade nitrogen
CO, mole %	In zero grade nitrogen
CO ₂ , mole %	In zero grade nitrogen

2.4.4 Sealed Housing for Evaporative Determinations (SHED)

Evaporative emissions tests were performed using an AESi SHED and its associated operator console. The SHED meets all requirements in "Evaporative Emission Regulations for Light-Duty Vehicles and Trucks" as described in Federal Register 164, dated Monday, August 23, 1976. The console includes a Beckman 400 FID analyzer with ranges of 0-100, 0-300, 0-1000 and 0-3000 ppmC; a Linear Instruments chart recorder for analyzer output; a Leeds and Northrup SPEEDOMAX multipoint temperature recorder; and a variable

voltage source and heating element (blanket) for applying heat to the vehicle gas tank for the diurnal heat build. A cooling package is installed to ensure operation of the SHED within the temperature range of 68°F to 86°F.

2.4.5 Chassis Dynamometer

The chassis dynamometer was equipped to simulate vehicle inertia and road load horsepower as required in 40 CFR Part 86.

The dynamometer used is a Clayton ECE-50 with remote controlled lift, 17 1/4 inch roll center spacing, 89 inch overall roll length and 4000 lb axle weight capacity. Direct drive variable inertia loading weights were employed, with 125 pound increments from 1000 through 8875 lbs.

A speed meter which indicates mi/hr was used to monitor the speed of the dynamometer roll. The rear dynamometer roll is equipped with a tachometer generator which provides the speed signal during testing. The meter response was linear with speed and the accuracy was within ± 2.0 km/hr (± 1.2 mph) over the range of 0-95 km/hr (0-59 mph). The dynamometer is equipped to measure actual distance traveled for each segment of the FTP testing sequence.

The power absorption unit was monitored by a power meter accurate and readable to ± 0.25 hp (.187 kw) over the range of intended use.

2.4.6 Data Acquisition System

Data was obtained from the analyzers, CVS and dynamometer via an AESi Data Acquisition Control Computer (DACC). The Data General NOVA computer was also used for generation of driver traces for the various driving schedules, for sample bag management and for calculation and presentation of the emission test results. The data was printed by a Data General Dasher printer immediately following sample analysis.

The output from the analyzers was also wired to the inputs of four Hewlett-Packard Model 7130A two-pen recorders. One recorder was used for dilute HC and NO_x, one for dilute CO and CO₂, one for undiluted HC and CO and one for undiluted NO and CO₂.

2.4.7 Driver's Aid

An AESi designed two-pen Hewlett-Packard Model 7130A Driver's Aid (speed vs time recorder) and Clayton speed power meters were employed to permanently record the driver's performance during the test. The Hewlett-Packard Recorder is mounted in the Driver's Aid box. The box itself is situated on a 4-piece moveable boom so that it can be easily moved when testing vehicles such as ones with front wheel drive. The driving trace was generated by the NOVA computer on this recorder in agreement with the specifications of 40 CFR Part 86.

2.4.8

Miscellaneous Equipment

Miscellaneous equipment used in conjunction with the major items of equipment included the following:

Two Teco Model 100 NO_x Generators. The generator in the raw gas analysis bench was not used since only NO is reported.

One Rustrak Chart Recording Psychrometer, Model 2133B with continuous recording of wet/dry bulb temperatures.

One Rustrak Chart Recorder, Model AD 101-462-2A for continuous recording of CVS temperature.

One Weathermeasure M701 continuous recording temperature recorder for soak area temperature.

One Princo mercurial Barometer.

One Meriam 50 MC2-4SF Laminar Flow Element for CVS calibration.

One Sartorius Model 2257 Balance used for weighing the propane cylinders for propane recovery tests.

One Strobotach for dynamometer speed calibration.

Horiba GSM and MEXA 300A garage analyzers were used for inspection by the mechanic.

2.5

EQUIPMENT QUALIFICATION, CALIBRATION AND CROSSCHECK

This section describes the qualification, calibration, and crosscheck procedures utilized by AESI and verified by EPA technical personnel to ensure that valid test data were generated throughout the test program. Initial qualification included complete demonstration of individual instrument calibration, stability, response time, zero air and nitrogen purity, CVS calibration, dynamometer calibration, and inspection of all daily, weekly and monthly logs.

2.5.1

Constant Volume Sampler

The CVS was calibrated with a laminar flow element (Meriam Model 50-MC 2-45F) using the basic procedures specified in the Federal Register. CVS air flow, measured using the laminar flow element on the inlet side of the mass pump (CVS blower), was controlled by throttling. Air flow rates were measured at five incremental changes in pump differential pressure on each side of the normal operating point. Flow rates at a total of at least ten points were measured. The nominal air flow of the CVS is 345 cfm. Auxiliary devices employed in the calibration included a mercury

barometer to measure absolute ambient pressure, a close tolerance mercury thermometer to measure pump inlet air temperature, a U-tube water manometer to measure pressure drop across the pump and pump inlet pressure and a close tolerance inclined water manometer to measure pressure drop across the laminar flow element. Once this calibration was completed, data from these devices were computer processed and the mid-range blower operating point was determined. Propane recovery tests using instrument grade propane were made after the calibration to confirm its accuracy. A copy of the calibration data was provided to the EPA Project Officer as a part of the qualification data package.

Calibration of the laminar flow element (LFE) is traceable to the National Bureau of Standards, and a certified copy of the LFE calibration curve was furnished to the Project Officer at the time of Laboratory Qualification.

Daily propane recovery tests were made to confirm continued calibration of the CVS system. The measured propane mass recovered by the CVS had to be within ± 2.0 percent of the injected mass of up to 20 grams of instrument grade propane as determined gravimetrically. The recovered amount of propane was measured on the 0-300 ppmC FID range. A Rustrak chart recorder was used to continuously record CVS temperature during these tests.

2.5.2 Emission Analysis Console

2.5.2.1 Dilute Exhaust Analysis Console

Complete calibrations of the mass emission analysis console instruments were performed initially and checked each week thereafter until testing was completed. Calibration curves for the mass emission analysis console CO, CO₂, HC and NO_x instruments were established using the gases previously identified. The CO and CO₂ instruments were calibrated at seven somewhat evenly spaced points (zero and six upscale points) across each operating range. Calibration of the HC and NO_x instruments was performed at three somewhat evenly spaced points (zero and two upscale points) across each operating range. Calibration of these instruments was established and maintained within one percent of full scale for each range, respectively, or five percent of the measured value, whichever was smaller. A computer program provided by the EPA was used in the generation of the calibration curves.

In connection with each test, the CVS sample bags were purged with nitrogen, evacuated and leak-checked. These operations were performed in a bag evacuate, N₂ purge, evacuate and leak-check sequence by means of a manual push-button selection of solenoids located within the CVS. A leak in the system is indicated by a non-zero flow in the flow meters on the operator's console.

Other activities included setting zero and span points immediately prior to exhaust sample analysis and zero and span point verifications immediately following exhaust sample analysis. Strip chart recorders were operated throughout the zero and span set-point calibration, sample

analysis and zero and span verification sequence. Verification tolerances were maintained within ± 1 deflection from the set-point for the range in use. Converter efficiency of the NO_x converter was maintained above 90 percent. The noise level of analyzer outputs as indicated on the strip chart was maintained within ± 0.5 percent of full scale for the range used during both calibration and analysis.

2.5.2.2 Raw Exhaust Analysis Console

The NO and CO₂ instruments used in the undiluted (raw) emission analysis console are laboratory instruments calibrated using the same gases, calibration points, tolerances and verification frequency described above in connection with the NO_x and CO₂ instruments used in the mass emission analysis console.

The tail pipe HC/CO measurement instrument was operated in accordance with the manufacturer's recommendations except that this instrument was zeroed with nitrogen and the HC and CO span-points calibrated with appropriate gases immediately prior to each test. Each analyzer was checked for zero and span point drift immediately following each test. Verification tolerances were maintained within ± 2 deflections from the set-point for the range in use.

2.5.2.3 Daily Qualification Checks

Daily qualification checks included:

Leak-check of each instrument as well as the system.

Recording of zero, gain and tune, as applicable, for each instrument.

Hang-up and leak-checks for background and sample bags and sample line.

NO_x analyzer vacuum and converter efficiency checks.

Propane recovery tests to ensure proper FID operation as well as verification of the CVS calibration.

Recording of FID fuel and air pressure.

Recording of cylinder number, concentration, deflection, cylinder pressure for each working gas.

In addition to the above daily checks, weekly calibration curve checks were made for each range of each instrument.

Appropriate calibrations, leak-checks, etc., were also made whenever maintenance was performed which could change instrument or system operation.

2.5.3 Sealed Housing for Evaporative Determinations (SHED)

The volume of the SHED used was determined by physical measurement. Calibration of thermocouples used in the SHED was verified by an ASTM thermometer as was the temperature recording instrument. Calibration curves were generated for each range of the Beckman 400 FID used in the analytical console. These curves were verified weekly.

For initial calibration, the FID was zeroed on zero grade prepurified air and calibrated at two upscale points (i.e. 45% and 90% of full scale) on each of the ranges used. The same hydrocarbon gas standards previously described were employed for this calibration. Curve fit tolerances and verification frequency were the same as those applied to the dilute emission analysis console instruments.

The SHED was subjected to a background hydrocarbon check, a calibration check and a retention check prior to testing the first vehicle.

The background emissions check was performed by sealing the enclosure and allowing it to remain sealed for a period of four hours. Initial and final hydrocarbon readings were taken. The background emission rate was acceptable when it was less than the maximum increase of 0.4 grams for the four hours, as defined in 41 Federal Register 164, dated Monday, August 23, 1976.

The SHED was calibrated by first purging with fresh air and then sealing the enclosure. Approximately 4 grams of instrument grade propane was injected into the enclosure after the enclosure was sealed. The mixing fans were operating during this injection. After five minutes of mixing, the stabilized hydrocarbon level of the enclosure was measured and the mass calculated. The quantity of the calculated recovery was within +2% of the injected amount.

The propane retention (leak) check was performed following the calibration. In this check the SHED was allowed to remain sealed for a minimum of four hours with the mixing blowers operating. At the end of this period the hydrocarbon level of the enclosure was measured and the mass calculated. For this check, the hydrocarbon level was within +4% of the initial reading as calculated. The SHED calibration and retention tests were performed monthly thereafter.

2.5.4 ECE-50 Chassis Dynamometer

Dynamometer speed was verified initially and bi-weekly with a Strobotach. Road load force was determined using calibrated weights. Coastdowns were performed initially and bi-weekly thereafter to verify the road load force versus inertia weight relationships as given in 40 CFR Part 86.

2.5.5 Data Acquisition System

The data acquisition system was verified by performing manual checks of equipment performance and hand calculations from strip chart data and comparing these with the data provided by the DACC. This activity is verified by a Quality Assurance inspection for each test. A reasonableness check is performed for each critical data element. Any suspect data was verified by strip chart or calculation. Any data found to be in error is independently recalculated wherever possible or the test is rejected.

2.5.6 Miscellaneous Equipment

All miscellaneous equipment was calibrated or verified according to manufacturer's recommended practices. The CVS laminar flow element and barometers were calibrated by Meriam Instruments Company.

2.6 TEST PROCEDURES

2.6.1 Vehicle Preparation

Each vehicle received a preliminary safety inspection as part of the procurement activity. This was done to ensure that the vehicle was safe to operate on the street or dynamometer. Upon acceptance for testing, the vehicle's fuel tank was drained and refueled with appropriate test fuel to 40% of tank capacity. At this time all vehicles received a liquid chemical lead test and a plumbtesmo lead test. Vehicles to receive SHED tests were further prepared by undergoing a pressure check of the fuel system. The gas tank was fitted with a Type J Thermocouple by soldering it to the side of the tank at the approximate mid-point of the 40% fuel volume. To ensure that test fuel had purged the fuel system, the vehicle was driven for ten minutes on city streets or on the dynamometer for the first 505 seconds of the FTP. After the preconditioning run, the vehicle was driven or pushed into the soak area for the required 12 to 36 hour soak at temperatures between 68°F and 86°F. Drive wheel tire pressure was set to 45 psi prior to dynamometer testing to prevent tire damage.

Figures 1 and 2 present flow charts of vehicle preparation and testing activities.

2.6.1.1 Driveability Evaluation

An evaluation of the driveability of each vehicle was performed prior to and during each FTP. The evaluation is essentially the same as that performed on previous EPA light duty vehicle projects.

2.6.2 Equipment Preparation

Prior to the first test of the day and following any shut-down, equipment which had been idle or in a stand-by condition was activated to begin warm-up. This included the CVS water heater and mass pump

and each of the analytical instruments. Following the warm-up of the respective instruments, efficiency of the NOx instrument thermal converter was checked and the propane recovery test involving the CVS sample system and the FID hydrocarbon instrument was conducted. Subsequent to these checks, analyzer outputs as indicated by the strip chart recorders and the DACC computer and printer, were checked for correlation by calibrating at zero and five volts. Prior to the first exhaust emissions test of the day or following any extended shut-down, the dynamometer was warmed-up. The prescribed 15 minutes of 30 mile per hour operation of the dynamometer was the warm-up procedure followed. Following warm-up, the speed calibration of the dynamometer, driver's aid recorder and associated indicating devices were also checked and calibrated as necessary.

Prior to each test, all charts were properly stamped to show, among other things, the vehicle number, run number, date and persons involved in the test.

2.6.3 Federal Exhaust Emission Test Procedure

The Federal Test Procedure as described in 40 CFR Part 86 was performed on all vehicles in the as-received condition. The evaporative emission portion of the procedure was performed on 125 vehicles in this program. The exhaust emission portion of the Federal Test Procedure is comprised of cold transient, cold stabilized and hot transient phases. The cold transient portion is 505 seconds long, covering a distance of 3.59 miles with an average speed of 25.6 mph. The cold stabilized portion is 869 seconds in length, 3.91 miles in distance and a 16.2 mph average speed. The hot transient portion is identical to the cold transient portion except that it is preceded by a 10 minute soak. The evaporative emissions testing consisted of a diurnal heat build as described in 41 Federal Register 164, dated Monday, August 23, 1976. This was followed by FTP testing and a hot soak test per 40 CFR paragraph 86.138-78.

The cold soak period used for the test vehicles was 12 to 36 hours. The starting procedures and shift points used for the test vehicles were as recommended by each manufacturer.

2.6.4 Bagged Idle

This test immediately follows the FTP. The test begins with a 6 minute "engine-off" soak period with the cooling fan off and the hood closed. At the end of the soak period the engine is restarted and operated for 3 minutes at idle in drive (manual transmission vehicles in neutral with the clutch engaged). During the 3 minutes a dilute sample is collected and then analyzed. The sample period begins when the starter is engaged and includes crank time. However, if an evaporative emissions test was performed on the test vehicle, this test is preceded by a preconditioning cycle consisting of the first 505 seconds of the FTP driving cycle.

2.6.5 50 MPH Cruise

This test takes advantage of the 3 minute preconditioning

run before the HFET. Tail pipe emissions are recorded and measured continuously throughout the period although the official sampling period ends 30 seconds after the speed and load have stabilized at 50 MPH.

2.6.6 Highway Fuel Economy Test

Starting with each vehicle in a warmed-up condition (at least 7.5 miles of cyclic operation within the last thirty-five minutes) each vehicle was operated on the chassis dynamometer at 50 miles per hour for three minutes. Within one minute after the end of the 50 mile per hour cruise period, the vehicle commenced operation over the 10.242 mile, 765 second driving schedule. A CVS sample bag was used to gather the dilute exhaust for emissions analysis and fuel economy calculations. HC, CO, CO₂ and NO_x emissions were measured and reported in grams per mile. Fuel economy was calculated by the carbon balance method and report in miles per gallon.

2.6.7 Four-Speed Idle Test

This test followed the HFET and required additional analytical instruments, aside from those required for the basic FTP test, to measure undiluted exhaust emissions. The instruments used for measurement of undiluted HC, CO, NO and CO₂ emissions are specified in Section 2.4.3.

This short test consisted of volumetric sampling of undiluted exhaust emissions during four steady state operating conditions, with the hood open and the cooling fan on. The first operating mode was basic idle with the transmission in neutral. The second operating mode was at 2500 engine RPM, also in neutral. The third mode was again normal curb idle in neutral and the fourth mode (automatic transmission vehicles only) was curb idle in drive with brakes applied.

Four-Speed Idle tests were preceded by a 6 minute idle soak period with transmission in neutral, the hood open and the auxiliary cooling fan on. At the end of the soak period the vehicle was operated at idle in neutral, then at 2500 RPM, again at idle in neutral and then idle in Drive for automatic transmission vehicles. Equilibrium of engine speed and the CO, HC, NO and CO₂ analyzer output meters was maintained for 30 seconds before the readings were recorded. CO, HC, NO and CO₂ were measured and reported in % CO, % CO₂, ppm Hexane and ppm NO respectively. Engine RPM from the last idle mode was written on the Driver's trace for each particular vehicle.

2.6.8 Loaded Two Mode Test

The six minute soak period and the undiluted exhaust analysis instruments described under the Four-Speed Idle test were also used for this test. This test followed the HFET and Four-Speed Idle test so the engine, dyno and analyzers were at normal operating temperature. Inertia weight was set at 1750 pounds. The dynamometer load was set to 9.0 actual horsepower at 30 miles per hour regardless of vehicle weight. Using drive

for automatic and third gear for manual transmissions, the vehicle was operated at 30 miles per hour roll speed. The concentrations of HC, CO, CO₂ and NO emissions were recorded continuously during this time and analyzed after a maximum of 30 seconds or when stabilized. Following this, the vehicle was allowed to idle until emissions once again stabilized or for a maximum of 30 seconds before the concentrations were again analyzed.

2.6.9 After-Test Procedures

After the completion of testing and acceptance of the data by Quality Assurance, each vehicle was taken to the inspection and maintenance area. Here the mechanic measured and recorded engine parameters which included initial timing, idle speed, undiluted idle CO and undiluted idle HC emissions. When possible the procedures outlined in the owner's manual and on the vehicle's emission sticker were followed in performing these inspections. If the owner's manual and emissions sticker were missing, the shop manual, or other available publication was used to determine vehicle specifications. In some cases, the vehicle manufacturer was called upon to aid in determining specifications.

Prior to returning the vehicle to the owner, tire pressure was set to manufacturer's specifications, and the fuel tank was filled to full capacity with fuel currently being marketed in the test area. This fuel was suitable for use in the particular vehicle.

2.6.9.1 Propane Gain

Each dynamometer test series was followed by a Propane Gain test. A copy of the test procedure and a copy of the data sheet for this test are attached to this report (Figure 3).

2.6.9.2 Maladjustment and Disablement Inspection

All vehicles were given an extensive underhood inspection to determine the condition and proper installation of each emission control component. Procedures used were those detailed in manufacturer's shop manuals. These procedures were supplemented by other manufacturer supplied information where necessary. The systems inspected and the inspection results and the results of the many subsystem inspections were submitted to EPA but are not listed in this report.

2.6.10 State Lane Inspections

Every 1980-81 passenger car was inspected at the State I/M Lane after each FTP sequence.

2.6.11 Restorative Maintenance

Twenty-two vehicles were subjected to the One-Step Restorative Maintenance test sequence. The testing included repair of all maladjusted and disabled emission control components, replacement of defective emission control parts, and a major tune-up as specified by the appropriate

manufacturer's maintenance schedule for such tune-up. The vehicles were retested following all repairs using the as-received dynamometer test sequence. The One-Step Restorative Maintenance sequence is presented in Figure 4.

2.6.11.1 Failure Criteria For R/M Sequence

- A. Vehicle fails a California FTP standard by more than 100%, or
- B. Vehicle fails any mode of the following short test using cut points of 1.2% CO/200 HEX:
 - *50 MPH Cruise
 - *Four-Mode Idle
 - *Loaded Two Mode, or
- C. Vehicle fails its I/M State Lane test for any reason, or
- D. Vehicle has a check engine light on or a trouble code stored in its memory.

2.6.12 Selective Malperformance

Four 1981 throttle body injection (TBI) vehicles were subjected to Selective Malperformance test sequence. Two GM, 1 Ford-Lincoln, and 1 Chrysler. These tests were conducted to determine the effects of component disablement on the exhaust emissions control systems. The Selective Malperformance sequence is presented in Figure 5.

2.6.13 Daily Test Schedule

Test shifts were generally limited to the first and second shifts of the day. Vehicles scheduled for test the next day were usually preconditioned on the second shift. Daily calibration checks and system preparation (as described in Section 2.5) were performed prior to the first test of the day and tests were scheduled with this in mind.

2.7 DATA HANDLING

2.7.1 Data Collection

All emission results and appropriate test parameters necessary to compute emissions were reported on data forms supplied by the Contract Officer. These are presented in Figure 6.

2.7.2 Data Processing

Diluted exhaust emissions test results include ambient temperature, barometric pressure, humidity, and concentrations of HC, CO, CO₂, and NO_x. Undiluted exhaust emissions were recorded as ppm Hexane for

hydrocarbons, % CO for carbon monoxide, ppm NO for nitric oxides and % CO₂ for carbon dioxide.

All of the exhaust emissions data were collected at the time of test by the AESi DACC. This computer was checked at least monthly using independent calculations from the analyzer strip charts to ensure its validity.

2.7.3 Quality Control

The quality assurance program applied to this project monitors every aspect of each emissions test. This includes operator and driver performance, the sampling system, ambient test conditions, analyzer performance, gases, fuel, dynamometer settings and all data processing. In addition, all other data submitted as part of this project received the inspection of the Quality Assurance section. Any discrepancies noted during the review process were resolved in an appropriate manner.

Figure 7 presents a flow chart of the Quality Assurance activities.

SECTION 3

LIST OF FIGURES

Figure 1	Vehicle Procurement Flow Chart
Figure 2	Testing Flow Chart
Figure 3	Propane Test Procedure and Sample Test Data Sheet
Figure 4	One-Step Restorative Maintenance Testing Flow Chart
Figure 5	TBI Selective Malperformance Testing Flow Chart
Figure 6	Data Forms
Figure 7	Quality Assurance Activity Flow Chart

FIGURE 1
VEHICLE PROCUREMENT FLOW CHART

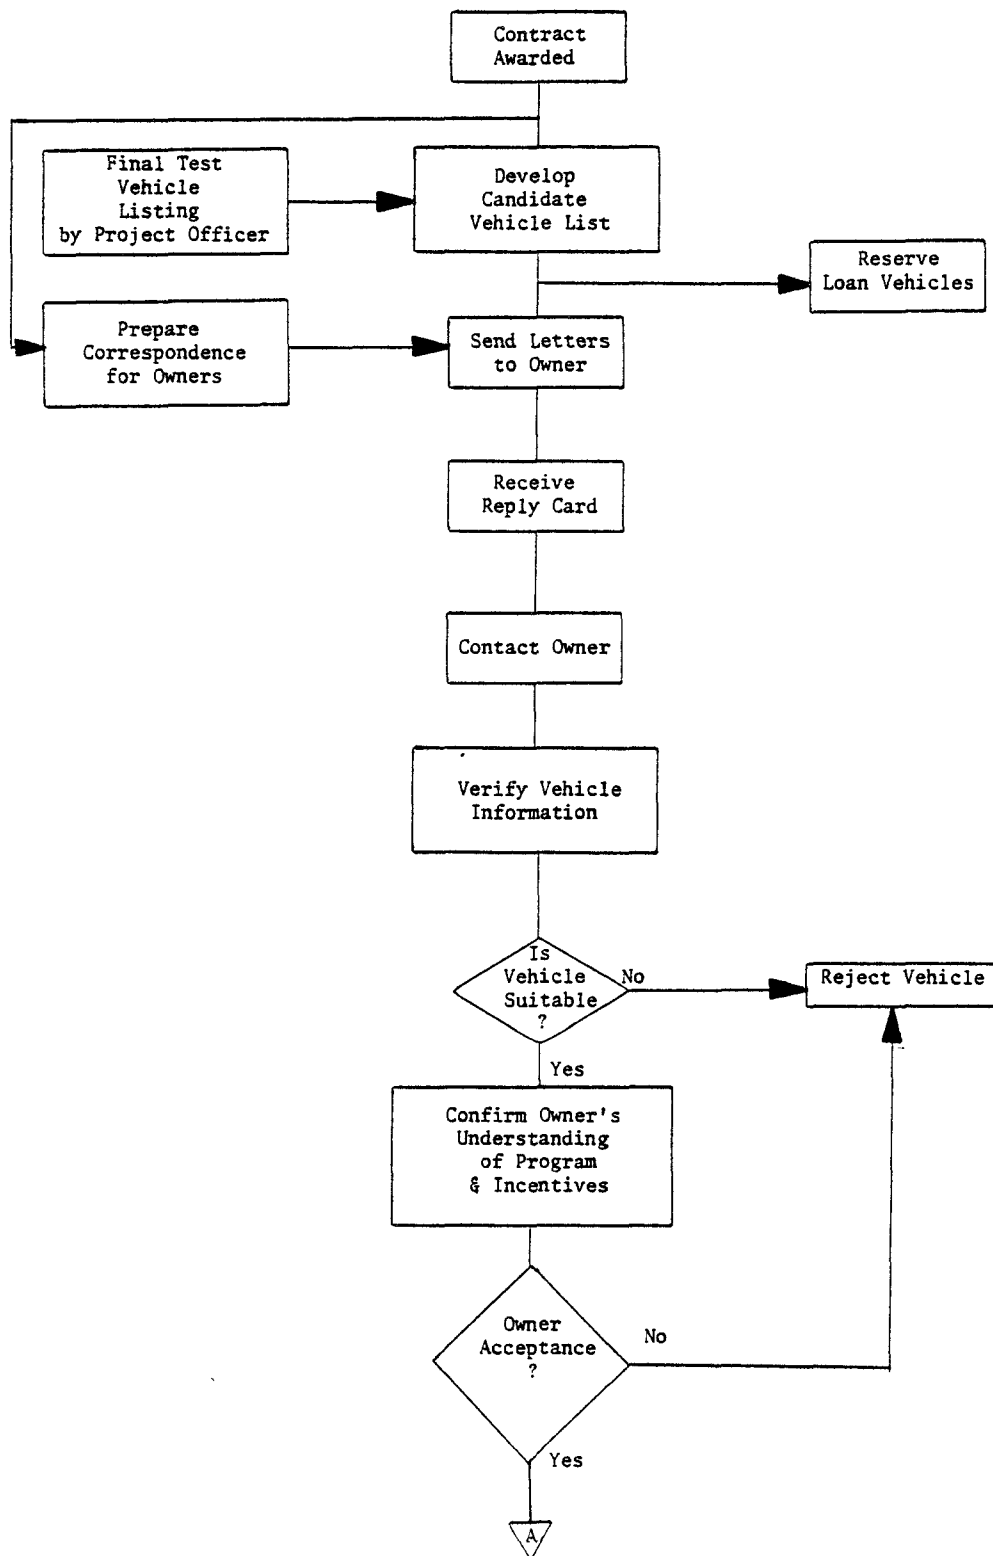


FIGURE 1
VEHICLE PROCUREMENT
FLOW CHART

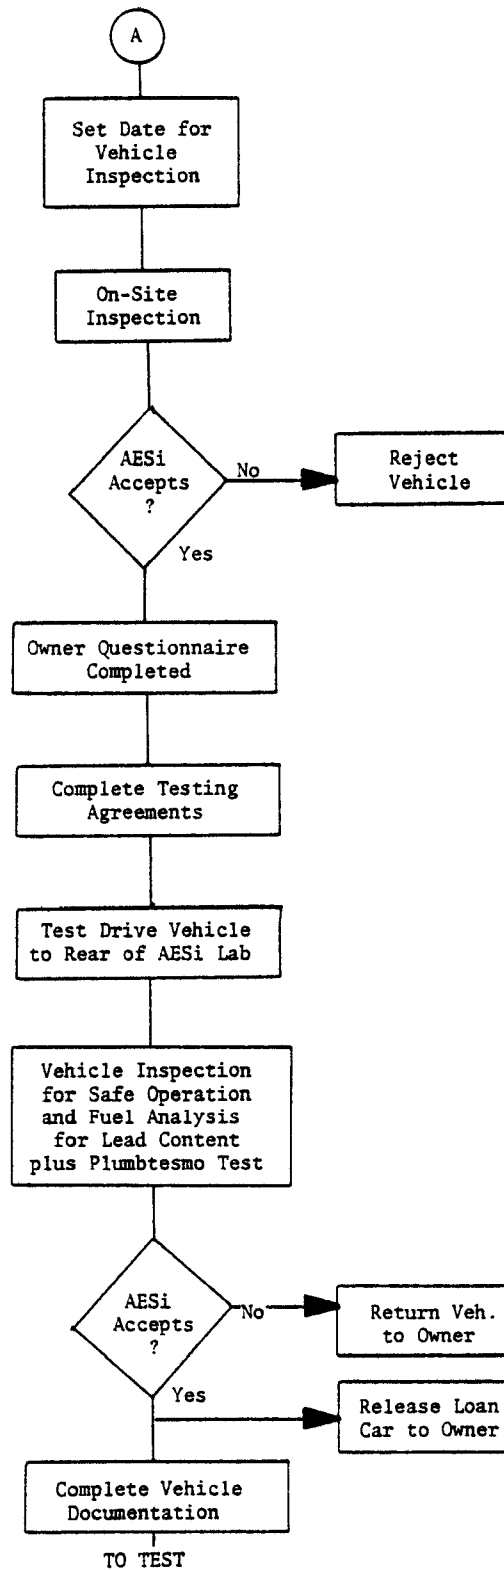


FIGURE 1 CONTINUED

FIGURE 2
TESTING FLOW CHART

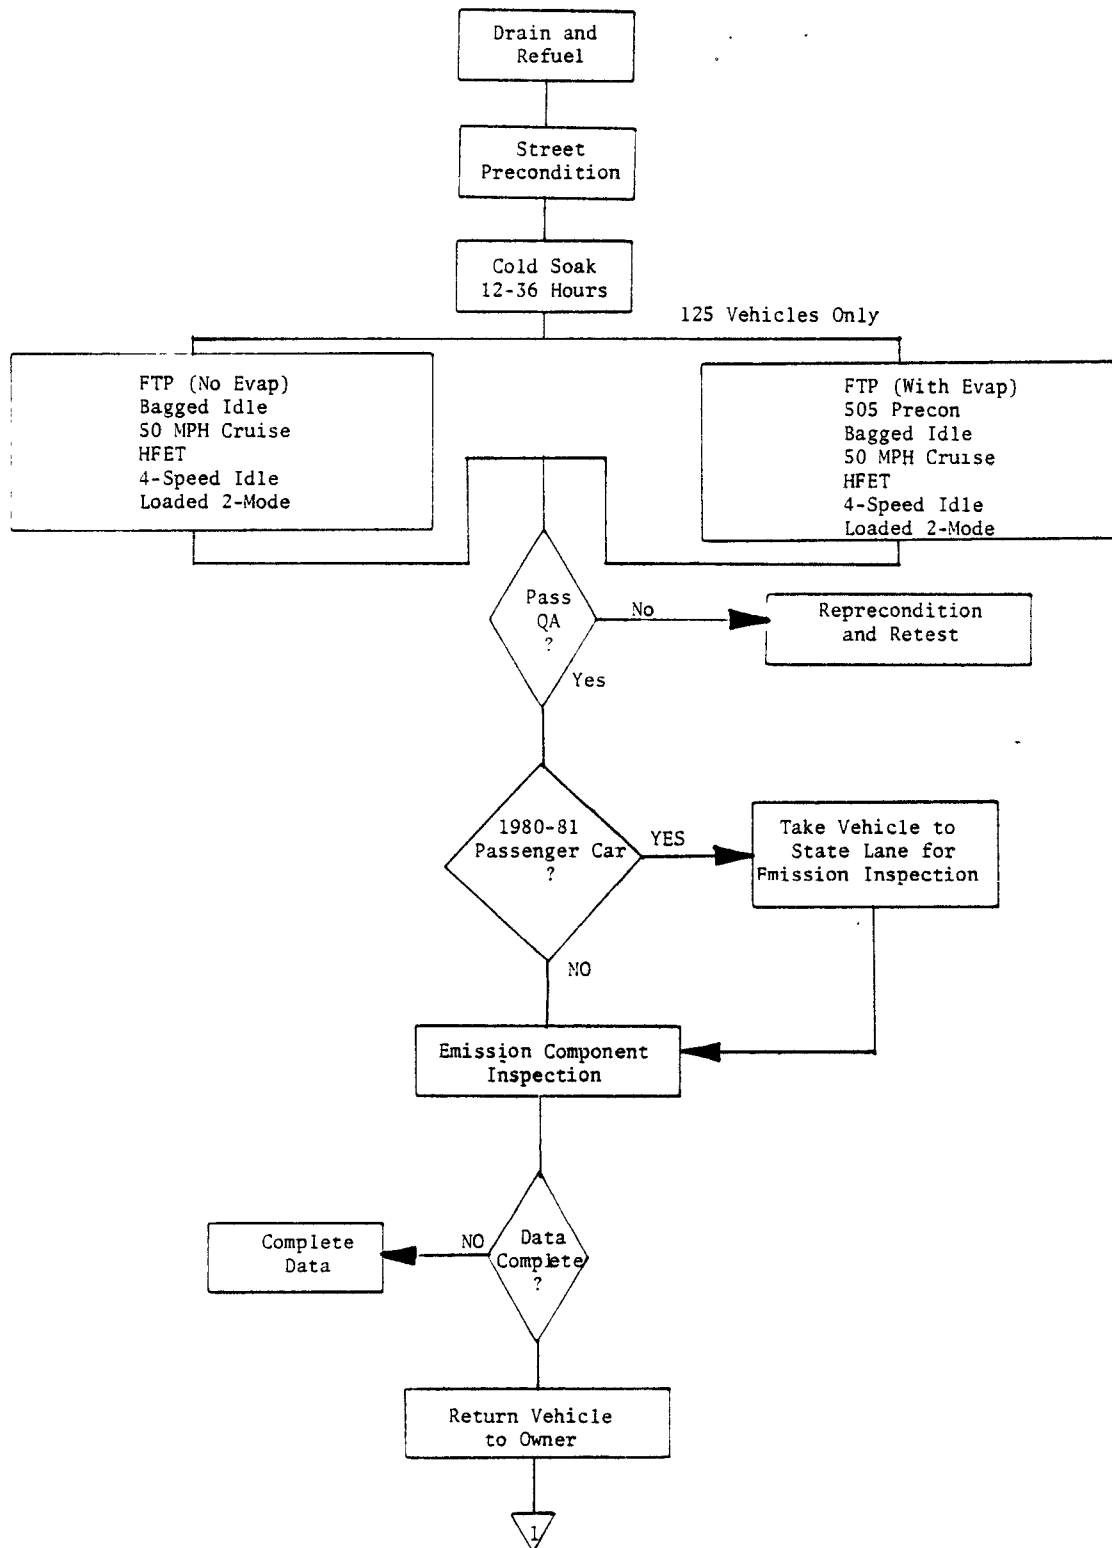


FIGURE 2
TESTING FLOW CHART

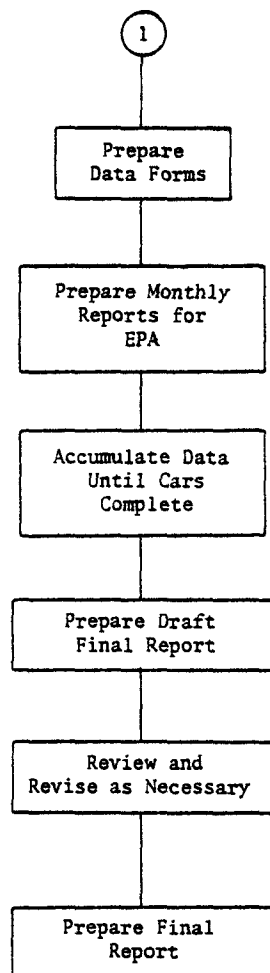


FIGURE 2 CONTINUED

FIGURE 3

PROPANE TEST PROCEDURE AND SAMPLE TEST DATA SHEET

Description of the 3-Way Closed Loop
Propane Test Procedure

Step 1: Preset the propane flow rate to 4 CFH.

Step 2: With no propane flowing into the vehicle record idle RPM and idle CO.

Step 3: Induce propane to the air inlet of the carburetor and observe the engine behavior.

a. If the engine RPM rises to a maximum value and then decreases, record the maximum RPM value.

If the engine RPM value rises to a maximum value and continues to run at that speed, record that RPM value. This RPM value will be the same as the RPM value to be recorded in step 4.

b. If the engine RPM falls to a minimum value and then rises, record the minimum value.

If the engine RPM falls to a minimum value and continues to run at that speed, record that RPM value.

Note: The importance of closely observing the engine speed change immediately after induction of propane and until the engine speed stabilizes cannot be overstressed. The success or failure of this procedure as an I/M test key upon the ability of the technician to make a real time observation of the behavior of the engine, observable in engine speed, when propane is introduced.

An analog (meter type) tachometer must be used. A digital tachometer will not show maximum or minimum transient engine speeds.

Figure 3
PROPANE TEST PROCEDURE

JAN 13 1981

c. Self explanatory

d. If engine dies terminate test at this point.

e. If engine speed remains constant (neither rises nor falls) after induction of propane record a yes value (1).

Step 4: When engine stabilizes (not to exceed 60 seconds) and with propane flowing record idle RPM and idle CO.

Step 5: Withdraw the propane supply from the vehicle and observe the engine behavior as in Step 3.

Step 6: When engine stabilizes (not to exceed 60 seconds) record idle RPM and idle CO.

Note: If the engine behaves in an unusual manner add narrative comments in the data sheet margins.

Figure 3 Continued

JAN 13 1981

PROPANE GAIN DATA SHEET

Page (1 of 2)

CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ		P		0				
IDENT	3	0	2	3	0	1	0	4			1	2								
	5				10				15				20				80			

3-WAY CLOSED LOOP

		IN NEUTRAL	IN DRIVE
STEP 1	PRESET FLOW RATE		
STEP 2	RECORD: a) FLOW RATE	<div>1</div>	<div>2</div>
	b) RPM	<div>5</div>	<div>10</div>
	c) IDLE %CO	<div>15</div>	<div>20</div>
STEP 3	INDUCE PROPANE, OBSERVE VEHICLE BEHAVIOR		
	RECORD ONE: a) RPM RISES SMOOTHLY TO	<div>25</div>	<div>30</div>
	b) RPM FALLS SMOOTHLY TO	<div>35</div>	<div>40</div>
	c) ENGINE RUNS ROUGH AND THEN STABILIZES (1-YES)	<div>43</div>	<div>44</div>
	d) ENGINE DIES (1-YES)	<div>45</div>	<div>46</div>
	e) RPM STAYS THE SAME (1-YES)	<div>47</div>	<div>48</div>
STEP 4	WHEN ENGINE STABILIZES, RECORD:		
	a) RPM	<div>50</div>	<div>55</div>
	b) IDLE %CO	<div>60</div>	<div>65</div>
		P 1	
		80	
(Continues on Next Page)			

Page (2 of 2)

3-WAY CLOSED LOOP (Continued)

30

TRANS SPEC

RPM SPEC
LEAN DROP
OR
PROPANE

IN DRIVE

RPM W/O
PROPANE

RPM W/
PROPANE

IN NEUTRAL

RPM W/O
PROPANE

RPM W/
PROPANE

IN NEUTRAL
W/O PROPANE

IDLE
HC
ppm

IDLE
%CO

5 10 15 20 25 30 35

34

FIGURE 4

ONE-STEP RESTORATIVE MAINTENANCE TESTING FLOW CHART


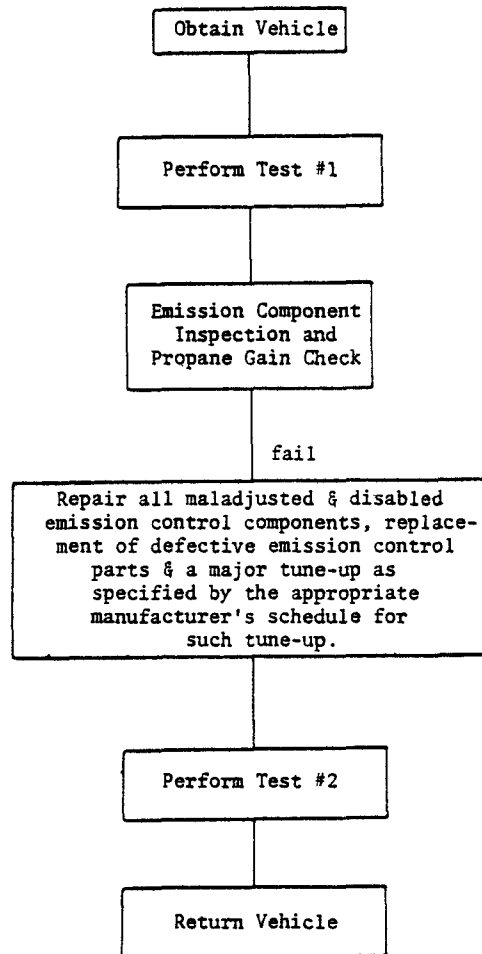


FIGURE 4
ONE-STEP RESTORATIVE MAINTENANCE
TESTING FLOW CHART

FIGURE 5

TBI SELECTIVE MALPERFORMANCE TESTING FLOW CHART

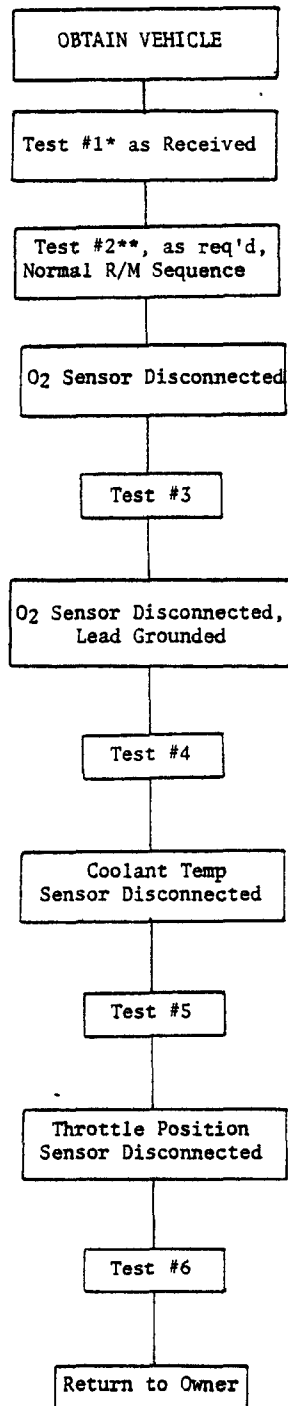

*FTP (No Evap)
Bagged Idle
50 MPH Cruise
HFET
4-Speed Idle
Loaded 2-Mode

** NOTE: Previous malfunctions were corrected in Test 2 before continuing to Test 3.

FIGURE 5
TBI SELECTIVE MALPERFORMANCE TESTING
FLOW CHART

FIGURE 6
DATA FORMS

VEHICLE INFORMATION DATA SHEET

	CONTRACT NUMBER				TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ											V	0	80				
IDENT	3	0	2	3		0	4		0	2																
CARD-V1	VEH MATCH	METHOD OF PROCUREMENT	VEH TYPE	ENGINE TYPE	MODEL YEAR	MFR CODE	MAKE CODE	MODEL CODE	ENGINE DISP. CID	OVERDRIVE	TRANS TYPE	TRANS SPEEDS	CARB BBLs	VARB VENTURI	TURBO	CYLINDERS	DRIVETRAIN	GROSS VEH WEIGHT RATING lb	A/C	SUPP AIR	FUEL INJ					
	CATALYST CAT CONFIG BUILD DATE				VIN (LEFT JUSTIFY)						STANDARDS	ACTUAL STANDARDS							V	1	80					
	Y	Y	M	M								HC gm/mi	CO gm/mi	NOX gm/mi												
CARD-V2	CONTRACTOR RUN NUMBER	FUEL TANK CAPACITY gal	LEAD CONTENT OF FUEL gms/gal	PLUMBESMO	FUEL FILLER NECK DAMAGE	EPA FUEL ECONOMY (GUIDE) CITY MPG HWY. MPG	AXLE RATIO	TIRE SIZE (LEFT JUSTIFY)									V	2	80							
	TIRE MANUFACTURER (LEFT JUSTIFY)				TIRE PRESSURE (psi) MEASURED SPEC				TIRE WEAR		VEH TESTED PREVIOUSLY	PREVIOUS CONTRACT NUMBER	TASK NUMBER	LAST CONTRACT VEHICLE NUMBER	V	3	80									
	LF	RF	LR	RR	FRONT	REAR	LF	RF																		
CARD-V3	ENGINE FAMILY (LEFT JUSTIFY)								EMISSION STICKER PART NUMBER (LEFT JUSTIFY)										V	4	80					
	EGR VALVE PART NUMBER (LEFT JUSTIFY)								CARBURETOR PART NUMBER (LEFT JUSTIFY)												V	5	80			
CARD-V4	DISTRIBUTOR PART NUMBER (LEFT JUSTIFY)								TIME INSPECTION HRS MIN REPAIR HRS MIN				COST CONV. 3-WAY				V	6	80							

MAR 24 1981

ENGINE PARAMETER DATA SHEET

	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ																	
IDENT	3	0	2	3	0	1	0	4			0	3													G	0				
	5				10				15				20														80			
	TEST DATE								ENGINE IDLE SPEED				INITIAL TIMING																	
	Y Y M M D D				ODOMETER MILES				MEAS rpm				SPEC rpm				VAC LINE DISC deg		VAC LINE CONN deg		SPEC deg		IDLE % CO							
CARD G1																														
	5				10				15				20				25				30				35				40	
	IDLE HC ppm/hex				FUEL INJ		CHOKE NOTCHES																							
							MEAS +				SPEC +																			
	45				50																				G	1				
																									80					

FTP TEST DATA

CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ													
IDENT				3 0 2 3		0 1		0 4		0 5				F 0											
				5		10		15		20		80													
INERTIA WEIGHT lbs				ROAD LOAD H.P.		EXTRA 10%																			
CARD F1												F 1													
				5		10		15		20		80													
VOLUME OF GAS (Vo) ft³				NUMBER OF REVOLS		BAROM "HG		INLET PRESS "HG		CVS TEMP °F		VMIX													
BAG 1																									
				5		10		15		20		25		30		40									
WET BULB °F				DRY BULB °F		DISTANCE MILES		HC ppm		CO ppm		% CO2		NOX ppm		CH4 ppm									
																F 2									
				45		50		55		60		65		70		80									
				CONCENTRATION OF DILUTE EXHAUST SAMPLE																					
HC ppm				CO ppm		% CO2		NOX ppm		CH4 ppm															
				5		10		15		20		25		30		40									
VOLUME OF GAS (Vo) ft³				NUMBER OF REVOLS		BAROM "HG		INLET PRESS "HG		CVS TEMP °F		VMIX													
BAG 2																									
				45		50		55		60		65		70		80									
				CONCENTRATION OF DILUTION AIR																					
WET BULB °F				DRY BULB °F		DISTANCE MILES		HC ppm		CO ppm		% CO2		NOX ppm		CH4 ppm									
																F 3									
				5		10		15		20		25		30		40									
				CONCENTRATION OF DILUTE EXHAUST SAMPLE																					
HC ppm				CO ppm		% CO2		NOX ppm		CH4 ppm															
				5		10		15		20		25		30		40									
				CONCENTRATION OF DILUTION AIR																					
WET BULB °F				DRY BULB °F		DISTANCE MILES		HC ppm		CO ppm		% CO2		NOX ppm		CH4 ppm									
																F 4									
				45		50		55		60		65		70		80									

FTP AND EVAP TEST DATA SHEET

Page (2 of 2)

FTP TEST DATA (continued)

IDENT	CONTRACT NUMBER				TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ	
3023	01	04		05						F 0
<div>5</div> <div>10</div> <div>15</div> <div>20</div> <div>80</div>										
<div>VOLUME OF GAS (V₀) ft³</div> <div>NUMBER OF REVOLS</div> <div>BAROM "HG</div> <div>INLET PRESS "HG</div> <div>CVS TEMP °F</div> <div>VMIX</div>										
BAG 3										
<div>5</div> <div>10</div> <div>15</div> <div>20</div> <div>25</div> <div>30</div> <div>35</div> <div>40</div>										
<div>WET BULB °F</div> <div>DRY BULB °F</div> <div>DISTANCE MILES</div> <div>CONCENTRATION OF DILUTION AIR</div> <div>HC ppm</div> <div>CO ppm</div> <div>% CO₂</div> <div>NOX ppm</div> <div>CH₄ ppm</div>										
										F 5
<div>45</div> <div>50</div> <div>55</div> <div>60</div> <div>65</div> <div>70</div> <div>75</div> <div>80</div>										
<div>CONCENTRATION OF DILUTE EXHAUST SAMPLE</div> <div>HC ppm</div> <div>CO ppm</div> <div>% CO₂</div> <div>NOX ppm</div> <div>CH₄ ppm</div>										
										F 6
<div>5</div> <div>10</div> <div>15</div> <div>20</div> <div>25</div> <div>30</div> <div>80</div>										

EVAP TEST DATA

IDENT	CONTRACT NUMBER				TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ	
3023	01	04		06						E 0
<div>5</div> <div>10</div> <div>15</div> <div>20</div> <div>80</div>										
<div>NET ENCLOSURE VOLUME ft³</div> <div>DIURNAL</div> <div>HC CONC</div> <div>BAROM PRESS</div> <div>AMB TEMP</div>										
<div>INIT ppm/carbon</div> <div>FINAL ppm/carbon</div> <div>INIT "HG</div> <div>FINAL "HG</div> <div>INIT °F</div> <div>FINAL °F</div>										
CARD E1	1682									
<div>5</div> <div>10</div> <div>15</div> <div>20</div> <div>25</div> <div>30</div> <div>40</div>										
<div>HOT SOAK</div> <div>HC CONC</div> <div>BAROM PRESS</div> <div>AMB TEMP</div>										
<div>INIT ppm/carbon</div> <div>FINAL ppm/carbon</div> <div>INIT "HG</div> <div>FINAL "HG</div> <div>INIT °F</div> <div>FINAL °F</div>										
										E 1
<div>50</div> <div>55</div> <div>60</div> <div>65</div> <div>70</div> <div>80</div>										

JAN 13 1981

BAG IDLE AND 50 MPH CRUISE TESTS DATA SHEET

BAG IDLE TEST DATA

IDENT	CONTRACT NUMBER				TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ											B																			
	3	0	2	3	0	1	0	4		0	7											B	0																
5					10					15					20					80																			
VOLUME OF GAS (V ₀) ft ³					NUMBER OF REVOLS					BAROM "HG					INLET PRESS "HG					CVS TEMP °F					VMIX														
BAG 1																																							
5					10					15					20					25					30					40									
WET BULB °F					DRY BULB °F					SECONDS OF TEST					CONCENTRATION OF DILUTION AIR																								
HC ppm					CO ppm					% CO ₂					NOX ppm					CH ₄ ppm																			
45					50					55					60					65					70					75					80				
CONCENTRATION OF DILUTE EXHAUST SAMPLE																																							
HC ppm					CO ppm					% CO ₂					NOX ppm					CH ₄ ppm																			
5					10					15					20					25					30					80									

50 MPH CRUISE DATA

IDENT	CONTRACT NUMBER				TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ											B																			
	3	0	2	3	0	1	0	4		0	8											B																	
5					10					15					20					40																			
INERTIA WEIGHT lb					ACTUAL H.P.					ENGINE SPEED rpm					50 MPH CRUISE																								
HC ppm/hex					% CO					% CO ₂					NO ppm																								
CARD 50																																							
45					50					55					60					65					70					75					80				

HIGHWAY FUEL ECONOMY TEST DATA SHEET

IDENT	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ												H	0							
	3	0	2	3	5	0	1	0	4			0	9																				
		VOLUME OF GAS (Vo) ft³				NUMBER OF REVOLS				BAROM "HG				INLET PRESS "HG				CVS TEMP °F				VMIX								80			
BAG 1																																	
		5				10				15				20				25				30				35				40			
		WET BULB °F				DRY BULB °F				DISTANCE MILES				CONCENTRATION OF DILUTION AIR																			
		HC ppm				CO ppm				% CO2				NOX ppm				CH4 ppm								H	1						
		45				50				55				60				65				70				75				80			
		CONCENTRATION OF DILUTE EXHAUST SAMPLE																															
		HC ppm				CO ppm				% CO2				NOX ppm				CH4 ppm												H	2		
		5				10				15				20				25				30								80			

JAN 13 1981

FOUR MODE IDLE AND LOADED TWO MODE TESTS DATA SHEET

FOUR MODE IDLE TEST DATA

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ		
3 0 2 3	0 1	0 4			1 0			M 0
FIRST IDLE READING IN NEUTRAL								
CARD-M1	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	5	10	15	20	25	30	35	40
2500 RPM								
	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	5	10	15	20	25	30	35	40
SECOND IDLE READING IN NEUTRAL								
CARD-M2	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	5	10	15	20	25	30	35	40
FINAL IDLE READING IN DRIVE								
	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	5	10	15	20	25	30	35	40

LOADED TWO MODE TEST DATA

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ		
3 0 2 3	0 1	0 4			1 1			L 0
30 MPH MODE								
CARD-L1	INERTIA WEIGHT lbs	ACTUAL H.P.	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm	
	5	10	15	20	25	30	35	40
IDLE MODE IN NEUTRAL								
	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	5	10	15	20	25	30	35	40

Page (1 of 2)

IDENT	CONTRACT NUMBER				TASK NUMBER	TEST SITE	VEH NUMBER			TEST TYPE	TEST SEQ											
	3	0	2	3	01	04				12												
	5					10		15			20	80										

		IN NEUTRAL	IN DRIVE
STEP 1	PRESET FLOW RATE		
STEP 2	RECORD: a) FLOW RATE	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>
	b) RPM	<div style="text-align: center;">1</div>	<div style="text-align: center;">2</div>
	c) IDLE %CO	<div style="text-align: center;">5</div>	<div style="text-align: center;">10</div>
		<div style="text-align: center;">15</div>	<div style="text-align: center;">20</div>
STEP 3	INDUCE PROPANE, OBSERVE VEHICLE BEHAVIOR		
	RECORD ONE: a) RPM RISES SMOOTHLY TO	<div style="text-align: center;">25</div>	<div style="text-align: center;">30</div>
	b) RPM FALLS SMOOTHLY TO	<div style="text-align: center;">35</div>	<div style="text-align: center;">40</div>
	c) ENGINE RUNS ROUGH AND THEN STABILIZES (1-YES)	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>
	d) ENGINE DIES (1-YES)	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>
	e) RPM STAYS THE SAME (1-YES)	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>	<div style="border: 1px solid black; width: 20px; height: 20px; margin: auto;"></div>
STEP 4	WHEN ENGINE STABILIZES, RECORD:	<div style="text-align: center;">43</div>	<div style="text-align: center;">44</div>
	a) RPM	<div style="text-align: center;">45</div>	<div style="text-align: center;">46</div>
	b) IDLE %CO	<div style="text-align: center;">47</div>	<div style="text-align: center;">48</div>
		<div style="text-align: center;">50</div>	<div style="text-align: center;">55</div>
		<div style="text-align: center;">60</div>	<div style="text-align: center;">65</div>
		<div style="text-align: center;">P</div>	<div style="text-align: center;">1</div>
		<div style="text-align: center;">80</div>	

Page (2 of 2)

				CONTRACT NUMBER				TASK NUMBER				TEST SITE				VEH NUMBER				TEST TYPE				TEST SEQ																			
IDENT				3	0	2	3	0	1	0	4				1	2			P 0																								
				5				10				15				20				80																							

3-WAY CLOSED LOOP (Continued)

		IN NEUTRAL	IN DRIVE
STEP 5	WITHDRAW PROPANE, OBSERVE VEHICLE BEHAVIOR RECORD ONE: a) RPM RISES SMOOTHLY TO b) RPM FALLS SMOOTHLY TO c) ENGINE RUNS ROUGH AND THEN STABILIZES (1-YES) d) ENGINE DIES (1-YES) e) RPM STAYS THE SAME (1-YES)	<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>	<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>
		5	10
		<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>	<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>
		15	20
		<div></div> <div>21</div>	<div></div> <div>22</div>
STEP 6	WHEN ENGINE STABILIZES, RECORD: a) RPM b) IDLE %CO	<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>	<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>
		23	24
		<div></div> <div>25</div>	<div></div> <div>26</div>
		<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>	<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>
		30	35
		<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>	<div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div>
		40	45
		P 2	

VEHICLES OTHER THAN 3-WAY CLOSED LOOP

TRANS SPEC

RPM SPEC LEAN DROP OR PROPANE

IN DRIVE

RPM W/O PROPANE

RPM W/O PROPANE

IN NEUTRAL

RPM W/O PROPANE

RPM W/O PROPANE

IN NEUTRAL W/O PROPANE

IDLE HC ppm

IDLE %CO

5 10 15 20 25 30 35 80

61

P 3

DRIVEABILITY EVALUATION DATA SHEET

IDENT	CONTRACT NUMBER	TEST NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ	INTLS	DATE
	3023	01	04		13			

AMBIENT TEMPERATURE OF				(41-43)	
ROAD CONDITION (1-DRY 2-WET 3-ICY 4-SNOW)	1	2	3	4	(44)

CONSTANT SPEED PHASE							
NUMBER OF STALLS, PASS-OUTS UPON PART THROTTLE ACCELERATION TO ROAD SPEED				(45)			
ACCELERATION QUALITY	1	2	3	4	5	(46)	
CRUISE QUALITY	1	2	3	4	5	(47)	
SLIGHT ACCELERATION RESPONSE (PASSING)	1	2	3	4	5	(48)	
IDLE QUALITY AT STOP WITH A/C 'ON'	1	2	3	4	5	9	(49)
IDLE QUALITY AT STOP WITH A/C 'OFF'	1	2	3	4	5	(50)	

ACCELERATION FROM STOP PHASE						
QUALITY OF ACCELERATION UNDER 1/4 THROTTLE	1	2	3	4	5	(51)
QUALITY OF ACCELERATION UNDER 1/2 THROTTLE	1	2	3	4	5	(52)
QUALITY OF ACCELERATION UNDER 2/3 THROTTLE	1	2	3	4	5	(53)
QUALITY OF ACCELERATION UNDER 3/4 THROTTLE	1	2	3	4	5	(54)

RESTART PHASE						
CRANKING TIME TO START AFTER 10 MIN (IN SECONDS)				(55-56)		
IDLE QUALITY AFTER RESTART	1	2	3	4	5	(57)

COLD START AND IDLE PHASE (DYNAMOMETER)						
INITIAL CRANKING TIME (IN SECONDS)				(58-59)		
NUMBER OF ENGINE IDLE-OUTS AFTER START				(60)		
NUMBER OF ENGINE STALLS AFTER GEAR SELECTION				(61)		
HESITATION, LAG UPON SLIGHT ACCELERATION (1-YES 2-NO)	1	2		(62)		
IDLE QUALITY	1	2	3	4	5	(63)

DRIVE AWAY PHASE (DYNAMOMETER)						
NUMBER OF STALLS, PASS-OUTS UPON SLIGHT ACCELERATION TO ROAD SPEED				(64)		
ACCELERATION QUALITY	1	2	3	4	5	(65)
IDLE QUALITY AFTER 0.2 MILE FROM STOP	1	2	3	4	5	(66)
NUMBER OF STALLS, PASS-OUTS UPON SLIGHT ACCELERATION TO ROAD SPEED				(67)		
ACCELERATION QUALITY	1	2	3	4	5	(68)
IDLE QUALITY AFTER 0.4 MILES FROM STOP	1	2	3	4	5	(69)

QUALITY CODE 0 0 (79-80)

9=IF NOT EQPD, 5=EXCELLENT, 4=GOOD, 3=FAIR, 2=POOR, 1=FAIL

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ	SUB SYS PERF CODE	SUB SYS COMMENT CODE	SYS PERF CODE
	3023	01	04		04				
INDUCTION SYSTEM									
a) HEATED AIR DOOR ASSEMBLY									
b) TEMPERATURE SENSORS									
c) AIR FILTER ELEMENT									
d) HOSES									
e) OTHER									
CARBURETOR AND FUEL SYSTEM - FUEL SUBSYSTEM									
a) CARBURETOR ASSEMBLY									
b) IDLE MIXTURE ADJUSTMENT LIMITING DEVICE									
c) IDLE MIXTURE									
d) IDLE SPEED									
e) IDLE SPEED SOLENOID									
f) FUEL INJECTION COMPONENTS									
g) HOSES, LINES, WIRES									
h) OTHER									

JAN 13 1981

IDENT	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ		SUB SYS PERF CODE				SUB SYS COMMENT CODE				SYS PERF CODE			
	3	0	2	3	0	1	0	4			0	4														
CARBURETOR AND FUEL SYSTEM - CHOKE SUBSYSTEM																										
a) CHOKE ADJUSTMENT (NOTCHES)																										
															10											
b) CHOKE ADJUSTMENT (VACUUM BREAK)																										
															15											
c) CHOKE ADJUSTMENT LIMITING DEVICE																										
															20											
d) FAST IDLE SPEED																										
															25											
e) VACUUM DIAPHRAGMS																										
															30											
f) ELECTRICAL CONTROLS																										
															35											
g) EXHAUST HEAT CONTROL VALVE ASSEMBLY																										
															40											
h) HOSES, LINES, WIRES																										
															45											
i) OTHER																										
															50											
															55											
															60											
															65											
															70											
															75											
															C 2											

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC			
	3023	01	04		04				

EGR SYSTEM		SUB SYS PERF CODE	SUE SYS COMMENT CODE	SYS PERF CODE
a)	EGR VALVE ASSEMBLY			5
b)	BACK PRESSURE TRANSDUCER			10
c)	DELAY SOLENOID			15
d)	VACUUM AMPLIFIER			20
e)	VACUUM RESERVOIR			25
f)	COOLANT TEMPERATURE SENSOR (TVS)			30
g)	HOSES, LINES, WIRES			35
h)	OTHER			40
				45
				50
				55
				60
				65
				70
				75
				80

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC	SUB SYS PERE CODE	SUE SYS COMMENT CODE	SYS PERE CODE
	3023	01	04		04				
EXHAUST SYSTEM									
a) MANIFOLD, TAILPIPE, MUFFLERS									10
b) CATALYST									15
c) OTHER									20
EVAPORATIVE CONTROL SYSTEM									25
a) CANISTER									30
b) CANISTER FILTER									35
c) CANISTER PURGE SOLENOID/VALVE									40
d) HOSES, LINES, WIRES									45
e) OTHER									50
ENGINE ASSEMBLY									55
a) ENGINE ASSEMBLY									60
b) COOLING SYSTEM									65
c) VALVE ADJUSTMENT									70
d) BELT TENSIONS									75
e) HOSES, LINES, WIRES								C	6

Page (8 of 8)

JAN 13 1981

VEHICLE OWNER QUESTIONNAIRE DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ	
	3 0 2 3	0 1	0 4		0 1	0 1	0 0

1) What is the brand name of the fuel you normally use (see list below)?	<div style="border: 1px solid black; display: inline-block; width: 40px; height: 20px;"></div>	
2) Have you, or others, ever noticed a hydrogen sulfide (rotten eggs) odor in the vehicle exhaust?	1 (never) 2 (seldom) 3 (occasionally) 4 (frequently) 5 (don't know)	(1-4)
3) Have you ever used gasohol in this vehicle?	1 (never) 2 (seldom) 3 (occasionally) 4 (frequently) 5 (don't know)	(5)
4) If you have used gasohol, a) Have you noticed any difference in the vehicle performance?	1 (never used gasohol) 2 (perf. is better) 3 (perf. is worse) 4 (no difference) 5 (don't know)	(6)
b) Have you noticed any difference in fuel economy?	1 (never used gasohol) 2 (fuel economy better) 3 (fuel economy worse) 4 (no difference) 5 (don't know)	(7)
5) How long ago did you purchase the vehicle to be tested?	1 (0-3 months) 2 (3-12 months) 3 (1-2 years) 4 (over 2 years)	(8)
		(9)

DATA ENTRIES FOR QUESTION #1

ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME
AMOC	AMOCO	CLAR	CLARK	FINA	FINA	MOBI	MOBIL	SHEL	SHELL	UNIO	UNION
ARCO	ARCO	CONO	CONOCO	GEMC	GEMCO	MOTO	MOTOR	SINC	SINCLAIR	VICK	VICKERS
ASHL	ASHLAND	CROW	CROWN	GULF	GULF	PENN	PENNEYS	SITE	SITE	WARD	WARDS
BONA	BONAFIDE	DERB	DERBY	HESS	HESS	PHIL	PHILLIPS	SKEL	SKELLY	ZEPH	ZEPHYR
BP	BP	ENCO	ENCO	HUDS	HUDSON	SCOT	SCOTT	STAN	STANDARD	**	OTHER
CHEV	CHEVRON	ESSO	ESSO	MARS	MARS	SEAR	SEARS	SUNO	SUNOCO	UNKN	UNKNOWN
CITC	CITCO	EXXO	EXXON	MART	MARTIN	SHAM	SHAMROCK	TEXA	TEXACO	VARI	VARIOUS

** IF BRAND IS 'OTHER', THEN ENTER THE FULL BRAND NAME VEHICLE OWNER USES.

JAN 13 1981

VEHICLE OWNER QUESTIONNAIRE DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ
	3023	01	04		01	01

<p>6) On a yearly basis, how many thousands of miles is this vehicle driven?</p>	<p>1 (0-5) 2 (5-10) 3 (10-15) 4 (15-20) 5 (20-30) 6 (over 30)</p>	(10)
<p>7) Where is the driving done?</p> <p style="margin-left: 40px;">almost all: >75% most: 75-51% some: 50-21% little or none: <20%</p>	<p>a) City expressways</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(11)
	<p>b) Major city streets</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(12)
	<p>c) Other city streets</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(13)
	<p>d) Rural expressways</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(14)
	<p>e) Other rural roads</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(15)
<p>8) How is the driving done?</p> <p style="margin-left: 40px;">almost all: >75% most: 75-51% some: 50-21% little or none: <20%</p>	<p>a) To and from work</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(16)
	<p>b) Shopping and errands</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(17)
	<p>c) Business (not to and from work)</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(18)
	<p>d) Other (social, vacations, etc.)</p> <p>1 (almost all) 2 (most) 3 (some) 4 (little or none)</p>	(19)
<p>9) How did you get here today?</p>	<p>1 (city streets only) 2 (some expressway) 3 (primarily expressways)</p>	(20)
<p>Approx. miles</p>		(21-22)

VEHICLE OWNER QUESTIONNAIRE DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ
	3023	01	04		01	01

10) How is this vehicle used? almost all: > 75% most: 75-51% some: 50-21% little or none: < 20%	a) Driver only	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(23)
	b) Driver and one passenger	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(24)
	c) Driver and 2 or more passengers	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(25)
	d) Driver only with heavy cargo	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(26)
	e) Driver, passenger and cargo	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(27)
	f) Towing a trailer	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(28)
11) On a typical day, how many trips are made with this vehicle? (One trip is defined as starting the engine, traveling some distance and stopping the engine).		<input type="text"/>	(29-30)
12) On a weekly basis, how often is full throttle acceleration used?		1 (seldom) 2 (once or twice) 3 (3-6 times) 4 (every day)	(31)
13) Do you now experience any engine performance problems with this vehicle?	a) Hard starting	1 (yes) 2 (no)	(32)
	b) Stalling	1 (yes) 2 (no)	(33)
	c) Rough idle	1 (yes) 2 (no)	(34)
	d) Engine misfiring	1 (yes) 2 (no)	(35)
	e) Poor acceleration	1 (yes) 2 (no)	(36)
	f) Stumbling	1 (yes) 2 (no)	(37)
	g) Hesitation	1 (yes) 2 (no)	(38)
	h) Engine knock or ping	1 (yes) 2 (no)	(39)
	i) Dieseling (after run)	1 (yes) 2 (no)	(40)

VEHICLE OWNER QUESTIONNAIRE DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC	
	3023	01	04		01	01	00

14) Overall, are you reasonably satisfied with the engine performance of this vehicle?	1 (yes) 2 (most of the time) 3 (no)	(41)
15) How long ago was the last oil change?	1 (too new, not due) 2 (due, but not yet done) 3 (0-6 months ago) 4 (6-12 months ago) 5 (Over 1 year ago) 6 (don't know)	(42)
16) If you purchased the vehicle under warranty, how many times has it been returned for warranty repairs?	1 (no warranty) 2 (never returned) 3 (twice) 4 (3 or more) 5 (don't know)	(43)
17) What was the nature of the warranty repair?	1 (no warranty) 2 (never returned) 3 (recall) 4 (driveability) 5 (other)	(44)
18) Have you had any repairs to your vehicle for the correction of driveability problems?	1 (yes) 2 (no problems)	(45)
19) What repairs were performed on your vehicle to correct the driveability problems? Specify _____	1 (none) 2 (carburetor) 3 (engine) 4 (emission control system) 5 (ignition system) 6 (other) 7 (don't know)	(46)
20) How long ago were these repairs accomplished?	1 (no repairs) 2 (0-3 months) 3 (3-6 months) 4 (over 6 months) 5 (don't know)	(47)
21) Were these repairs effective in correcting the driveability problems?	1 (no repairs) 2 (yes) 3 (no)	(48)
22) Is this vehicle operated regularly on unpaved roads, in competitive events, or in hauling or transporting loads heavier than for which it was designed?	1 (yes) 2 (no) 3 (don't know)	(49)

VEHICLE OWNER QUESTIONNAIRE DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC			
	3 0 2 3	0 1	0 4		0 1	0 1			

23) Has the vehicle ever had major damage in any of the following areas?	a) Engine	1 (yes) 2 (no)	(50)
	b) Cooling system	1 (yes) 2 (no)	(51)
	c) Fuel system	1 (yes) 2 (no)	(52)
	d) Exhaust system	1 (yes) 2 (no)	(53)
	e) No damage	1 (yes) 2 (no)	(54)
	f) Don't know	1 (yes) 2 (no)	(55)
24) Has the catalytic converter ever been replaced on this vehicle?		1 (no catalyst) 2 (yes) 3 (no) 4 (don't know)	(56)
25) Was the vehicle tested in a previous EPA program?		1 (yes) 2 (no)	(57)
26) Was any maintenance performed since the last test?		1 (yes) 2 (no) 3 (not tested)	(58)
27) What type of maintenance was performed?		1 (warranty) 2 (tune-up) 3 (none) 4 (not tested)	(59)
28) How much did the maintenance cost? 001 : no maintenance 002: don't know 003: not tested		<div style="border: 1px solid black; display: inline-block; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; display: inline-block; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; display: inline-block; width: 20px; height: 20px; margin: 2px;"></div>	(60-62)
29) Who performed the maintenance?		1 (no maintenance) 2 (dealer) 3 (independent garage) 4 (tune-up clinic) 5 (yourself) 6 (not tested)	(63)

VEHICLE OWNER QUESTIONNAIRE DATA SHEET

IDENT	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEC			
	3	0	2	3	0	1	0	4			0	1	0	1	Q 0	

30) Do you accurately keep records of the fuel economy on this vehicle?	1 (yes) 2 (no)	(64)
31) Are you concerned with the fuel economy of this vehicle?	1 (yes) 2 (no)	(65)
32) Date of last city or state inspection	a) Month	(66-67)
99 : don't know 99 : not required 00 : never inspected	b) Year	(68-69)
33) Did your vehicle pass or fail the inspection?	1 (pass) 2 (fail) 3 (don't know) 4 (not required) 5 (never inspected)	(70)
34) a) Does your odometer indicate the true number of miles on your car?	1 (yes) 2 (no)	(71)
b) If no, specify approximate total number of miles this vehicle has been driven.		(72-77)

Q1
80

VEHICLE INSPECTION DATA SHEET

CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ	IDENT	1	0
5	10	15	20	25	30	35	40	45

FINAL INSPECTION RESULT (P=PASS, F=FAIL) ☐

ECS FAILURE CODES ☐

EXHAUST EMISSION ANALYSIS FAILURE CODE ☐

DATE (MMDDYY) ☐

STATION NO. ☐

LANE NO. ☐

TEST MODE ☐

TEST NO. ☐

LICENSE PLATE ☐

VEHICLE ID (LEFT JUSTIFY) ☐

YEAR ☐

MAKE ☐

CYLINDERS (CYL) ☐

LOAD CLASS (LC) ☐

MILEAGE ☐

AI/CAT ☐

CRUISE STANDARD						CRUISE EMISSION READINGS					
HC ppm	% CO	NO ppm	HC ppm	P/F	% CO	P/F	COMBINED % CO+CO2	P/F	NO ppm	P/F	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
IDLE STANDARD						IDLE EMISSION READINGS					
HC ppm	% CO	HC ppm	P/F	% CO	P/F	COMBINED % CO+CO2	P/F	MAR 09 1981			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			

FIGURE 7
QUALITY ASSURANCE ACTIVITY

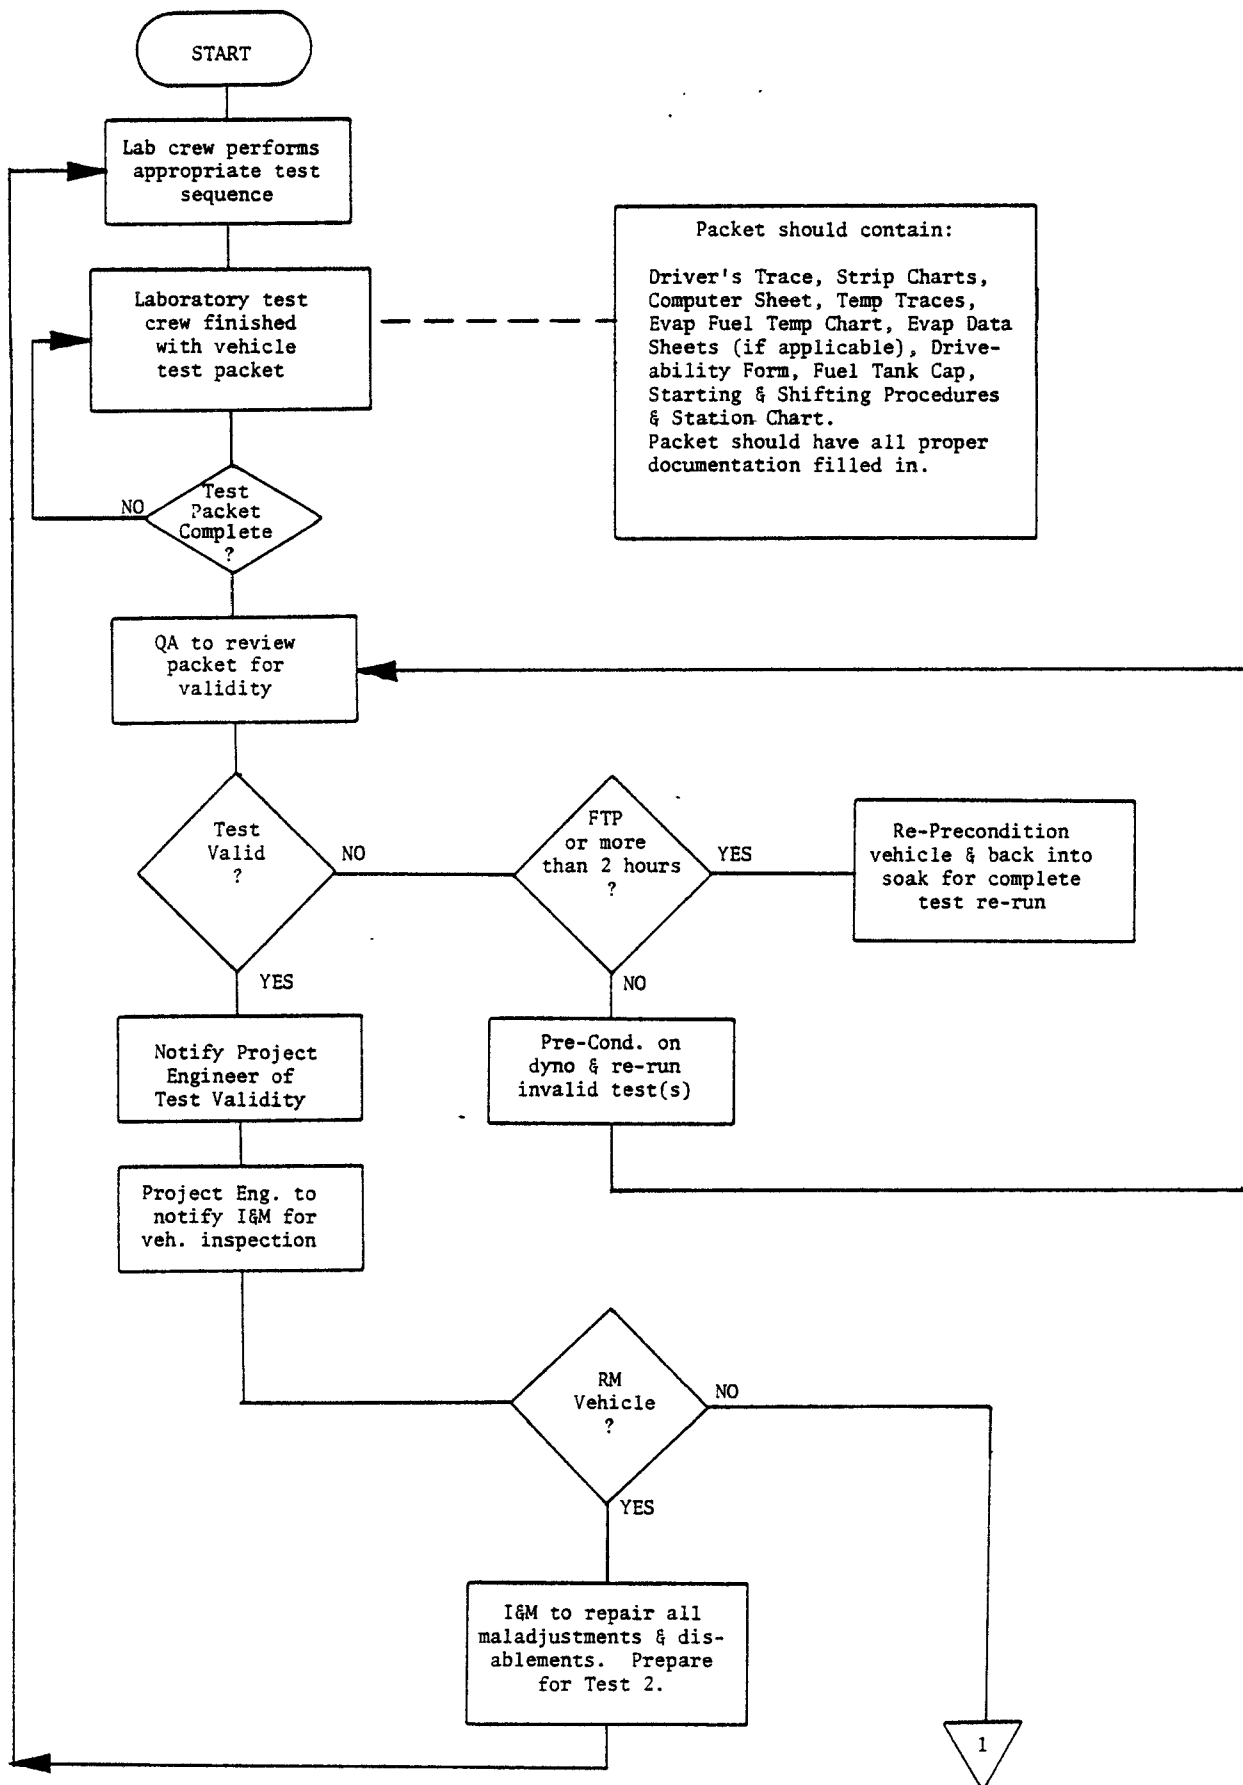


FIGURE 7
QUALITY ASSURANCE ACTIVITY

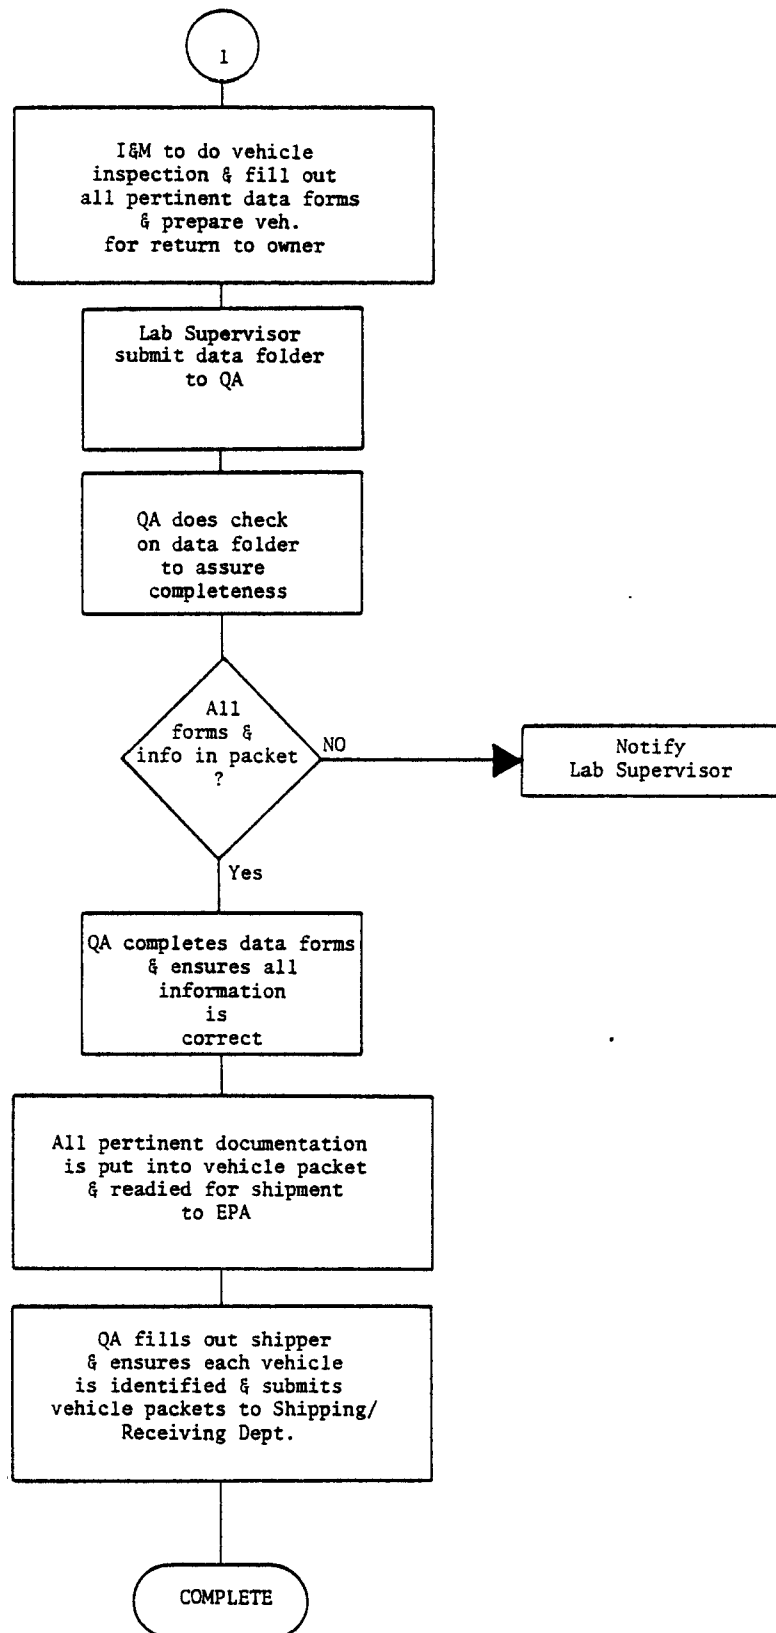


FIGURE 7 CONTINUED