

A Study of Emissions from Light Duty
Vehicles in San Antonio, Texas
EPA Contract No. 68-03-3024

prepared by:
Maurice Forshee
Mark D. Dalen
L. Kevin Kott

EG&G Automotive Research, Inc.
5404 Bandera Road
San Antonio, Texas 78238
(512) 684-2310

prepared for:
Environmental Protection Agency
2565 Plymouth Road
Ann Arbor, Michigan 48105

Thomas C. Bejma
EPA Project Officer

Date: September, 1981

This report is issued by the U.S. Environmental Protection Agency to convey technical information to those interested in the subject matter. Copies of this report are available without charge to employees of the U.S. Government, contractors, grantees and nonprofit organizations currently doing business with the Government from the EPA Library, 2565 Plymouth Road, Ann Arbor, Michigan 48105. Copies are also available commercially from the National Technical Information Service, 5285 Port Royal Road, Springfield, Virginia 22161.

This report was furnished to the Environmental Protection Agency by EG&G Automotive Research, San Antonio, Texas in fulfillment of Contract No. 68-03-3024. The contents of this report are reproduced herein as received from EG&G Automotive Research, San Antonio, Texas. The opinions, findings, and conclusions expressed are those of the author and not necessarily those of the Environmental Protection Agency. Mention of company or product names is not to be considered as an endorsement by the Environmental Protection Agency.

ABSTRACT

Three hundred 1978 through 1981 in-use light duty vehicles were obtained from the public, in the San Antonio Metropolitan Area. These vehicles were tested, as received, for exhaust emissions utilizing the Federal Test Procedure, the Highway Fuel Economy Test, and four short mode tests. All vehicles were subjected to a thorough emissions control component inspection. Fifty vehicles which failed to meet applicable standards received maintenance and a retest.

TABLE OF CONTENTS
A STUDY OF EMISSIONS FROM LIGHT-DUTY
VEHICLES IN SAN ANTONIO, TEXAS
EPA CONTRACT NUMBER 68-03-3024

	PAGE
ABSTRACT.	iii
TABLE OF CONTENTS	v
LIST OF FIGURES AND TABLES.	vii
SECTION I - BACKGROUND	1
SECTION II - INTRODUCTION	3
SECTION III - PROCUREMENT OF VEHICLES.	5
A - PROCUREMENT METHODS.	5
B - SUMMARY OF RESULTS	6
SECTION IV - VEHICLE PREPARATION, INSPECTION AND MAINTENANCE.	17
A - INITIAL MECHANICAL INSPECTION.	17
B - POST TEST INSPECTION	17
C - RESTORATIVE MAINTENANCE.	17
SECTION V - VEHICLE EMISSION TESTING	27
A - TEST LABORATORY.	27
B - EQUIPMENT CHANGES.	27
C - TEST PROCEDURES.	29
D - CALIBRATIONS	31
SECTION VI - TEST RESULTS	35
SECTION VII - DATA HANDLING.	37
A - EMISSION TEST AUDITING AND VALIDATION.	37
B - TEST DATA TRANSMITTAL.	37
C - CALIBRATION DATA TRANSMITTAL	37

TABLE OF CONTENTS
(continued)

	PAGE
APPENDIX A - SAMPLE PROCUREMENT PACKET.	39
APPENDIX B - EPA VEHICLE DATA PACKET.	53
APPENDIX C - LAB QUALIFICATION WORKSHEETS	65
APPENDIX D - CALIBRATION FORMS.	79
APPENDIX E - AUDIT FORMS.	95

LIST OF TABLES AND FIGURES

			PAGE
TABLE	III-1	ORIGINAL VEHICLE REQUIREMENTS.	7
TABLE	III-2	VEHICLE SUBSTITUTIONS.	13
FIGURE	III-1	VEHICLE PROCUREMENT FLOW CHART 1981 MODEL YEAR EXAMPLE	14
TABLE	III-3	VEHICLES OBTAINED BY ALTERNATE PROCUREMENT METHODS	15
TABLE	IV-1	RESTORATIVE MAINTENANCES	19
FIGURE	V-1	EG&G AUTOMOTIVE RESEARCH, INC. CHASSIS DYNAMOMETER TESTING LABORATORY.	28

SECTION I

BACKGROUND

The United States Environmental Protection Agency (EPA) has the authority under the provisions of the Clean Air Act to develop, implement, and administer programs designed to quantify and reduce the pollution of the nation's resources. Authority in part for this objective is assigned to EPA's Emission Control Technology Division (ECTD). ECTD is responsible for assessing, quantifying and ultimately reducing air pollution from in-use motor vehicle sources. One of the major test projects that is utilized to attain this goal is the Emissions Factor (EF) Program.

The first EF Program was conducted in EPA's Fiscal Year (FY) 1971. Subsequent Programs were conducted in FY's 1972, 1973, 1974, 1975, 1977 and 1979. The programs conducted in FY's 1975 and 1977 were extended to include the following year. These EF Programs were specifically designed to obtain exhaust emissions data from in-use vehicles operated in a wide range of topographical and climatological conditions. During the course of EF Programs, vehicles located in the following U.S. cities have been tested: Chicago, Houston, San Antonio, Denver, Los Angeles, Detroit, Phoenix, St. Louis and Washington, D.C.

The number of model years, number of vehicles to be tested, and any other specific vehicle requirements for each EF Program was established by ECTD. Some of the factors which affected the vehicle requirements were, sales percentages by manufacturer for each model year, changes in emissions standards, advancements in emission control technology and revisions in Federal Testing Procedures.

In the recent EF Programs special short mode testing procedures have been incorporated. These short mode tests are designed to correlate with the more extensive certification tests. These methods are under consideration for use by state governments in vehicle emissions inspection and maintenance programs.

The portion of the FY 1980 Emission Factor Study which was conducted in San Antonio, Texas, is the subject of this report. In order to accomplish this study EPA contracted EG&G Automotive Research, Inc. (EG&G-AR) to provide data on vehicles operated in the San Antonio metropolitan area.

SECTION II

INTRODUCTION

In September of 1980, EG&G Automotive Research, Inc. was awarded a contract to procure and test three hundred vehicles in the San Antonio area. Model year 1978 through 1981 vehicles were procured from registration listings. In accordance with the contract terms a limited number of 1981 vehicles were obtained through car rental agencies. Only light duty, gasoline powered vehicles were included in the program. The contract period was from September 1980 to July 1981.

All three hundred vehicles were tested as received. The test sequence consisted of the FTP emissions test, Highway Fuel Economy Test and four short cycle tests. After the test sequence, each vehicle received an extensive inspection of emission-related components and adjustments.

The first fifty vehicles that exhibited high exhaust emissions levels received a restorative maintenance procedure, followed by an additional test sequence. After validation of the test results, each vehicle was returned to the owner along with the participation incentives.

All test data was supplied to either the Project Officer or the EPA's data contractor, with calibration and maintenance data supplied to the Project Officer on a weekly basis.

This program is detailed in Sections III through VII.

- o Section III contains a brief narrative of the procurement methods utilized. It also includes a summary of the procurement activity.
- o Section IV outlines the methods and procedures used in vehicle preparation, inspection and maintenance.
- o Section V describes the emission testing equipment that was used. It also explains calibration procedures. A brief description of the different testing modes is also found in this section.
- o Section VI is an explanation of how test results were processed.
- o Section VII explains the process that was used in auditing and transmitting test results and equipment calibration data.

SECTION III
PROCUREMENT OF VEHICLES

A. PROCUREMENT METHODS

The EPA supplied a list of three hundred vehicles to be procured and tested. This list is found in Table III-1. Substitutions were made by the EPA for some models that were unavailable. Table III-2 lists these substitutions and the reasons why they were made.

Total requirements by model year were as follows:

<u>MODEL YEAR</u>	<u>NUMBER OF VEHICLES</u>
1978	25
1979	25
1980	100
1981	<u>150</u>
TOTAL	300

Each of the model year lists specified the vehicle number, number of units required, make, model, and in some cases engine size. Individual vehicle requirements for each model year were based on sales volumes for that year.

The Wilson Publishing Company in Houston, Texas was contracted to supply vehicle registration lists for all the required year models. Registration listings were limited by U.S. Postal codes for the immediate San Antonio metropolitan area.

A random number table was used to randomize the registration listing for the 1978, 1979 and 1980 model years. The list for the 1981 model year which was supplied later, was randomized prior to printing by the Wilson Publishing Company.

Procurement mailings were then made from these randomized lists. The mailing consisted of an EPA supplied letter briefly describing the project, a list of normally asked questions and answers and a reply card. Positive response cards were followed up with telephone interviews. Appendix A contains copies of all of the forms and documents that were utilized in the procurement process.

Each of the procurement mailings were recorded in the Sample Vehicle Control Logs. These logs were supplied by EPA and used for tracking each vehicle from initial solicitation to the conclusion of the procurement process.

Figure III-1 is a Vehicle Procurement Flow Chart which shows the procurement method that was utilized. This flow chart reflects the 1981 year model requirements for percentage of high mileages, number of rental vehicles, etc. The same sequence of events applies for all year models.

B. SUMMARY OF RESULTS

Of the three hundred vehicles procured, 268 (89%) were obtained in accordance with the prescribed random method. The remaining 32 (11%) vehicles were procured using alternate methods that were either specified in the contract or specifically approved by the EPA. The methods included rentals (1981 models only), EG&G-AR employee owned vehicles, leased vehicles, etc. Table III-3 lists these vehicles and shows the alternate methods that were utilized.

In order to obtain the 268 vehicles that were procured from the randomized listings, a total of 1,665 procurement packets were mailed.

ORIGINAL VEHICLE REQUIREMENTS

FY80 Emission Factor Program

1981 Model Year

<u>Veh. No.</u>	<u>Quantity</u>	<u>Make</u>	<u>Model</u>
001-007	7	Chev	Chevette
008-014	7	Chev	Citation-four 4-cylinder, three V-6
015-019	5	Chev	Malibu-three V-6, two V-8
020-022	3	Chev	Cavalier
023-024	2	Chev	Camaro
025-026	2	Chev	Impala/Caprice
027	1	Chev	Monte Carlo
028-034	7	Olds	Cutlass/Supreme-four V-6, three V-8
035-037	3	Olds	88/98
038-040	3	Olds	Omega-two 4-cylinder, one V-6
041-044	4	Buick	Skylark-two 4-cylinder, two V-6
045-049	5	Buick	Regal/Century-three V-6, two V-8
050-051	2	Buick	LeSabre/Electra
052-054	3	Pontiac	Phoenix-two 4-cylinder, one V-6
055	1	Pontiac	Firebird
056-057	2	Pontiac	Grand Prix
058-059	2	Pontiac	Catalina/Bonneville
060	1	Pontiac	LeMans
061	1	Pontiac	"J-Car"
062-063	2	Cadillac	DeVille, Fleetwood
064	1	Cadillac	Eldorado or Seville (non-diesel)
065-069	5	Ford	Escort
070-073	4	Ford	Fairmont
074-077	4	Ford	Mustang
078-079	2	Ford	Thunderbird
080	1	Ford	Granada
081-082	2	Mercury	Lynx
083-084	2	Mercury	Zephyr
085	1	Mercury	Capri
086	1	Mercury	Marquis
087-088	2	Plymouth	Reliant
089-090	2	Plymouth	Horizon
091-092	2	Dodge	Aries
093-094	2	Dodge	Omni
095-096	2	Chrysler	LeBaron/Cordoba
097-099	3	Volkswagen of America	Rabbit
100-101	2	AMC	Concord/Spirit
102-104	3	Toyota	Corolla
105-107	3	Toyota	Terrel
108-109	2	Toyota	Celica
110	1	Toyota	Corona
111-113	3	Datsun	210
114-115	2	Datsun	310
116-117	2	Datsun	510

TABLE III-1

Page 1 of 6

ORIGINAL VEHICLE REQUIREMENTS
FY80 Emission Factor Program
1981 Model Year

<u>Veh. No.</u>	<u>Quantity</u>	<u>Make</u>	<u>Model</u>
118	1	Datsun	200SX/280ZX
119-121	3	Honda	Civic
122-123	2	Honda	Accord
124-125	2	Mazda	GLC/626/RX-7
126-127	2	Mitsubishi	Colt/Arrow
128-129	2	Subaru	Any model except "Brat"
130-131	2	Volkswagen	Dasher
132	1	Ford	Fiesta
133	1	Fiat	Strada/Brava
134	1	Volvo	Any model
135	1	Audi	Any model
136-140	5	Chev/GMC	P/U
141-145	5	Ford	P/U
146-148	3	Dodge	P/U
149	1	Datsun	P/U
150	1	Toyota	P/U

TABLE III-1
Page 2 of 6

ORIGINAL VEHICLE REQUIREMENTS

FY80 Emission Factor Program

1980 Model Year

<u>Veh. No.</u>	<u>Quantity</u>	<u>Make</u>	<u>Model</u>
151-154	4	Chev	Chevette .
155-156	2	Chev	Monza
157-161	5	Chev	Citation-three 4-cylinder, two V-6
162	1	Chev	Camaro
163-165	3	Chev	Malibu
166-167	2	Chev	Monte Carlo
168-170	3	Chev	Impala/Caprice
171	1	Olds	Omega
172-176	5	Olds	Cutlass/Supreme-three V-6, two V-8
177-178	2	Olds	88/98
179-180	2	Buick	Skylark
181-182	2	Buick	Century
183-184	2	Buick	Regal
185	1	Buick	LeSabre
186	1	Pontiac	Sunbird
187	1	Pontiac	Phoenix
188	1	Pontiac	Firebird/LeMans
189	1	Pontiac	Grand Prix
190	1	Pontiac	Catalina/Bonneville
191	1	Cadillac	Any model
192	1	Ford	Pinto
193-195	3	Ford	Mustang
196-198	3	Ford	Fairmont
199	1	Ford	Granada
200	1	Ford	Thunderbird
201	1	Ford	LTD
202-203	2	Mercury	Zephyr
204	1	Mercury	Capri
205	1	Lincoln	Continental/Mark VI
206-207	2	Plymouth	Horizon
208	1	Plymouth	Volare
209	1	Chrysler	Cordoba/LeBaron
210	1	Dodge	Omni
211	1	Dodge	Aspen
212-213	2	Volkswagen of America	Rabbit
214-215	2	AMC	Concord/Spirit
216-217	2	Toyota	Corolla
218-219	2	Toyota	Tercel
220	1	Toyota	Celica
221-222	2	Datsun	210
223-224	2	Datsun	310
225	1	Datsun	510
226-227	2	Honda	Civic
228-229	2	Honda	Accord

TABLE III-1

Page 3 of 6

ORIGINAL VEHICLE REQUIREMENTS
FY80 Emissions Factor Program
1980 Model Year

<u>Veh. No.</u>	<u>Quantity</u>	<u>Make</u>	<u>Model</u>
230	1	Mazda	GLC
231	1	Mazda	626
232-233	2	Subaru	Any model except "Brat"
234-235	2	Volkswagen	Dasher
236-237	2	Mitsubishi	Colt/Arrow
238	1	Volvo	Any model
239	1	Ford	Fiesta
240	1	Mercedes Benz	Any model
241-244	4	Chev/GMC	P/U
245-246	2	Ford	P/U
247-248	2	Toyota	P/U
249	1	Dodge	P/U
250	1	Datsun	P/U

ORIGINAL VEHICLE REQUIREMENTS
FY80 Emission Factor Program
1979 Model Year

<u>Veh. No.</u>	<u>Quantity</u>	<u>Make</u>	<u>Model</u>
251	1	Chev	Chevette
252	1	Chev	Monza
253	1	Chev	Malibu
254	1	Chev	Camaro
255	1	Olds	Cutlass/Supreme
256	1	Olds	88/98
257	1	Buick	Regal/Century
258	1	Pontiac	Sunbird/Phoenix
259	1	Pontiac	Firebird/Grand Prix
260	1	Ford	Mustang
261	1	Ford	Fairmont
262	1	Ford	LTD/Thunderbird
263	1	Mercury	Monarch
264	1	Dodge	Omni
265	1	Plymouth	Horizon
266	1	Datsun	B210
267	1	Datsun	510/280Z
268	1	Toyota	Corona/Corolla
269	1	Toyota	Celica/Cressida
270	1	Volkswagen	Rabbit
271	1	Honda	Civic/accord
272	1	Mazda	GLC/626/RX7
273	1	Chev	P/U
274	1	Ford	P/U
275	1	Dodge	P/U

ORIGINAL VEHICLE REQUIREMENTS
FY80 Emission Factor Program
1978 Model Year

<u>Veh. No.</u>	<u>Quantity</u>	<u>Make</u>	<u>Model</u>
276	1	Chev	Chevette
277	1	Chev	Monza
278	1	Chev	Camaro
279	1	Chev	Malibu
280	1	Chev	Monte Carlo
281	1	Olds	Cutlass/Supreme
282	1	Olds	88/98
283	1	Buick	Regal/Century
284	1	Pontiac	Sunbird
285	1	Pontiac	LeMans/Firebird
286	1	Ford	Pinto
287	1	Ford	Mustang
288	1	Ford	Fairmont
289	1	Ford	Granada
290	1	Mercury	Zephyr
291	1	Dodge	Aspen
292	1	Plymouth	Horizon
293	1	Datsun	B210
294	1	Datsun	510
295	1	Toyota	Corona/Corolla
296	1	Toyota	Celica
297	1	Volkswagen	Rabbit
298	1	Honda	Accord
299	1	Chev	P/U
300	1	Ford	P/U

TABLE III-1
Page 6 of 6

VEHICLE SUBSTITUTIONS

ORIGINAL REQUIREMENTS					SUBSTITUTIONS					
Veh. No.	No. of Veh.	Year	Make/Model	Engine	Veh. No.	No. of Veh.	Year	Make/Model	Engine	Reason
132	1	1981	Ford/Fiesta	Any	132	1	1982	Merc/LN7	Any	1980 was the last production year for the Ford Fiesta.
133	1	1981	Fiat/Strada Brava	Any	133	1	1982	Ford/EXP	Any	Registration list supplier could not locate 1981 vehicles.
*130	1	1981	Volks/Dasher	Any/gasoline	130	1	1982	Ford-Merc/EXP-LN7	Any	Registration list supplier and local dealer stated that the 1981 VW Dasher is available with diesel engines only.
*097-099	3	1981	Volks/Rabbit	Any/gasoline	097-099	3	1982	Ford/Merc/EXP-LN7	Any	All registration of 1981 VW were used with no positive responses.
063	1	1981	Cadillac/DeVille	Any	063	1	1981	Cadillac/Eldorado	Any	Could not obtain required model. Substitution approved by the Project Officer.
157	1	1980	Chev/Citation	V-6	157	1	1980	Chev/Citation	4-Cyl	Contract allows that 10% (30 vehicles) of the vehicles do not have to be an exact match for engine displacement.
103	1	1981	Toyota/Corolla	Any	103	1	1981	Toyota/Tercel	Any	Could not obtain required model. Substitution approved by the Project Officer.
127	1	1981	Mitsubishi/Arrow	Any	127	1	1981	Dodge/Aries	Any	Could not obtain required model. Substitution approved by the Project Officer.
*131	1	1981	Volks/Dasher	Any gasoline	131	1	1982	Merc/LN7	Any	Could not obtain required model. Substitution approved by the Project Officer

*All available registration listings for 1981 Volkswagens were solicited, but the majority of positive responses were diesel powered units. Attempts to obtain these vehicles through local dealers and other sources were unsuccessful.

TABLE III-2

VEHICLE PROCUREMENT FLOW CHART

1981 MODEL YEAR EXAMPLE

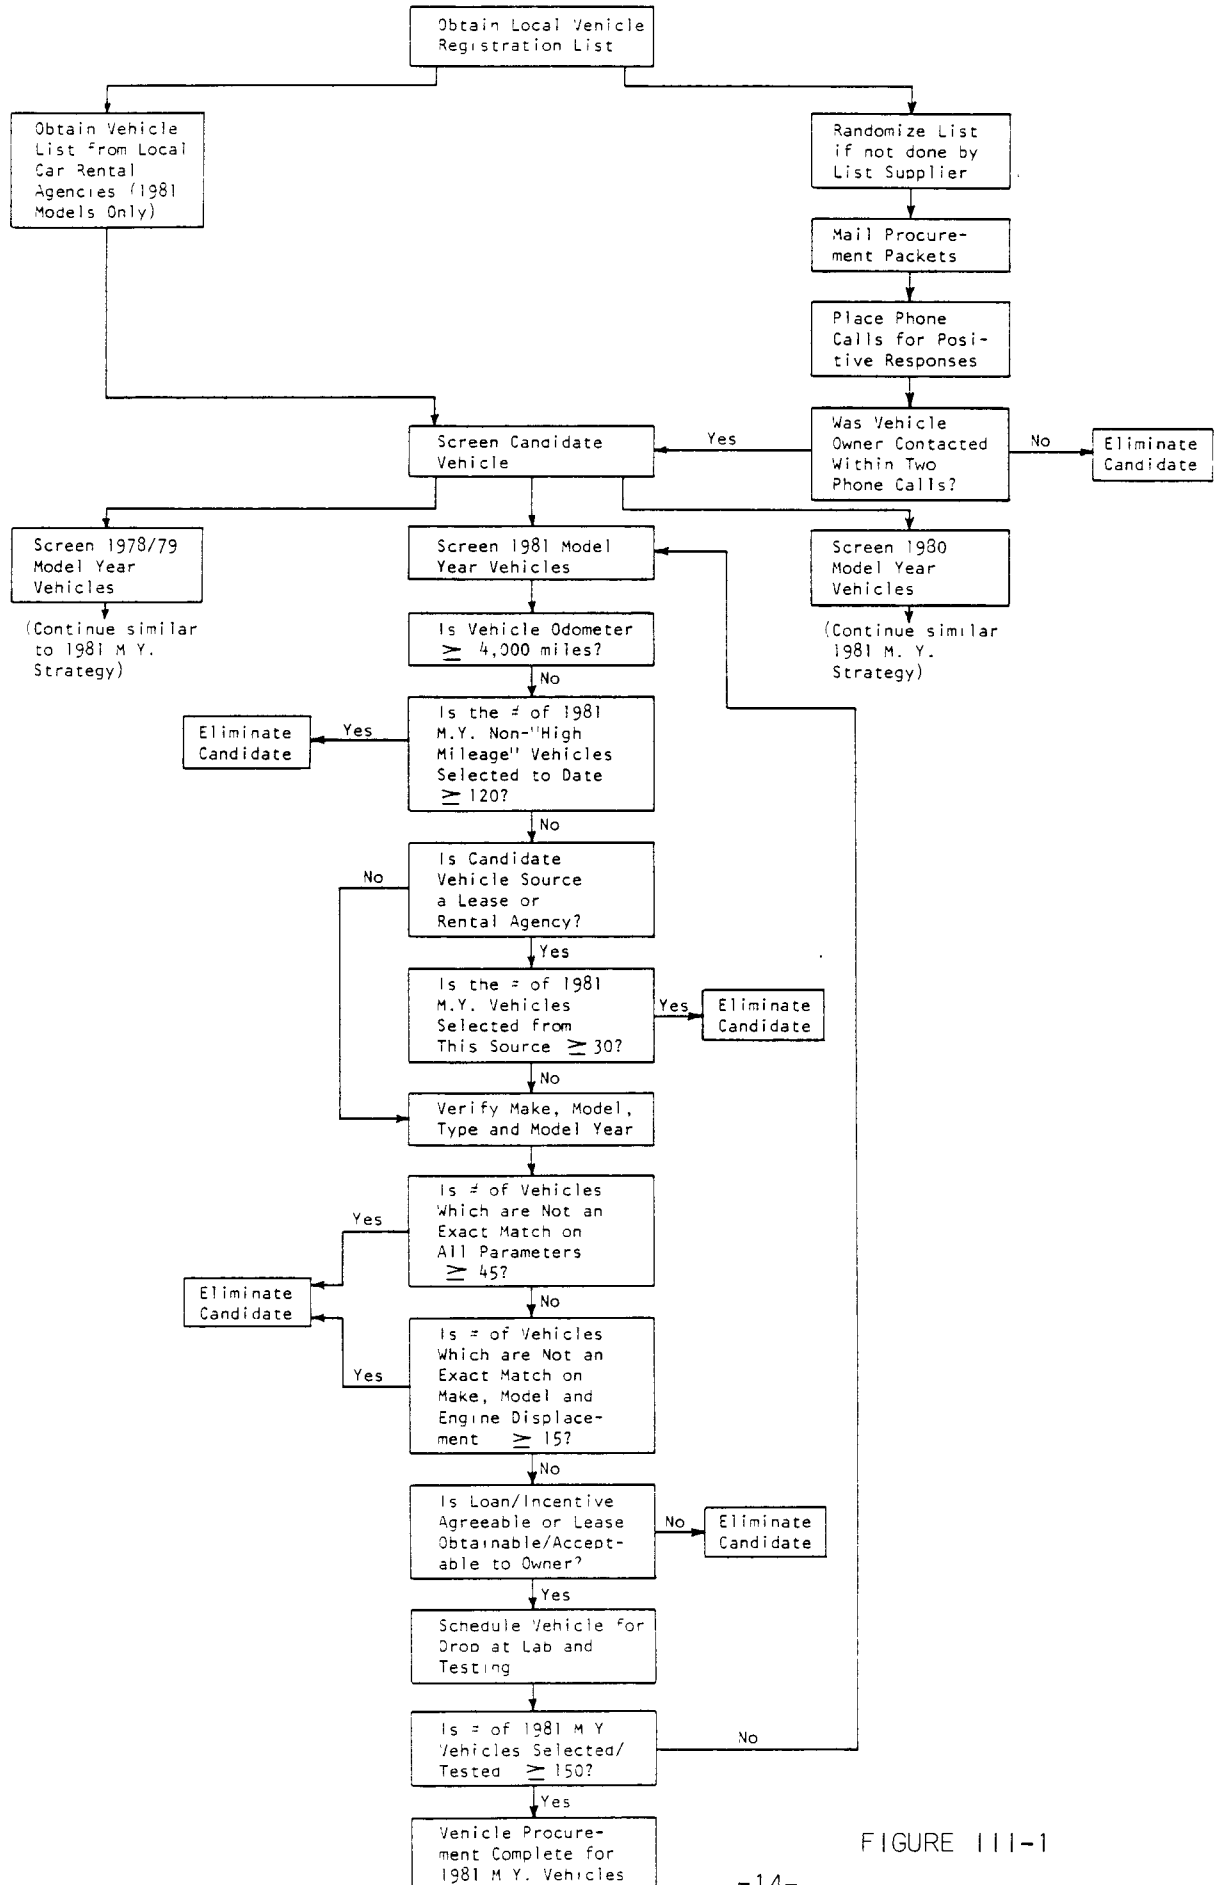


FIGURE III-1

VEHICLES OBTAINED BY ALTERNATE
PROCUREMENT METHODS

<u>Veh.No.</u>	<u>Year</u>	<u>Make/Model</u>	<u>Alternate Method</u>	<u>Reason</u>
020	1982	Chev/Cavalier	Rental	Per terms of contract
021	1982	Chev/Cavalier	Rental	Per terms of contract
022	1982	Chev/Cavalier	Rental	Per terms of contract
032	1981	Olds/Cutlass	Rental	Per terms of contract
036	1981	Olds/Delta 88	Rental	Per terms of contract
041	1981	Buick/Skylark	Rental	Per terms of contract
045	1981	Buick/Century	Rental	Per terms of contract
056	1981	Pontiac/Grand Prix	Rental	Per terms of contract
057	1981	Pontiac/Grand Prix	Employee reference	Approved by Project Officer
078	1981	Ford/Thunderbird	Employee reference	Approved by Project Officer
081	1981	Merc/Lynx	Rental	Per terms of contract
083	1981	Merc/Zephyr	Rental	Per terms of contract
087	1981	Plymouth/Reliant	Rental	Per terms of contract
089	1981	Plymouth/Horizon	Rental	Per terms of contract
101	1981	AMC/Concord	Rental	Per terms of contract
111	1981	Datsun/210	Rental	Per terms of contract
132	1982	Merc/LN7	Rental	Per terms of contract
133	1982	Ford/EXP	Participant reference	Approved by Project Officer
145	1981	Ford/Pick Up	Employee	Approved by Project Officer
127	1980	Chev/Citation	Employee	Approved by Project Officer
240	1980	Mercedes/450 SL	Obtained thru Dealer	Approved by Project Officer
287	1978	Ford/Mustang	Employee	Approved by Project Officer
103	1981	Toyota/Tercell	Employee reference	Approved by Project Officer
105	1981	Toyota/Tercell	Rental	Per terms of contract
130	1982	Ford/EXP	Employee reference	Approved by Project Officer
131	1982	Merc/LN7	Rental	Per terms of contract
061	1982	Pontiac/J2000	Rental	Per terms of contract
075	1981	Ford/Mustang	Rental	Per terms of contract
016	1981	Chev/Malibu	Rental	Per terms of contract
097	1982	Merc/LN7	Rental	Per terms of contract
098	1982	Merc/LN7	Rental	Per terms of contract
099	1982	Merc/LN7	Rental	Per terms of contract

TABLE III-3

SECTION IV

VEHICLE, PREPARATION, INSPECTION AND MAINTENANCE

A. INITIAL MECHANICAL INSPECTION

After a vehicle was screened by telephone, the owner was asked to deliver it to the laboratory for testing. On arrival, the vehicle was checked for exhaust leaks and the Vehicle Information Data Sheet and the Engine Parameter Data Sheet (Appendix B) were completed. During this process, all emission control systems and sub systems were checked to verify that they matched those listed in the Gas Mileage Guide for that model year. Variances were noted when found.

A fuel sample was taken from the vehicle fuel tank for lead content analysis. The vehicle was then delivered to the Chassis Dynamometer Testing Laboratory for preconditioning and testing.

B. POST TEST INSPECTION

On completion of the "as received" emissions test, each vehicle received a thorough engine and emission control systems inspection. Appendix B of this report contains a copy of the data sheets that were used to record the inspection information. The methods for inspection and specifications for operating parameters on each system were obtained from Manufacturer's shop manuals or Chilton's Automotive Manuals for the appropriate model. Information from the emissions data sticker, which is found in the engine compartment, was used when available. Observed values, (i.e. basic timing, idle speeds, idle HC and CO levels, etc.) were recorded on the Inspection Data Sheets (Appendix B). The Comments Data Sheet (Appendix B) was used to note any maladjustments, disabled systems or abnormal operating conditions that were found during the inspection.

Representatives from General Motors and the Chrysler Corporation actively participated in the inspection and maintenance portions of this project. The EPA Project Officer allowed these representatives to receive copies of emissions test data and observe and/or assist in the inspection and maintenance procedures for their companies respective vehicles. On numerous occasions this participation was beneficial in locating parts, and supplying technical information for emission control systems.

C. RESTORATIVE MAINTENANCE

The first fifty vehicles which failed the "as received" tests were subjected to a restorative maintenance procedure and a retest.

Pass/fail criteria for the various model years were established by the EPA as follows:

1. Emission results which were within two times the standard for that model year were considered a pass with the following exception. If, during the inspection procedure a problem was found that could account for excessive emissions, a maintenance procedure and retest was recommended. These maintenance procedures and retests were authorized by the EPA in some instances, although the results did not exceed the two times limit.
2. In order to simplify the complexity of 1981 standards (due to the various waivers that were granted), the following standards are used as a guideline for all 1981 vehicles:

<u>HC gm/mi</u>	<u>CO gm/mi</u>	<u>*NOx gm/mi</u>
.41	7.0	1.0

* A 2.0 NOx gm/mi standard applied to all 1981 American Motors Corporation vehicles.

3. Idle test results greater than 200 PPM Hexane or 1.2% CO were considered a failure. This was based on the sample taken at the second idle in neutral during the four mode test (immediately after 2,500 RPM in neutral mode).

Once a failure was identified, the inspection-maintenance procedure was initiated. The first step was to review the manufacturer's recommended maintenance intervals. Each item listed for the last interval was inspected and a determination was made as to whether or not the required maintenance had been performed. Any part replacements, adjustments or checks required at the last interval that had not been performed were accomplished during the restorative maintenances.

A complete diagnostic performance check was made on the emission control systems and sub systems in order to locate the problems. Adjustments and/or replacements were made as necessary to bring all systems back to manufacturer's specifications.

When the problem was diagnosed as a malfunction in a major component (any single item which would cost in excess of \$100.00 to repair or replace) no restorative action was taken. The EPA was notified in these cases. Any further action on vehicles in this category was at the EPA's discretion. In all cases the restorative maintenance activities were documented in detail on the Comment Data Sheet (Appendix B) in the After Maintenance Data Packet (Appendix B).

Table IV-1 lists each of the restorative maintenances, what problems were found, and the corrective action taken.

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results		
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results	% Δ
214	1980	11,183	AMC/Concord	CVS-CH	HC gm/mi 1.07 CO gm/mi 38.0	Found broken wire on the open loop close loop switch. Repaired wire. Changed EGR valve and spark plugs.	CVS-CH	HC gm/mi .409 CO gm/mi 6.29	- 62% - 83%
267	1978	36,261	Datsun/280Z	CVS-CH	HC gm/mi 7.58 CO gm/mi 172.	Major problem with the fuel injection system. Repair cost would have exceeded contractual limitations. (Not retested)	-	N/A N/A	-
196	1980	6,442	Ford/Futura	CVS-CH	HC gm/mi 2.03	Spark plugs appeared oil fouled. Conducted cylinder compression and leakdown test; results within manufacturer's specification. Problem was diagnosed as oil leak in valve guides and seals. Repair cost would have exceeded contractual limitations. (Not retested)	-	N/A	-
251	1979	27,956	Chev/Chevette	CVS-CH	HC gm/mi 1.46 CO gm/mi 22.3	Spark plugs fouled; no other problems found. (Not retested)	-	N/A N/A	-
289	1978	30,964	Ford/Granada	CVS-CH	HC gm/mi 1.64 CO gm/mi 34.0	Reset idle mixture to manufacturer's specs. Replaced spark plugs and air filter element.	CVS-CH	HC gm/mi .707 CO gm/mi 6.78	- 57% - 80%
255	1979	34,118	Olds/Cutlass	CVS-CH	HC gm/mi 1.64 CO gm/mi 24.5	Reset choke index to manufacturer's specs.	CVS-CH	HC gm/mi 1.51 CO gm/mi 20.1	- 8% - 18%
258	1979	17,845	Pontiac/Sunbird	CVS-CH	HC gm/mi 3.01 CO gm/mi 33.2	Reset idle mixture to manufacturer's specs and replaced spark plugs.	CVS-CH	HC gm/mi .090 CO gm/mi 7.75	- 97% - 77%
198	1980	19,531	Ford/Fairmont	CVS-CH	HC gm/mi 6.32 CO gm/mi 89.6	Reset idle mixture to manufacturer's specs (one mixture screw was damaged and had to be replaced). Reconnected vacuum supply line to air diverter valve.	CVS-CH	HC gm/mi .508 CO gm/mi 5.18	- 92% - 94%

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results		
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results	% Δ
197	1980	11,915	Ford/Fairmont	CVS-CH	HC gm/m1 .809 CO gm/mi 34.7	Reset idle mixture to manufacturer's specs.	CVS-CH	HC gm/m1 .282 CO gm/mi 12.0	- 65% - 66%
171	1980	17,812	Olds/Omega	CVS-CH	NO _x gm/m1 4.70	Removed vacuum delay valve from EGR vacuum supply line. The delay valve was not shown on the manufacturer's schematic.	CVS-CH	NO _x gm/mi 1.92	- 59%
221	1980	10,856	Datsun/210	Idle	CO % 378.	Reset idle mixture to manufacturer's specs.	Idle	CO % .013	- 99.9%
203	1980	11,128	Merc/Zephyr	CVS-CH	HC gm/m1 1.51 CO gm/mi 43.0	Reset idle mixture to manufacturer's specs and changed spark plugs	CVS-CH	HC gm/m1 .484 CO gm/mi 17.4	- 68% - 60%
265	1979	23,413	Ply/Horizon	CVS-CH	HC gm/m1 2.59 CO gm/mi 28.0	Reset idle mixture to manufacturer's specs, changed spark plugs and PCV valve.	CVS-CH	HC gm/mi 1.74 CO gm/mi 6.36	- 33% - 77%
284	1979	39,308	Pontiac/Sunbird	CVS-CH	HC gm/m1 3.61 CO gm/mi 54.9	Reset idle mixture to manufacturer's specs and performed 24K maintenance interval (oil & filter change, spark plugs and PCV valve change).	CVS-CH	HC gm/m1 1.56 CO gm/mi 21.1	- 57% - 62%
285	1978	55,945	Pontiac/Lemans	CVS-CH	HC gm/m1 3.12 CO gm/mi 43.4	Reset idle mixture to manufacturer's specs. Changed air filter, PCV valve, PCV hose and PCV filter.	CVS-CH	HC gm/m1 1.48 CO gm/mi 12.0	- 53% - 72%
271	1979	49,753	Honda/Accord	CVS-CH	HC gm/m1 1.51 CO gm/mi 11.0	Reset idle mixture to manufacturer's specs.	CVS-CH	HC gm/m1 1.04 CO gm/mi 6.21	- 31% - 44%
292	1978	26,534	Ply/Horizon	CVS-CH	HC gm/m1 2.32 CO gm/mi 49.5	Reset idle mixture to manufacturer's specs. Changed spark plugs and PCV valve.	CVS-CH	HC gm/mi .359 CO gm/mi 6.48	- 85% - 87%
263	1979	23,743	Merc/Monarch	CVS-CH	HC gm/m1 1.14 CO gm/mi 17.0	Reset idle mixture to manufacturer's specs. Changed spark plugs, and EGR valve.	CVS-CH	HC gm/m1 .557 CO gm/mi 5.28	- 51% - 69%

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results		
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results	% Δ
161	1980	23,297	Chev/Citation	CVS-CH	NO _x gm/mi 4.42	Pulse air system was disabled. Reactivated pulse air system, changed spark plugs and EGR valve.	CVS-CH	NO _x gm/mi 2.21	- 50%
253	1979	22,958	Chev/Malibu	CVS-CH	NO _x gm/mi 5.30	Changed EGR valve and spark plugs.	CVS-CH	NO _x gm/mi 1.21	- 77%
286	1978	26,865	Ford/Pinto	CVS-CH	HC gm/mi 9.46 CO gm/mi 90.0	Reset idle mixture to manufacturer's specs. Changed air filter element and spark plugs.	CVS-CH	HC gm/mi 4.74 CO gm/mi 36.4	- 50% - 60%
199	1980	18,862	Ford/Granada	CVS-CH Idle	CO gm/mi 12.0 HC ppm 239. CO % 4.98	Reset idle mixture to manufacturer's specs.	CVS-CH Idle	CO gm/mi 2.16 HC ppm 5.77 CO % .009	- 82% - 98% - 99.8%
030	1981	4,121	Olds/Cutlass	CVS-CH	HC gm/mi .723 CO gm/mi 10.8	Idle mixture control solenoid was defective. With approval of the EPA, GM supplied new carburetor assembly. Installed new carburetor.	CVS-CH	HC gm/mi .253 CO gm/mi 2.82	- 65% - 74%
036	1981	6,880	Olds/Delta 88	CVS-CH	CO gm/mi 8.14	Reset basic timing to manufacturer's specs. (10° advanced as received)	CVS-CH	CO gm/mi 4.22	- 48%
276	1978	56,615	Chev/Chevette	CVS-CH Idle	CO gm/mi 19.4 CO % 1.94	Reset idle mixture to manufacturer's specs. Changed spark plugs, PCV valve and fuel filter.	CVS-CH Idle	CO gm/mi 9.11 CO % .006	- 53% - 99.7%
190	1980	13,525	Pontiac/Bonneville	CVS-CH	NO _x gm/mi 4.28	Reconnected EGR vacuum supply line.	CVS-CH	NO _x gm/mi 1.93	- 55%
300	1978	49,950	Ford/F150	CVS-CH Idle	HC gm/mi 7.29 HC ppm 1190.	Replaced vacuum operated choke pull off, repaired carb. leaks, changed spark plugs, PCV valve and reset idle RPM. Also diagnosed engine misfire due to burned exhaust valve. Repair of the problem would have exceeded contractual limitations.	CVS-CH Idle	HC gm/mi 6.45 HC ppm 284.	- 12% - 76%

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results		
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results	% Δ
186	1980	5,453	Pontiac/Sunbird	CVS-CH	NO _x gm/mi 5.83	Reset idle mixture to manufacturer's specs and unplugged EGR vacuum supply line.	CVS-CH	NO _x gm/mi 1.21	- 79%
007	1981	6,983	Chev/Chevette	CVS-CH	HC gm/mi 1.17	Signal from O ₂ sensor was within limits, but signal was erratic. The EPA approved O ₂ sensor change (GM provided) and retest.	CVS-CH	HC gm/mi 1.05	- 10%
					CO gm/mi 12.8			CO gm/mi 9.26	- 28%
				Idle	CO % 2.53		Idle	CO % 1.04	- 59%
104	1981	3,747	Toyota/Corolla	CVS-CH	HC gm/mi 2.21	Owner admitted using leaded fuel. Reconnected air pump supply line to air cleaner and reconnected hot air tube to air cleaner.	CVS-CH	HC gm/mi 1.78	- 20%
					CO gm/mi 22.0			CO gm/mi 13.0	- 42%
				Idle	HC ppm 400.		Idle	HC ppm 355.	- 11%
260	1979	14,879	Ford/Mustang	CVS-CH	CO gm/mi 35.2	Reset idle mixture to manufacturer's specs and changed spark plugs.	CVS-CH	CO gm/mi 2.56	- 93%
211	1980	9,011	Dodge/Aspen	CVS-CH	HC gm/mi .812	Reset idle mixture, idle RPM's and basic timing to manufacturer's specs.	CVS-CH	HC gm/mi .704	- 13%
					CO gm/mi 12.7			CO gm/mi 9.61	- 24%
093	1981	3,160	Dodge/Omn1	CVS-CH	HC gm/mi .307	Vehicle passed standards as received but during the inspection it was discovered that the emission control module was improperly wired. The lead wire to the O ₂ sensor was also disconnected. This was apparently done when an after market A/C was installed. The EPA authorized repair and retest.	CVS-CH	HC gm/mi .224	- 27%
					CO gm/mi 4.55			CO gm/mi 1.22	- 73%
264	1979	26,261	Dodge/Omn1	CVS-CH	NO _x gm/mi 4.56	Reset idle mixture to manufacturer's specs. Repaired tampering change made to idle solenoid plunger assembly and removed plug from EGR vacuum supply line. Changed spark plugs and PCV filter.	CVS-CH	NO _x gm/mi 1.31	- 71%

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results		% Δ
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results	
237	1980	10,668	Dodge/Colt	CVS-CH	HC gm/mi .535 CO gm/mi 23.0	Reset idle mixture and idle RPM's to manufacturer's specs. Changed spark plugs. Restorative maintenance did not cause any substantial change in emissions results. Chrysler representative assisted in this maintenance procedure and could offer no further suggestions other than catalyst damage. Replacement of catalyst would exceed contractual limitations.	CVS-CH	HC gm/mi .654 CO gm/mi 25.0	+ 22% + 9%
291	1978	46,376	Dodge/Aspen	CVS-CH	HC gm/mi 2.18 CO gm/mi 21.0 NO _x gm/mi 4.06	Reset idle mixture, idle RPM's and basic timing. Changed spark plugs, PCV valve, evap. canister purge line, evap. canister vent line, EGR vacuum supply hose, vacuum amplifier, fuel filter and carburetor base gasket. Restorative maintenance resulted in increases on some emissions. A Chrysler representative assisted in this maintenance procedure and the increases were attributed to the overall poor condition of this vehicle.	CVS-CH	HC gm/mi 2.38 CO gm/mi 12.8 NO _x gm/mi 2.64	+ 9% - 39% - 35%
				Idle	HC ppm 309. CO % .161		Idle	HC ppm 612. CO % .026	+ 98% - 84%
209	1980	22,045	Chrysler/Le Baron	CVS-CH	HC gm/mi .685 CO gm/mi 24.0	Reset idle mixture to manufacturer's specs.	CVS-CH	HC gm/mi .402 CO gm/mi 8.36	- 41% - 65%
229	1980	6,900	Honda/Accord	Idle	CO % 1.34	Reset idle mixture to manufacturer's specs.	Idle	CO % .232	- 83%
234	1980	11,200	Volks/Basher	CVS-CH	HC gm/mi 1.37 CO gm/mi 19.0	Reset fuel injector limiting device to manufacturer's specs.	CVS-CH	HC gm/mi .436 CO gm/mi 3.90	- 68% - 80%
				Idle	CO % 1.80		Idle	CO % .006	- 99.6%

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results		
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results	% Δ
152	1980	33,020	Chev/Chevette	CVS-CH	CO gm/mi 31.6	Replaced pulse air distribution element and purge valve for pulse air system. Changed spark plugs, PCV valve in accordance with manufacturer's recommendations for last regular schedule maintenance interval.	CVS-CH	CO gm/mi 18.5	- 41%
005	1981	6,282	Chev/Chevette	CVS-CH	HC gm/mi .834 CO gm/mi 9.91	Engine would not respond to propane enrichment. GM representative diagnosed the problem an improperly set idle mixture (sealed carb.) The EPA authorized a carburetor assembly change (GM supplied) and retest.	CVS-CH	HC gm/mi .336 CO gm/mi 4.12	- 60% - 58%
048	1981	10,529	Buick/Regal	CVS-CH	CO gm/mi 6.52	Reset choke plate opening angle to manufacturer's specs.	CVS-CH	CO gm/mi 2.36	- 64%
019	1982	6,727	Chev/Malibu	CVS-CH	NO _x gm/mi 1.20	Reconnected vacuum supply line to EGR valve.	CVS-CH	NO _x gm/mi .631	- 47%
149	1981	7,373	Datsun/Pickup	Idle	HC ppm 275. CO % 1.77	Reset idle mixture to manufacturer's specs and changed spark plugs.	Idle	HC ppm 64.8 CO % .009	- 76% - 99.5%
254	1979	33,708	Chev/Camaro	CVS-CH	HC gm/mi 3.99 CO gm/mi 108.	Reset idle mixture and idle RPM's to manufacturer's specs. Changed fuel filter, air filter, PCV filter, PCV valve, PCV supply line.	CVS-CH	HC gm/mi .881 CO gm/mi 6.31	- 78% - 94%
				Idle	HC ppm 211. CO % 2.89		Idle	HC ppm 78.7 CO % .007	- 63% - 99.8%
156	1980	18,250	Chev/Monza	CVS-CH	NO _x gm/mi 3.07	Rerouted vacuum lines in accordance with manufacturer's specs. Reset idle RPM's and basic timing to manufacturer's specs.	CVS-CH	NO _x gm/mi 1.85	- 40%

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results		
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results	% Δ
299	1978	33,763	Chev/C-10 Pickup	CVS-CH	HC gm/mi 4.96 CO gm/mi 68.2	Diagnosis indicated a defective power valve in the carburetor, installed carburetor kit. Reset basic timing and set carburetor to specs.	CVS-CH	HC gm/mi 3.42 CO gm/mi 52.6	- 31% - 23%
279	1979	68,593	Chev/Malibu	CVS-CH Idle	HC gm/mi 6.10 CO gm/mi 84.53 HC ppm 641. CO % 5.15	Reset idle mixture, curb idle, fast idle and basic timing to specs.	CVS-CH Idle	HC gm/mi 2.32 CO gm/mi 32.0 HC ppm 25.6 CO % .009	- 62% - 62% - 96% - 99.8%
280	1978	40,951	Chev/Monte Carlo	CVS-CH Idle	HC gm/mi 2.11 CO gm/mi 36.1 HC ppm 261. CO % 3.07	Reset idle mixture to manufacturer's specs. Changed spark plugs, air filter, PCV valve, PVC filter, EGR valve and fuel filter.	CVS-CH Idle	HC gm/mi .887 CO gm/mi 14.3 HC ppm 28.7 CO % .009	- 58% - 60% - 89% - 99.7%
178	1980	26,384	Olds/Delta 88	CVS-CH	CO gm/mi 11.3	Reset primary choke vacuum break and curb idle speed to manufacturer's specs.	CVS-CH	CO gm/mi 9.60	- 15%
168	1980	31,670	Chev/Impala	CVS-CH	HC gm/mi 2.91 CO gm/mi 56.8	Reset idle mixture and basic timing to manufacturer's specs. Changed spark plugs, air filter and PCV filter.	CVS-CH	HC gm/mi 2.73 CO gm/mi 45.6	- 6% - 20%
236	1980	19,652	Dodge/Colt	CVS-CH	CO gm/mi 53.6	Reset idle mixture to manufacturer's specs. Changed spark plugs.	CVS-CH	CO gm/mi 19.7	- 63%
069	1981	3,652	Ford/Escort	CVS-CH	HC gm/mi 1.04 CO gm/mi 15.0	Reconnected hot air stove pipe from the exhaust manifold to the air intake.	CVS-CH	HC gm/mi .918 CO gm/mi 12.2	- 12% - 19%

-25-

RESTORATIVE MAINTENANCES

Vehicle Number	Year	Odometer	Make/Model	As Rec'd Test Results		Corrective Actions	After Maint. Test Results			% Δ
				Test Type	Emissions Results (Failed Standards)		Test Type	Emissions Results		
*063	1981	9,645	Cadillac/ Barritz	CVS-CH	CO gm/mi 8.15 NO _x gm/mi 4.00	During bags one and two of the "as received" FTP CVS-CH test the engine would not come off of fast idle. The G.M. representative diagnosed the problem as a faulty ECM and malfunctioning fuel injectors. These components were replaced. While attempting to retest, the check engine light came on and problem codes were found. With the approval of the Project Officer the vehicle was then taken to a local Cadillac dealer for repairs. The throttle position sensor was replaced by the dealer.	CVS-CH	CO gm/mi 2.96 NO _x gm/mi .751	- 64% - 81%	
*058	1981	5,669	Pontiac/ Bonneville	CVS-CH	HC gm/mi 8.88 CO gm/mi 205. NO _x gm/mi .325	Replaced O2 sensor. A G.M. representative assisted in this diagnosis and repair.	CVS-CH	HC gm/mi 4.53 CO gm/mi 27.4 NO _x gm/mi 3.94	- 49% - 87% +1112%	
				Idle	HC ppm 354. CO % 4.03		Idle	HC ppm 152. CO % .526	- 57% - 87%	
* Vehicles 063 and 058 were tested after the required 50 I/M procedures had been completed. At the manufacturer's request, the Project Officer agreed to allow retest on the vehicles. These retests will be applied to the contractual requirements for the FY81 project.										

-26-

SECTION V
VEHICLE EMISSION TESTING

A. TEST LABORATORY

EG&G-AR Chassis Dynamometer Testing Laboratory is located at 5404 Bandera Road, San Antonio, Texas. A floor plan of this lab is included as Figure V-1. This lab presently consists of two automotive test cells with chassis dynamometers, one motorcycle chassis dynamometer test cell, emissions analytical equipment, soak area and support equipment. Details on most equipment are available in Appendix C, EPA Laboratory Qualification Worksheets.

Test Cell Number One was exclusively used for the data generated in the Emission Factor Program. This cell contains a Clayton ECE-50 chassis dynamometer with an inertia range from 1000 lbs. to 8875 lbs. in 125 lb. increments. The drivers aid is a Hewlett Packard 7133A recorder. A Hartzell N24D WW fan was used in this cell.

A CFV-CVS System was utilized for testing under this contract. The system is a Horiba Model 20-B-CFV-CVS with a flow capacity of 325 CFM. Details may be found in Appendix D.

The Emission Analytical Console used was constructed by Horiba Instruments according to EG&G-AR specifications. The console contains a total of seven analyzers on two sample trains for both dilute and raw exhaust gas analysis. Details on this console may be found in Appendix D. Additionally, a Horiba Mexa 321 E was used for undiluted HC (Hexane) measurements.

EG&G-AR's Chassis Dynamometer Testing Laboratory has a soak area capacity of approximately 14 vehicles, dependent upon vehicle size. Soak area temperature is controlled year-round to a target 74 ± 3 F.


A full complement of support equipment is located in the Chassis Dynamometer Testing Laboratory. This equipment is detailed in Appendix D but essentially consists of temperature and humidity recorders, a barometer, clocks, timers, calibration equipment, lead (Pb) test kit and a zero gas generator.

B. EQUIPMENT CHANGES

At the start of the contract period, the Horiba Console was used to measure undiluted HC, with results converted to Hexane equivalent. Later the Mexa 321 E was used, beginning with run number 61.

The only other equipment change was the initiation of the use of Plumbtesmo kits. Beginning with run number 134, these kits were used to detect the presence of lead traces in the test vehicle tailpipes.

EG&G AUTOMOTIVE RESEARCH, INC.
CHASSIS DYNAMOMETER TESTING LABORATORY

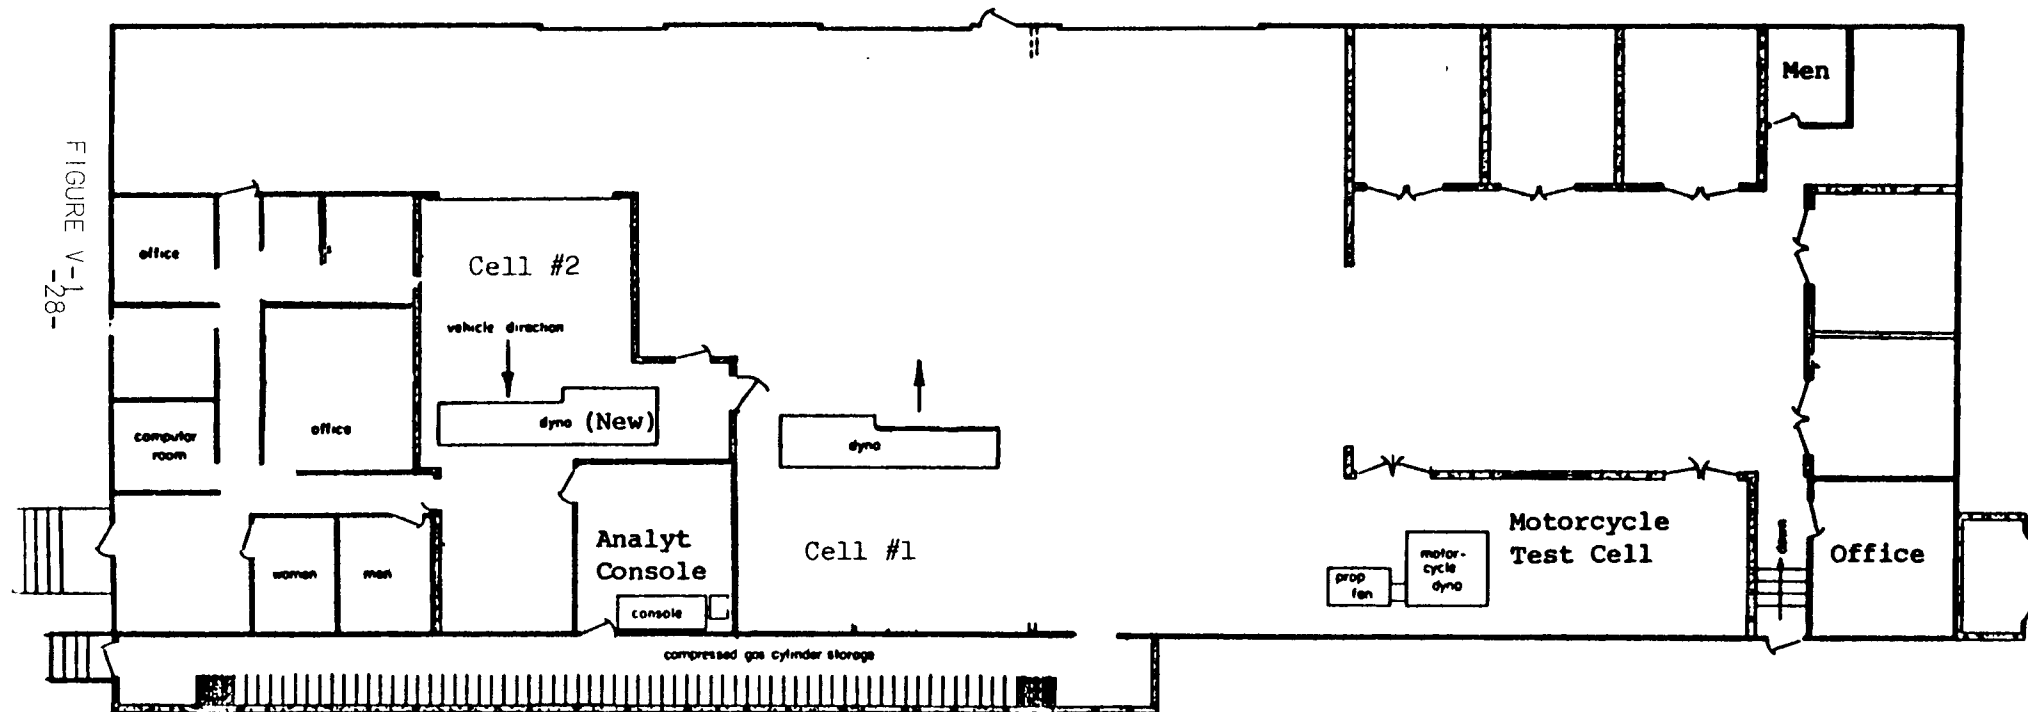

C. TEST PROCEDURES

1. Preconditioning Procedures

On all vehicles the "as received" fuel was drained and the tank refilled to tank-fuel volumes (40% of tank capacity) with the appropriate test fuel. The vehicles were run on the dynamometer for the first 505 seconds of the Federal Cycle. During preconditioning and the cold transient phase of the FTP, a vehicle driveability evaluation form was completed. The preconditioning ensured that the test fuel had purged the vehicle's fuel system and the engine had achieved a normal operating temperature. Test vehicles were then placed in the soak area. The required ambient temperature in the soak area was maintained and the prescribed 12 to 36 hour soak began. The ignition was not turned on again until the beginning of the emissions test.

2. FTP Procedure

The basic test performed on each vehicle was the Federal Test Procedure for exhaust emissions as described in Federal Register Vol. 42, No. 125 - Tuesday, June 28, 1977 and as amended in Vol. 43, No. 220 - Tuesday, November 14, 1978. This procedure was modified and expanded by EPA guidelines contained in the subject contract.

3. Highway Fuel Economy Test Procedures and Requirements

After the FTP the vehicle was operated on the chassis dynamometer at 50 miles per hour for a period of three minutes. The "50 cruise" short cycle test was performed at this time. Within one minute of this cruise period, the vehicle commenced operation over the 10.242 mile, 765 second driving schedule. The CVS system was used to gather the dilute exhaust for the purpose of emission and fuel economy calculations. The engine was at an idle condition at the beginning of the sampling period.

The tolerance of this driving schedule was identical to those defined in the basic FTP driving schedule.

Dynamometer loading and transmission shift points follow the procedures required for FTP tests.

4. Additional Test Cycles

This set of four short cycle tests included; 50 cruise, four-speed idle test, two-mode loaded test and bagged idle test. Measurements of diluted and undiluted HC, CO, CO₂ and NO_x emissions were accomplished with instruments described in Section V-A. Test Laboratory. The entire sequence was conducted with the hood open and the auxiliary cooling fan on. For the final test, the inertia was reduced to the

lowest available setting (1,000 lbs.). Each of the short cycle tests began after a six (\pm one) minute idle period with the transmission in neutral. The idle period began immediately after the end of the preceding test. If the time between tests was exceeded by less than two hours, the vehicle was preconditioned by driving the first 505 seconds of the FTP Driving Schedule. The test sequence then resumed, beginning with a six minute idle. If the idle time was exceeded by more than two hours, the vehicle was placed in soak from 12-36 hours and retested from the beginning of the cold start FTP. In each case, equilibrium of engine (or vehicle) speed and analyzer outputs were achieved before the readings are taken. Only in the case of the 50 Cruise Test, did the mode exceed 30 seconds after the proper engine (or vehicle) speed and dynamometer load had been reached. Emission values were monitored continuously on strip chart recorders. Sample data sheets are located in Appendix C. Details of the procedures for each of the short cycles are listed below.

- a. The 50 Cruise Test was a high speed loaded test that takes advantage of the three minute preconditioning run before the HFET. Tailpipe emissions were measured and recorded continuously throughout the period although the official sampling period ended 30 seconds after speed and load had stabilized at 50 mph.
- b. The Four-Speed Idle Test involved four steady state idle conditions with the transmission in neutral. Emissions were measured and recorded at basic idle, idle at 2500 rpm and after returning to basic idle. The transmission was then placed in drive (with brakes applied) for sampling in the fourth mode.
- c. The Two-Mode Loaded Test consisted of two operating conditions. At the end of the six minute idle period, the vehicle was operated at 30 mph while setting 9.0 actual horsepower. Immediately following sampling in this mode, the vehicle was returned to the idle mode, the transmission placed in neutral and the emissions sampled again.
- d. The Bagged Idle Test followed the FTP and preceded the HFET. The Bagged Idle Test required the use of the same instrumentation as the FTP to measure dilute exhaust emissions during one steady state of operation.

The test was preceded by an "engine-off" soak period of six (\pm one) minutes. At the end of this soak period, the vehicle was restarted and operated for three minutes at idle with the transmission in drive (manual transmission vehicles were operated in neutral with the clutch engaged). The three minute sampling period began at the time the starter was engaged so that the engine cranking was included as part of the sample. During the

three minute period, the exhaust sample was gathered through the CVS.

D. CALIBRATIONS

The following calibrations were performed routinely during the contract period. No changes in usual lab operations were required to meet the requirements of the subject contract.

1. Chassis Dynamometer

The chassis dynamometer received the following calibrations: A complete calibration was performed prior to initiation of testing. The calibration included speed, load cell deadweight, deadband adjustment and dynamometer coastdowns. This calibration was repeated after maintenance was performed that could affect the calibration or whenever a weekly verification exceeded the ± 0.5 road load horsepower tolerance.

On a weekly basis coastdown times were verified on half of the inertia weight and road load combinations used. The following week the remainder of the inertia weight and road load combinations used were verified. A speed check at 74.54 km/hr (46.3 mph), 1800 rpm was performed on a weekly basis.

During the dynamometer warm-up and prior to the start of each test, the indicated horsepower for the selected inertia weight was verified at 50 mph.

The dynamometers were lubricated and maintained in accordance with Clayton's recommended maintenance schedule.

2. CVS System

The CFV-CVS System received a complete calibration, according to the guidelines set forth in Title 40, Code of Federal Regulations, Part 86, Section 86.199-78 (b) CFV calibration, prior to the start of the program, when maintenance was performed that could have an effect on the calibration or when deemed necessary by Quality Control personnel.

The flow computation board calibration was verified on a weekly basis. If the variance of one counter exceeded ten counts from the average count or the calculated SCFM and the indicated SCFM exceed five counts, the flow computation board was adjusted.

On a daily basis a CVS System verification was performed using the propane recovery method as outlined in Title 40, Code of Federal Regulations, Part 86, Section 86.199-78 (c). If the recovery was outside of the $\pm 2\%$

tolerance, the problem was identified and repaired. Two successive recoveries within $\pm 2\%$ were obtained before testing began.

3. Analytical Bench

Monthly calibrations on all used analyzer ranges were conducted using seven gases spaced evenly over each range (e.g., zero, 15, 30, 45, 60, 75 and 90 percent of full scale). The gases used to calibrate the CO, CO₂, and NO_x analyzers are all single blend gases with nitrogen as the diluent. The gases used for the FID were single blend gases using propane with air as the diluent. All of the above gases were purchased from Scott Specialty Gases and were gravimetric blends with certified analysis ($\pm 1\%$) and are traceable to NBS standards. An Aadco Model 737-13 pure air generator was used for all zero air requirements. The operation of this generator was verified weekly by cross-checks with compressed zero air with certified levels of impurities. A complete calibration was performed following maintenance or when curve checks were out of limits.

On a weekly basis all analyzer curves were checked using the span gas and three of the gravimetrics (e.g. 90, 60, and 30% of full scale). If any of the readings exceeded $\pm 1\%$ of the concentration for gases, above 50% of meter, the instrument received a complete calibration. On alternating weeks, 75, 45, and 15% gravimetrics were substituted in the procedure.

The entire analytical system was leak checked daily. Zero and span drift on all analyzer ranges measured and recorded, zero and span pot settings were recorded, NO_x converter efficiency was checked and CO analyzer vapor interference was checked using CO₂ bubbled through water. Propane recoveries were performed, span gas cylinder pressures recorded, HC hangup was checked and ambient HC and CO analysis was performed.

4. Soak Area Temperature Recorder and Wet Bulb/Dry Bulb Recorder

The temperature recorders were calibrated monthly by referencing the temperature sensors to a certified thermometer. They were checked at ambient, cool (approx. 60° F) and warm (approx. 90° F) temperatures. Response time was recorded.

The recorder was checked daily at ambient temperatures.

5. Strip Chart Recorders

The chart speed and linearity of all emissions recorders and the driver's aid were checked weekly. Response time and deadband adjustments were also checked during this calibration. The data forms used for all calibrations and functional checks are included in Appendix D.

6. Quality Audit

In order to ensure that all calibrations were completed in a consistent manner and that no procedural or operational errors had occurred during the calibrations, each completed data sheet was audited by the EG&G-AR Quality Control Group.

SECTION VI

TEST RESULTS

All test results were transferred to special data sheets (included in Appendix B) provided by the EPA. After review by the EPA, these packets were forwarded to Systex Inc. which was contracted by the EPA to process all data supplied by the Emission Factor testing contractors.

Because of this arrangement, EG&G-AR's contract required that test data not be included as part of the final report.

SECTION VII

DATA HANDLING

A. EMISSIONS TEST AUDITING AND VALIDATION

Upon completion of each vehicle test sequence, test data packets were reviewed by the Quality Control Department, independent from testing operations. This review consisted of:

1. Checks for errors, omissions and legibility.
2. Verification of time specifications.
3. Application of current calibration data and use of properly calibrated equipment.
4. Compliance with FTP specifications.

To ensure consistency and completeness of audits, a group of checklists was utilized. These checklists are located in Appendix E. When problems were discovered in the data packets, the packet was returned to the appropriate technician for corrections. If any inconsistencies could not be resolved, the test was invalidated.

B. TEST DATA TRANSMITTAL

After completion and review of each data packet, the packet was forwarded to the EPA via United Parcel Services. As directed by the EPA, on July 15, 1981, all data packets were sent to Systex, Inc., via United Parcel Services.

C. CALIBRATION DATA TRANSMITTAL

On a weekly basis a copy of all calibrations was sent to the EPA. This packet also included daily work summary logs, daily instrument checks and the barometric recording for the week. The packet included information generated from Monday to Sunday of each week.

Beginning in mid July, the monthly analytical instrument calibration curves were sent to Systex, Inc. as directed by the EPA. The remainder of the packet continued to be sent directly to the EPA.

APPENDIX A
Sample Procurement Packet

- 1) Letter of Introduction
- 2) Emission Factor Testing Program - Question and Answers
- 3) Telephone Questionnaire
- 4) Incoming Vehicles Inspection Sheet
- 5) Test Agreement
- 6) Standard Vehicle Loan Agreement
- 7) Savings Bond Information Sheet
- 8) Test Agreement Addendum
- 9) University of Michigan Questionnaire
- 10) EG&G-AR Letter of Appreciation
- 11) EG&G-AR Letter of Acknowledgement for Response
- 12) Vehicle Owner Questionnaire Data Sheet



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

ANN ARBOR MICHIGAN 48105

OFFICE OF
AIR, NOISE AND RADIATION

EMISSION FACTOR TESTING PROGRAMS

Questions and Answers

Dear Vehicle Owner:

As you may know, the Environmental Protection Agency and EG & G Automotive Research are conducting an important research program on air pollution from motor vehicles in San Antonio. You have been selected by a random, scientific sampling procedure as a possible participant in this program, which involves analyzing exhaust emissions from certain vehicles. We hope you will agree to take part in this important effort.

If your vehicle matches our research specifications, we will provide you with a late-model loaner car for the several days that your car is being examined by EG & G. Both your vehicle and the one being loaned to you will be insured. Your car will be returned to you with a full tank of gasoline and you will also receive a \$100 United States Savings Bond as our way of thanking you for your help. Your participation in this research will be an important contribution toward solving this country's air pollution problems.

Please fill out and mail the enclosed postage-paid card as soon as you can. If you are willing to participate, a representative of EG & G will be in touch with you to ask a few questions about your vehicle. The enclosed information sheet answers some questions people often ask about this research program. If you have any additional questions about your participation, please feel free to call Mr. Kevin Kott of EG & G at 684-2310. He will be happy to answer any questions you may have.

We look forward to receiving your reply card very soon.

Sincerely,

Thomas C. Bejma, Project Officer
Emission Control Technology Division

Enclosures

1. Must I participate in this program?

No, your cooperation in this research program is completely voluntary. If, for any reason, you decide not to participate, please let us know on the enclosed postpaid reply card.

2. Why should I participate?

In addition to the free gasoline and a \$100.00 U.S. Savings Bond, your participation will benefit you indirectly by helping EPA understand and improve the quality of the air in and around your city.

3. How long will the examination take?

While the examination itself takes only about an hour, the vehicle must be completely cooled off before the examination can begin. This requires that the vehicle not be started for 12 to 36 hours to simulate overnight parking. Therefore, we will need to have your vehicle at the laboratory for two or three days. You will be contacted once the evaluation is complete so that arrangements can be made to pick up your vehicle. In general, we suggest that you plan to use the loaner car for three to four days.

4. Will my vehicle be mistreated in any way?

No, every aspect of the evaluation has been designed to duplicate everyday operation.

5. Exactly what will be done to my vehicle?

Once the vehicle is sufficiently cooled off, it will be pushed onto a dynamometer. Although the vehicle does not actually move during the examination, the dynamometer is a type of treadmill which simulates conditions which would normally be encountered on the road. A hose is connected to the exhaust pipe to collect the exhaust. A specially trained driver then starts the vehicle and "drives" it through a "driving cycle" which represents typical operation in urban, suburban, and rural areas. Throughout this time, a portion of the exhaust gases are collected for subsequent analysis. This analysis allows us to calculate the quantity of exhaust emissions emitted by your vehicle. Values for the city and highway fuel economy are also calculated. A complete inspection of the emission control components is conducted after the examination.

TELEPHONE QUESTIONNAIRE

6. How many miles will my vehicle be driven during the program?

Your vehicle will be driven approximately 50 odometer miles during the examination. The majority of these miles will be accumulated indoors on the dynamometer. A 10 minute drive will precede the examination.

7. How will my vehicle be protected while in the contractor's possession?

In addition to the insurance provided by the contractor, your vehicle will be stored indoors while the examination is being conducted. If required to be parked outside, your vehicle will be located in a secure area.

8. What determines whether or not my vehicle will be ultimately selected?

Your vehicle has been initially identified by a statistically random sampling procedure. In order to obtain a cross section of the population of vehicles on the road, certain other criteria such as make, model and model year must be met. We are examining a limited number of vehicles that meet these particular specifications. If your vehicle meets these criteria, the final decision on whether your vehicle is selected will be based on a random process.

9. What happens to the information obtained from my vehicle?

The information collected as a result of this program is used to determine how the entire population of in-use vehicles is affecting air quality. The data from your vehicle are combined with data from several hundred other vehicles in this area in order to obtain a statistically valid sample.

10. How can I obtain the results from your examination of my vehicle?

After the completion of the examination you will be provided with a form to complete and return to us. This form has a space in which you may indicate your desire to obtain the results on your vehicle. We will forward them to you as soon as all the data have been processed.

Date _____ and time _____ of contact.

If owner was not contacted, list the number of attempts that have been made _____ (eliminate after three attempts).

Individual Contacted: _____

If you were instructed to call back later, obtain convenient date _____ and time _____.

VEHICLE CONTROL NO. _____ TELEPHONE NO. _____

* Mr./Mrs. _____, you have been randomly selected from a list of 19 _____ vehicle owners living in the San Antonio Metropolitan area. As the letter you recently received explains, a study of vehicle exhaust emissions is currently being conducted in this area by the United States Environmental Protection Agency and EG&G Automotive Research.

Your participation in this program is strictly voluntary. EPA is authorized by law to conduct this study and to offer incentives to you for your cooperation should you decide to participate.

Your cooperations will aid EPA's efforts to control air pollution due to vehicle exhaust.

The conditions for participation in this program are:

- 1) We ask you to bring your vehicle into our testing facility, which is located at 5404 Bandera Road. You will receive a late model loaner vehicle which will have a full tank of gas. This vehicle is yours to use for the duration of the testing program which will take approximately 3 to 4 working days. During this time we will be conducting a series of exhaust emissions test on your vehicle.
- 2) At the completion of our testing, if a full program has been performed, your vehicle will be returned to you with a tune-up and oil change (if required) and a full tank of gas. You will also receive a \$100.00 U.S. Savings Bond for your cooperation in this study.

* If individual listed on the reply card was not contacted, enter name of person you talked with and indicate relationship i.e. husband, wife, son, daughter, friend, etc.

Prior to releasing your vehicle into our possession you will be given some documents to sign. These documents, which will also be signed by an authorized EG&G Automotive Research representative, will define in detail these areas:

- 1) Initial Inspection form which will document the overall interior and exterior condition of your vehicle when received.
- 2) Test Agreement form which explains what sequence of tests your vehicle will be given and assign full liability responsibilities to EG&G Automotive Research for your vehicle while in our possession.
- 3) Loaner Car Agreement explains the terms and liability responsibilities for both parties in relation to the loaner vehicle.
- 4) Savings Bond information sheets. This form when completed will contain all the information necessary for a Savings Bond to be issued in your name.

Do you think you would be willing to participate in this program? _____ Yes _____ No

IF RESPONSE IS POSITIVE

For the purpose of identifying your vehicle as a possible candidate for this study, I am going to ask you a few questions. None of this information can be used against you in any way and you should answer these questions to the best of your knowledge. Please indicate when you are not sure of something.

- 1) What is the make, model, year, transmission type, vehicle identification number and engine size?

MAKE _____ MODEL _____ YEAR _____

TRANS: AUTO _____ MANUAL _____ V.I.N. _____

ENGINE _____

- 2) What is the approximate odometer reading? _____
- 3) Has your vehicle ever been involved in an accident? _____ Yes _____ No
If the answer is yes, indicate the type and extent of damage, i.e. frame, engine, drive train, cooling system, exhaust system, etc.

- 4) Because this is an exhaust emissions test, it is critical that the exhaust systems on the vehicle tested be in good condition. To your knowledge, are the exhaust pipes, muffler and catalyst on your vehicle in good condition with no leaks or holes. _____ Yes _____ No

IF NO

Would you consider making the necessary repairs or replacements to your exhaust system at your own expense in order to participate in this program? _____ Yes _____ No

IF NO ELIMINATE

If Yes try to obtain an estimate of when these repairs will be completed _____.

This should supply all of the information needed to determine if your vehicle is acceptable.

This information will have to be reviewed by the Project Manager and a decision should be made within the next few days. We will notify you as soon as possible.

Is it convenient for you if we contact you at this same number and time when the decision is made. _____ Yes _____ No

IF NO, obtain number and time _____.

Thank you very much for your cooperation.

INCOMING VEHICLE INSPECTION
SHEET PART II

TIRES: _____ RADIAL OR _____ BIAS
ENGINE SIZE: _____
BODY STYLE: _____
YEAR: _____
MAKE/MODEL: _____
A/C _____ OR NONE A/C _____
CAR NO.: _____

* PLEASE GIVE JOHN R. INFORMATION



5404 BANDERA ROAD, SAN ANTONIO TEXAS 78238 • TEL (512) 684-2310 TWX 910-871 1075

TEST AGREEMENT

Your vehicle is being loaned to EG&G AUTOMOTIVE RESEARCH, INC., for use in a government-sponsored program for cleaner air. This executed Agreement is your assurance of full protection against any loss sustained by accident or damage to the vehicle while in the possession of EG&G AUTOMOTIVE RESEARCH, INC., or its designed representatives.

EG&G AUTOMOTIVE RESEARCH, INC., agrees to be fully responsible for any and all damage to the vehicle occurring while the vehicle is in its possession. Possession is hereby defined as care, control, custody, operation, inspection, or storage between the time the vehicle is received from the owner by EG&G AUTOMOTIVE RESEARCH, INC., and the time the vehicle is returned to the owner.

EG&G AUTOMOTIVE RESEARCH, INC., agrees to indemnify and hold harmless the vehicle owner of any repairs, damage, loss, or liability sustained by the vehicle owner by reason of accident or damage to the vehicle while in its possession.

EG&G AUTOMOTIVE RESEARCH, INC., agrees to provide primary automobile insurance on the vehicle while in its possession.

EG&G AUTOMOTIVE RESEARCH, INC., agrees to exercise extreme care in the use of the vehicle and agrees to return the vehicle to the owner in as good exterior, interior, and operating condition, except for normal wear and tear, as when the vehicle was received by EG&G AUTOMOTIVE RESEARCH, INC.

EG&G AUTOMOTIVE RESEARCH, INC., reserves the right to perform any repairs and maintenance upon the vehicle, at its sole discretion, provided all such repairs and maintenance are performed according to the manufacturer's specifications.

I, _____, agree to loan my vehicle, described as a _____ (Year) _____ (Make and Model), registered in the State of _____ under License Plate No. _____ to EG&G AUTOMOTIVE RESEARCH, INC., for a period of approximately _____ days for a series of tests. I further agree that, should testing not be completed within the time period specified above, I will execute the Agreement Renewal which is an addendum to this Agreement, for the additional time required to complete testing. I understand that I may refuse to loan the vehicle to EG&G AUTOMOTIVE RESEARCH, INC., at any time and that I am under no obligation whatsoever.

AGREED TO this _____ day of _____, 198__.

VEHICLE OWNER:

EG&G AUTOMOTIVE RESEARCH

By: _____

By: _____

Control No. _____
Data Form No. 3024.4

STANDARD VEHICLE LOAN AGREEMENT

THIS STANDARD VEHICLE LOAN AGREEMENT (the "Agreement") is made and entered into by and between Mr./Mrs./Miss/Ms. _____ of _____ County, State of Texas (referred to in this Agreement as the "Participant"), and EG&G Automotive Research, Inc., a Texas corporation having a usual place of business at 5404 Bandera Road, City of San Antonio, Bexar County, State of Texas (referred to in this Agreement as "Automotive Research").

W I T N E S S E T H T H A T

WHEREAS: Automotive Research has entered into a contract with the United States Environmental Protection Agency under which Automotive Research will borrow cars from the public and test those cars to determine the effectiveness of their emissions control systems; and

WHEREAS: The Participant has agreed to let Automotive Research test the Participant's car on the condition that Automotive Research lend the Participant a car to use during the period of such tests; and

WHEREAS: Automotive Research is willing to lend a car to the Participant and the Participant is willing to accept the loan of such car (such car being referred to in this Agreement as the "Car") all on the terms and conditions hereinafter set forth,

NOW, THEREFORE. In consideration of the mutual covenants and agreements set forth in this Agreement, Participant and Automotive Research do hereby contract, covenant and agree as follows:

1. Automotive Research lends to and the Participant hereby accepts the loan of the Car whose license number and condition are set forth in the box at the bottom of the last page of this Agreement.
2. Participant agrees to exercise care in the use of the Car and agrees to return the Car to Automotive Research within forty-eight (48) hours, or two (2) working days, after notification of the completion of the tests on the Participant's own car, but in no event later than ten (10) days from the date of execution of this Agreement. Upon its return, the Car will have with it all tires, tools, and other accessories now contained in or installed on the Car. The Car and all such tires, tools, and accessories will, upon return, be in as good exterior and interior repair and operating condition as they now are and as is indicated in the box at the bottom of the following page, except for wear and tear caused by normal use and except for damage caused by casualty.
3. Participant agrees that the Car will not be operated to carry passengers or property for any money or other consideration, expressed or implied, or to push or tow any other vehicle or trailer. The Car will be operated only by Participant and permitted members of his immediate family, and provided that all such operators shall be duly qualified and licensed.

4. Participant agrees to be liable for: (a) all charges, fines, and costs for parking, traffic, or other legal violations assessed against the Car, Participant, or Automotive Research, except where caused through fault of Automotive Research; (b) Automotive Research's costs including reasonable attorney's fees, where permitted by law, incurred collecting payments due from Participant hereunder; (c) Automotive Research's costs to repair collision damages to the Car caused by the negligence or willful misconduct of the operator; provided, however, that Participant's liability for such damage will not exceed \$100.00.

5. Participant and any authorized operator agree to participate as an insured in benefits of an automobile liability insurance policy, a copy of which is available from Automotive Research. Said policy comes before any other insurance carried by Participant or authorized operator and contains bodily injury or death liability limits of \$250,000 for each person in each accident and is subject to the following limitations: A \$500,000 limit for all persons in each accident and a property damage liability limit of \$50,000 for each accident. Participant is bound by and agrees to the terms, conditions, limitations, and restrictions of said policy; it being understood that the policy is a standard Texas motor vehicle policy.

6. Participant releases Automotive Research from any liability for loss of or damage to any property left, stored, or transported by Participant or any other person in or upon the Car, during the term of this loan, or after return of the Car to Automotive Research.

TO WITNESS this Agreement, the Participant has signed below and Automotive Research has caused the Agreement to be executed by its authorized representative, all under seal, as of the _____ day of _____, 198____, in the city of San Antonio, Texas.

PARTICIPANT: _____ EG&G AUTOMOTIVE RESEARCH, INC.:

By: _____

Driver's License # _____

Expiration Date _____ By: _____

CAR AND CONDITION

DATE: _____
Loan Car License No: _____
Loan Car Condition: OUT _____ OK/Initial
DATE _____ IN _____ OK/Initial
Defects noted when Car was received by Participant: _____

EG&G AUTOMOTIVE RESEARCH, INC.
 5404 Bandera Road
 San Antonio, Texas 78238

SAVINGS BOND INFORMATION

NAME		SOCIAL SEC. NO.	
STREET ADDRESS			
CITY	STATE	ZIP	
HOME TELEPHONE NO.	BUSINESS TELEPHONE NO.		
THE FOLLOWING PERSON, IF ANY, IS TO		<input type="checkbox"/>	OWNER
		<input type="checkbox"/>	CO-OWNER
		<input type="checkbox"/>	BENEFICIARY
NAME		SOCIAL SEC. NO.	
MAILING ADDRESS (IF DIFFERENT THAN ABOVE)			
CITY	STATE	ZIP	

CLASS/SERIAL NO.	
CODE NO.	
YEAR/MAKE OF VEHICLE	
MODEL OF VEHICLE	
ACCEPTED	REJECTED
BOND NO.	ISSUE DATE
REMARKS	

TEST AGREEMENT ADDENDUM

I, _____ owner() and/or joint-owner() and/or principal driver() of the vehicle described as a (Year) _____ (Make and Model) _____, registered in the State of _____, agree to extend original testing agreement dated _____, 19____ for a period of _____ days.

VEHICLE OWNER

By: _____

Date: _____

SITE _____

VEHICLE NUMBER _____

1. How many adults are there in your family? _____
2. How many drivers are there? _____
3. How many of these drivers are employed? _____
4. How many children do you have living at home? _____
5. Altogether, how many cars or other vehicles do you (and your family living with you) own or lease? _____

- | | | | | |
|--------|--------|----------|---------|-----------------|
| 1. ONE | 2. TWO | 3. THREE | 4. FOUR | 5. FIVE OR MORE |
|--------|--------|----------|---------|-----------------|

6. How often is the car we are testing tuned up; according to the owner's manual, at least every 6 months, every 7 to 12 months, or less than once a year, or what?

TOO NEW
5. TO BE
TUNED

TURN TO P. 2, 7.

- | | | | | |
|----------------------------------|----------------------|-----------------------------|---------------------|-----------------------------|
| 1. AT LEAST
EVERY 6
MONTHS | 2. 7 TO 12
MONTHS | 3. LESS THAN
ONCE A YEAR | 4. OWNERS
MANUAL | 7. OTHER (SPECIFY)
_____ |
|----------------------------------|----------------------|-----------------------------|---------------------|-----------------------------|

- 6a. How long ago was the last tune up, 6 months ago or less, 7 to 12 months, or longer than 12 months?

- | | | |
|------------------------|----------------------|-----------------------------|
| 1. 6 MONTHS
OR LESS | 2. 7 TO 12
MONTHS | 3. LONGER THAN
12 MONTHS |
|------------------------|----------------------|-----------------------------|

- 6b. Was the tune up done by a car dealer, a service station, an independent garage, you (or another family member), or someone else?

- | | | | | |
|---------------|-----------------------|--------------------------|--------------------------------|-----------------------------|
| 1. CAR DEALER | 2. SERVICE
STATION | 3. INDEPENDENT
GARAGE | 4. SELF/OTHER
FAMILY MEMBER | 7. OTHER (SPECIFY)
_____ |
|---------------|-----------------------|--------------------------|--------------------------------|-----------------------------|

7. We are interested in the fuel economy people actually get with their cars. How many miles per gallon do you get with this car in city driving?

MPG IN CITY

8. How about on the highway?

MPG ON HIGHWAY

9. Is unleaded gasoline usually used in this car?

1. YES

- 9a. Is regular or premium used?
- | | |
|------------|------------|
| 1. REGULAR | 2. PREMIUM |
|------------|------------|
- GO TO 10

5. NO

- 9b. Is regular, premium, or some other fuel used?
- | | | |
|------------|------------|----------|
| 1. REGULAR | 2. PREMIUM | 7. OTHER |
|------------|------------|----------|
- TURN TO P. 3, 11

10. Unleaded gas is more expensive than leaded and at times has been hard to find. Have you ever used leaded gasoline in this car?

1. YES

5. NO

8. DON'T
KNOW

TURN TO P. 3, 11

- 10a. How often has leaded gasoline been used? _____



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

ANN ARBOR MICHIGAN 48105

OFFICE OF
AIR NOISE AND RADIATION

11. Have any special modifications like installing high performance equipment been made to this car to improve its performance?

1. YES

5. NO

8. DON'T
KNOW

GO TO 12

11a. What has been done?

SRC THUMBNAIL SKETCH

Dear Participant:

Thank you very much for your participation in our vehicle emission testing program. We are conducting a follow-up on this effort and would like your response to a few questions on the program. These may be answered after you have had a few days to become reacquainted with your vehicle. You may use this self-addressed franked envelope to submit your responses.

1. "Were you treated courteously and efficiently by the personnel at our contractor's laboratory?"

Yes ☐

No ☐

2. "Do you feel that the performance of your vehicle is now different than when it was submitted for testing?"

No noticeable change ☐

Slightly better ☐

Much better ☐

Slightly worse ☐

Much worse ☐

3. "Are you satisfied with the present performance of your vehicle?"

Yes ☐

No ☐

We appreciate the time you have spent in completing this questionnaire. If you would like to receive a summary of the emission results on your vehicle, please fill in the name and address for mailing in the space below:

Name _____

Street _____

City, State _____ Zip _____

(Please

Print)

Any Other Comments?

Contractor Use:

Test Location _____ Test Date _____ Run No. _____ Veh. No. _____

11 NM



5404 BANDERA ROAD SAN ANTONIO TEXAS 78238 • TEL(512)684-2310 TWX 910-871-1075

Dear Participant:

This letter is to express my thanks to you for your recent participation in the exhaust emissions testing program which EG&G AUTOMOTIVE RESEARCH, INC., is conducting on behalf of the Environmental Protection Agency.

In addition to the tank of gas, savings bond and use of a loan car which you have received as incentives for your cooperation in this effort, we may have performed maintenance items on your vehicle according to the manufacturer's specifications. Attached for your records is a detailed summary of any maintenance performed on your car while in our laboratory.

Again, thank you very much for your kind cooperation in this important effort.

Sincerely,

Mark D. Dalen
Project Manager

MDD/bh

Attachment



5404 BANDERA ROAD SAN ANTONIO TEXAS 78238 • TEL(512)684-2310 TWX 910-871-1075

Dear Vehicle Owner:

Thank you for your response to our recent inquiry on your vehicle. This information will be valuable in our overall data gathering process.

Unfortunately, your vehicle does not meet all of the specifications and requirements for this particular study and can not be used in the actual testing phase at this time.

Again, we would like to express our appreciation for your timely response.

Sincerely,

Mark D. Dalen
Project Manager

MDD/bh

VEHICLE OWNER QUESTIONNAIRE
DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ
101NT	3024	01	11		01	

1) What is the brand name of the fuel you normally use (see list below)?	<input type="text"/>	(1)
2) Have you, or others, ever noticed a hydrogen sulfide (rotten egg) odor in the vehicle exhaust?	1 (never) 2 (seldom) 3 (occasionally) 4 (frequently) 5 (don't know)	(2)
3) Have you ever used gasoline in this vehicle?	1 (never) 2 (seldom) 3 (occasionally) 4 (frequently) 5 (don't know)	(3)
4) If you have used gasoline, a) Have you noticed any difference in the vehicle performance?	1 (never used gasoline) 2 (perf. is better) 3 (perf. is worse) 4 (no difference) 5 (don't know)	(4)
b) Have you noticed any difference in fuel economy?	1 (never used gasoline) 2 (fuel economy better) 3 (fuel economy worse) 4 (no difference) 5 (don't know)	(5)
5) How long ago did you purchase the vehicle to be tested?	1 (0-3 months) 2 (3-12 months) 3 (1-2 years) 4 (over 2 years)	(6)

DATA ENTRIES FOR QUESTION #1

ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME	ENTER	BRAND NAME
ANOC	ANOCO	CLAR	CLARK	FINA	FINA	MOBI	MOBIL	SHEL	SHELL	UNIO	UNION
ARCO	ARCO	CONO	CONOCO	GEMC	GEMCO	MOTO	MOTOR	SINC	SINCLAIR	VICK	VICKERS
ASHL	ASHLAND	CROW	CROWN	GULF	GULF	PENN	PENNEYS	SITE	SITE	WARD	WARDS
BONA	BONAFIDE	DERB	DERBY	HESS	HESS	PHIL	PHILLIPS	SKEL	SKELLY	ZEPH	ZEPHYR
BP	BP	ENCO	ENCO	HUDS	HUDSON	SCOT	SCOTT	STAN	STANDARD	**	OTHER
CHEV	CHEVRON	ESSO	ESSO	MARS	MARS	SEAR	SEARS	SUNO	SUNOCO	UNKN	UNKNOWN
CITC	CITCO	EXXO	EXXON	HART	MARTIN	SHAM	SHAMROCK	TEXA	TEXACO	VARI	VARIOUS

** IF BRAND IS 'OTHER' THEN ENTER THE FULL BRAND NAME VEHICLE OWNER USES

VEHICLE OWNER QUESTIONNAIRE
DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ
101NT	3024	01	11		01	

6) On a yearly basis, how many thousands of miles is this vehicle driven?	1 (0-5) 2 (5-10) 3 (10-15) 4 (15-20) 5 (20-30) 6 (over 30)	(10)	
7) Where is the driving done?	a) City expressways almost all: >75% most: 75-51% some: 50-21% little or none: <20%	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(11)
b) Major city streets	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(12)	
c) Other city streets	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(13)	
d) Rural expressways	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(14)	
e) Other rural roads	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(15)	
8) How is the driving done?	a) To and from work almost all: >75% most: 75-51% some: 50-21% little or none: <20%	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(16)
b) Shopping and errands	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(17)	
c) Business (not to and from work)	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(18)	
d) Other (social, vacations, etc.)	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(19)	
9) How did you get here today?	1 (city streets only) 2 (some expressway) 3 (primarily expressways)	(20)	
Approx. miles	<input type="text"/>	(21-22)	

VEHICLE OWNER QUESTIONNAIRE
DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC
	3024	01	11		01	

10) How is this vehicle used? almost all > 75% most: 75-51% some 50-21% little or none < 20%	a) Driver only	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(23)
	b) Driver and one passenger	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(24)
	c) Driver and 2 or more passengers	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(25)
	d) Driver only with heavy cargo	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(26)
	e) Driver, passenger and cargo	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(27)
	f) Towing a trailer	1 (almost all) 2 (most) 3 (some) 4 (little or none)	(28)
11) On a typical day, how many trips are made with this vehicle? (One trip is defined as starting the engine, traveling some distance and stopping the engine)		<input type="checkbox"/> <input type="checkbox"/>	(29)
12) On a weekly basis, how often is full throttle acceleration used?		1 (seldom) 2 (once or twice) 3 (3-6 times) 4 (every day)	(31)
13) Do you now experience any engine performance problems with this vehicle?	a) Hard starting	1 (yes) 2 (no)	(32)
	b) Stalling	1 (yes) 2 (no)	(33)
	c) Rough idle	1 (yes) 2 (no)	(34)
	d) Engine misfiring	1 (yes) 2 (no)	(35)
	e) Poor acceleration	1 (yes) 2 (no)	(36)
	f) Stumbling	1 (yes) 2 (no)	(37)
	g) Hesitation	1 (yes) 2 (no)	(38)
	h) Engine knock or ping	1 (yes) 2 (no)	(39)
	i) Dieseling (after run)	1 (yes) 2 (no)	(40)

VEHICLE OWNER QUESTIONNAIRE
DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC
	3024	01	11		01	

14) Overall, are you reasonably satisfied with the engine performance of this vehicle?	1 (yes) 2 (most of the time) 3 (no)	(41)
15) How long ago was the last oil change?	1 (too new, not due) 2 (due, but not yet done) 3 (0-6 months ago) 4 (6-12 months ago) 5 (over 1 year ago) 6 (don't know)	(42)
16) If you purchased the vehicle under warranty, how many times has it been returned for warranty repairs?	1 (no warranty) 2 (never returned) 3 (twice) 4 (3 or more) 5 (don't know)	(43)
17) What was the nature of the warranty repair?	1 (no warranty) 2 (never returned) 3 (recall) 4 (driveability) 5 (other)	(44)
18) Have you had any repairs to your vehicle for the correction of driveability problems?	1 (yes) 2 (no problems)	(45)
19) What repairs were performed on your vehicle to correct the driveability problems? Specify _____	1 (none) 2 (carburetor) 3 (engine) 4 (emission control system) 5 (ignition system) 6 (other) 7 (don't know)	(46)
20) How long ago were these repairs accomplished?	1 (no repairs) 2 (0-3 months) 3 (3-6 months) 4 (over 6 months) 5 (don't know)	(47)
21) Were these repairs effective in correcting the driveability problems?	1 (no repairs) 2 (yes) 3 (no)	(48)
22) Is this vehicle operated regularly on unpaved roads, in competitive events, or in hauling or transporting loads heavier than for which it was designed?	1 (yes) 2 (no) 3 (don't know)	(49)

VEHICLE OWNER QUESTIONNAIRE
DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC
	3 0 2 4	0 1	1 1		0 1	

23) Has the vehicle ever had major damage in any of the following areas?	a) Engine b) Cooling system c) Fuel system d) Exhaust system e) No damage f) Don't know	1 (yes) 2 (no) 1 (yes) 2 (no) 1 (yes) 2 (no) 1 (yes) 2 (no) 1 (yes) 2 (no)	(50) (51) (52) (53) (54) (55)
24) Has the catalytic converter ever been replaced on this vehicle?	1 (no catalyst) 2 (yes) 3 (no) 4 (don't know)	(56)	
25) Was the vehicle tested in a previous EPA program?	1 (yes) 2 (no)	(57)	
26) Was any maintenance performed since the last test?	1 (yes) 2 (no) 3 (not tested)	(58)	
27) What type of maintenance was performed?	1 (warranty) 2 (tune-up) 3 (none) 4 (not tested)	(59)	
28) How much did the maintenance cost? 001 no maintenance 002 don't know 003 not tested		(60)	
29) Who performed the maintenance?	1 (no maintenance) 2 (dealer) 3 (independent garage) 4 (tune-up clinic) 5 (yourself) 6 (not tested)		

VEHICLE OWNER QUESTIONNAIRE
DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEC
	3 0 2 4	0 1	1 1		0 1	

30) Do you accurately keep records of the fuel economy on this vehicle?	1 (yes) 2 (no)	(61)
31) Are you concerned with the fuel economy of this vehicle?	1 (yes) 2 (no)	(62)
32) Date of last city or state inspection	a) Month b) Year	(63-64)
33) Did your vehicle pass or fail the inspection?	1 (pass) 2 (fail) 3 (don't know) 4 (not required) 5 (never inspected)	(65)
34) a) Does your odometer indicate the true number of miles on your car? b) If no, specify approximate total number of miles this vehicle has been driven	1 (yes) 2 (no)	(66-72)

APPENDIX B
EPA Vehicle Data Packet

- 1) Vehicle Information Data Sheet
- 2) Engine Parameter Data Sheet
- 3) Vehicle Information Data Sheet
- 4) Mechanic's Inspection Form
- 5) FTP Test Data
- 6) Highway Fuel Economy Test Data Sheet
- 7) Bag Idle and 50 MPH Cruise Test Data Sheet
- 8) Four Mode and Loaded Two Mode Test Data Sheet
- 9) Propane Gain Data Sheet
- 10) Comments Data Sheet
- 11) Driveability Evaluation Data Sheet
- 12) Emission Component Data Sheet

[illegible]

	CONTRACT NUMBER			TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ									G	0		
IDENT	3	0	2	4	0	1	1	1	0	3										
	5				10			15		20										
	TEST DATE					ENGINE IDLE SPEED					INITIAL TIMING									
	Y	Y	M	M	D	ODOMETER MILES					MEAS rpm	SPEC rpm	VAC LINE DISC deg	MEAS VAC LINE CONN deg	SPEC deg	IDLE % CO				
CARD G1																				
	5				10			15		20		25		30		35		40		
	IDLE HC ppm/hex		FUEL INJ.	CHOKE NOTCHES																
				MEAS +	SPEC +															
	45		50																	
																	G	1		

[illegible]

VEHICLE NO. _____

AXLE RATIO

TIRE SIZE

TIRE MANUFACTURER

EGR VALVE PART NUMBER _____ (Includes all spaces, slashes,
dashes, etc.)

CARBURETOR PART NUMBER _____ (Includes all spaces, slashes,
dashes, etc.)

DISTRIBUTOR PART NUMBER _____ (Includes all spaces, slashes,
dashes, etc.)

FTP AND EVAP TEST DATA SHEET

FTP TEST DATA

Page (1 of 2)

IDENT	CONTRACT NUMBER			TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ				F	0
	3	0	2	4	0	1	1	1			0	5					
	5			10		15		20									80
CARD F1	INERTIA WEIGHT lbs			ROAD LOAD H.P.		EXTRA 10%										F	1
	5			10		15		20									80
BAG 1	VOLUME OF GAS (Vol ft ³)			NUMBER OF REVOLS		BAROM "HG		INLET PRESS "HG		CVS TEMP °F		VMIX					
	5			10		15		20		25		30					
	WET BULB °F			DRY BULB °F		DISTANCE MILES		CONCENTRATION OF DILUTION AIR		HC ppm		CO ppm		% CO2		NOX ppm	
	45			50		55		60		65		70		75		80	
	CONCENTRATION OF DILUTE EXHAUST SAMPLE			HC ppm		CO ppm		% CO2		NOX ppm		CH4 ppm					
	5			10		15		20		25		30					
BAG 2	VOLUME OF GAS (Vol ft ³)			NUMBER OF REVOLS		BAROM "HG		INLET PRESS "HG		CVS TEMP °F		VMIX				F	3
	45			50		55		60		65		70					80
	WET BULB °F			DRY BULB °F		DISTANCE MILES		CONCENTRATION OF DILUTION AIR		HC ppm		CO ppm		% CO2		NOX ppm	
	5			10		15		20		25		30		35		40	
	CONCENTRATION OF DILUTE EXHAUST SAMPLE			HC ppm		CO ppm		% CO2		NOX ppm		CH4 ppm					
	5			10		15		20		25		30					

FTP AND EVAP TEST DATA SHEET

FTP TEST DATA (continued)

Page (2 of 2)

IDENT	CONTRACT NUMBER			TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ				F	0
	3	0	2	4	0	1	1	1			0	5					
	5			10		15		20									80
BAG 3	VOLUME OF GAS (Vol ft ³)			NUMBER OF REVOLS		BAROM "HG		INLET PRESS "HG		CVS TEMP °F		VMIX					
	5			10		15		20		25		30					
	WET BULB °F			DRY BULB °F		DISTANCE MILES		CONCENTRATION OF DILUTION AIR		HC ppm		CO ppm		% CO2		NOX ppm	
	45			50		55		60		65		70		75		80	
	CONCENTRATION OF DILUTE EXHAUST SAMPLE			HC ppm		CO ppm		% CO2		NOX ppm		CH4 ppm					
	5			10		15		20		25		30					

EVAP TEST DATA

IDENT	CONTRACT NUMBER			TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ				E	0
	3	0	2	4	0	1	1	1			0	6					
	5			10		15		20									80
CARD E1	NET ENCLOSURE VOLUME ft ³			DIURNAL		HC CONC		BAROM PRESS		AMB TEMP							
	5			10		15		20		25		30					
	HOT SOAK			HC CONC		BAROM PRESS		AMB TEMP									
	5			10		15		20		25		30					

HIGHWAY FUEL ECONOMY TEST DATA SHEET

IDENT	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ												H 0		
	3	0	2	4	5	0	1	1	1			0	9													80	
		VOLUME OF GAS (V ₀) ft ³				NUMBER OF REVOLS				BAROM "HG		INLET PRESS "HG		CVS TEMP °F		VMIX											
BAG 1																											
		WET BULB °F				DRY BULB °F				DISTANCE MILES				HC ppm		CO ppm		% CO ₂		NOX ppm		CH ₄ ppm		H 1			
		CONCENTRATION OF DILUTION AIR																									
		CONCENTRATION OF DILUTE EXHAUST SAMPLE																									
		HC ppm				CO ppm				% CO ₂				NOX ppm		CH ₄ ppm						H 2					
		5				10				15				20		25		30						80			

BAG IDLE AND 50 MPH CRUISE TESTS DATA SHEET

BAG IDLE TEST DATA

IDENT	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ												B 0		
	3	0	2	4	5	0	1	1	1			0	7													80	
		VOLUME OF GAS (V ₀) ft ³				NUMBER OF REVOLS				BAROM "HG		INLET PRESS "HG		CVS TEMP °F		VMIX											
BAG 1																											
		WET BULB °F				DRY BULB °F				SECONDS OF TEST				HC ppm		CO ppm		% CO ₂		NOX ppm		CH ₄ ppm		B 1			
		CONCENTRATION OF DILUTION AIR																									
		CONCENTRATION OF DILUTE EXHAUST SAMPLE																									
		HC ppm				CO ppm				% CO ₂				NOX ppm		CH ₄ ppm								B 2			
		5				10				15				20		25		30						80			

50 MPH CRUISE DATA

IDENT	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VEH NUMBER		TEST TYPE		TEST SEQ																		
	3	0	2	4	5	0	1	1	1			0	8													40					
		INERTIA WEIGHT lb				ACTUAL HP				ENGINE SPEED rpm				50 MPH CRUISE																	
CARD 50																															
		HC ppm/hex				% CO				% CO ₂				NO ppm																	
		45				50				55				60				65				70				75				80	

FOUR MODE IDLE AND LOADED TWO MODE TESTS DATA SHEET

FOUR MODE IDLE TEST DATA

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ		
3	0	2	4	0	1	1	1	0
FIRST IDLE READING IN NEUTRAL								
CARD M1	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	5	10	15	20	25			
2500 RPM								
	HC ppm/hex	% CO	% CO2	NO ppm				
	45	50	55	60	65			
SECOND IDLE READING IN NEUTRAL								
CARD M2	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	5	10	15	20	25			
FINAL IDLE READING IN DRIVE								
	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	45	50	55	60	65			

LOADED TWO MODE TEST DATA

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ		
3	0	2	4	0	1	1	1	0
30 MPH MODE								
CARD L1	INERTIA WEIGHT lbs	ACTUAL HP	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm	
	5	10	15	20	25	30		
IDLE MODE IN NEUTRAL								
	ENGINE SPEED rpm	HC ppm/hex	% CO	% CO2	NO ppm			
	45	50	55	60	65			

PROPANE GAIN DATA SHEET

Page (1 of 2)

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ		
3	0	2	4	0	1	1	1	0
3-WAY CLOSED LOOP								

3-WAY CLOSED LOOP

		IN NEUTRAL	IN DRIVE
STEP 1	PRESET FLOW RATE		
STEP 2	RECORD: a) FLOW RATE	1	2
	b) RPM	5	10
	c) IDLE %CO	15	20
STEP 3	INDUCE PROPANE, OBSERVE VEHICLE BEHAVIOR		
	RECORD ONE: a) RPM RISES SMOOTHLY TO	25	30
	b) RPM FALLS SMOOTHLY TO	35	40
	c) ENGINE RUNS ROUGH AND THEN STABILIZES (1-YES)	43	44
	d) ENGINE DIES (1-YES)	45	46
	e) RPM STAYS THE SAME (1-YES)	47	48
STEP 4	WHEN ENGINE STABILIZES, RECORD:		
	a) RPM	50	55
	b) IDLE %CO	60	65
			P 1
			80

(Continues on Next Page)

Page (2 of 2)

CONTENTS

	CONTRACT NUMBER				TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ											P	O	
IDENT	3	0	2	4	0 1	1 1		1 2														
	5				10		15		20													

	CONTRACT NUMBER				TASK NUMBER		TEST SITE		VER NUMBER		TEST TYPE		TEST SEQ		
IDENT	3	0	2	4	0	1	1	1			1	4			10
	5				10		15		20						

		IN NEUTRAL	IN DRIVE
STEP 5	<p>WITHDRAW PROPANE, OBSERVE VEHICLE BEHAVIOR</p> <p>RECORD ONE:</p> <p>a) RPM RISES SMOOTHLY TO</p> <p>b) RPM FALLS SMOOTHLY TO</p> <p>c) ENGINE RUNS ROUGH AND THEN STABILIZES (1-YES)</p> <p>d) ENGINE DIES (1-YES)</p> <p>e) RPM STAYS THE SAME (1-YES)</p>		
		5	10
		15	20
STEP 6	<p>WHEN ENGINE STABILIZES, RECORD:</p> <p>a) RPM</p> <p>b) IDLE %CO</p>	21	22
		23	24
		25	26
		30	35
		40	45
		P	2

TRANS SPEC	RPM SPEC LEAN DROP OR PROPANE		IN DRIVE		IN NEUTRAL		IN NEUTRAL W/O PROPANE		P	3
	RPM W/O PROPANE	RPM W/ PROPANE	RPM W/O PROPANE	RPM W/ PROPANE	RPM W/O PROPANE	RPM W/ PROPANE	IDLE HC ppm	IDLE %CO		
5	10	15	20	25	30	35	40	45		

The image displays eight identical horizontal rulers stacked vertically. Each ruler is marked with 20 vertical grid lines. Numerical labels are present below the grid lines at intervals of 5, starting from 5 and ending at 35. On the right side of each ruler, there is a label: 'N 1' for the first, 'N 2' for the second, 'N 3' for the third, 'N 4' for the fourth, 'N 5' for the fifth, 'N 6' for the sixth, 'N 7' for the seventh, and 'N 8' for the eighth. The rulers are otherwise blank.

DRIVABILITY EVALUATION DATA SHEET

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ
3024	01	11	13	13	13	13
<p>AMBIENT TEMPERATURE OF (41-43)</p> <p>ROAD CONDITION (1-DRY 2-WET 3-ICY 4-SNOW) (44)</p> <p>CONSTANT SPEED PHASE</p> <p>NUMBER OF STALLS, PASS-OUTS UPON PART THROTTLE ACCELERATION TO ROAD SPEED (45)</p> <p>ACCELERATION QUALITY (46)</p> <p>CRUISE QUALITY (47)</p> <p>SLIGHT ACCELERATION RESPONSE (PASSING) (48)</p> <p>IDLE QUALITY AT STOP WITH A/C 'ON' (49)</p> <p>IDLE QUALITY AT STOP WITH A/C 'OFF' (50)</p> <p>ACCELERATION FROM STOP PHASE</p> <p>QUALITY OF ACCELERATION UNDER 1/4 THROTTLE (51)</p> <p>QUALITY OF ACCELERATION UNDER 1/2 THROTTLE (52)</p> <p>QUALITY OF ACCELERATION UNDER 2/3 THROTTLE (53)</p> <p>QUALITY OF ACCELERATION UNDER 3/4 THROTTLE (51)</p> <p>RESTART PHASE</p> <p>CRANKING TIME TO START AFTER 10 MIN (IN SECONDS) (55-56)</p> <p>IDLE QUALITY AFTER RESTART (57)</p> <p>COLD START AND IDLE PHASE (DYNAMOMETER)</p> <p>INITIAL CRANKING TIME (IN SECONDS) (58-59)</p> <p>NUMBER OF ENGINE IDLE-OUTS AFTER START (60)</p> <p>NUMBER OF ENGINE STALLS AFTER GEAR SELECTION (61)</p> <p>HESITATION, LAG UPON SLIGHT ACCELERATION (1-YES 2-NO) (62)</p> <p>IDLE QUALITY (63)</p> <p>DRIVE AWAY PHASE (DYNAMOMETER)</p> <p>NUMBER OF STALLS, PASS-OUTS UPON SLIGHT ACCELERATION TO ROAD SPEED (64)</p> <p>ACCELERATION QUALITY (65)</p> <p>IDLE QUALITY AFTER 0.2 MILE FROM STOP (66)</p> <p>NUMBER OF STALLS, PASS-OUTS UPON SLIGHT ACCELERATION TO ROAD SPEED (67)</p> <p>ACCELERATION QUALITY (68)</p> <p>IDLE QUALITY AFTER 0.4 MILES FROM STOP (69)</p>						

QUALITY CODE
9=IF NOT EQPD, 5=EXCELLENT, 4=GOOD, 3=FAIR, 2=POOR, 1=FAIL

EMISSION COMPONENTS DATA SHEET

Page (1 of 1)

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH NUMBER	TEST TYPE	TEST SEQ
3024	01	11	13	13	13	13
<p>INDUCTION SYSTEM</p> <p>a) HEATED AIR DOOR ASSEMBLY</p> <p>b) TEMPERATURE SENSORS</p> <p>c) AIR FILTER ELEMENT</p> <p>d) HOSES</p> <p>e) OTHER</p> <p>CARBURETOR AND FUEL SYSTEM - FUEL SUBSYSTEM</p> <p>a) CARBURETOR ASSEMBLY</p> <p>b) IDLE MIXTURE ADJUSTMENT LIMITING DEVICE</p> <p>c) IDLE MIXTURE</p> <p>d) IDLE SPEED</p> <p>e) IDLE SPEED SOLENOID</p> <p>f) FUEL INJECTION COMPONENTS</p> <p>g) HOSES, LINES, WIRES</p> <p>h) OTHER</p>						

- 62 -

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VEH	TEST TYPE	TEST SEC	PER CODE	SUE CODE	COM CODE
10101	3024	01	11		04				
AIR INJECTION SYSTEM									
a) AIR INJECTION ASSEMBLY									
b) AIR BYPASS VALVE									
c) AIR DIVERTER VALVE									
d) CHECK VALVE									
e) DRIVE BELT									
f) HOSES, LINES, WIRES									
g) OTHER									
PCV SYSTEM									
a) PCV VALVE									
b) PCV FILTER									
c) HOSES									
d) OTHER									

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VER	NUMBER	TEST TYPE	TEST SEC	SUB SYS PER CODE	SUB SYS COMPONENT CODE	SUB PER CODE
	3024	01	11			04				80
EXHAUST SYSTEM										
a) MANIFOLD, TAILPIPE, MUFFLERS										
b) CATALYST										
c) OTHER										
EVAPORATIVE CONTROL SYSTEM										
a) CANISTER										
b) CANISTER FILTER										
c) CANISTER PURGE SOLENOID/VALVE										
d) HOSES, LINES, WIRES										
e) OTHER										
ENGINE ASSEMBLY										
a) ENGINE ASSEMBLY										
b) COOLING SYSTEM										
c) VALVE ADJUSTMENT										
d) BELT TENSIONS										
e) HOSES, LINES, WIRES										

IDENT	CONTRACT NUMBER	TASK NUMBER	TEST SITE	VER	NUMBER	TEST TYPE	TEST SEC	SUB SYS PER CODE	SUB SYS COMPONENT CODE	SUB PER CODE
	3024	01	11			04				80
f) OTHER										
3-WAY SYSTEM										
a) ELECTRONIC CONTROL UNIT										
b) OXYGEN SENSOR										
c) BAROMETRIC PRESSURE SENSOR										
d) LOAD SENSOR (THROTTLE POSITION, MANIFOLD VACUUM, ETC.)										
e) ENGINE SPEED SENSOR										
f) COOLANT TEMPERATURE SENSOR										
g) CRANKSHAFT POSITION SENSOR										
h) EGR POSITION SENSOR										
i) EGR CONTROL SOLENOID(S)										
j) AIR/FUEL CONTROL ACTUATOR (SOLENOID, STEPPER MOTOR)										
k) AIR BYPASS SOLENOID/VALVE										
l) AIR DIVERTOR SOLENOID/VALVE										
m) THROTTLE KICKER ACTUATOR										
n) IDLE SPEED CONTROL SYSTEM										

Page 11 of 11

-64-

APPENDIX C
Lab Qualification Worksheets

- 1) Facility Inspection
- 2) Dynamometer Inspection
- 3) Driver's Aide Inspection
- 4) Analytical System Checks
- 5) Hydrocarbon Analyzer A (Low Ranges)
- 6) Hydrocarbon Analyzer B (High Ranges)
- 7) Carbon Monoxide Analyzers A (Low Ranges)
- 8) Carbon Monoxide Analyzers B (High Ranges)
- 9) Carbon Dioxide Analyzer
- 10) Constant Volume Sampling System Inspection
- 11) Oxides of Nitrogen Analyzer
- 12) Methane Analyzer
- 13) Raw Exhaust Hexane Analyzer
- 14) Raw Exhaust CO Analyzer
- 15) Raw Exhaust CO₂ Analyzer
- 16) Raw Exhaust NO Analyzer
- 17) Sealed Housing for Evaporative Determination
- 18) Temperature Recording - Auxilliary Devices
- 19) Record Keeping System Check
- 20) List of Documents to be included in the Lab Qualification Packet
- 21) General Comments

LABORATORY QUALIFICATION WORKSHEETS

Page 2 of 24

Facility Inspection

Yes/ No/
Pass Fail Corrected

1. Test Site San Antonio, Texas
2. Contractor EG&G Automotive Research, Inc.
3. Date of Inspection December 11, 1980
4. Inspector Butch Naegelin
5. Contractor personnel
 - a. M. Dalen g. J. Rivenburgh g. C. Jackel j. L. Hernandez
 - b. M. Forshee e. R. Martinez h. R. Gilmore k. S. Gearhart
 - c. B. Naegelin f. B. Martinez i. C. VanTassel
6. Test area of adequate size? X
7. Soak area of adequate size? Number of vehicles 12-14 X
8. Soak area temperature between 68°F and 86°F? 72 °F X
(Distance from soak area to dynamometer 0 + ft same building.
10. Soak area free of precipitation? X
11. Laboratory floor area? 4547 sq ft
12. Laboratory air conditioned? 73 + 5 °F X
 - a. Air conditioning capacity 56 tons X
13. Laboratory humidity controlled? 72 + 5 ^{TC-2 only} Grains X
14. Laboratory elevation 830 ft
15. Office space 723 ft²
16. Test fuel
 - a. Does leaded fuel meet all specs? (Attach analysis) X
 - b. Does unleaded fuel meet all specs? (Attach analysis) X

- c. Are fuel containers clearly identified? X
- d. Are separate systems used for leaded and unleaded fuels? X
- e. Is the fuel dispensing system accurate within 2%? X
- f. Storage area and temperature 55 ± 5 °F X

17. Gas Cylinders.

- a. Storage area of adequate size? X
- b. Temperature of area (60°F-86°F) 65 ± 10 °F X
- c. Are cylinders secured? X
- d. Is each cylinder equipped with a regulator? X
Only cylinders in-use.
- e. Are cylinder considered empty at 100 Psi? X

18. Leao Analysis

33060

- a. Make and model Scientific Glass & Instruments/ X
- b. Work area adequate to perform analysis? X
- c. Good laboratory techniques utilized? X

Comments:

Gas cylinder storage reaches low of 55°F at low ambient temperatures.

Contractor EG&G Automotive Research, Inc. Site San Antonio, Texas
 Insured by Butch Naegelin date: 12 / 11 / 80
 Submitted by Mark Dalen date: 12 / 11 / 80

Dynamometer Inspection

	Yes/ Pass	No/ Fail	Corrected
1. Make and model <u>Clayton ECE-50</u>	X		
2. Is dynamometer equipped with direct drive inertia assembly?	X		
3. Is dynamometer equipped with 125 lb. increment inertia wts?	X		
4. Is dynamometer equipped with 90 Hp. power absorber unit?	X		
5. Are dynamometer rolls 8.65" dia., 78" long, and on 17.25" centers and not damaged?	X		
6. Is dynamometer calibration kit used?	X		
7. Is dynamometer horsepower calibrated in accordance with the requirements of the contract?	X		
8. Horsepower meter accurate and readable to 0.25 hp or less?	X		
9. Check speedometer-actual vs. indicated using a Strobotach. For ECE 50, 46.3 mph= 1800 rpm, 45 mph= 1750 rpm, 55 mph= 2140 rpm	X		
10. Tach. generator located on rear roll?	X		
11. Vehicle restraint cable available?	X		
12. Is dynamometer equipped to measure actual distance traveled?	X		
13. Capacity of fixed speed cooling fan shall be 5300 CFM (Hartzell Model M240MW or equiv.) and positioned 6-12" in front of vehicle with hood open during testing?	X		

Comments:

Contractor: EG&G Automotive Research, Inc. Site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12/1/81
 Submitted by: Mark Dalen date: 12/1/81

Driver's Aid Inspection

	Yes/ Pass	No/ Fail	Corrected
Make and model <u>Hewlett Packard 7133 (A)</u>	X		
Check elapsed time for complete LISA test with accurate stop watch. (Tolerance 1.0 sec or less) Cell #1 Serial # <u>1060A00302</u>	X		
a. Stopwatch time <u>1873.63</u> sec			
b. Chart time <u>1874</u> sec			
Zero and span driver's aid, check after test (+ 1 mph) <u>1.0</u> mph	X		
Zero and span driver's aid, check after test (+ 1 lhp) <u>.5</u> lhp	X		
Are drivers aid strip charts within ±1 mph and ±1.0 sec. for all driving cycles?	X		
Chart width <u>11</u> in	X		
Chart speed <u>4</u> ^{cm} / _{min} in/min	X		
Scale <u>12</u> ^{mph} / _{in} miles/inch	X		

Comments:

#2 Drivers aid Serial # 1606A00301

Cell #2

A Stopwatch Time: 1873.06B Chart Time: 1874.00

.94 sec.

X

Contractor: EG&G Automotive Research, Inc. Site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12/1/81
 Submitted by: Mark Dalen date: 12/1/81

Analytical System Checks

Page 5 of 24

Yes/ No/
Pass Fail Corrected

1. Check for leaks in the system using oily procedure. X _____
2. Is the system plumbing either stainless steel or teflon? X _____
3. Is system leak check done before and after each test? X _____
4. Are bags purged, evacuated, and leak checked before each use? X _____
5. Are sample filters changed before each test? _____ N/A _____
6. Are zero and span gas traces identified before and after each analysis? X _____
7. Is NO_x analyzer spanned through converter? X _____
8. Are all samples analyzed on the lowest available range? X _____
9. Are analyzer flows the same for calibration and sample analysis? X _____
10. Are samples analyzed within 20 minutes of end of test? X _____
11. Do the analyzers stay in calibration throughout the test? (<1% FS) X _____
12. Is dilution air less than 30 ppm Carbon (less than 10 ppm C for 1975 and later model year vehicles); <10 ppm X _____
13. Is dilution air 10 ppm CO for 1977 and later model year tests? <5 ppm X _____
14. For 3-way catalyst vehicle testing is dilution air concentration of HC and CO less than or equal to the applicable sample? X _____
15. What are typical dilution air levels (ppm)?
9.0 Carbon 1.3 CO 3.1 CO₂ 0.2 NO_x
16. Is system purged continuously with air or nitrogen between emission tests to reduce hang-up? X _____
17. Is analytical system exhaust properly vented outside the laboratory? X _____

Comments:

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
Prepared by: Butch Naegelin date: 12-11-86
Reviewed by: Mark Dalen date: 12-11-86

Page 6 of 24

Yes No/
Pass Fail Corrected

tocarbon analyzer A (Low Ranges)

1. Make and model Horiba FIA-23A with OPE-415 X _____
2. Use prepurified air for zero gas - carbon less than 1ppm, CO less than 1 ppm, CO₂ less than 400 ppm, NO_x less than .1 ppm, Mfr. AADCO clean air generator 0.1 ppm C X _____
3. Prepurified air used for combustion? Mfr. Liquid carbonics X _____
4. Calibration gases cover all ranges? X _____
5. Analyzed span gas available for each range? (80% FS) min X _____
6. Check curve at three (3) points across each range. Calibration shall be within ±1% of full scale or ±5% of measured value, whichever is smaller. X _____
7. Approved peaking procedure used? _____ N/A _____
8. Fuel pressure (H₂-N₂) 1.0 - 1.5 kg/cm²
9. Fuel source pressure 20 psi
Air pressure 1.0 - 1.5 kg/cm²
11. Air source pressure 14 psi
12. Sample pressure 6.0 psi
13. Response time (zero gas to 90% span point) (less than 3 sec) 2 sec X _____
14. Zero gas 5% scale return time from span point (less than 5 sec) 1.7 sec X _____
15. Analyzer range(s) 0- 100 0- 500 0- 1000 0- 5000
16. Sample bypass flow rate 6 cfm
17. Stability check @ zero and span point Enter max. variation after 10 mins. X _____
(±1% FS Range 0-100 Zero 0 %FS Span .1 %FS

Comments:

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
Prepared by: Butch Naegelin date: 12-11-86

Preparation and/or B (high ranges)

Yes/ Pass	No/ Fail	Corrected
--------------	-------------	-----------

1. Make and model Horiba FIA-23A with OFI-415
2. Use prepurified air for zero gas - Carbon less than 1 ppm, CO less than 1 ppm, CO₂ less than 400 ppm, NO_x less than 1 ppm. Mfr. AAPCO Clean Air 0.1 ppm C
3. Prepurified air used for combustion? Mfr. Liquid carbonics
4. Calibration gases cover all ranges?
5. Analyzed span gas available for each range? (80% FS) min
6. Check curve at three (3) points across each range. Calibration shall be within $\pm 1\%$ of full scale or $\pm 5\%$ of measured value, whichever is smaller.
7. Approved peaking procedure used?
8. Fuel pressure (H₂-N₂) 1.0 - 1.5 kg/cm²
9. Fuel source pressure 20 psi
10. Air pressure 1.0 - 1.5 kg/cm²
11. Air source pressure 14 psi
12. Sample pressure 6.0 psi
13. Response time (zero gas to 90% span point) 2 sec (less than 3 sec)
14. Zero gas 5% scale return time from span point 1.7 sec (less than 3 sec)
15. Analyzer range(s) 0-100, 0-500, 0-1000, 0-5000
16. Sample bypass flow rate 6 cfm
17. Stability check @ zero and span point Enter Max. variation after 10 mins. ($\pm 1\%$ FS) Range 0-100 Zero 0 % FS Span .1 % FS

Comments:

Contractor: EG&G Automotive Research, Inc. site San Antonio, Texas
 Prepared by: Butch Naegelin date 12/1/80
 Submitted by: Mark Dalen date 12/1/80

On Monoxide Analyzers A (Low Ranges)

Yes/ Pass	No/ Fail	Corrected
--------------	-------------	-----------

1. Make and model Horiba AIA-23-AS
2. Flow rates Bypass 5 cfm, Sample 5 cfm
3. Check for CO₂ and H₂O interference using wet 3% CO₂ cal. gas (less than 3 ppm on 100 ppm CO range) 0 ppm
4. Do calibration gases cover all ranges?
5. Analyzed span gas available for each range? (80% FS)
6. Use prepurified air on N₂ for zero gas. Concentration CO less than 1 ppm, CO₂ less than 400 ppm, carbon less than 1 ppm, NO_x less than 0.1 ppm. Mfr. AAPCO .01 ppm
7. Check curve at seven (7) points across each range. Calibration shall be within $\pm 1\%$ of full scale or $\pm 5\%$ of measured value, whichever is smaller.
8. Response time (Zero gas to 90% span point) 8.74 sec (less than 5 sec)
9. Zero gas 5% scale return time from span point 11.26 sec (less than 5 sec)
10. Analyzer range(s) 0-100, 0-500, 0-1000, 0-5000
11. Stability checks @ Zero and span point Enter max. variation after 10 mins. ($\pm 1\%$ FS) Range 0-100 Zero 0 % FS Span .1 % FS.

Comments:

¹The times shown reflect the response times through the entire sampling system. There is no practical method for isolating the individual analyzers to determine their response times.

Contractor: EG&G Automotive Research, Inc. Site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12/1/80
 Submitted by: Mark Dalen date: 12/1/80

Carbon Monoxide Analyzer B (High Ranges)

	Yes/ Pass	No/ Fail	Corrected
1. Make and model <u>See Carbon Monoxide Analyzer A</u>			
2. Flow rates Bypass _____ cfm, Sample _____ cfm			
3. Check for CO ₂ and H ₂ O interference using wet 3% CO ₂ cal. gas (less than 1% FS on 3000 ppm CO range) _____ ppm			
4. Do calibration gases cover all ranges			
5. Analyzed span gas available for each range? (80% FS)			
6. Use prepurified air or N ₂ for zero gas. Concentration CO less than 1 ppm, CO ₂ less than 400 ppm, carbon less than 1 ppm, NO _x less than 0.1 ppm Mfr. _____ ppm CO			
7. Check curve at seven (7) points across each range. Calibration shall be within $\pm 1\%$ of full scale or $\pm 5\%$ of measured value, whichever is smaller.			
8. Response time (Zero gas to 90% span point) (less than 5 sec) _____ sec			
9. Zero gas 5% scale return time from span point (less than 5 sec) _____ sec			
10. Analyzer range(s) 0- _____, 0- _____, 0- _____			
11. Stability check @ zero and span point. Enter max. variation after 10 mins. ($\pm 1\%$ FS) Range 0- _____ Zero _____ % FS Span _____ % FS			

Comments:

Carbon Dioxide Analyzer

	Yes/ Pass	No/ Fail	Corrected
1. Make and model <u>Horiba AIA-23A</u>	X		
2. Flow rates Bypass <u>6</u> cfm, Sample <u>6</u> cfm	X		
3. Calibration gases cover all ranges?	X		
4. Analyzed span gas available for each range? (80% FS)	X		
5. Use prepurified air or N ₂ for zero gas concentration CO less than 1 ppm, CO ₂ less than 400 ppm, carbon less than 1 ppm, NO _x less than 0.1 ppm Mfr. <u>Liquid Carbonic</u> <u><400</u> ppm CO ₂	X		
6. Check curve at seven (7) points across each range. Calibration shall be within $\pm 1\%$ of full scale or $\pm 5\%$ of measured value, whichever is smaller.	X		
7. Response time (zero gas to 90% of span point) (less than 4 sec) <u>7.3</u> sec		¹ N/A	
8. Zero gas 5% scale return time from span point (less than 5 sec) <u>9.23</u> sec		¹ N/A	
9. Analyzer range(s) <u>0-1.5%, 0-4.0%</u>			
10. Stability check @ zero and span point. Enter max. variation after 10 mins. ($\pm 1\%$ FS) (Range <u>0-1.5%</u>) Zero <u>.1</u> % FS Span <u>0</u> % FS	X		

Comments:

¹The times shown reflect the response times through the entire sampling system. There is no practical method for isolating the individual analyzers to determine their response times.

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12/1/81
 Submitted by: Mark Balen date: 12/1/81

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12/1/81

Volume Sampling System Inspection

	Yes/ Fail	No/ Pass	Corrected
1. Make and model <u>Horiba CVS 20B</u>			
2. Submit all pertinent data obtained during laminar flow element calibration.			
3. Where is the source of the CVS dilution air? Cell #1	X		
4. What is the total flow capacity of the CVS? (Min 325 cfm) <u>338 cfm</u>	X		
5. What is CVS sample bag flow rate? (Min 10 cfm) <u>15.75 cfm</u>	X		
6. What is CVS background bag flow rate (Min 10 cfm) <u>15.75 cfm</u>	X		
7. Check static pressure at mixing point of dilution air and exhaust sample. Pressure should be less than 1" H ₂ O below ambient when the CVS is operating at its maximum flow rate. <u>0.5" H₂O</u>	X		
8. Check static pressure at the vehicle tailpipe. Pressure shall be less than 1" H ₂ O as referenced in 39 Federal Register 101 Section 85.075-20 (b) (2). <u>0.5" H₂O</u>	X		
9. Propane Recovery Test			
a. Recovery shall be within ±2.0% of injected volume <u>-0.87 % -0.86 %</u>	X		
b. Instrument grade propane used? Mfr. <u>Liquid Carbonic</u>	X		
c. Make and model of balance used (Accuracy within ± 0.1 grams) <u>Mettler P1210</u>	X		
d. Is upper third of 0- 500ppm carbon range used? <u>90.3 def . 83.4 def</u>	X		
e. Submit all pertinent data.	X		
10. Stainless steel convoluted tubing between vehicle and CVS as short as possible?	X		
11. Are CVS sample bags made of tedlar and of sufficient size not to restrict sample flow?	X		

Comments:

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12-11-81
 Submitted by: Mark Dalen date: 12-11-81

oxides of Nitrogen Analyzer

	Yes/ Pass	No/ Fail	Corrected
1. Make and model <u>Horiba CLA-22</u>	X		
2. Flow rates <u>0.1</u> N/A psi Internal Bypass <u>N/A</u> cfm External Bypass (if used) <u>6</u> cfm	X		
3. Sample pressure/reactor vacuum <u>N/A</u> psi/ <u>N/A</u> torr/cm		N/A	
4. Use prepurified nitrogen or air for zero gas. Concentration NO _x (less than 0.1 ppm) <u>< 0.1 ppm NO_x</u>	X		
5. Calibration gases cover all ranges?	X		
6. Are NO _x cylinder regulators corrosion resistant?	X		
7. Analyzed span gas available for each range? (80% FS)	X		
8. Check curve at three (3) points across each range. Calibration shall be within ±1% of full scale or ±3% of measured value, whichever is smaller	X		
9. Spanned through the converter?	X		
10. Response times (zero gas to 90% of span point) (5 sec max)			
a. Through Converter <u>2.2 sec</u>	X		
b. Bypass converter <u>1.8 sec</u>	X		
11. Zero gas 5% scale return time from span point. (must be 5 sec or less) <u>4.0 sec</u>	X		
12. Analyzer range(s) <u>0- 100, 0- 300, 0-1000, 0-</u>			
13. Check converter efficiency (95% ± 5%)? <u>98 % 1 %</u>	X		
14. Is NO _x converter efficiency detector used?	X		
15. Is converter efficiency check performed daily?	X		
16. Stability Check @ Zero and span point. Enter max. variation after 10 minutes - (±1% FS) Range 0-100 Zero <u>1 % FS</u> Span <u>1 % FS</u>	X		

Comments:

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12-11-81
 Submitted by: Mark Dalen date: 12-11-81

Methane Analyzer

	Yes/	No/
	Pass	Fail
1. Make and model _____	_____	_____
2. Use prepurified air for zero gas - Carbon less than 1 ppm, CO less than 1 ppm, CO ₂ less than 400 ppm, NO _x less than 0.1 ppm.Hrg. _____ ppm	_____	_____
3. Prepurified air used for combustion? Mfg. _____	_____	_____
4. Calibration gases cover all ranges?	_____	_____
5. Analyzed span gas available for each range? (80% FS)	_____	_____
6. Check curve at three (3) points across each range calibration shall be within $\pm 1\%$ of full scale or $\pm 5\%$ of measured value, whichever is smaller.	_____	_____
7. Approved peaking procedure used?	_____	_____
8. Fuel pressure (H ₂ - H ₂) _____ psi		
Fuel source pressure _____ psi		
10. Air pressure _____ psi		
11. Air source pressure _____ psi		
12. Sample pressure _____ psi		
13. Analyzer range 0- _____, 0- _____, 0- _____		
14. Method of reading output of analyzer _____		

Comments:

N/A

Contractor: EG&G Automotive Research, Inc. Site: San Antonio, Texas
 Prepared by: Butch Naegelin Date: 12 11 80
 Submitted by: Mark Dalen Date: 12 11 80

Raw Exhaust Measuring Analyzer

	Yes/	No/
	Pass	Fail
1. Make and model <u>Horiha Mexa 321 E</u>	<u>X</u>	_____
2. Flow rates Sample <u>6</u> cfm	_____	_____
3. Calibration gases cover all ranges?	<u>X</u>	_____
4. Analyzed span gas available for each range? (80% FS)	<u>X</u>	_____
5. Use prepurified nitrogen or air for Zero gas <u>0.1</u> ppm C	<u>X</u>	_____
6. Check curve at <u>6</u> points across each range. Calibration shall be within $\pm 2\%$ of full scale or $\pm 10\%$ of measured value, whichever is smaller.	<u>X</u>	_____
7. Response time (zero gas to 90% of span point) (less than 5 sec) <u>3</u> sec	<u>X</u>	_____
8. Zero gas 5% scale return time from span point (less than 5 sec.) <u>2</u> sec	<u>X</u>	_____
Analyzer range(s) <u>0- 500 , 0- 2000</u>		

Comments:

N/A

Contractor: EG&G Automotive Research, Inc. Site: San Antonio, Texas
 Prepared by: Butch Naegelin Date: 12 11 80
 Submitted by: Mark Dalen Date: 12 11 80

Raw Exhaust CO Analyzer

	Yes/ Pass	No/ Fail	Corrected
1. Make and model <u>Horiba AIA-23-A</u>	X		
2. Flow rates <u>sample 5 cfm</u>	X		
3. Check for CO ₂ and H ₂ O interference using wet 8% CO ₂ cal. gas (less than 1% FS on .5% CO range) <u>0 ppm % FS</u>	X		
4. Calibration gases cover all ranges?	X		
5. Analyzed span gas available for each range? (80% FS)	X		
6. Use prepurified air or N ₂ for zero gas (Concentration CO less than 1 ppm) <u>Mfr. AADCO < .1 ppm</u>	X		
7. Check curve at <u>7</u> points across each range. Calibration shall be within ±2% of full scale or ±10% of measured value, whichever is smaller	X		
8. Response time (Zero gas to 90% span point) (less than 5 sec) <u>6.2 sec</u>	¹ N/A		
9. Zero gas 5% scale return time from span point (less than 5 sec) <u>6.9 sec</u>	¹ N/A		
10. Analyzer range(s) <u>0- 0% , 0- 10.0%</u>			

Comments:

¹ The times shown reflect the response times through the entire sampling system. There is no practical method for isolating the individual analyzers to determine their response times.

Raw Exhaust CO₂ Analyzer

	Yes/ Pass	No/ Fail	Corrected
1. Make and model <u>Horiba AIA-23A</u>	X		
2. Flow rates <u>Sample 5 cfm</u>	X		
3. Calibration gases cover all ranges?	X		
4. Analyzed span gas available for each range?	X		
5. Use prepurified nitrogen or air for zero gas <u>.1 ppm CO₂</u>	X		
6. Check curve at <u>7</u> points across each range. Calibration shall be within ±2% of full scale or ±10% of measured value, whichever is smaller.	X		
7. Response time (zero gas to 90% of span point) (less than 5 sec) <u>5.7 sec</u>	¹ N/A		
8. Zero gas 5% scale return time from span point (less than 5 sec) <u>5.9 sec</u>	¹ N/A		
9. Analyzer range(s) <u>0- 7.0% , 0- 15.0%</u>			

Comments:

The times shown reflect the response times through the entire sampling system. There is no practical method for isolating the individual analyzers to determine their response times.

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12 11 80
 Submitted by: Mark Dalen date: 12 11 80

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12 11 80
 Submitted by: Mark Dalen date: 12 11 80

Exhaust NO Analyzer

	Yes/ Pass	No/ Fail	Corrected
1. Make and model <u>Same as NO_x Analyzer</u>			
2. Flow rates O ₂ <u> </u> psi Internal Bypass <u> </u> cfm External bypass (if used) <u> </u> cfm			
3. Sample pressure/reactor vacuum <u> </u> psi / <u> </u> torr/cm			
4. Calibration gases cover all ranges?			
5. Analyzed span gas available? (80% FS)			
6. Use prepurified nitrogen or air for zero gas. (NO _x concentration less than 0.1 ppm) <u> </u> ppm NO _x			
7. Check curve at <u> </u> points across each range. Calibration shall be within ±2% of full scale or ±10% of measured value, whichever is smaller.			
8. Response time (zero gas to 90% of span point) (10 sec. max.)			
9. Zero gas 9% scale return time from span point. (10 sec max) <u> </u> sec			
10. Analyzer range(s) 0- <u> </u> , 0- <u> </u> , 0- <u> </u> , 0- <u> </u>			

Comments:

Factor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Reported by: Butch Naegelin Date: 2-11-80
 Submitted by: Mark Dalen Date: 2-11-80

Fuel Housing for Evaporative Determination

	Yes/ Pass	No/ Fail	Corrected
1. Hydrocarbon analyzer			
a. Make and model <u>N/A</u>			
b. Use prepurified air for zero gas- Carbon less than 1 ppm, CO less than 1 ppm, CO ₂ less than 400 ppm, NO _x less than .1 ppm Mfr. <u> </u> <u> </u> ppm C			
c. Prepurified air used for combustion? Mfr. <u> </u>			
d. Calibration gases cover all ranges?			
e. Analyzed span gas available for each range? (80% FS)			
f. Check curve at three (3) points across each range. Calibration shall be within ±1% of full scale or ±5% of measured value, whichever is smaller.			
g. Approved peaking procedure used?			
h. Fuel pressure (H ₂ - He) <u> </u> psi			
i. Fuel source pressure <u> </u> psi			
j. Air pressure <u> </u> psi			
k. Air source pressure <u> </u> psi			
l. Sample pressure <u> </u> psi			
m. Response time (zero gas to 90% span point) (less than 1.5 sec) <u> </u> sec			
n. Zero gas 9% scale return time from span point (less than 5 sec) <u> </u> sec			
o. Analyzer range(s) 0- <u> </u> , 0- <u> </u> , 0- <u> </u>			
p. Sample bypass flow rate <u> </u> cfm			
2. Test Fuel			
a. Does fuel meet specifications?			
b. Was sample of fuel analyzed by other than manufacturer? (attach analysis)			
c. Refrigerated fuel handling system adequate?			

3. Enclosure Calibration

a. Background emissions (.4 gms/4 hrs. max.) _____

b. Verify enclosure calibration ($\pm 2\%$ of injected value) _____

c. Enclosure volume (from calibration) _____

d. Enclosure retention check (less than 4% leak rate in 4 hours) _____

4. Temperature Recorders

a. Capable of resolving time to 15 sec? _____

b. Capable of resolving temp. to $\pm .75^\circ\text{F}$ ($.42^\circ\text{C}$)? _____c. Temp. accuracy of $\pm 2^\circ\text{F}$ (1.1°C)? _____d. Time accuracy over one (1) hour period (± 15 sec max.) _____ sece. Temp. sensor correctly located (3 \pm .9 Ft. from floor, approx. 4 inches from wall, approx. at vertical centerline of wall)? _____

5. Purge blower adequate? _____

6. Internal mixing blowers adequate? _____

7. Evaporative system pressure check equipment.

a. Able to measure fifteen (15) inches of H_2O pressure? _____b. Capable of resolving pressure to ± 1.0 in. H_2O ? _____

8. Enclosure cooling system.

a. Cooling surfaces monitored to maintain temp. between 68°F (20°C) and 86°F (30°C)? _____

Comments:

N/A

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas

Prepared by: Butch Naegelin date: 12 11 80

Submitted by: Mark Dalen date: 12 11 80

Temperature Recording - Auxiliary Devices

Yes/Pass	No/Fail	Corrected
----------	---------	-----------

1. Device used to continuously measure wet and dry bulb temperatures during tests.

a. Make and model Thermocouples

X

b. Recorder make and model Easterline Anger MS 42-B
Range 0-50-100 or

X

2. Soak area temperature continuously monitored and recorded on a strip chart?

Distance from Vehicles Max 15 ft

Range 0 to 100 or

Chart Speed 0.5 in/hr

Chart Width 11 inches

90% Step Change in less than 10 sec? 4 sec.

X

ants:

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas

Prepared by: Butch Naegelin date: 12 11 80

Submitted by: Mark Dalen date: 12 11 80

Yes/ Pass	No/ Fail	Corrected
--------------	-------------	-----------

Record Keeping System Check

	Yes/ Pass	No/ Fail	Corrected
1. Complete analytical system check made weekly?	X		
2. Dynamometer calibration check made bi-weekly?	X		
3. MC hang-up check using zero grade air results recorded daily? Sample bag and line 0.5 ppm/C (less than 1ppm C)	X		
4. Are prepurified air and N ₂ checks suitably recorded? A copy of manufacturers analysis is required for each cylinder.	X		
5. MC, CO, CO ₂ , NO _x analytical system leak check performed and recorded daily?	X		
6. CVS calibration check using propane injection on 0-3000 range done daily before testing begins?	X		
7. CVS sample and background bags purged, leak checked before each test and results recorded daily?	X		
8. Check log of daily, weekly, biweekly, monthly calibrations and checks. Does each entry contain date, results and signatures?	X		
9. Check maintenance log for all laboratory equipment?	X		
10. Check for proper test fuel as required by <u>Federal Register</u> and/or contract.	X		
11. Daily log of instrument settings.	X		
12. Master log of all tests performed.	X		
13. Proper storage for all instrument and driver's trace and temperature recorder charts?	X		
14. Check master log of gas cylinders (including lab standards and span gases) to insure record of dates, cylinder numbers, pressures, types of gases, concentrations, and ranges of use?	X		

15. Check information on test data sheets

a. Test lab location, date and time of test.	X		
b. Type of test (CVS, etc.)	X		
c. Personnel involved.	X		
d. Vehicle data - make, model, year, transmission type, odometer, engine family, carb. information, displacement, cylinders, type of emission controls, fuel tank capacity, inertia loading, actual road load HP @ 50 mph, indicated HP setting @ 50 mph, tire pressure, air conditioning.	X		
e. Test conditions - Are barometric pressure and ambient temperature (dry bulb and wet bulb) in front of vehicle recorded continuously on strip charts during the tests) (dry bulb tolerance 68°F - 86°F)	X		
f. Temperature and pressure of the exhaust and dilution air mixture entering the positive displacement pump. Temperature of the mixture shall be recorded continuously during the test. Set point ___ of Max. Variation during test ___ of	N/A		
16. Do records include vehicle inspection parameters such as idle rpm, spark advance, idle mixture, exhaust MC, CO, etc?	X		
17. Check for records of all pertinent information on recorder charts, such as: location, car and run no. date, time, person in charge; identify zero and span gas traces before and after test, gas analyzed and range(s) used?	X		

Comments:

Contractor: EG&G Automotive Research, Inc. Site: San Antonio, Texas
 Prepared by: Butch Naegelin Date: 12 11 80
 Checked by: Mark Dalen Date: 12 11 80

Documents to be included as part of this package

	Yes/ Pass	No/ Fail	Corrected
1. Latest copy of all analyzer curves.	X		
2. Copy of certified calibration for the laminar flow element in the CVS calibration.	X		
3. Latest copy of the dynamometer curves.	X		
4. Copy of daily, weekly, monthly logs.	X		
5. Copy of preventive maintenance and calibration schedule for laboratory equipment other than dyno, CVS and analytical systems.	*		
6. Copy of fuel analysis.	X		
7. Copy of analysis of zero air and/or nitrogen cylinders.	N/A		
8. Copy of calibrations of flow meters.	X		
9. Copy of calibrations of temperature recorders.	X		

Comments:

- * Preventive maintenance and calibrations are performed on a monthly basis or sooner if deemed necessary by the lab supervisor or lab technician.

General Comments:

Contractor: EG&G Automotive Research, Inc. site: San Antonio, Texas
 Prepared by: Butch Naegelin date: 12/11/80
 Submitted by: Mark Dalen date: 12/11/80

I have reviewed all the data contained in this report and have discussed its contents with the EPA Inspector.

Signature

Date

APPENDIX D
Calibration Forms

- 1) Daily Work Summary Log
- 2) Daily Equipment Check Sheet
- 3) Span Gas Information
- 4) Weekly Analyzer Calibration Curve Sheet
- 5) Monthly Analyzer Calibration Curve Sheet
- 6) Weekly CO₂/H₂O Interference Check
- 7) Zero Compensation Adjustment for CO₂ Interference
- 8) Daily NO_x Converter Efficiency Test
- 9) Weekly Chassis Dyno Calibration Verification Data Sheet
- 10) Monthly Dynamometer Calibration Data Sheet
- 11) Daily CFV Propane Verification
- 12) CVS-CFV Flow Calculation Check
- 13) CVS-CFV Flow Computer Calibration Data Sheet
- 14) Monthly Temperature Recorder Calibration and Functional Check
- 15) Dynamometer/RLPC Calibration Check List
- 16) CVS-CFV Calibration Data Sheet

DAILY WORK SUMMARY LOG

Date _____ Shift _____

ENTER TIME OF COMPLETION AND INITIALS IN EACH ACTIVITY SPACE

PERFORM DAILY

Analytical Bench Start Up _____

Equipment Checks _____

HC_x Converter Efficiency _____

Propane Injection Verification _____

Swa: Gas/Pressure Log _____

Maintenance Performance _____

Dynamometer Warm Up. Dyno #1 _____

Dyno #2 _____

PERFORM WEEKLY

Chassis Dyno Verification. Dyno #1 _____ Dyno #2 _____

Analyzer Calibrations _____

PERFORMED PERIODICALLY

Chassis Dyno Calibration. Dyno #1 _____ Dyno #2 _____

CWE Flow Calibration _____

Test Number	Vehicle Number	Vehicle Make & Model	Received	Main-tenance	Precon-ditioning	FTP	Data Reduc-tion	Data Valida-tion	FTP Sequence & Result (Good/Bad)
					Dyno #	Dyno #			
					Dyno #	Dyno #			
					Dyno #	Dyno #			
					Dyno #	Dyno #			
					Dyno #	Dyno #			
					Dyno #	Dyno #			
					Dyno #	Dyno #			
					Dyno #	Dyno #			

Technician's Signature _____

Quality Control Signature _____

Observer _____

SUBSCRIBED AND SWORN TO BEFORE ME
THIS _____ DAY OF _____, 197_____
NOTARY PUBLIC
MY COMMISSION EXPIRES _____

DAILY EQUIPMENT CHECK SHEET
CONSOLE NUMBER 1

-81-

DATA FORM NO. _____

Page _____ of _____

SPAN GAS INFORMATION

Component	Range Code	Full Conc.	Span Gas Concentration	Span Point Deflections	Effective Date	Effective Run Numbers
CO	11	100 ppm				
	12	500 ppm				
	13	1,000 ppm				
	14	5,000 ppm				
	15	2.0%				
	16	10.0%				
CO ₂	11	1.5%				
	12	4.0%				
	13	7.0%				
	14	15.0%				
O ₂	13	25.0%				
HC TOTAL CARBON HEXANE HEXANE	11	100 ppm				
	12	500 ppm				
	13	1,000 ppm				
	14	5,000 ppm				
	N/A	500 ppm				
	N/A	2,000 ppm				
NO _x	10	30 ppm				
	11	100 ppm				
	12	300 ppm				
	13	1,000 ppm				

Date: _____ Technician: _____ Quality Audit: _____

Date: _____ Technician: _____ Quality Audit: _____

Date: _____ Technician: _____ Quality Audit: _____

Date: _____ Technician: _____ Quality Audit: _____

Date: _____ Technician: _____ Quality Audit: _____

Date: _____ Technician: _____ Quality Audit: _____

Date: _____ Technician: _____ Quality Audit: _____

DATA FORM NO. _____

Supplemental Page

SPAN GAS INFORMATION

Component	Range Code	Full Conc.	Span Gas Concentration	Span Point Deflections	Effective Date	Effective Run Numbers
CO	11	100 ppm				
	12	500 ppm				
	13	1,000 ppm				
	14	5,000 ppm				
	15	2.0%				
	16	10.0%				
CO ₂	11	1.5%				
	12	4.0%				
	13	7.0%				
	14	15.0%				
O ₂	13	25.0%				
HC TOTAL CARBON HEXANE HEXANE	11	100 ppm				
	12	500 ppm				
	13	1,000 ppm				
	14	5,000 ppm				
	N/A	500 ppm				
	N/A	2,000 ppm				
NO _x	10	30 ppm				
	11	100 ppm				
	12	300 ppm				
	13	1,000 ppm				

Prepared By: _____ Date: _____

Quality Audit: _____ Date: _____

WEEKLY ANALYZER CALIBRATION CURVE SHEET

Gas Analyzed: _____
 Analyzer Make/Model: _____
 Serial Number: _____
 Zero Setting: _____ Gain: _____

Range: _____
 Cell Length: _____
 Recorder: _____
 Time at Start: _____ am/pm

Nominal Meter (%)	Nominal Concentrat (PPM)	Cylinder Serial Number	Cylinder Pressure (To Reg)	Cylinder Pressure (Out Reg)	Analyzer Outlet Flow (SCFH)	Cylinder Concentrat. (PPM)	Meter Deflect.	Lower Limit on Deflect.	Upper Limit on Deflect.
0	0								
90									
75									
60									
45									
30									
15									
Span									
90									

Operator's Signature: _____ Completion Time: _____ am/pm Date: _____
 Quality Control Signature: _____
 VW Observer: _____

Date 10/17/01

MONTHLY ANALYZER CALIBRATION CURVE SHEET

Gas Analyzed: _____
 Analyzer Make/Model: _____
 Serial Number: _____
 Zero Setting: _____ Gain: _____

Range: _____
 Cell Length: _____
 Recorder: _____
 Time At Start: _____ am/pm

Nominal Meter (%)	Nominal Concentrat. (PPM)	Cylinder Serial Number	Cylinder Pressure (To Reg)	Cylinder Pressure (Out Reg)	Analyzer Outlet Flow (SCFH)	Cylinder Concentrat (PPM)	Meter Deflectio
0	0						
90							
75							
60							
45							
30							
15							
span							
90							

Operator's Signature _____ Completion Time _____ am/pm Date _____
 Quality Control Signature _____
 Observer _____

DATA FORM 18 PAGE 1 OF 2

WEEKLY CO₂/H₂O INTERFERENCE CHECK

DATE: _____

TIME: _____

ANALYZER MODEL: _____

SERIAL NO: 466920/24

1. ZERO LCO ANALYZER RANGE 1 (LCO₂ ANALYZER MUST BE ON RANGE 2)
2. SET RECORDER PEN ON THE 10.0 LINE OF CHART PAPER AND USE THIS AS ZERO SET POINT.
3. INTRODUCE INTERFERENCE GAS. BUTTON SELECTION:
LCO = Master
LCO₂ = SPAN
MASTER = Idle
INTF CHK = in
4. _____ WET CO₂ DEFLECTION (Bubbles should be seen in Bubbler)
5. ZERO LCO ANALYZER. WET CO₂ DEFLECTION MUST BE LESS THAN 3.0 PPM.
BUTTON SELECTION FOR ZERO:
LCO = Zero
LCO₂ = Zero
MASTER = Idle
INTF CHK = out

OPERATORS SIGNATURE _____

QUALITY CONTROL SIGNATURE _____

ZERO COMPENSATION ADJUSTMENT FOR CO₂ INTERFERENCENOTE: IF ANY ADJUSTMENTS ARE REQUIRED, ALL STEPS MUST BE DONEAFTER COMPLETION OF ADJUSTMENTS A MONTHLY ANALYZER CALIBRATION MUST BE DONE ON ALL RANGES.

1. LCO ANALYZER TO RANGE 1
2. LCO₂ ANALYZER TO RANGE 2
3. DVM SELECTOR TO LCO
4. CONNECT A VOLTMETER BETWEEN TP2 AND E (COM) ON MOTHERBOARD 2I
5. ZERO AND SPAN LCO ANALYZER AND RETURN TO ZERO. (DO NOT TOUCH SPAN Knob AGAIN AFTER ANALYZER IS SPANNED)
6. INTRODUCE INTERFERENCE GAS. BUTTON SELECTION:
LCO = MASTER
LCO₂ = SPAN
MASTER = IDLE
INTF CHK = in
7. ON MOTHERBOARD 2E, ADJUST THE CS 1 POTENTIOMETER FOR A 0.000 \pm 1mv INDICATION ON THE VOLTMETER
8. INTRODUCE ZERO GAS AND CHECK ANALYZER FOR ZERO READING. BUTTON SELECTION:
LCO = ZERO
LCO₂ = ZERO
MASTER = IDLE
INTF CHK = out
9. REPEAT STEPS #6 - 8. IF NO ADJUSTMENTS ARE REQUIRED CONTINUE TO STEP # 10
10. LCO ANALYZER TO RANGE 3 CHECK ZERO. IF ZERO IS NOT CORRECT, ADJUST NZ 3 POTENTIOMETER ON MOTHERBOARD 2E UNTIL VOLTMETER INDICATES 0.000 \pm 1mv.
11. INTRODUCE INTERFERENCE GAS. (BUTTON SELECTION IS SAME AS STEP #6)
12. ADJUST THE CG 3 POTENTIOMETER ON MOTHERBOARD 2E FOR A 0.000 \pm 1mv INDICATION ON THE VOLTMETER.
13. INTRODUCE ZERO GAS AND CHECK ANALYZER FOR ZERO READING. (BUTTON SELECTION IS THE SAME AS STEP #8)
14. REPEAT STEPS #10 - 13. IF NO FURTHER ADJUSTMENTS ARE REQUIRED, THIS COMPLETES INTERFERENCE ZERO COMPENSATION ADJUSTMENTS. THE ANALYZER REQUIRES A MONTHLY CALIBRATION ON ALL RANGES.

DATE _____ ANALYZER MODEL AIA 23 SERIAL NO 466920/24

WERE THE FOLLOWING POTENTIOMETERS ADJUSTED?

NZ 1 YES NO
 CS 1 YES NO
 NZ 3 YES NO
 CG 3 YES NO

OPERATORS SIGNATURE _____

DAILY NO_x CONVERTER EFFICIENCY TEST
(HORIBA NO_x GENERATOR MODEL #210)

DATE OF TEST: _____ TIME: _____

OPERATOR _____ ANALYZER MAKE AND MODEL _____

(NO) CYLINDER # _____ CONCENTRATION _____ PPM VENDOR _____

AIR CYLINDER # _____ VENDOR _____ POT SLT _____

BAROMETRIC PRESSURE _____ " HG BAROMETER TEMPERATURE _____ °F

1. PRESS NO_x GEN. BUTTON ON CONTROL PANEL IN.
2. VERIFY THAT OZONE GENERATOR IS ON
3. FLOW CONTROL VALVES ON DRY AIR, OZONE BYPASS, AND NITRIC OXIDE ARE OFF
4. POWER SWITCH "OFF" AND OZONE AND AIR SHUT OFF VALVE "CLOSED"
5. ADJUST NITRIC OXIDE FLOW CONTROL VALVE FOR 6 TO 10 SCFH
6. NO_x ANALYZER TO "NO" MODE, AND SPAN TO 80.0. RECORD THIS ON CHART. _____
7. POWER SWITCH TO "ON"
8. OPEN OZONE & AIR SHUTOFF VALVE AND ADJUST OZONE BYPASS FLOW CONTROL VALVE TO 1 SCFH
9. ADJUST OZONE FLOW NEEDLE VALVE UNTIL THE NO_x ANALYZER INDICATES APPROX. 16.0
RECORD READING _____
10. POWER SWITCH TO "OFF". NOTE: DVM MUST RETURN TO 75.0 OR HIGHER IF IT DOES NOT, REPEAT STEPS 6-9 WITH OZONE BYPASS FLOW SET AT A LOWER RATE. (LESS THAN 1.0 SCFH)
11. ADJUST FLOW CONTROL ON DRY AIR FLOWMETER FOR A READING OF 72.0 ± 1.0
RECORD READING _____
12. POWER SWITCH TO "ON".
13. READJUST OZONE FLOW NEEDLE VALVE FOR A READING OF 14.4 ± 1.0 RECORD READING _____
14. POWER SWITCH TO "OFF".
15. VERIFY THAT THE READING IS STILL APPROX. 72.0 RECORD READING _____
16. POWER SWITCH TO "ON" & RECORD READING _____
17. NO_x ANALYZER TO "NO_x" MODE ALLOW TO STABILIZE AND RECORD READING _____
18. POWER SWITCH TO "OFF" AND ALLOW TO STABILIZE AND RECORD READING _____
19. CLOSE OZONE AND AIR SHUTOFF VALVE AND RECORD STABLE READING _____
NOTE THIS READING WILL NOT BE MORE THAN 4.0 OF STEP #6

DAILY NO_x CONVERTER EFFICIENCY TEST
(HORIBA NO_x GENERATOR MODEL #210)

20. NO_x ANALYZER TO ZERO.

21. PRESS NO_x GEN. BUTTON ON CONTROL PANEL TO RELEASE BUTTON TO THE OUT " OFF" POSITION.

22. PERFORM THE FOLLOWING CALCULATION FOR PERCENT CONVERSION.

$(1+(a-b)/(c-d)) * 100$ NOTE: This is how it is entered in the H/P Calculator.

a = step # 17

b = step # 18

c = step # 15

d = step # 16

Percent efficiency = _____ (must be over 90%)

OPERATOR'S SIGNATURE: _____

QUALITY CONTROL SIGNATURE: _____

WEEKLY CHASSIS DYNO CALIBRATION

VERIFICATION DATA SHEET

DATE: _____ DYN0 I.D. No. _____
TIME: _____ AM - PM TECHNICIAN: _____

DATE OF LAST ELECTRONIC CALIBRATION: _____

DATE OF LAST MECHANICAL CALIBRATION: _____

[illegible]

	Front Roll	Rear Roll	Must Be	F.R.	Diff.	R.R.
Speed at 1800 R.P.M.			46.3 ± .2			

This coastdown is to be used for Car(s) # _____ >	
Actual Horsepower = _____	K Factor = _____

Technician's Signature: _____

Quality Control Signature: _____

NONILLY DYNAMOMETER CALIBRATION DATA SHEET

Date: _____ Dyno I.D.: _____
Time: _____ am/pm Technician: _____
Comments from Electrical Adjustments: _____

Inertia Weight (LBS)	Indicated H.P.	Time (Seconds)			Average	K	Actual RHP
		Run 1	Run 2	Run 3			

$$\text{Actual RHP} = \frac{K}{\text{Average Time}}$$

Technician's Signature: _____ Time: _____ am/pm Date: _____

Quality Control Signature: _____

DAILY C F. V. PROPANE VERIFICATION

OPERATOR: _____ DATE: _____
 BAROMETER TEMP. _____ °F BAROMETRIC PRESSURE _____ " HG

BOTTLE WEIGHT BEFORE _____

BOTTLE WEIGHT AFTER _____

Vmix (SCF) _____

EXHAUST BAG # _____
 HC RANGE _____ METER DEFLECTIONS _____ CONC. _____ PPM

BACKGROUND BAG # _____
 HC RANGE _____ METER DEFLECTIONS _____ CONC. _____ PPM

OPERATOR'S SIGNATURE _____ TIME: _____

QUALITY CONTROL SIGNATURE _____

CVS-CFV FLOW CALCULATION CHECK

DATE _____ TIME _____ AM / PM TECHNICIAN _____

CVS MASS CALCULATION TAPE, PROGRAM #5

	T _A (°F) AMBIENT TEMP	B (IN HG) BARO PRESS	T _I (°C) BARO TEMP	TIME SECONDS	Δ P (IN H ₂ O)	INDICATED VOLUME	CALCULATED VOLUME	DIFFERENCE
TEST 1								
TEST 2								
TEST 3								
AVERAGE								

TECHNICIAN'S SIGNATURE _____ TIME _____ AM / PM

DATE _____

Q. C. ENGINEER'S

SIGNATURE _____ TIME _____ AM / PM

DATE _____

CVS NUMBER _____

DATE _____ TIME _____ AM/PM _____ TECHNICIAN _____

NOTE: USE CVS MASS CALCULATION TAPE, PROGRAM #5

Counter For Phase	Pot Turns Before This Phase	Obs. Baro. Pressure (In. Hg)	Baro Temp (°C)	Ambient Temp (°F)	Elapsed Time (Seconds)	ΔP Venturi Inlet Dep (In. H ₂ O)	Counter Ind. Vol. (ft. ³)	Calc. Vol. (ft. ³)	Counter Error (ft. ³)
		Avg.	Avg.	Avg.					
		Avg.	Avg.	Avg.					
		Avg.	Avg.	Avg.					
Average									

CVS NUMBER *****

Data Form No. 25 -
Supplement
Sheet 2 of 3

Counter For Phase	Pot Turns Before This Phase	Obs. Baro. Pressure (In. Hg)	Baro. Temp (°C.)	Ambient Temp (°F.)	Elapsed Time (Seconds)	A p Venturi Inlet Dep. (In. H ₂ O)	Counter Ind. Vol. (ft. ³)	Calc. Vol. (ft. ³)	Counter Error (ft. ³)
		Avg.	Avg.	Avg.					
		Avg.	Avg.	Avg.					
		Avg.	Avg.	Avg.					
Average									

BENTLEY
TEMPERATURE RECORDER
CALIBRATION AND FUNCTIONAL CHECK

Applicable Specifications:

Elapsed Time (Seconds)	Maximum Allowed Error For Single Counter (Ft. ³)	Maximum Allowed Average Error For The Three Counters (Ft. ³)	Maximum Allowed Difference Between Any Two of the Three Counter Errors (Ft. ³)
500	10.00	6.00	8.00
1000	15.00	9.00	10.00

TECHNICIAN'S SIGNATURE: _____ DATE: _____

TIME: _____ AM / PM

THIS DATA HAS BEEN REVIEWED AND APPROVED
BY EG&GAR QUALITY CONTROL DEPARTMENT:

DATE: _____

TOOLS REQUIRED: Thermocouples

Three beakers, each of which has a capacity of at least 500 milliliters
Ice (needed only if 50° water cannot be obtained from tap)
Precision thermometer having NBS traceability
Instrument repair tool kit
Implement for stirring water baths

CALIBRATION AND FUNCTIONAL CHECK:

1. Use the pertinent sections of the instrument manual to make any mechanical adjustments which are deemed necessary after observing the recorder in operation.
2. Allow the recorder and its servo-mechanism to warm up for at least 10 minutes.
3. Using the beakers, tap water and the precision thermometer, make three water baths having different temperatures, as follows:

Cool Water Bath - 50° to 60°F

Room Temperature Water Bath - 70° to 80°F

Warm Water Bath - 85° to 88°F

When this is complete, check each thermocouple and its associated recorder channel against the precision thermometer in each water bath in the following sequence:

Room Temperature Water Bath

Cool Water Bath

Room Temperature Water Bath

Warm Water Bath

Room Temperature Water Bath

When performing these checks, the water bath in use should be stirred constantly and readings should be taken only after both the thermometer and the recorder readings have been stabilized. When changing water, baths, visually observe the transient response of the recorder to see whether or not overshoot occurs and to see whether or not the overshoot is less than two percent (2%) of full scale.

Usually, no overshoot will occur and a rough estimate of the instrument deadband can be obtained from the difference between the first and second and the second and third readings of the room temperature water bath. Deadband, as indicated by the above mentioned differences, should not exceed 10.2% of full scale. If the indicated deadband does exceed 10.2% of full scale, the readings discussed above should be taken again to ensure that the high indicated deadband was not a result of temperature changes in the room temperature water bath.

The temperature readings on the recorder should agree with the corrected thermometer readings within ±1°F. If only one of the thermocouples shows a response which is out

WATER BATH	THERMOMETER				RECORDER				CORRECTED			
	INDICATED TEMPERATURE				INDICATED TEMPERATURE				THERMOMETER READING			
	THERMOCOUPLE CHANNEL				THERMOCOUPLE CHANNEL				THERMOCOUPLE CHANNEL			
Room Temperature:												
Cool												
Room Temperature												
Warm												
Room Temperature												

	THERMOCOUPLE CHANNEL				THERMOCOUPLE CHANNEL			
Overshoot (% of Full Scale)								
Deadband (± 3 of Full Scale)								

Technician: _____

W Observer: _____

Data Form No. 27

Temperature Recorder
Calibration and Functional Check
Page 2

of the $\pm 1^{\circ}\text{F}$ tolerance, that thermocouple may be faulty and it should be replaced and the new one should be checked. If two or more of the thermocouples show a response outside the $\pm 1^{\circ}\text{F}$ tolerance, the recorder gain and zero potentiometers may need adjustment. Before adjusting the gain or zero potentiometers, each thermocouple should be rechecked against the thermometer in each water bath to ensure that an out-of-tolerance condition indeed exists.

RESULTS OF CALIBRATION AND FUNCTIONAL CHECK:

1. Mechanical Adjustments Performed: _____

2. Electrical Adjustments Performed: _____

APPLICATION SPECIFICATIONS FROM CTR: Accuracy to within $\pm 1.8^{\circ}\text{F}$

OTHER SPECIFICATIONS: Overshoot $\leq 2\%$ of full scale
 Deadband $\leq 0.2\%$ of full scale

CALIBRATION AND FUNCTIONAL CHECK PERFORMED BY: _____

DATE: _____ TIME: _____ am/pm

W Observer: _____

SUBSCRIBED TO AND SWORN TO BEFORE ME
 THIS _____ DAY OF _____, 197

 NOTARY PUBLIC

MY COMMISSION EXPIRES: _____

DYNAMOMETER/RLPC CALIBRATION CHECK LIST

* (Dyno #1 ONLY, Serial #A-32206-3-578)

DYNAMOMETER NUMBER _____ SERIAL NUMBER _____

TECHNICIAN _____ DATE _____

A. WARM UP:

1. Unless the dynamometer has been used within the last half hour, obtain a copy of DATA FORM 107.1 and perform a dynamometer warm up, as per the procedure on that form.

Warm up performed: _____

Warm up not necessary since
dynamometer last used at: _____ A.M./P.M.

2. Negative lead of DVM connected to ITB COMMON terminal 211: _____

B. REAR ROLL CALIBRATION: (Reference Figure 2)

1. Speed/power switch to: REAR ROLL _____
2. Positive lead of DVM to test point 2 board 8. _____
3. Adjust pot 3 board 8 to DVM reading of 0.000+
.002 VDC (ROLLS STOPPED). _____
4. Adjust pot 4 board 8 to DVM reading of 4.63+
.002 VDC (REAR ROLL at 1800 rpm) Time: _____ AM/PM _____
5. Recheck pot 3 board 8 reading at 0.000+
.002 VDC (ROLLS STOPPED). _____

C. FRONT ROLL CALIBRATION: (Reference Figure 2)

1. Speed/power switch to: FRONT ROLL _____
2. Positive lead of DVM to test point 5 board 7. _____
3. Adjust pot 6 board 7 to DVM reading of 0.000+
.002 VDC (ROLLS STOPPED). _____
4. Adjust pot 7 board 7 to DVM reading of 4.63+
.002 VDC (FRONT ROLL at 1800 rpm) _____
5. Recheck pot 6 board 7 reading at 0.000+
.002 VDC (ROLLS STOPPED). _____

DYNAMOMETER/RLPC CALIBRATION CHECK LIST

D. DIGITAL SPEED READ-OUT CALIBRATION

1. Positive lead of DVM to test point 2 board 8. _____
2. Switch 2 board 8 to: CAL (Away from board) _____
3. Adjust pot 5 board 8 to DVM reading of
5.000 + .002 VDC. _____
4. Adjust span pot under logo on instrument box to:
50.0 mph ON DIGITAL SPEEDMETER. _____

E. TORQUE CELL CALIBRATION:

1. Remove vehicle - RELEASE DYNO BRAKES. _____
2. Switches 1 and 2 board 8 and switch 1 board 7 to:
RUN (TOWARD BOARD). _____
3. Positive lead of DVM to test point 4 board 8
reading (INCLUDING + or - SIGN). _____
4. Switch 2 board 8 to: CAL (AWAY FROM BOARD). _____
5. Adjust pot 5 board 8 to:
50 mph READING ON DIGITAL SPEEDMETER. _____
6. Positive lead of DVM to test point 1 board 8. _____
7. Remove load cell hysteresis (LIGHTLY TAP LOAD CELL
MOUNTING CHANNEL WITH Mallet). _____
8. Adjust pot 1 board 8 to DVM reading of 0.05+ 0.005 VDC _____
9. Positive lead of DVM to test point 4 board 8. _____
10. Adjust pot 1 board 8 clockwise until DVM reading JUST
equals reading at 3 _____ (TURN POT SLOWLY SO AS
NOT TO OVERSHOOT READING). _____
11. Positive lead of DVM to test point 1 board 8 (RECORD
READING). _____
12. Install arbor D33102 and TIGHTEN - retaining screw to
snug. _____
13. Gently install three D33112 Weights - REMOVE HYSTERESIS. _____

DYNAMOMETER/RLPC CALIBRATION CHECK LIST

E. TORQUE CELL CALIBRATION: (continued)

- _____ 14. Adjust pot 2 board 8 to DVM reading of $4.07 \pm .002$ VDC. _____
- _____ 15. Remove weight and arbor - REMOVE HYSTERESIS. _____
- _____ 16. Compare DVM reading with reading in 11 within ± 0.002 VDC if not within tolerance, adjust pot 1 board 8 to proper setting - - THEN REPEAT STEPS 12 through 16. _____

F. DIGITAL POWER READOUT CALIBRATION:

- _____ 1. Adjust power meter reading to: 00.0 HP (ADJUST SCREW LOCATED AT LOWER RIGHT HAND CORNER OF METER DVM). _____
- _____ 2. Switches 1 and 2 board 8 to: CAL (AWAY FROM BOARD). _____
- _____ 3. Adjust pot 5 board 8 to: 50.0 mph (ON DIGITAL SPEEDMETER) _____
- _____ 4. Positive lead of DVM to test point 1 board 8. _____
- _____ 5. Adjust pot 6 board 8 to DVM reading of $4.070 \pm .002$ VDC. _____
- _____ 6. Adjust power span pot for reading of 40.7 (LOCATED UNDER CLAYTON LOGO). _____

G. HORSEPOWER SCALING VERIFICATION:

- _____ 1. Switch 1 board 8 to: RUN (TOWARD BOARD) _____
- _____ 2. Adjust pot 5 board 8 to: 50.0 mph (ON DIGITAL SPEEDMETER) _____
- _____ 3. Install arbor and weights and verify reading (REMOVE HYSTERESIS AFTER EACH WEIGHT). _____
- | | | | |
|-------------------|----------------|-----------------------------|-------|
| _____ None | 00.0 ± 0.1 | Arbor + 35# 14.8 ± 0.1 | _____ |
| _____ Arbor | 1.9 ± 0.1 | Arbor + 110# 40.7 ± 0.1 | _____ |
| _____ Arbor + 70# | 27.8 ± 0.1 | | _____ |
- _____ 4. If not within tolerance, STEPS "E" AND "F" REPEATED TO CORRECT. _____

DYNAMOMETER/RLPC CALIBRATION CHECK LIST

H. HORSEPOWER "CAL CHECK" CALIBRATION:

- _____ 1. Warm up dynamometer for minimum 15 minutes. _____
- _____ 2. Set mode selector switch to: PENDENT _____
- _____ 3. Switch 1 board 8 to: RUN (TOWARD BOARD). _____
- _____ 4. Switch 1 board 7 to: RUN (TOWARD BOARD). _____
- _____ 5. Switch 2 board 8 to: CAL (AWAY FROM BOARD). _____
- _____ 6. Adjust pot 5 board 8 to: 50.0 mph (ON DIGITAL SPEEDMETER) _____
- _____ 7. Remove vehicle - RELEASE DYNO BRAKES. _____
- _____ 8. Remove load cell HYSTERESIS. _____
- _____ 9. Press CAL check button and record HP reading _____ HP on digital HP meter. _____

I. DEADBAND ADJUSTMENT:

- _____ 1. Turn water supply to dynamometer OFF. _____
- _____ 2. Press pendant load or unload button to RELEASE pressure in the lines. _____
- _____ 3. Speed/power switch to: FRONT ROLL _____
- _____ 4. Set thumbwheel to: 30.0 mph _____
- _____ 5. Set mode selector to: THUMBWHEEL _____
- _____ 6. Set vehicle factor to: 0.00 _____
- _____ 7. Switches 1 and 2 board 8 and switch 1 board 7 to: CAL (AWAY FROM BOARD). _____
- _____ 8. Adjust pot 5 board 8 to: 50.0 mph (ON DIGITAL SPEEDMETER) _____
- _____ 9. Adjust pot 6 board 8 to: 30.0 mph (ON DIGITAL SPEEDMETER) _____
- _____ 10. Adjust pot 6 board 8 to START LOW RATE UNLOAD LIGHT PULSE - RECORD HP READING _____ HP. _____

DYNAMOMETER/RLPC CALIBRATION CHECK LIST

I. DEADBAND ADJUSTMENT. (continued)

- _____ 11. Adjust pot 6 board 8 to START LOW RATE UNLOAD LIGHT PULSE - RECORD HP READING _____ HP.
- _____ 12. Difference between 11 and 12 _____ HP
(THIS IS THE DEADBAND).
- _____ 13. Adjust pot 3 board 2 and REPEAT 8 and 9 UNTIL DEADBAND IS 0.4 HP.

J. THUMBWHEEL "LOW RANGE" ADJUSTMENT:

- _____ 1. Set thumbwheel to: 3.0 HP
- _____ 2. Set mode selector to: THUMBWHEEL
- _____ 3. Set vehicle factor switch to: 0.00
- _____ 4. Switches 1 and 2 board 8 and switch 1 board 7 to: CAL. (AWAY FROM BOARD).
- _____ 5. Adjust pot 5 board 8 to: 50.0 mph (ON DIGITAL SPEEDMETER)
- _____ 6. Adjust pot 6 board 8 to: 3.0 HP (ON DIGITAL POWER METER)
- _____ 7. Adjust pot 1 board 7 until LOW AND HIGH RATE LOAD AND UNLOAD LIGHTS GO OUT.
- _____ 8. Adjust pot 6 board 8 counter - CLOCKWISE TO START LOW RATE UNLOAD LIGHT PULSE - RECORD HP READING: _____ HP.
- _____ 9. Adjust pot 6 board 8 CLOCKWISE TO START LOW RATE LOAD LIGHT PULSE - RECORD HP READING: _____ HP.
- _____ 10. Adjust pot 1 board 7 for LOAD LIGHT PULSE AND UNLOAD LIGHT PULSE - TO BE CENTERED AROUND 3.0.

K. THUMBWHEEL "SPAN" ADJUSTMENT:

- _____ 1. Set thumbwheel to: 39.0 HP
- _____ 2. Set mode selector to: THUMBWHEEL
- _____ 3. Set vehicle factor to: 0.00
- _____ 4. Switches 1 and 2 board 8 and 1 board 7 to: CAL. (AWAY FROM BOARD).
- _____ 5. Adjust pot 5 board 8 to: 50.0 ON DIGITAL SPEEDMETER.

DYNAMOMETER/RLPC CALIBRATION CHECK LIST

K. THUMBWHEEL "SPAN" ADJUSTMENT (continued)

- _____ 6. Adjust pot 6 board 8 to: 39.0 HP ON DIGITAL POWER METER.
- _____ 7. Adjust pot 1 board 1 until LOW AND HIGH RATE LOAD/UNLOAD LIGHTS GO OUT.
- _____ 8. Adjust pot 6 board 8 counter-CLOCKWISE TO START LOW RATE UNLOAD LIGHT PULSE. RECORD HP READING: _____ HP
- _____ 9. Adjust pot 6 board 8 CLOCKWISE TO START LOW RATE LOAD LIGHT PULSE. RECORD HP READING: _____ HP
- _____ 10. Adjust pot 1 board 1 for LOAD LIGHT PULSE AND UNLOAD LIGHT PULSE. TO BE CENTERED AROUND 39.0 HP.
(DIFFERENCE BETWEEN 8 and 9).

L. HIGH RATE DEADBAND ADJUSTMENT:

- _____ 1. Set thumbwheel to: 39.0 HP.
- _____ 2. Set mode selector to: THUMBWHEEL
- _____ 3. Set vehicle factor to 0.00
- _____ 4. Switches 1 and 2 board 8 and switch 1 board 7 to: CAL. (AWAY FROM BOARD).
- _____ 5. Adjust pot 5 board 8 to: 50.0 mph ON DIGITAL SPEEDMETER.
- _____ 6. Adjust pot 6 board 8 to: 40.5 mph ON DIGITAL POWER METER.
- _____ 7. Adjust pot 1 board 3 to START HIGH RATE UNLOAD LIGHT
- _____ 8. Adjust pot 6 board 8 to 37.5 HP ON DIGITAL POWER METER.
- _____ 9. Adjust pot 1 board 2 to START HIGH RATE LOAD LIGHT.

M. DRIVER CUT-OFF ADJUSTMENT:

- _____ 1. Set thumbwheel to: 00.0 HP
- _____ 2. Switches 1 and 2 board 8 and switch 1 board 7 to: RUN (TOWARD THE BOARD)
- _____ 3. Positive lead of DVM to TEST POINT 1 board 8.
- _____ 4. Adjust pot 1 board 8 to DVM READING OF $+0.060 \pm 0.005$ VDC.

CVS CFV CALIBRATION DATA SHEET

DATE _____

CVS MAKE/MODEL _____

TIME @ START _____

SERIAL NO _____

LFE SERIAL NO _____

TECHNICIAN _____

	LFE INLET TEMP (°F) T_1	LFE INLET VACUUM (in H ₂ O) P_{in}	CFV INLET VACUUM (in H ₂ O) P_{in}	LFE PRESSURE DROP (in H ₂ O) ΔP	CVS BLOWER INLET VAC (in H ₂ O) P_o	AMB BARO PRESSURE (in Hg) P_a	P_B	ΔP_T	P_{ci}	P_{mi}	T_1	OK? (YES/) (CHECK)
1												
2												
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												
16												
17												
18												
19												
20												
21												
22												
23												
24												
25												

TEST TECHNICIAN SIGNATURE _____ TIME _____ AM/PM DATE _____

DATA FORM NO. 301.2
Page 7 of 7

DYNAMOMETER/RLJC CALIBRATION CHECK LIST

M. DRIVER CUT-OUT ADJUSTMENT: (continued)

5. Adjust pot 2 board 3 CLOCKWISE UNTIL BOTH LOW AND HIGH RATE UNLOAD LIGHT GO OUT.

6. REMOVE HYSTERESIS.

7. Adjust pot 1 board 8 to SAME READING AS RECORDED IN E-11 - READING (INCLUDE + OR - SIGN).

N. FINAL SYSTEM PREPARATION:

1. Switches 1 and 2 board 8 and switch 1 board 7 to: RUN (TOWARD THE BOARD).

2. Remove DVM leads.

3. Reinstall COVER ON CONTROL BOX.

4. Return LOGO ON INSTRUMENT BOX TO HORIZONTAL.

5. Turn WATER SUPPLY ON. (RECORD WATER PRESSURE)

SIGNATURE OF TECHNICIAN: _____

DATE: _____ TIME: _____ AM _____ PM

DATE: _____

THESE DATA SHEETS HAVE BEEN REVIEWED AND APPROVED BY EG&G-AR QUALITY CONTROL DEPARTMENT.

EG&G AUTOMOTIVE RESEARCH

APPENDIX E
Audit Forms

- 1) Comments to be resolved
- 2) Quality Control Audit of: Non-Evaporative Hot LA-4 Precondition Check List
- 3) Quality Control Audit of: Precondition Trace
- 4) Quality Control Audit of: Dynamometer Warm-up Check List
- 5) Quality Control Audit of: Driver's FTP Check List
- 6) Quality Control Audit of: WB/DB Chart (EPA sequence)
- 7) Quality Control Audit of: FTP Driver's Trace
- 8) Quality Control Audit of: CO/CO₂ Instrument Traces
- 9) Quality Control Audit of: CO/CO₂ Instrument Traces (Bagged Idle Test)
- 10) Quality Control Audit of: HC/NO_x Instrument Traces
- 11) Quality Control Audit of: NO Instrument Traces (50 Cruise Test)
- 12) Quality Control Audit of: HC/NO_x Instrument Traces (Bagged Idle Test)
- 13) Quality Control Audit of: HC/NO_x Instrument Traces (Highway Fuel Economy)
- 14) Quality Control Audit of: CO/CO₂ Instrument Traces (Highway Fuel Economy)
- 15) Quality Control Audit of: NO Instrument Trace - Loaded Two Mode
- 16) Quality Control Audit of: NO Instrument Trace (4 Speed Idle Test)
- 17) Quality Control Audit of: CO/CO₂ Instrument Traces (4 Speed Idle Test)
- 18) Quality Control Audit of: CO/CO₂ Instrument Traces (50 Cruise Test)
- 19) Quality Control Audit of: Hexane Instrument Trace (50 Cruise Test)
- 20) Quality Control Audit of: Hexane Instrument Trace (4 Speed Idle Test)
- 21) Quality Control Audit of: CO/CO₂ Instrument Traces - Loaded Two Mode
- 22) Quality Control Audit of: Hexane Instrument Trace - Loaded Two Mode
- 23) Quality Control Audit of: CVS-CFV Test Data Sheet

APPENDIX E

Audit Forms (continued)

- 24) Quality Control Audit of: Bagged Idle Test
- 25) Quality Control Audit of: 50 Cruise Test Data Sheet
- 26) Quality Control Audit of: Highway Fuel Economy Data Sheet
- 27) Quality Control Audit of: 4 Speed Idle Test (Data Sheet)
- 28) Quality Control Audit of: Loaded Two Mode (Data Sheet)
- 29) Quality Control Audit of: Computer Input and Output
- 30) Data Packet Enclosure Test

COMMENTS TO BE RESOLVED

QUALITY CONTROL AUDIT OF:
NON-EVAPORATIVE HOT LA-4 PRECONDITION CHECK LIST

	Comments	Comments Resolved	QC Review	OK
S. Gearhart				
B. Martinez				
C. Jackel				
B. GILMORE				
L. HERNANDEZ				
R. Martinez				
C. Vantassel				
R. Bellows				
R. Schneberger				

	Yes	No	Contact	Comments	Comments Resolved
1) Test Number					
2) Vehicle Number					
3) Date					
4) Dyno Code					
5) Time					
6) I.W. Correct?					
7) I.H.P. Correct?					
8) Correct Fuel Type Used?					
9) Correct Fuel Tank Capacity Entered?					
10) Correct Amount of Fuel Put In Tank?					
11) Fuel Temp Less Than 86°F					
12) Are Items 1 - 8 Completed Properly?					
13) Correct Time Entered for Last Dyno Use?					
14) Are Items 9 - 16 Completed Properly?					
15) Is Test Area Temp Between 68°F and 86°F?					
16) Are Items 17 - 20 Completed Properly?					
17) Is IHP From Digital Dis- play within + .2 of the Value Determined During Calibration?					
18) Time at End of Precon- dition (S.O.S.)					
19) Items 21 - 28 Completed Properly?					
20) Is Soak Area Temp Between 68°F and 86°F?					
21) Driver's Signature Entered?					
22) QC Signature Entered?					

QUALITY CONTROL AUDIT OF:
PRECONDITION TRACE

	Yes	No	Contact	Comments	Comments Resolved
1) Vehicle Number					
2) Test Number					
3) Dyno Number					
4) Date					
5) Time					
6) Time Less than 2 Hours After Dyno Warm Up?					
7) I.W. Correct?					
8) I.H.P. Correct?					
9) 50 MPH Entered Adjacent to I.H.P.					
10) 50 MPH Cal. Check on Trace?					
11) Driver's Signature on Trace?					
12) Trace OK?					
13) Q.C. Signature Entered?					

QUALITY CONTROL AUDIT OF:
DYNAMOMETER WARM-UP CHECK LIST

Part "A"	Yes	No	Contact	Comments	Comments Resolved
1) Date					
2) Dyno Code					
3) Test Number					
4) Car Number					
5) Start Time					
6) Vehicle Make Entered?					
7) Vehicle Model Entered?					
8) I.H.P. Correct?					
9) I.W. Correct?					
10) Tech. Name Entered?					
11) Items 1-14 Properly Completed?					
Part "B"					
12) Item 1 Completed?					
13) Is applied Inertia Weight correct?					
14) Items 3-6 Completed Properly?					
15) Stop Time from Item 6					
16) Items 7-11 Completed Properly?					
17) Driver's Signature Entered?					
18) Date Entered?					
19) Time Entered?					
20) QC Signature Entered?					

QUALITY CONTROL AUDIT OF
DRIVER'S FTP CHECK LIST

	Yes	No	Contact	Comments	Comments Resolved
1) Date					
2) Test Number					
3) Vehicle Number					
4) Dyno Number					
5) Driver's Name Entered?					
6) I W Correct?					
7) I.H.P. Correct?					
8) Time at Beginning of 12 Hour Soak (SOS)					
9) Is Above Time Same as End of Precondition?					
10) Time at Start of Test?					
11) Is SOT 12-24 Hours Later Than SOS?					
12) Is Calculated Soak Time Correct?					
13) Time at Which Dyno Was Last Used?					
14) Are Items 1-7 Properly Completed?					
15) Were Vehicle Tires at Approx. 45 PSI for Test?					
16) Are Items 8-16 Properly Completed?					
17) Do Sling and Strip Chart Agree Within 1.8°F?					
18) Are Items 17-26 Properly Completed?					
19) Starting Conditions Properly Noted?					
20) Are Items 27-41 Properly Completed?					
21) Driver's Signature Entered?					
22) QC Signature Entered?					

QUALITY CONTROL AUDIT OF
WB/DB CHART (EPA Sequence)

	Yes	No	Contact	Comments	Comments Resolved
1) Vehicle Number					
2) Test Number					
3) Date					
4) Time Entered?					
5) Driver's Name or Initial's Entered?					
6) SOP 1 Marked?					
7) SOP 2 Marked?					
8) Hot Soak Marked?					
9) SOP 3 Marked?					
10) EOT Marked?					
11) DB Temp. 68°F to 86°F?					
3 MIN. BAGGED IDLE					
12) SOT Marked?					
13) EOT Marked?					
14) DB Temp 68°F to 86°F?					
50 CRUISE TEST					
15) SOT Marked?					
16) EOT Marked?					
17) DB Temp. 68°F to 86°F?					
HFET					
18) SOT Marked?					
19) EOT Marked?					
20) DB Temp 68°F to 86°F?					
4 SPEED IDLE					
21) SOT Marked?					
22) SOT Marked?					
23) DB Temp 68°F to 86°F?					
LOADED 2 MODE					
24) SOT Marked?					
25) EOT Marked?					
26) DB Temp. 68°F to 86°F?					
Q.C. SIGNATURE ENTERED?					

QUALITY CONTROL AUDIT OF:
FTP DRIVER'S TRACE

	Yes	No	Contact	Comments	Comments Resolved
1) Vehicle Number					
2) Test Number					
3) Dyno Number					
4) Date					
5) Time					
6) Driver's Signature on Trace					
7) I.W. Correct?					
8) I.H.P. Correct?					
9) 50 MPH Entered Adjacent to I.H.P.?					
10) 50 MPH Calibration at Beginning of Trace?					
11) Trace OK?					
12) Driving Abnormalities Noted?					
13) 50 MPH Speed Check at End of Trace?					
14) Is I.H.P. Within ± 0.5 HP of Original Setting?					
15) QC Signature Entered?					

QUALITY CONTROL AUDIT OF:
CO/CO₂ INSTRUMENT TRACES

	Phase 1		Phase 2		Phase 3		Contact	Comments	Comments Resolved
	Yes	No	Yes	No	Yes	No			
1) Vehicle Number									
2) Test Number									
3) Date									
4) Time Entered?									
5) Signature Entered?									
6) Chart Speed Entered?									
7) CO Span OK? (Low Range)									
8) CO ₂ Span OK? (Low Range)									
9) Zero OK?									
10) CO Span OK?									
11) CO ₂ Span OK?									
12) Zero OK?									
13) CO Sample OK?									
14) CO Range?									
15) CO Deflection?									
16) CO ₂ Sample OK?									
17) CO ₂ Range?									
18) CO ₂ Deflection?									
19) Ambient CO Trace OK?									
20) Ambient CO Deflection?									
21) Ambient CO OK?									
22) Ambient CO ₂ Trace OK?									
23) Ambient CO ₂ Deflection?									
24) Zero OK?									
25) CO Span OK?									
26) CO ₂ Span OK?									
27) Zero OK?									
28) Repeat Steps 9 - 27									
29) All Operator Errors Marked?									
30) QC Signature Entered?									

QUALITY CONTROL AUDIT OF:
CO/CO₂ INSTRUMENT TRACES
(Bagged Idle Test)

	Yes	No	Contact	Comments	Comments Resolved
1) Zero OK?					
2) CO Span OK?					
3) CO ₂ Span OK?					
4) Zero OK?					
5) CO Sample OK?					
6) CO Range ?					
7) CO Deflection?					
8) CO ₂ Sample OK?					
9) CO ₂ Range?					
10) CO ₂ Deflection?					
11) Ambient CO OK?					
12) Ambient CO Deflection?					
13) Ambient CO ₂ OK?					
14) Ambient CO ₂ Deflection?					
15) Zero OK?					
16) CO Span OK?					
17) CO ₂ Span OK?					
18) Zero OK?					
19) ALL OPERATOR ERRORS MARKED?					
20) Q.C. SIGNATURE ENTERED?					

QUALITY CONTROL AUDIT OF
HC/NO_x INSTRUMENT TRACES

	Phase 1		Phase 2		Phase 3		Contact	Comments	Comments Resolved
	Yes	No	Yes	No	Yes	No			
1) Vehicle Number									
2) Test Number									
3) Date									
4) Time Entered?									
5) Signature Entered?									
6) Chart Speed Entered?									
7) HC Span OK (Low Range)?									
8) NO _x Span OK (Low Range)?									
9) Zero OK?									
10) HC Span OK?									
11) NO _x Span OK?									
12) Zero OK?									
13) HC Sample OK?									
14) HC Range									
15) HC Deflection									
16) NO _x Sample OK?									
17) NO _x Range									
18) NO _x Deflection									
19) Ambient HC Trace OK?									
20) Ambient HC Deflection									
21) Ambient HC OK?									
22) Ambient NO _x Trace OK?									
23) Ambient NO _x Deflection									
24) Zero OK?									
25) HC Span OK?									
26) NO _x Span OK?									
27) Zero OK?									
28) Repeat Steps 9-27									
29) All Operator Errors Marked?									
30) QC Signature Entered?									

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF:
NO INSTRUMENT TRACES:
(50 Cruise Test)

	30 Second Sample	Contact	Comments	Comments Resolved
1) Zero?				
2) NO Span OK?				
3) Zero OK?				
4) NO Sample OK?				
5) NO Range				
6) NO Deflection				
7) Zero OK?				
8) NO Span OK?				
9) Zero OK?				
10) All Operator Errors Marked?				
11) Q.C. Signature Entered?				

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF:
HC/NO_x INSTRUMENT TRACES
(Bagged Idle Test)

	Yes	No	Contact	Comments	Comments Resolved
1) Zero?					
2) HC Span OK?					
3) NO _x Span OK?					
4) Zero OK?					
5) HC Sample OK?					
6) HC Range?					
7) HC Deflection?					
8) NO _x Sample OK?					
9) NO _x Range?					
10) NO _x Deflection?					
11) Ambient HC OK?					
12) Ambient HC Deflection?					
13) Ambient NO _x OK?					
14) Ambient NO _x Deflection?					
15) Zero OK?					
16) HC Span OK?					
17) NO _x Span OK?					
18) Zero OK?					
19) All Operator Errors Marked?					
20) Q.C. Signature Entered?					

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF:
HC/NO_x INSTRUMENT TRACES
(Highway Fuel Economy)

	Yes	No	Contact	Comments	Comments Resolved
1) Zero?					
2) HC Span OK?					
3) NO _x Span OK?					
4) Zero OK?					
5) HC Sample OK?					
6) HC Range?					
7) HC Deflection?					
8) NO _x Sample OK?					
9) NO _x Range?					
10) NO _x Deflection?					
11) Ambient HC OK?					
12) Ambient HC Deflection?					
13) Ambient NO _x OK?					
14) Ambient NO _x Deflection?					
15) Zero OK?					
16) HC Span OK?					
17) NO _x Span OK?					
18) Zero OK?					
19) All Operator Errors Marked?					
20) Q.C. Signature Entered?					

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF
CO/CO₂ INSTRUMENT TRACES
(Highway Fuel Economy)

	Yes	No	Contact	Comments	Comments Resolved
1) Zero OK?					
2) CO Span OK?					
3) CO ₂ Span OK?					
4) Zero OK?					
5) CO Sample OK?					
6) CO Range ?					
7) CO Deflection?					
8) CO ₂ Sample OK?					
9) CO ₂ Range?					
10) CO ₂ Deflection?					
11) Ambient CO OK?					
12) Ambient CO Deflection?					
13) Ambient CO ₂ OK?					
14) Ambient CO ₂ Deflection?					
15) Zero OK?					
16) CO Span OK?					
17) CO ₂ Span OK?					
18) Zero OK?					
19) ALL OPERATOR ERRORS MARKED?					
20) Q.C. SIGNATURE ENTERED?					

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF:
NO INSTRUMENT TRACE:
LOADED TWO MODE

	30 mph 19.0 APH	Basic Idle Trans. In Neut	Contact	Comments	Comments Resolved
1) Zero OK?					
2) NO Span OK?					
3) Zero OK?					
4) NO Sample OK?					
5) No Range					
6) NO Deflection					
7) Zero OK?					
8) NO Span OK?					
9) Zero OK?					
10) Repeat Steps					
11) All Operator Errors Marked?					
12) Q.C. Signature Entered?					

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF
NO INSTRUMENT TRACE:
(4 Speed Idle Test)

	Basic Idle In Neutral		Idle At 2500 rpm		Basic Idle In Neutral		Basic Idle In Drive		Contacts/ Comments	Comments Resolved
	Yes	No	Yes	No	Yes	No	Yes	No		
1) Zero?										
2) NO Span OK?										
3) Zero OK?										
4) NO Sample OK?										
5) NO Range										
6) NO Deflection										
7) Zero OK?										
8) NO Span OK?										
9) Zero OK?										
10) Repeat Steps										
11) All Operator Errors Marked?										
12) Q.C. Signature Entered?										

* Does not apply with manual transmission

QUALITY CONTROL AUDIT OF:
CO/CO₂ INSTRUMENT TRACES:
(4 Speed Idle Test)

	Basic Idle In Neutral		Idle At 2500 rpm		Basic Idle In Neutral		Basic Idle In Drive		Contacts/ Comments	Comments Resolved
	Yes	No	Yes	No	Yes	No	Yes	No		
1) Zero?										
2) CO Span OK?										
3) CO ₂ Span OK?										
4) Zero OK?										
5) CO Sample OK?										
6) CO Range?										
7) CO Deflection?										
8) CO ₂ Sample OK?										
9) CO ₂ Range?										
10) CO ₂ Deflection?										
11) Zero OK?										
12) CO Span OK?										
13) CO ₂ Span OK?										
14) Zero OK?										
15) Repeat Steps 6 - 10										
16) All Operator Errors Marked?										
17) Q.C. Signature Entered?										

* Does not apply with manual transmission.

QUALITY CONTROL AUDIT OF:
CO/CO₂ INSTRUMENT TRACES:
(50 Cruise Test)

	30 Second Sample	Contact	Comments	Comments Resolved
1) Zero?				
2) CO Span OK?				
3) CO ₂ Span OK?				
4) Zero OK?				
5) CO Sample OK?				
6) CO Range				
7) CO Deflection				
8) CO ₂ Sample OK?				
9) CO ₂ Range				
10) CO ₂ Deflection				
11) Zero OK?				
12) CO Span OK?				
13) CO ₂ Span OK?				
14) Zero OK?				
15) All Operator Errors Marked?				
16) Q.C. Signature Entered?				

Date Form No. _____

QUALITY CONTROL AUDIT OF:
HEXANE INSTRUMENT TRACE:
(50 Cruise Test)

	30 Second Sample	Contact	Comments	Comments Resolved
1) Zero OK?				
2) Hexane Span OK?				
3) Zero OK?				
4) Hexane Sample OK?				
5) Hexane Range (ppm)				
6) Hexane Deflection				
7) Zero OK?				
8) Hexane Span OK?				
9) Zero OK?				
10) All Operator Errors Marked?				
11) Q.C. Signature Entered?				

QUALITY CONTROL AUDIT OF:
HEXANE INSTRUMENT TRACE:
(4 Speed Idle Test)

	Basic Idle In Neutral		Idle At 2500 rpm		Basic Idle In Neutral		Basic Idle In Drive		Contacts/Comments	Comments Resolved
	Yes	No	Yes	No	Yes	No	Yes	No		
1) Zero?										
2) Hexane Span OK?										
3) Zero OK?										
4) Hexane Sample OK?										
5) Hexane Range (ppm)										
6) Hexane Deflection										
7) Zero OK?										
8) Hexane Span OK?										
9) Zero OK?										
10) Repeat Steps										
11) All Operator Errors Marked?										
12) Q.C. Signature Entered?										

* Does not apply with manual transmission

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF
CO/CO₂ INSTRUMENT TRACES
LOADED TWO MODE

	30 mph 19.0 AHP	Basic Idle Trans. In Neut		Contact	Comments	Comments Resolved
1) Zero OK?						
2) CO Span OK?						
3) CO ₂ Span OK?						
4) Zero OK?						
5) CO Sample OK?						
6) CO Range						
7) CO Deflection						
8) CO ₂ Sample OK?						
9) CO ₂ Range						
10) CO ₂ Deflection						
11) Zero OK?						
12) CO Span OK?						
13) CO ₂ Span OK?						
14) Zero OK?						
15) Repeat Steps 1-14						
16) All Operator errors marked?						
17) Q.C. Signature entered?						

QUALITY CONTROL AUDIT OF:
HEXANE INSTRUMENT TRACE:
 LOADED TWO MODE

QUALITY CONTROL AUDIT OF:
 CVS-CFV TEST DATA SHEET

	30 mph 19.0 APH	Basic Idle Trans. In Neut	Contact	Comments	Comments Resolved
1) Zero OK?					
2) Hexane Span OK?					
3) Zero OK?					
4) Hexane Sample OK?					
5) Hexane Range (ppm)					
6) Hexane Deflection					
7) Zero OK?					
8) Hexane Span OK?					
9) Zero OK?					
10) Repeat Steps					
11) All Operator Errors Marked?					
12) Q.C. Signature Entered?					

	Yes	No	Contact	Comments	Comments Resolved
1) Date					
2) Test Number					
3) Vehicle Number					
4) Odometer					
5) I.W. Correct?					
6) Thumb Wheel Correct?					
7) Barometric Pressure Reason- able (28.5 to 30 in. Hg.)					
8) Barometric Temp. Reasonable?					
9) Dry Bulb Temp. Correct?					
10) Wet Bulb Temp. Correct?					
11) Roll Revs. Entered Correctly?					
12)					
13) VMIX 1 Reasonable?					
14) VMIX 2 Reasonable?					
15) VMIX 3 Reasonable?					
16) Time at SOP 1?					
17) Is SOP 1 Within Two Hours of Warm Up?					
18) Time at EOP 1?					
19) EOP 1 = SOP 2?					
20) SOP 2 - SOP 1 = +8.5 ± 0.5 Minutes?					
21) EOP 2 - SOP 2 = +14.5 ± 0.5 Minutes?					
22) SOP 3 - EOP 2 = 10 ± 1 Min.?					
23) EOP 3 - SOP 3 = +8.5 ± 0.5 Minutes?					
24) ET 1 = 505 ± 4 sec. + Stall Seconds?					
25) ET 2 = 867 ± 4 Seconds?					
26) ET 3 = 505 ± 4 Seconds + Stall?					

QUALITY CONTROL AUDIT OF:
CVS-CFV TEST DATA SHEET (CONTINUED)

	Yes	No	Contact	Comments	Comments Resolved
27) Ranges Correct for CO?					
28) Ranges Correct for CO ₂ ?					
29) Deflections for CO Read Correctly?					
30) Deflections for CO ₂ Read Correctly?					
31) Concentrations Correct for CO?					
32) Concentrations Correct for CO ₂ ?					
33) Ranges Correct for HC?					
34) Ranges Correct for NO _x ?					
35) Deflections for HC Read Correctly?					
36) Deflections for NO _x Read Correctly?					
37) Concentrations Correct for HC?					
38) Concentrations Correct for NO _x ?					
39) EOA Less Than or Equal To EOP 1 + 20 Minutes?					
40) EOA 2 Less Than or Equal to EOP 2 + 20 Minutes?					
41) EOA 3 Less Than or Equal to EOP 3 + 20 Minutes?					
42) Does Comment Imply Test Is OK?					
43) Operator's Signature Entered?					
44) QC Signature Entered?					

QUALITY CONTROL AUDIT OF:
BAGGED IDLE TEST

	Yes	No	Contact	Comments	Comments Resolved
1) Transmission in proper gear?					
2) Time at START OF TEST?					
3) Time at END OF TEST?					
4) Elapsed Time?					
5) Is Total Test Time 3 min. + (30 sec.)					
6) Barometric Press. reasonable? (28.5 to 30 in.hg.)					
7) Barometric Temp. reasonable?					
8) (VIMX) reasonable?					
9) Dry bulb correct?					
10) Wet bulb correct?					
11) Ranges correct for CO?					
12) Ranges correct for CO ₂ ?					
13) Deflections for CO read correctly?					
14) Deflections for CO ₂ read correctly?					
15) Concentrations correct for CO?					
16) Concentrations correct for CO ₂ ?					
17) Ranges correct for HC?					
18) Ranges correct for NO _x ?					
19) Deflections for HC read correctly?					
20) Deflections for NO _x read correctly?					
21) Concentrations correct for HC?					
22) Concentrations correct for NO _x ?					
23) EOA Less Than 20 min. From End Of Sample?					
24) Does Comment Imply Test is OK?					
25) Operator's Signature Entered?					
26) Q.C. Signature Entered?					

DATA FORM NO. _____

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF:
50 CRUISE TEST DATA SHEET

	Yes	No	Contact	Comments	Comments Resolved
1) Test Start Time.					
2) Test End Time:					
3) End of Sample Equal 30 Seconds:					
4) Barometric Press. reasonable 28.5 to 30 in.Hg.?					
5) Barometric Temp. reasonable?					
6) Dry Bulb Temp. correct?					
7) Wet Bulb Temp. correct?					
8) Ranges correct for CO?					
9) Ranges correct for CO ₂ ?					
10) Deflections for CO read correctly?					
11) Deflections for CO ₂ read correctly?					
12) Concentrations correct for CO?					
13) Concentrations correct for CO ₂ ?					
14) Ranges correct for HC?					
15) Ranges correct for NO ?					
16) Deflections for HC read correctly?					
17) Deflections for NO read correctly?					
18) Concentrations correct for HC?					
19) Concentrations correct for NO ?					
20) Does comment imply test is OK?					
21) Operator's Signature Entered?					
22) Is R.P.M. reasonable?					
23) Q.C. Signature Entered?					

QUALITY CONTROL AUDIT OF:
HIGHWAY FUEL ECONOMY DATA SHEET

	Yes	No	Contact	Comments	Comments Resolved
1) TEST START TIME:					
2) TEST END TIME:					
3) Is ELAPSED TIME 12.45 min. (+ .5 min.)?					
4) Barometric Press. reasonable (28.5 to 30 in.hg.)?					
5) Barometric Temp. reasonable?					
6) Dry bulb Temp. correct?					
7) Wet bulb Temp. correct?					
8) VMIX reasonable?					
9) Roll Revs. correct?					
10) Ranges correct for CO?					
11) Ranges correct for CO ₂ ?					
12) Deflections for CO read correctly?					
13) Deflections for CO ₂ read correctly?					
14) Concentrations correct for CO?					
15) Concentrations correct for CO ₂ ?					
16) Ranges correct for HC?					
17) Ranges correct for NO _x ?					
18) Deflections for HC read correctly?					
19) Deflections for NO _x read correctly?					
20) Concentrations correct for HC?					
21) Concentrations correct for NO _x ?					
22) EOA less than or equal to 20 min.?					
23) Does comment imply test is OK?					
24) Operator's signature entered?					
25) Q.C. Signature entered?					

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF:
4 SPEED IDLE TEST (Data Sheet)

	Yes	No	Contact	Comments	Comments Resolved
1) TEST START TIME:					
2) TEST END TIME:					
3) ELAPSED TIME:					
4) Barometric Press. reasonable (28.5 to 30 in.hg.)?					
5) Dry bulb Temp. correct?					
6) Wet Bulb Temp. correct?					
7) Ranges correct for CO?					
8) Ranges correct for CO ₂ ?					
9) Deflections for CO read correctly?					
10) Deflections for CO ₂ read correctly?					
11) Concentrations correct for CO?					
12) Concentrations correct for CO ₂ ?					
13) Ranges correct for HC?					
14) Ranges correct for NO ?					
15) Deflections for HC read correctly?					
16) Deflections for NO read correctly?					
17) Concentrations correct for HC?					
18) Concentrations correct for NO ?					
19) Is R.P.M. reasonable?					
20) Does comment imply test is OK?					
21) Operator's Signature entered?					
22) Q.C. Signature entered?					

DATA FORM NO. _____

QUALITY CONTROL AUDIT OF:
LOADED TWO MODE (Data Sheet)

	Yes	No	Contact	Comments	Comments Resolved
1) TEST START TIME:					
2) TEST END TIME:					
3) ELAPSED TIME:					
4) Barometric Press. reasonable 28.5 to 30 in.hg.?					
5) Barometric Temp. reasonable?					
6) Dry bulb Temp. correct?					
7) Wet bulb Temp. correct?					
8) Is the I.W. 1000 lbs.?					
9) Is the I.H.P. correct?					
10) Ranges correct for CO?					
11) Ranges correct for CO ₂ ?					
12) Deflections for CO read correctly?					
13) Deflections for CO ₂ read correctly?					
14) Concentrations correct for CO?					
15) Concentrations correct for CO ₂ ?					
16) Ranges correct for HC?					
17) Ranges correct for NO _x ?					
18) Deflections for HC read correctly?					
19) Deflections for NO _x read correctly?					
20) Concentrations correct for HC?					
21) Concentrations correct for NO _x ?					
22) Does comment imply test is OK?					
23) Operator's Signature entered?					
24) Is R.P.M. reasonable?					
25) Q.C. Signature Entered?					

DATA PACKET ENCLOSURE LIST
EPA Contract No. 68-03-3024

QUALITY CONTROL AUDIT OF:
COMPUTER INPUT AND OUTPUT

	Yes	No	Contact	Comments	Comments Resolved
1) Date					
2) Vehicle Number					
3) Test Number					
4) Roll Revs. Entered Correctly					
5) If 1977 Year Model, Were STD Roll Revs. Used					
6) BO Entered Correctly?					
7) BT Entered Correctly?					
8) DB Temp Correct?					
9) WB Temp Correct?					
10) VMIX Correct?					
11)					
12) Meter Reading Correct?					
13) Concentration Values Correct?					
14) QC Signature Entered?					

To be submitted with each Data Packet.

I. Emissions Testing Data

Precondition Check List
Precondition Trace
Test Drivers Check List Pages 1 through 7
FTP Trace
Vehicle Refueling Records
Bench Operator Data Forms Pages 1 through 7
WB/DB Trace
Soak Area Trace
Analytical Traces
CVS Print-Out
Quality Audit Work Sheets
Vehicle Drivability Report
Highway Fuel Economy Print-Out
Bagged Idle Print-Out
Test Validity Statement

II. Procurement Data

Telephone Survey (3024.2)
Incoming Inspection Form (3024.8)
Test Agreement (3024.1)
Test Agreement Addendum (3024.3)
Standard Vehicle Loan Agreement (3024.4)
Savings Bond Information Sheet (3024.6)
Vehicle Owner Questionnaire Data Sheet
Supplemental Owners Survey
Loaner Vehicle Log (3024.7)
Mechanics Inspection Form (3024.9)
Vehicle Maintenance Log (3024.10)
EPA Data Pack
Vehicle Information Sheet (3024.12)
Post Test Inspection Form (3024.11)
Vehicle Release and Savings Bond Receipt (3024.5)
Procurement Check List (3024.13)

III. Supplied To Owner

Fuel Economy Kit
Contractor Information Filled In
Vehicle Fuel Fill In Information Recorded
Letter Of Appreciation
EPA Follow-up Letter and Envelope
Contractor Portion Filled In
Savings Bond
Vehicle Maintenance Log (3024.10)

TECHNICAL REPORT DATA
(Please read Instructions on the reverse before completing)

1. REPORT NO.			2.			3. RECIPIENT'S ACCESSION NO.		
4. TITLE AND SUBTITLE A Study Of Emissions From Light Duty Vehicles In San Antonio, Texas						5. REPORT DATE September 1981		
						6. PERFORMING ORGANIZATION CODE		
7. AUTHOR(S) Mark Dalen, Maurice Forshee, L. Kevin Kott						8. PERFORMING ORGANIZATION REPORT NO. EPA 460/3-81-019		
9. PERFORMING ORGANIZATION NAME AND ADDRESS EG&G Automotive Research, Inc. 5404 Bandera Road San Antonio, Texas 78238						10. PROGRAM ELEMENT NO.		
						11. CONTRACT/GRANT NO. 68-03-3024		
12. SPONSORING AGENCY NAME AND ADDRESS Environmental Protection Agency 2565 Plymouth Road Ann Arbor, Michigan 48015						13. TYPE OF REPORT AND PERIOD COVERED Final: 9/29/80 to 7/29/81		
						14. SPONSORING AGENCY CODE		
15. SUPPLEMENTARY NOTES								
16. ABSTRACT Three hundred 1978 through 1981 in-use light duty vehicles were obtained from the public, in the San Antonio Metropolitan Area. These vehicles were tested as received, for exhaust emissions utilizing the Federal Test Procedure, the Highway Fuel Economy Test, and four short mode tests. All vehicles were subjected to a thorough emissions control component inspection. Fifty vehicles which failed to meet applicable standards, received maintenance and a retest.								
17. KEY WORDS AND DOCUMENT ANALYSIS								
a. DESCRIPTORS			b. IDENTIFIERS/OPEN ENDED TERMS			c. COSATI Field/Group		
Emissions-Exhaust Gases Gas Analysis Air Pollution								
18. DISTRIBUTION STATEMENT			19. SECURITY CLASS (This Report) Unclassified			21. NO. OF PAGES 114		
			20. SECURITY CLASS (This page) Unclassified			22. PRICE		