U.S. ENVIRONMENTAL PROTECTION AGENCY NATIONAL EUTROPHICATION SURVEY

WORKING PAPER SERIES



REPORT ON
SILVER LAKE
NEW CASTLE COUNTY
DELAWARE
EPA REGION III
WORKING PAPER No. 240

PACIFIC NORTHWEST ENVIRONMENTAL RESEARCH LABORATORY

An Associate Laboratory of the NATIONAL ENVIRONMENTAL RESEARCH CENTER - CORVALLIS, OREGON and

NATIONAL ENVIRONMENTAL RESEARCH CENTER - LAS VEGAS, NEVADA

REPORT ON
SILVER LAKE
NEW CASTLE COUNTY
DELAWARE
EPA REGION III
WORKING PAPER No. 240

WITH THE COOPERATION OF THE

DELAWARE DEPARTMENT OF NATURAL RESOURCES

AND ENVIRONMENTAL CONTROL AND THE

DELAWARE NATIONAL GUARD

JUNE 1975

REPORT ON SILVER LAKE NEW CASTLE COUNTY, DELAWARE, EPA REGION III

by

National Eutrophication Survey

Water and Land Monitoring Branch Monitoring Applications Laboratory National Environmental Research Center Las Vegas, Nevada

and

Eutrophication Survey Branch
Pacific Northwest Environmental Research Laboratory
National Environmental Research Center
Corvallis, Oregon

Working Paper No. 240

OFFICE OF RESEARCH AND DEVELOPMENT U.S. ENVIRONMENTAL PROTECTION AGENCY

June 1975

CONTENTS

	Page
Foreword	ii
List of Delaware Study Lakes	iv
Lake and Drainage Area Map	V
Sections	
I. Conclusions	1
II. Lake and Drainage Basin Characteristics	3
III. Lake Water Quality Summary	5
IV. Nutrient Loadings	9
V. Literature Reviewed	13
VI. Appendices	14

FOREWORD

The National Eutrophication Survey was initiated in 1972 in response to an Administration commitment to investigate the nationwide threat of accelerated eutrophication to freshwater lakes and reservoirs.

OBJECTIVES

The Survey was designed to develop, in conjunction with state environmental agencies, information on nutrient sources, concentrations, and impact on selected freshwater lakes as a basis for formulating comprehensive and coordinated national, regional, and state management practices relating to point source discharge reduction and nonpoint source pollution abatement in lake watersheds.

ANALYTIC APPROACH

The mathematical and statistical procedures selected for the Survey's eutrophication analysis are based on related concepts that:

- a. A generalized representation or model relating sources, concentrations, and impacts can be constructed.
- b. By applying measurements of relevant parameters associated with lake degradation, the generalized model can be transformed into an operational representation of a lake, its drainage basin, and related nutrients.
- c. With such a transformation, an assessment of the potential for eutrophication control can be made.

LAKE ANALYSIS

In this report, the first stage of evaluation of lake and watershed data collected from the study lake and its drainage basin is documented. The report is formatted to provide state environmental agencies with specific information for basin

planning [§303(e)], water quality criteria/standards review [§303(c)], clean lakes [§314(a,b)], and water quality monitoring [§106 and §305(b)] activities mandated by the Federal Water Pollution Control Act Amendments of 1972.

Beyond the single lake analysis, broader based correlations between nutrient concentrations (and loading) and trophic condition are being made to advance the rationale and data base for refinement of nutrient water quality criteria for the Nation's freshwater lakes. Likewise, multivariate evaluations for the relationships between land use, nutrient export, and trophic condition, by lake class or use, are being developed to assist in the formulation of planning guidelines and policies by EPA and to augment plans implementation by the states.

ACKNOWLEDGMENT

The staff of the National Eutrophication Survey (Office of Research and Development, U.S. Environmental Protection Agency) expresses sincere appreciation to the Delaware Division of Water Pollution Control for professional involvement and to the Delaware National Guard for conducting the tributary sampling phase of the Survey.

N. D. Vasuki, Director, and R. R. Bartchy, Resource Engineer, of the Delaware Division of Water Pollution Control provided invaluable lake documentation and counsel during the course of the Survey.

NATIONAL EUTROPHICATION SURVEY STUDY LAKES STATE OF DELAWARE.

LAKE NAME COUNTY

Killen Pond Kent


Moores Lake Kent

Noxontown Pond New Castle

Silver Lake New Castle

Williams Pond Sussex

Trussum Pond Sussex

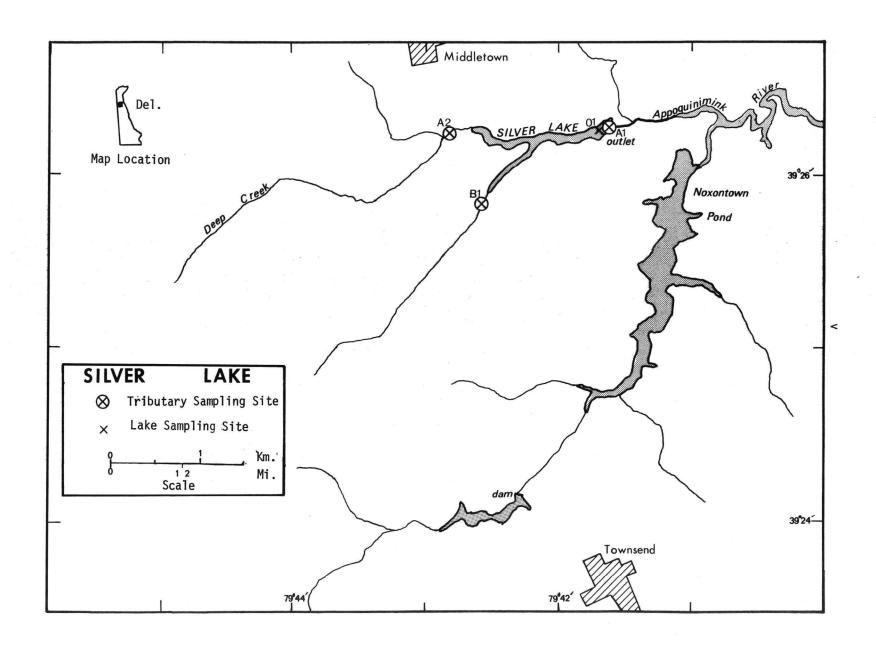

SILVER LAKE

STORET NO. 1008

I. CONCLUSIONS

A. Trophic Condition:

Silver Lake is classified as eutrophic based upon Survey data. Heavy growths of aquatic weeds (spatter-dock and smartweed) clog the upper reaches of the lake. Potential for primary productivity as measured by algal assay control yield, chlorophyll <u>a</u> levels, and nutrient concentrations was high. Dissolved oxygen concentrations were depressed during summer sampling, and water clarity was generally low. Phytoplankton genera identified were generally pollution-tolerant forms.

B. Rate-Limiting Nutrient:

Algal assay results indicate that at the time of sampling, phosphorus and nitrogen were present in sufficient concentrations that some unidentified nutrient limited growth of the assay alga before either of the major nutrients was exhausted. Lake data concerning the ratios of inorganic nitrogen to orthophosphorus (greater than 46:1 on all three sampling rounds) suggest that phosphorus would become limiting well before available nitrogen was depleted.

C. Nutrient Controllability:

- 1. Point Sources The mean annual phosphorus load from point sources was estimated to be 44.3% of the total load reaching Silver Lake. The Middletown wastewater treatment plant contributed 44.2% of the total load.
- 2. Nonpoint Sources The mean annual phosphorus load from nonpoint sources was 55.7% of the total load reaching Silver Lake. Measured tributaries accounted for 53.1% of the total phosphorus load, and the remaining drainage areas were estimated to have contributed 2.5%.

The present loading rate of 52.47 g P/m²/yr is approximately six times the "dangerous" (eutrophic) rate proposed by Vollenweider (in press) for a lake of such volume and detention time. However, Vollenweider's model probably does not apply to water bodies with short hydraulic retention times, and the hydraulic retention time of Silver Lake is only 8 days. Further analysis of surrounding land uses and unknown nutrient sources is needed before recommendations for the improvement of water quality in Silver Lake can be made.

II. LAKE AND DRAINAGE BASIN CHARACTERISTICS

Lake and drainage basin characteristics are itemized below. Lake surface area was provided by the State of Delaware; mean depth was estimated based on survey data; tributary flow data were provided by the Delaware District Office of the U.S. Geological Survey (USGS) (outlet drainage area includes the lake surface area). Mean hydraulic retention time was obtained by dividing the lake volume by mean flow of the outlet.

Precipitation values are estimated by methods as outlined in National Eutrophication Survey (NES) Working Paper No. 175. A table of metric/English conversions is included as Appendix A.

A. Lake Morphometry:

- 1. Surface area: 0.15 km².
- 2. Mean depth: 1.5 meters.
- 3. Maximum depth: ? meters.
- 4. Volume: $0.225 \times 10^6 \text{ m}^3$.
- 5. Mean hydraulic retention time: 8 days.

B. Tributary and Outlet (see Appendix C for flow data):

1. Tributaries -

	Name '	Drainage area(km ²)	Mean flow (m ³ /sec)
	A(2) Deep Creek	9.5	0.16
	B(1) Unnamed Stream	5.4	0.09
	Minor tributaries & immediate drainage -	4.4	0.08
	Totals	19.3	0.33
2.	Outlet - A(1) Deep Creek	19.5	0.33

C. Precipitation:

- 1. Year of sampling: 132.5 centimeters.
- 2. Mean annual: 104.5 centimeters.

III. LAKE WATER QUALITY SUMMARY

Silver Lake was sampled three times during the openwater season of 1973 by means of a pontoon-equipped Huey helicopter. Each time, samples for physical and chemical parameters were collected from one station on the lake and from a number of depths at that station (see map, page v). During each visit, depth-integrated samples were collected from the station for chlorophyll <u>a</u> analysis and phytoplankton identification and enumeration. During the first visit, an 18.9-liter depth-integrated sample was composited for algal assays. The maximum depth sampled was 2.4 meters. For a more detailed explanation of NES methods, see NES Working Paper No. 175.

The results obtained are presented in full in Appendix D and are summarized in III A for waters at the surface and at the maximum depth for the sampling site. Results of the phytoplankton counts and chlorophyll a determinations are included in III B. Results of the limiting nutrient study are presented in III C.

A. PHYSICAL AND CHEMICAL CHARACTERISTICS

	(4/10/73)					(7/20/73)				(9/29/73)					
			5***	= 1	MAX DEPTH RANGE			S*	** = 1	MAX DEPTH RANGE			S***	- 1	MAX DEPTH Range
PARAMETER	N=	RAI	NGE	MEDIAN	(METE		N*	RANGE	MEDIAN	(METE		Ν¤	RANGE	MEDIAN	(METERS)
TEMPERATURE (DEG CEN	NT)							•							
01.5 M DEPTH	2	12.1-	12.1	12.1	0.0-	1.2	2	21.2- 26.	2 23.7	0.0-	1.5	2	18.6- 20.2	19.4	0.0- 1.5
MAX DEPTHON	ì	12.1-	12.1	12.1	2.4-		1	21.2- 21.		1.5-		ì	18.6- 18.6	18.6	1.5- 1.5
DISSOLVED OXYGEN (MO	3/L)														
01.5 M DEPTH	1		9.2	9.2	1.2-		2	2.0- 17.		0.0-		1	6.5- 6.5	6.5	0.0- 0.0
MAX DEPTH**	1	9.2-	9.2	9.2	2.4-	2.4	1	2.0- 2.	0 2.0	1.5~	1.5	0	*****	*****	****
CONDUCTIVITY (UMHOS															
01.5 M DEPTH	2	200		200.	0.0-		2	217 224		0.0-		2	222 224.	223.	0.0- 1.5
MAX DEPTH##	1	195	195.	195.	2.4-	2.4	1	217 217	. 217.	1.5-	1.5	1	555*- 555*	555•	1.5- 1.5
PH (STANDARD UNITS)	_						_								
01.5 M DEPTH	2		7.1	7.1	0.0-		2	6.6- 9.		0.0-		1	7.7- 7.7	7.7	0.0- 0.0
MAX DEPTH##	1	7.1-	7.1	7.1	2.4-	2.4	1	6.6- 6.	6 6.6	1.5-	1.5	0	*****	*****	****-***
TOTAL ALKALINITY (ME							_								
01.5 M DEPTH	2		22.	22.	0.0-		2	27 31		0.0-		1	38 38.	38.	0.0- 0.0
MAX DEPTH##	1	24	24.	24.	2.4-	2.4	1	31 31	. 31.	1.5~	1.5	0	*****	****	****-****
TOTAL P (MG/L)	_						_								
01.5 M DEPTH		0.244-			0.0-			0.102-0.12		0.0-		1			0.0- 0.0
MAX DEPTH##	1	0.247-	0.247	0.247	2.4-	2.4	1	0.120-0.12	0 0.120	1.5~	1.5	0	*****	****	****-****
DISSOLVED ORTHO P (_								
01.5 M DEPTH		0.097-			0.0-			0.015-0.04		0.0-		1			0.0- 0.0
MAX DEPTH**		0.096-	0.096	0.096	2.4-	2.4	1	0.049-0.04	9 0.049	1.5-	1.5	0	*****	****	****-***
NO2+NO3 (MG/L)															
01.5 M DEPTH	2	2.900-	5.200	4.050	0.0-	1.2	2	4.100-4.50	0 4.300	0.0-	1.5	1	4.470-4.470	4.470	0.0- 0.0
MAX DEPTH##	1	4.500-	4.500	4.500	2.4-	2.4	1	4.500-4.50	0 4.500	1.5~	1.5	0	****-***	****	****-
AMMONIA (MG/L)															
01.5 M DEPTH		0.370-0			0.0-			0.090-0.31		0.0-		1	0.220-0.220	0.220	0.0- 0.0
MAX DEPTH##	1	0.380-	0.380	0.380	2.4-	2.4	1	0.310-0.31	0 0.310	1.5-	1.5	0	*****	****	****-***
KJELDAHL N (MG/L)															
01.5 M DEPTH	_	1.000-			0.0-			0.800-1.10		0.0-		1	1.700-1.700		0.0- 0.0
MAX DEPTH**	ł	0.900-	0.900	0.900	2.4-	2.4	1	0.800-0.80	0.800	1.5~	1.5	0	*****-****	*****	****-****
SECCHI DISC (METERS															
	1	0.5-	0.5	0.5			1	0.9- 0.	9 0.9			1	1.3- 1.3	1.3	

* N = NO. OF SAMPLES

** MAXIMUM DEPTH SAMPLED AT EACH SITE

*** S = NO. OF SITES SAMPLED ON THIS DATE

B. Biological Characteristics:

1. Phytoplankton -

Sampling Data	Dom: Gene	inant era	Algal Units per ml
07/20/73	1. 2. 3. 4. 5.	Flagellates Micractinium Schroederia Nitzschia Green cells	11,031 2,464 1,702 1,408 821
		Other genera	4,168
		Total	21,594
09/29/73	1. 2. 3. 4. 5.	Scenedesmus Flagellates Coelastrum Cosmerium Staurastrum	1,698 609 279 101 101
		Other genera	227
		Total	3,015

2. Chlorophyll \underline{a} -

Sampling Date	Station Number	Chlorophyll a (micrograms/Titer)
04/10/73	1	8.6
07/20/73	1	52.8
09/29/73	1	18.7

C. Limiting Nutrient Study:

Autoclaved, filtered, and nutrient spiked -

Spike(mg/l)	Ortho P Conc.(mg/l)	<pre>Inorganic N Conc.(mg/l)</pre>	Maximum yield (mg/l-dry wt.)
Control 0.05 P	0.128 0.178	4.664 4.664	30.2 31.1
0.05 P + 1.0 N	0.178	5.664	29.9
1.00 N	0.128	5.664	25.6

2. Discussion -

The control yield of the assay alga, <u>Selenastrum</u>

<u>capricornutum</u>, indicates that the potential for primary

production in Silver Lake was high at the time of

sampling. Spikes with phosphorus and nitrogen alone,

or simultaneous addition of these two nutrients failed

to enhance the control yield. It appears that those

major nutrients are present in sufficient concentrations

to allow reduction of some undetermined nutritional

element to levels which are limiting to lake productivity.

The ratios of the mean inorganic nitrogen to orthophosphorus for all three sampling dates were greater than 46:1, suggesting that phosphorus could become limiting while nitrogen still remained at high levels.

IV. NUTRIENT LOADINGS (See Appendix E for data)

For the determination of nutrient loadings, the Delaware National Guard collected monthly near-surface grab samples from each of the tributary sites indicated on the map (page v), except for the high runoff month of March when two samples were collected. Sampling was begun in April 1973 and was completed in March 1974.

Through an interagency agreement, stream flow estimates for the year of sampling and a "normalized" or average year were provided by the Delaware District Office of the USGS for the tributary sites nearest the lake.

In this report, nutrient loads for sampled tributaries were determined by using a modification of the USGS computer program for calculating stream loadings. Nutrient loads indicated for tributaries are those measured minus known point source loads, if any.

Nutrient loadings for unsampled "minor tributaries and immediate drainage" ("ZZ" of USGS) were estimated by using the mean annual concentrations in Unnamed Stream at Station B(1) and mean annual ZZ flow.

The operator of the Middletown wastewater treatment plant provided monthly effluent samples and corresponding flow data.

A. Waste Sources:

Known municipal -

<u>Name</u>	Population Served	Treatment	Mean Flow (m ³ /d x 103)	Receiving Water
Middletown	2,644	Trickling Filter	0.852	Appoquinimink River

- 2. Known industrial None
- B. Annual Total Phosphorus Loading Average Year:
 - 1. Inputs -

Sour	<u>ce</u>	kg P/yr	% of total
a.	Tributaries (nonpoint load) -		
	A(2) Deep Creek	2,440	50.1
	B(1) Unnamed Stream	145	3.0
b.	Minor tributaries & immediate drainage (nonpoint load) -	120	2.5
c.	Known municipal STP's -		
	Middletown	2,155	44.2
d. '	Septic tanks* -	5	0.1
e.	Known industrial - None		
f.	Direct precipitation** -	5	0.1
	Totals	4,870	100.0
Outp	uts - Deep Creek	2,520	
Net a	annual P accumulation -	2,350	•

2.

3.

^{*}Estimate based on 15 lakeshore residences. **Estimated (see NES Working Paper No. 175).

C. Annual Total Nitrogen Loading - Average Year:

1. Inputs -

Sour	cce	kg N/yr	% of total
a.	Tributaries (nonpoint load) -		
	A(2) Deep Creek	31,110	41.0
	B(1) Unnamed Stream	20,375	26.9
b.	Minor tributaries & immediate drainage (nonpoint load) -		25.3
с.	Known municipal STP's -		
	Middletown	4,845	6.4
d.	Septic tanks* -	160	0.2
e.	Known industrial - None		
f.	Direct precipitation** -	165	0.2
	Totals	75,815	100.0
2. Outp	outs - Deep Creek	58,835	•
3. Net	annual N accumulation -	16,980	

D. Mean Annual Nonpoint Nutrient Export by Subdrainage Area:

<u>Tributary</u>	kg P/km ² /yr	kg N/km ² /yr
A(2) Deep Creek	257	3,275
B(1) Unnamed Stream	27	3,773

^{*}Estimate based on 15 lakeshore residences. **Estimated (see NES Working Paper No. 175).

E. Yearly Loading Rates:

In the following table, the existing phosphorus loading rates are compared to those proposed by Vollenweider (in press). Essentially, his "dangerous" rate is the rate at which the receiving waters would become eutrophic or remain eutrophic; his "permissible" rate is that which would result in the receiving water remaining oligotrophic or becoming oligotrophic if morphometry permitted. A mesotrophic rate would be considered one between "dangerous" and "permissible."

Total Yearly Phosphorus Loading Rate (grams/m ² /year)	
Estimated loading rate for Silver Lake	32.47
Vollenweider's "dangerous" or eutrophic rate	4.88
Vollenweider's "permissible" or oligotrophic rate	2.44

V. LITERATURE REVIEWED

- Ketelle, Martha J. and Paul D. Uttormark. 1971. "Problem Lakes in the United States." U.S. Environmental Protection Agency Project #16010 EHR. University of Wisconsin, Madison, Wisconsin.
- Lesser, Charles A. 1966. "Aquatic Vegetation Survey; Federal Aid in Fish Restoration." Project #F-21-R. Delaware Fish and Game Commission, Dover, Delaware.
- U.S. Environmental Protection Agency. 1975. "National Eutrophication Survey Methods 1973-1976." Working Paper No. 175. NERC, Las Vegas, Nevada, and PNERL, Corvallis, Oregon.
- Vollenweider, Richard A. (in press). "Input-Output Models." <u>Schweiz. Z. Hydrol.</u>

VI. APPENDICES

APPENDIX A
CONVERSION FACTORS

CONVERSION FACTORS

Hectares x = 2.471 = acres

Meters x 3.281 = feet

Cubic meters $\times 8.107 \times 10^{-4} = acre feet$

Square kilometers x = 0.3861 = square miles

Cubic meters/sec x 35.315 = cubic feet/sec

Centimeters $x \ 0.3937 = inches$

Kilograms x 2.205 = pounds

Kilograms/square kilometer x 5.711 = lbs/square mile

APPENDIX B

PARAMETRIC RANKINGS OF LAKES

SAMPLED BY NES IN 1973

STATE OF DELAWARE

LAKE DATA TO BE USED IN RANKINGS

LAKE CODE	LAKE NAME	MEDIAN TOTAL P	MEDIAN INORG N	500- MEAN SEC	MEAN CHLORA	15- MIN DO	MEDIAN DISS ORTHO P
1002	KILLEN POND	0.170	1.610	479.333	116.200	12.000	0.042
1005	MOORES LAKE	0.245	2.400	472.667	81.267	4.700	0.071
1007	DNO9 NWOTNOXGN	0.160	0.530	478.833	37.600	10.400	0.016
1008	SILVER LAKE	0.227	4.750	465.667	26.700	13.000	0.095
1009	WILLIAMS POND	0.042	2.010	449.333	30.100	8.800	0.010
1010	TRUSSUM POND	0.038	1.280	464.000	5.100	5.800	0.011

PERCENT OF LAKES WITH HIGHER VALUES (NUMBER OF LAKES WITH HIGHER VALUES)

CODE	LAKE NAME	ME(MED]			500- MEAN		C	ME CHL	AN OR		15 MIN		0	ME DISS	DI OR		Ρ
1002	KILLEN POND	40	(2)	60	(3)	0	(0)	0	(0)	20	(1)	40	(2)	
1005	MOORES LAKE	0	(0)	20	(1)	40	(2)	20	(1)	100	(5)	20	(1)	
1007	NOXONTOWN POND	60	(3)	100	(5)	20	(1)	40	(2)	40	(2)	60	(3)	
1008	SILVER LAKE	20	(1)	0	(0)	60	(3)	80	(4)	0	(0)	0	•	0)	
1909	WILLIAMS POND	80	(4)	40	(2)	100	(5)	60	(3)	60	(3)	100	(5)	
1010	TRUSSUM POND	100	(5)	80	(4)	80	(4)	100	(5)	80	(4)	80	(4)	

APPENDIX C TRIBUTARY FLOW DATA

LAKE CODE 1008 SILVER LAKE

TOTAL DRAINAGE AREA OF LAKE(SQ MI) 7.51

	SUB-DRAINAGE						NORMALI	ZED FLO	WS (CFS)					
TRIBUTARY	AREA(SQ MI)	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN
1008A1	7.51	14.50	15.50	17.20	12.90	10.00	10.20	8.80	11.60	9.60	7.60	10.30	12.00	11.66
1008A2	3.68	7.00	7.50	8.30	6.20	4.70	4.90	4.30	5.60	4.60	3.60	5.00	5.80	5.61
100881	2.08	3.90	4.20	4.70	3.50	2.70	2.80	2.40	3.10	2.60	2.00	2.80	3.20	3.15
1008ZZ	1.75	3.60	3.80	4.20	3.20	2.60	2.50	2.10	2.90	2.40	2.00	2.50	3.00	2.90

SUMMARY

TOTAL DRAINAGE AREA OF LAKE = 7.51 TOTAL FLOW IN = 140.20 SUM OF SUB-DRAINAGE AREAS = 7.51 TOTAL FLOW OUT = 140.20

MEAN MONTHLY FLOWS AND DAILY FLOWS (CFS)

TRIBUTARY	MONTH	YEAR	MEAN FLOW	DAY	FLOW	DAY	FLOW	DAY	FLOW
1008A1	4	. 73	30.00	28	29.00				
	5	73	18.50	20	18.00				
	6	73	48.00	25	13.00				
	6 7	73	22.00	23	12.00				
	8	73	22.00	20	9.50				
	8 9	73	9.60	16	10.00				
	10	73	17.00	28	8.00				
	11	73	10.00	16	9.60				
	12	73	30.00	4	9.60				
	1	74	18.00	8	12.00				
	2	74	12.00	5	8.80	22	12.00		
	2 3	74	20.00	11	10.00	22	46.00		
1008A2	4	73	14.00	28	14.00				
	5	73	9.00	20	8.70				
	5 6 7	73	22.80	25	6.20				
	7	73	10.50	23	5.80				
	à	73	10.80	20	4.60				
	8 9	73	4.60	16	4.90				
	10	73	8.00	28	3.90				
	ii	73	4.90	16	4.60				
	12	73	14.00	4	4.60				
	ì	74	8.80	8	6.00				
		74	5.90	5	4.30	22	5.90		
	2 3	74	9.90	11	4.80	22	23.00		
	J	• •	,,,,		4.04		23100		

LAKE CODE 1008 SILVER LAKE

MEAN MONTHLY FLOWS AND DAILY FLOWS(CFS)

TRIBUTARY	MONTH	YEAR	MEAN FLOW	DAY	FLOW	DAY	FLOW	DAY	FLOW
100881	4	73	8.20	28	8.20				
	4 5	73	5.00	20	4.90				
	6	73	13.90	25	3.50				
	7	73	4.90	23	3.20				
	8	73	6.00	20	2.60				
	9	73	2.60	16	2.80				
	10	73	4.60	28	2.20				
	11	73	2.80	16	2.60				
	12	73	8.20	4	2.60				
	1	74	5.00	8	3.40				
	2 3	74	3.20	5	2.40	52	3.20		
•		74	5.60	11	2.70	22	13.00		
1008ZZ	4	73	6.70	28	6.70				
	5	73	4.30	20	4.20				
	6	73	10.90	25	3.00				
	7	73	5.00	23	2.80				
	8 9	73	5.20	20	2.20				
		73	2.20	16	2.40				
	10	73	3.80	28	1.90				
	11	73	2.40	16	2.20				
	12	73	6.70	4	2.20				
	1	74	4.20	-8	2.90				
	2 3	74	2.80	5	2.10	22	2.80		
	3	74	4.80	11	2.30	55	11.00		

APPENDIX D
PHYSICAL AND CHEMICAL DATA

STORET RETRIEVAL DATE 75/10/16

100801 39 26 15.0 075 41 40.0 SILVER LAKE 10 DELAWARE

2111202

11EPALES

							3		0010	FEET DEP	тн	
DATE FROM	OF	DEPTH	00010 WATER TEMP	00300 D0	00077 TRANSP SECCHI	00094 CNDUCTVY FIELD	00400 PH SU	00410 T ALK CACO3	00610 NH3-N TOTAL	00625 TOT KJEL N	00630 NO28NO3 N-TOTAL	00671 PHOS-DIS ORTHO
TO	DAY	FEET	CENT	MG/L	INCHES	MICROMHO	30	MG/L	MG/L	MG/L	MG/L	MG/L P
73/04/10	10 1	5 0000	12.1		18	200	7.10	22	0.370	1.000	2.900	0.097
	10 1	5 0004	12.1	9.2		200	7.10	21	0.370	1.000	5.200	0.099
	10 1	5 0008	12.1	9.2		195	7.10	24	0.380	0.900	4.500~	0.096
73/07/20	12 1	0 0000	26.2	17.8	35	224	9.70	27	0.090	1.100	4.100	0.015
	12 1	0 0005	21.2	2.0		217	6.60	31	0.310	0.800	4.500	0.049
73/09/29	10 1	0 0000	20.2	6.5	50	224	7.70	38	0.220	1.700	4.470	0.101
	10 1	0 0005	18.6			222						

DATE	TIM	1E	DEPTH	00665 PH0S-TOT	32217 CHLRPHYL
FROM	OF	•			A
TO	DAY	•	FEET	MG/L P	UG/L
73/04/10			0000	0.245	8.6
			0004	0.244	
	10	15	0008	0.247	
73/07/20	12	10	0000	0.102	52.8
	12	10	0005	0.120	
73/09/29	10	10	0000	0.211	18.7

APPENDIX E
TRIBUTARY AND WASTEWATER
TREATMENT PLANT DATA

1008A1
39 26 30.0 075 41 30.0
DEEP CREEK
10 7.5 MIDDLETOWN
0/SILVER LAKE
BRDG 2 MI SE OF MIDDLETOWN
11EPALES 2111204
4 0000 FEET DEPTH

DATE	TIME	DEPTH	00630 N028N03	00625 Tot kjel	00610 NH3-N	00671 PHOS-DIS	00665 PHOS-TOT
FROM	OF	5 2	N-TOTAL	N	TOTAL	ORTHO	
TO	DAY	FEET	MG/L	MG/L	MG/L	MG/L P	MG/L P
73/04/28	09 40)	4.800	1.150	0.260	0.105	0.200
73/05/20	13 35	5	4.850	0.600	0.198	0.115	0.200
73/06/25	13 30)	3.600	2.300	0.067	0.058	0.230
73/07/23	09 25	5	4.500	1.260	0.080	0.048	0.150
73/08/20	10 49	5		2.200	0.220	0.034	0.180
73/09/16	16 49	5	3.300	1.760	0.510	0.063	0.180
73/10/28	14 00)	4.600	1.650	0.046	0.066	0.230
73/11/16	14 00)	5.000	1.050	0.210	0.115	0.315
73/12/04	09 40		4.620	1.000	0.480	0.076	0.230
74/01/08	14 05	5	5.000	1.100	0.528	0.120	0.290
74/02/05	15 00)	6.000	0.900	0.250	0.100	0.260
74/03/11	10 00	·)	5.200	1.300	0.185	0.045	0.230
74/03/22	10 30)	4.800	1.200	0.180	0.055	0.185

STORET RETRIEVAL DATE 75/10/16

0.475	7.WE 05	00630	00625	00610	00671	00665
DATE	TIME DE	PTH N026N03	TOT KJEL	NH3-N	PHOS-DIS	PHOS-TOT
FROM	OF	N-TOTAL	N	TOTAL	ORTHO	
10	DAY FE	ET MG/L	MG/L	MG/L	MG/L P	MG/L P
73/04/28	08 30	4.900	1.760	0.430	0.273	0.540
73/05/20	12 40	6.050	1.540	0.730	0.380	0.700
73/06/25	12 30	6.200	1.320	0.590	0.790	1.000
73/07/23	09 05	6.300	0.380	0.189	0.420	0.600
73/08/20	09 55		0.360	0.350	0.500	0.660
73/09/16	15 30	4.900	2.100	1.080	0.690	0.850
73/10/28	13 30	6.400	2.700	2.100	3.230	
73/11/16	14 10	5.700	1.050	0.580	0.850	1.100
73/12/04	09 15	5.600	1.600	0.990	0.850	1.050
74/01/08	13 30	6.400	1.900	1.300	0.756	0.960
74/02/05	14 15	6.300	2.100	1.100	0.570	0.970
74/03/11	09 10	6.100	1.700	0.560	0.740	0.940
74/03/22	09 50	5.200	2.600	0.315	0.400	0.700

1008B1
39 26 00.0 075 42 30.0
UNNAMED STREAM
10 7.5 MIDDLETOWN
T/SILVER LAKE
ST HWY 71 BRDG 0.75 MI S OF MIDDLETOWN
11EPALES 2111204
4 0000 FEET DEPTH

			00630	00625	00610	00671	00665
DATE	TIME	DEPTH	K0N%20N	TOT KJEL	NH3-N	PHOS-DIS	PHOS-TOT
FROM	0F		N-TOTAL	N	TOTAL	ORTHO	
TO	DAY	FEET	MG/L	MG/L	MG/L	MG/L P	MG/L P
73/04/28	08 50)	6.100	1.100	0.126	0.033	0.095
73/05/20	12 59	5	7.150	0.150	0.113	0.012	0.050
73/06/25	12 40)	8.000		0.076	0.014	0.040
73/07/23	09 19	5	7.600	0.100K	0.052	0.022	0.040
73/08/20	10 10)		1.500	0.069	0.032	0.050
73/09/16	16 10)	7.350		0.069	0.024	0.047
73/10/28	14 39	5	8.500	0.100K	0.059	0.017	0.060
73/11/16	15 10)	7.900	0.100K	0.044	0.020	0.040
73/12/04	09 20)	8.400	0.100K	0.048	0.016	0.020
74/01/08	13 39	5	8.300	0.500	0.065	0.015	0.025
74/02/05	15 30)	8.500	0.100	0.030	0.007	0.020
74/03/11	09 20)	2.800	0.700	0.180	0.030	0.065
74/03/22	10 00)	7.300	0.600	0.110	0.015	0.060

K VALUE KNOWN TO BE LESS THAN INDICATED

STORET RETRIEVAL DATE 75/10/16

1009A1
38 38 30.0 075 36 30.0
CLEAR CREEK-WILLIAMS POND OUTLET
10 7.5 SEAFORD EAST
O/WILLIAMS POND
BRDG IN EASTERN EDGE OF SEAFORD
11EPALES 2111204
4 0000 FEET DEPTH

			00630	00625	00610	00671	00665
DATE	TIME	DEPTH	K0N920N	TOT KJEL	NH3-N	PHOS-DIS	PHOS-TOT
FROM	0F		N-TOTAL	N	TOTAL	ORTHO	
TO	DAY	FEET	MG/L	MG/L	MG/L	MG/L P	MG/L P
73/04/28	11 0	ı	2.200	0.480	0.048	0.011	0.040
73/05/20	09 00)	1.420	0.890	0.032	0.008	0.035
73/06/23	09 50)	0.360	0.690	0.048	0.008	0.030
73/07/22	08 30)	0.069	1.000	0.013	0.012	0.075
73/08/18	09 40)		1.320	0.019	0.023	0.095
73/09/23	13 10)	1.800	0.940	0.098	0.010	0.055
73/10/28	09 00)	1.360	0.700	0.044	0.012	0.060
73/11/10	10 49	5	1.360	0.575	0.028	0.011	0.032
73/12/01	09 10	0	1.760	0.400	0.032	0.008	0.040
74/01/05	09 29	5	3.200	0.500	0.064	0.024	0.045
74/02/05			4.000	0.400	0.057	0.020	0.020
74/03/09	12 19	5	3.200	0.800	0.035	0.010	0.025
74/03/25	10 00	0	2.800	0.700	0.020	0.015	0.035

1008BA TF1008BA P002644*
39 26 45.0 075 42 15.0
MIDDLETOWN
10 7.5 MIDDLETOWN
T/SILVER LAKE
APPOQUINIMINK RIVER
11EPALES 2141204
4 0000 FEET DEPTH

DATE	_	DEPTH	00630 N028N03	00625 TOT_KJEL	00610 NH3-N	00671 PHOS-DIS	00665 PHOS-TOT	50051 FLOW	50053 CONDUIT
FROM	OF		N-TOTAL	N	TOTAL	ORTHO		RATE	FLOW-MGD
TO	DAY	FEET	MG/L	MG/L	MG/L	MG/L P	MG/L P	INST MGD	MONTHLY
73/06/05	07.0	n D							
	V / U	י ע	4 700	0.100		0.750	0 (00	0.263	0 220
CP(T)-	14 0	•	6.700	8.100	0.930	8.750	9.600	0.261	0.238
73/06/05	-								
	17 0	ס פ							
CP(T)-		_	6.700	8.700	0.910	8.800	9.500	0.261	0.238
73/06/06	-	-							
73/07/12	07 0	0 P							
CP(T)-		_	4.100	2.100	0.340	1.900	2.650	0.262	0.233
73/07/13		-							
73/08/09	07 0	0 P							
CP(T)-			0.096	0.160	0.138	0.070	2.500	0.261	0.232
73/08/10									
73/09/19	07 0	0 P							
CP (T) -			4.640	14.800	4.600	4.500	5.800	0.229	0.243
73/09/20	07 0	0							
73/10/09	07 0	0 P							
CP(T)-			8.000	8.700	3.100	8.000	9.500	0.216	0.242
73/10/10	07 0	0							
73/11/14	07 0	0 P					,		
CP(T)-			5.200	16.500	5.000	8.300	9.400	0.229	0.243
73/11/15	07 0	0		•					
73/12/12	09 0	0 P							
CP (T) -	•	•	6.900	21.000	7.600	6.500	7.800	0.202	0.197
73/12/13	09 0	D				• • • • • • • • • • • • • • • • • • • •			
74/01/13	_	_	7.500	8.300	1.680	5.400	6.600	0.155	0.210
74/02/12	-	-	7.040	21.000	4.800	6.600	10.500	0.208	0.199
74/03/12		-	6.500	4.100	0.660	4.300	5.100	0.192	0.286
74/04/10	_	-	1.760	6.200	0.870	3.700	4.400	0.180	0.186
74/05/08		-	4.300	19.000	7.600	5.700	6.850	0.180	0.179
17/03/00	V 9 U	U	4.300	17000	,.000	34700	0.030	0.100	0.113