


PB85-214450

PLUME 2D: TWO-DIMENSIONAL PLUMES IN UNIFORM GROUND  
WATER FLOW

Oklahoma State University  
Stillwater, OK

Jun 85

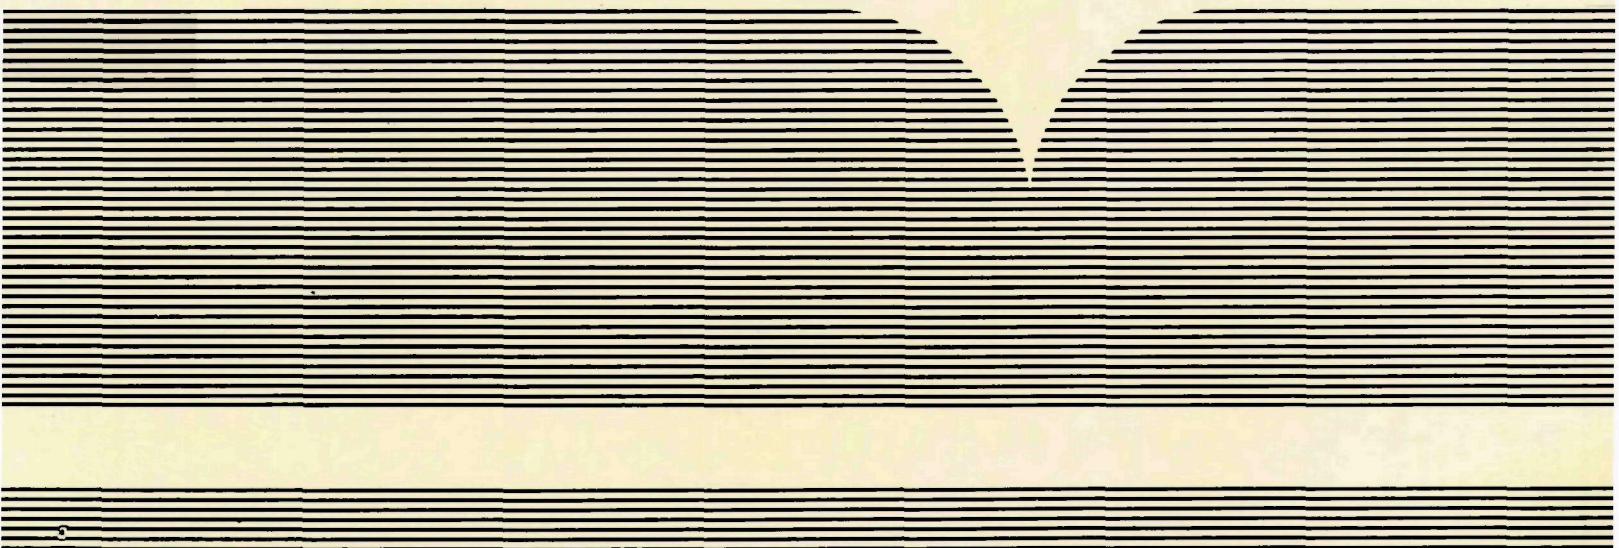

U.S. DEPARTMENT OF COMMERCE  
National Technical Information Service



EPA/600/2-85/065  
June 1985

PLUME2D

TWO-DIMENSIONAL PLUMES IN UNIFORM GROUND WATER FLOW

by

Jan Wagner and Stephanie A. Watts  
School of Chemical Engineering  
Oklahoma State University  
Stillwater, Oklahoma 74078

Douglas C. Kent  
Department of Geology  
Oklahoma State University  
Stillwater, Oklahoma 74078

CR811142

Project Officer

Carl G. Enfield  
Robert S. Kerr Environmental Research Laboratory  
U. S. Environmental Protection Agency  
Ada, Oklahoma 74820

ROBERT S. KERR ENVIRONMENTAL RESEARCH LABORATORY  
OFFICE OF RESEARCH AND DEVELOPMENT  
U.S. ENVIRONMENTAL PROTECTION AGENCY  
ADA, OK 74820

TECHNICAL REPORT DATA <i>(Please read Instructions on the reverse before completing)</i>			
1. REPORT NO. EPA/600/2-85/065	2.	3. RECIPIENT'S ACCESSION NO. FED 5 24 110 /AS	4. TITLE AND SUBTITLE PLUME2D: TWO-DIMENSIONAL PLUMES IN UNIFORM GROUND WATER FLOW
5. REPORT DATE June 1985		6. PERFORMING ORGANIZATION CODE	7. AUTHOR(S) Jan Wagner, Stephanie Watts, Douglas Kent
8. PERFORMING ORGANIZATION REPORT NO.		9. PERFORMING ORGANIZATION NAME AND ADDRESS Oklahoma State University Stillwater OK 74078	10. PROGRAM ELEMENT NO. ABRD1A
11. <del>CONTRACT NUMBER</del> Coop. Agr. CR-811142		12. SPONSORING AGENCY NAME AND ADDRESS Robert S. Kerr Environmental Research Laboratory Office of Research and Development U.S. Environmental Protection Agency Ada, OK 74820	13. TYPE OF REPORT AND PERIOD COVERED Final 9/83 - 2/85
14. SPONSORING AGENCY CODE EPA/600/15			
15. SUPPLEMENTARY NOTES Carl G. Enfield, Project Officer			
16. ABSTRACT A closed-form analytical solution for two dimensional plumes was incorporated in an interactive computer program. The assumption of an infinite aquifer depth and uniform source mass rate and source location was overcome by using the principle of superposition in space and time. The source code was written in a subset of FORTRAN 77 and can be compiled with FORTRAN IV, FORTRAN 66 as well as FORTRAN 77. As a result, the code is nearly independent of hardware and operating system. The model can be solved for either vertically or horizontally averaged conditions.			
17. KEY WORDS AND DOCUMENT ANALYSIS			
a. DESCRIPTORS	b. IDENTIFIERS/OPEN ENDED TERMS	c. COSATI Field/Group	
18. DISTRIBUTION STATEMENT RELEASE TO PUBLIC		19. SECURITY CLASS ( <i>This Report</i> ) UNCLASSIFIED	21. NO. OF PAGES 95
		20. SECURITY CLASS ( <i>This page</i> ) UNCLASSIFIED	22. PRICE

#### **DISCLAIMER**

The information in this document has been funded wholly or in part by the United States Environmental Protection Agency under assistance agreement number CR-811142 to Oklahoma State University. It has been subject to the Agency's peer and administrative review, and it has been approved for publication as an EPA document.

## FOREWORD

EPA is charged by Congress to protect the Nation's land, air, and water systems. Under a mandate of national environmental laws focused on air and water quality, solid waste management and the control of toxic substances, pesticides, noise, and radiation, the Agency strives to formulate and implement actions which lead to a compatible balance between human activities and the ability of natural systems to support and nurture life.

The Robert S. Kerr Environmental Research Laboratory is the Agency's center of expertise for investigation of the soil and subsurface environment. Personnel at the Laboratory are responsible for management of research programs to: (a) determine the fate, transport and transformation rates of pollutants in the soil, the unsaturated zone and the saturated zones of the subsurface environment; (b) define the processes to be used in characterizing the soil and subsurface environment as a receptor of pollutants; (c) develop techniques for predicting the effect of pollutants on ground water, soil and indigenous organisms; and (d) define and demonstrate the applicability and limitations of using natural processes, indigenous to the soil and subsurface environment, for the protection of this resource.

This project was initiated to develop an interactive computer model which could be utilized to predict toxic chemical fate in homogeneous aquifers. The model should be useful in making comparisons, between chemicals, for idealized homogeneous aquifers. This model is not intended for addressing site specific problems where there is significant heterogeneity in the aquifer.



Clinton W. Hall  
Director  
Robert S. Kerr Environmental  
Research Laboratory

## ABSTRACT

A closed-form analytical solution for two dimensional plumes was incorporated in an interactive computer program. The assumption of an infinite aquifer depth and uniform source mass rate and source location was overcome by using the principal of superposition in space and time. The source code was written in a subset of FORTRAN 77 and can be compiled with FORTRAN IV, FORTRAN 66 as well as FORTRAN 77. As a result, the code is nearly independent of hardware and operating system. The model can be solved for either vertically or horizontally averaged conditions.

## TABLE OF CONTENTS

INTRODUCTION.....	1
SECTION I - MATHEMATICAL DEVELOPMENT.....	2
Vertically-averaged solution.....	7
Horizontally-averaged solution.....	13
Assumptions and Limitations.....	17
Superposition.....	17
SECTION II - COMPUTER PROGRAM.....	25
Basic Input Data.....	25
Edit Commands.....	30
SECTION III - APPLICATIONS.....	32
REFERENCES.....	40
APPENDIX A - Example Problems.....	A-1
APPENDIX B - Description of Program PLUME2D.....	B-1
APPENDIX C - Numerical Analysis of the Hantush Well Function.....	C-1
APPENDIX D - Listing of Program PLUME2D.....	D-1
APPENDIX E - Listing of Utility Function Subroutines.....	E-1

## LIST OF FIGURES

Figure 1 - Coordinate system for vertically averaged solution.....	6
Figure 2 - Coordinate system for horizontally averaged solution.....	6
Figure 3 - Decomposition of a variables source rate using superposition in time.....	20
Figure 4 - Use of image sources to account for aquifers of finite depth.....	22
Figure 5 - Superposition in space to account for barrier boundaries.....	24
Figure 6 - Results of hexavalent chromium plume simulation at 3280 days..	33
Figure 7 - Results of hexavalent chromium spill simulation at 365. days...	36

## LIST OF TABLES

Table 1 - Edit Commands.....	31
Table 2 - Comparison of Concentrations Calculated Using Superposition in Time and an Analytical Solution for an Instantaneous Line Source.....	38
Table 3 - Typical Values for Aquifer Properties .....	39

## INTRODUCTION

Relatively simple analytical methods can often be used to evaluate ground-water contamination problems, depending upon the complexity of the system and the availability of field data. Analytical models can also serve as valuable tools in developing parameters for more sophisticated numerical models. Although the numerical evaluation of an analytical solution to a ground-water problem may be mathematically complex, analytical models are well suited for interactive use on digital computers. Many analytical solutions to ground-water contamination problems can be coded on programmable hand-held calculators. In general, very few input parameters are required to define a given problem and numerical results can be calculated in a few seconds.

This report presents analytical solutions to two ground-water pollution problems -- two-dimensional plumes in uniform ground-water flow. An interactive computer code has been developed which enables the user to modify the definition of a given problem, and thus gain some insight into the effects of various parameters on the extent of a contaminant plume.

SECTION I  
MATHEMATICAL DEVELOPMENT

The differential equation describing the conservation of mass of a component in a saturated, homogeneous aquifer with uniform, steady flow in the x-direction can be written as

$$\frac{\partial C_T}{\partial t} + V \frac{\partial(C)}{\partial x} = D_x \frac{\partial^2(\theta C)}{\partial x^2} + D_y \frac{\partial^2(\theta C)}{\partial y^2} + D_z \frac{\partial^2(\theta C)}{\partial z^2} - r_t \quad (1)$$

where

$C$	= component mass per unit of fluid phase	$M/L^3$
$C_T$	= total component mass per unit volume of aquifer	$M/L^3$
$D_x$	= dispersion coefficient in x-direction	$L^2/t$
$D_y$	= dispersion coefficient in y-direction	$L^2/t$
$D_z$	= dispersion coefficient in z-direction	$L^2/t$
$r_t$	= rate of degradation of mass per unit volume of aquifer	$M/L^3 t$
$V$	= Darcy, or seepage, velocity in the x-direction	$L/t$
$x, y, z,$	= rectangular coordinates at the point of interest	$L$
$\theta$	= porosity of porous media	$L^3/L^3$

The total mass of a component per unit volume of aquifer is distributed as dissolved solute in the fluid phase and adsorbed solute on the solid matrix. Let

$$C_S = \text{component mass per unit mass of solid} \quad M/M$$

and

$$\rho_B = \text{bulk density of the aquifer, or the mass of solids per unit volume of the aquifer} \quad M/L^3.$$

The total component mass per unit volume of aquifer can be expressed as

$$\frac{\text{Mass}}{\text{Unit Volume}} = \frac{\text{Volume of voids}}{\text{Unit Volume of aquifer}} \frac{\text{Component Mass}}{\text{Volume of voids}} + \frac{\text{Mass of solids}}{\text{Unit volume of aquifer}} \frac{\text{Component Mass}}{\text{Mass of solids}}$$

or

$$C_T = \theta C + \rho_B C_S \quad (2)$$

and, the rate of accumulation of mass in the aquifer becomes

$$\frac{\partial C_T}{\partial t} = \theta \frac{\partial C}{\partial t} + \rho_B \frac{\partial C_S}{\partial t} \quad (3)$$

In general,  $C_S = f(C)$  and

$$\frac{\partial C_S}{\partial t} = \frac{dC_S}{dC} \frac{\partial C}{\partial t} \quad (4)$$

For a linear equilibrium adsorption isotherm,

$$\frac{dC_S}{dC} = K_d \frac{M/M}{M/L^3} \quad (5)$$

where  $K_d$  is a distribution constant.

The change in concentration per unit volume of porous media,  $\partial C_T / \partial t$ , can be written in terms of fluid phase concentration,  $C$ , by substituting Equations 4 and 5 into Equation 3. Therefore,

$$\frac{\partial C_T}{\partial t} = \theta \frac{\partial C}{\partial t} + \rho_B K_d \frac{\partial C}{\partial t}$$

or

$$\frac{\partial C_T}{\partial t} + (\theta + \rho_B K_d) \frac{\partial C}{\partial t} \quad (6)$$

The rate of degradation of component mass per unit volume of porous media is also distributed between the solid and liquid phases, or

$$\begin{aligned} \frac{\text{Rate of mass degraded}}{\text{Unit volume of aquifer}} &= \frac{\text{Rate of mass degraded}}{\text{Unit volume of fluid}} \frac{\text{Volume of fluid}}{\text{Volume of aquifer}} \\ &+ \frac{\text{Rate of mass degraded}}{\text{Unit mass of solid}} \frac{\text{Mass of solid}}{\text{Volume of aquifer}} \end{aligned}$$

Now, the rate of change in total mass per unit volume of aquifer due to reaction can be written as

$$r_t = \frac{\partial C_T}{\partial t} = \theta \frac{\partial C}{\partial t} + \rho_B \frac{\partial C_s}{\partial t} \quad (7)$$

The concentration on the solid,  $C_s$ , is related to the concentration in the liquid,  $C$ , through the linear adsorption isotherm assumed previously, and

$$r_t = \frac{\partial C_T}{\partial t} = (\theta + \rho_B K_d) \frac{\partial C}{\partial t} \quad (8)$$

Assuming first order decay kinetics, the rate of decrease in fluid phase and solid phase concentrations due to reaction can be expressed as

$$\frac{\partial C}{\partial t} = \lambda C \quad (9)$$

and

$$\frac{\partial C_s}{\partial t} = \lambda C_s$$

respectively, where  $\lambda$  is a rate constant ( $1/t$ ), and

$$r_t = (\theta + \rho_B K_d) \lambda C \quad (10)$$

Equation 1 can now be written in terms of the fluid concentration.

Substituting Equations 6 and 10 and recalling that for a homogeneous porous medium the porosity,  $\theta$ , is constant, Equation 1 becomes

$$(1 + \frac{\rho_B}{\theta} K_d) \frac{\partial C}{\partial t} + V^* \frac{\partial C}{\partial x} = D_x \frac{\partial^2 C}{\partial x^2} + D_y \frac{\partial^2 C}{\partial y^2} + D_z \frac{\partial^2 C}{\partial z^2} - (1 + \frac{\rho_B}{\theta} K_d) \lambda C \quad (11)$$

where  $V^* \equiv \frac{V}{\theta}$  is the average interstitial, or pore, velocity. Defining a "retardation coefficient" as

$$R_d = 1 + \frac{\rho_B}{\theta} K_d \quad (12)$$

the differential equation describing the conservation of mass in the aquifer becomes

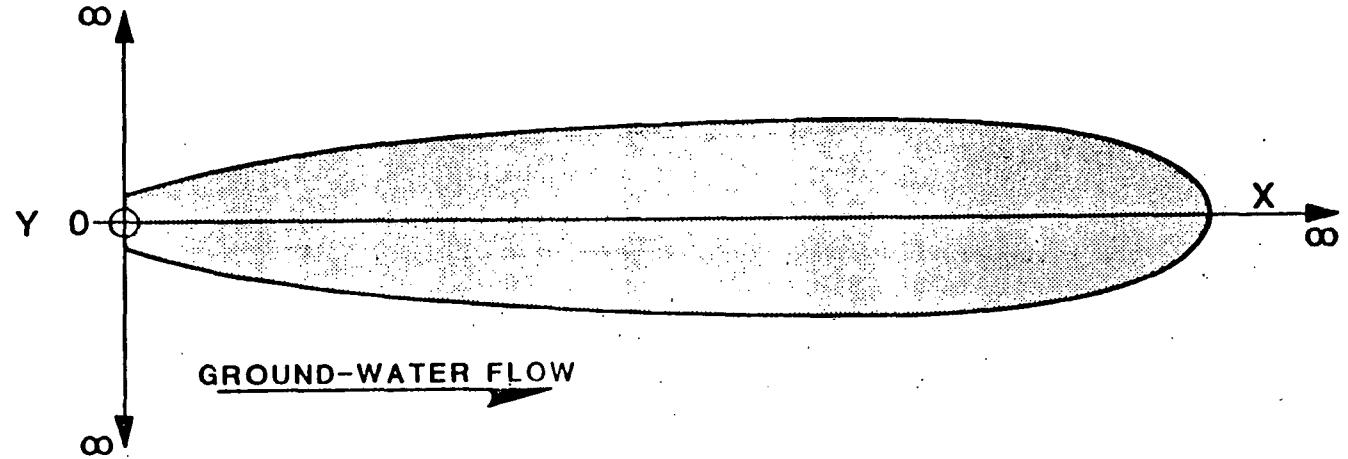


Figure 1. Coordinate system for vertically averaged solution.

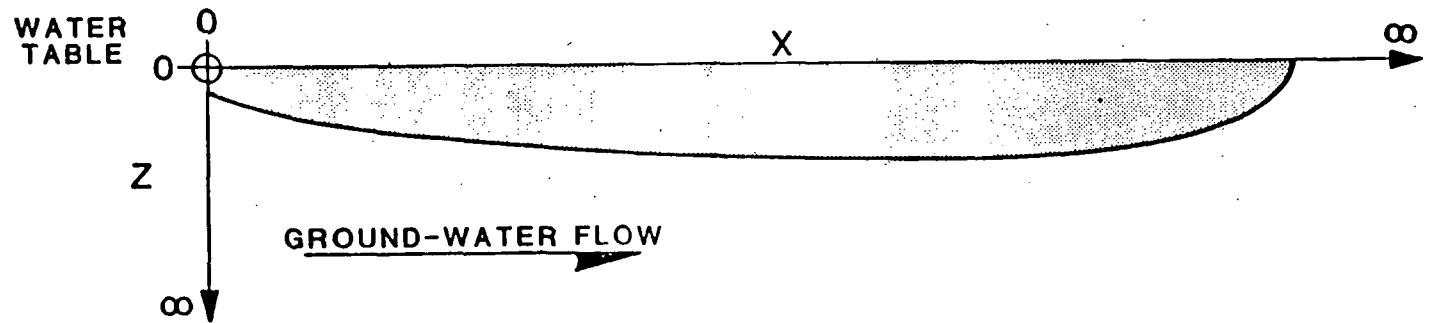


Figure 2. Coordinate system for horizontally averaged solution.

$$R_d \frac{\partial C}{\partial t} + V^* \frac{\partial C}{\partial x} = D_x \frac{\partial^2 C}{\partial x^2} + D_y \frac{\partial^2 C}{\partial y^2} + D_z \frac{\partial^2 C}{\partial z^2} - R_d \lambda C \quad (13)$$

Equation 13 is a linear partial differential equation which can be integrated analytically to yield an expression for concentration as a function of time and position.

Solutions of Equation 13 for two types of ground-water contamination problems are presented in the following paragraphs. The first is a vertically-averaged solution which describes a contaminant plume in the x-y plane (Figure 1). The second is a horizontally-averaged solution, describing a contaminant plume in the x-z plane (Figure 2).

Vertically-averaged solution. The vertically-averaged solution applies to a homogeneous aquifer of infinite aerial extent and finite depth. The contaminant is assumed to be well mixed over the saturated thickness. The source of contaminant is a vertical line source located at the origin of a coordinate system in the x-y plane. This conceptual model would apply to an injection well which fully penetrates the saturated zone.

Wilson and Miller (1978) have also applied this solution downstream from a contaminant source at the surface of the water table. For a relatively thin saturated zone, vertical dispersion will result in mixing vertically. The concentration distribution can be considered as being two-dimensional in a horizontal plane at distances downstream of the source sufficient for the concentration distribution to become uniform with depth. Mathematically, the problem is treated as an infinite aquifer with a line source at the origin. The vertically-averaged formulation of Equation 13 is

$$R_d \frac{\partial C}{\partial t} + V^* \frac{\partial C}{\partial x} = D_x \frac{\partial^2 C}{\partial x^2} + D_y \frac{\partial^2 C}{\partial y^2} - R_d \lambda C \quad (14)$$

The boundary conditions can be stated mathematically as follows

$$C(x, y, 0) = 0 \quad (15a)$$

$$C(x, \pm\infty, t) = 0 \quad (15b)$$

$$C(\pm\infty, y, t) = 0 \quad (15c)$$

A solution to Equation 14 with the Equation 15 boundary conditions and a continuous source of strength  $C_0 Q'$  can be written as (Hunt, 1978; Wilson and Miller, 1978):

$$C = \frac{C_0 Q' \exp\left(\frac{V^* x}{2D_x}\right)}{4\pi\theta (D_x D_y)^{0.5}} W(U, B) \quad (16)$$

where

$$U = \frac{\left(\frac{V_x}{D_x}\right)^2 + \frac{D_x}{D_y} \left(\frac{V^* y}{D_x}\right)^2}{\frac{4 V^{*2} t}{R_d D_x}} \quad (17)$$

and

$$B = \frac{1}{2} \left[ \left( \frac{V^* x}{D_x} \right)^2 + \frac{D_x}{D_y} \left( \frac{V^* y}{D_x} \right)^2 \right]^{1/2} \left[ 1 + \frac{4D_x R_d \lambda}{V^{*2}} \right]^{1/2} \quad (18)$$

and  $C_0 Q'$  ( $M/t/L$ ) is the contaminant source rate per unit depth of the saturated zone.

The function  $W(U, B)$  is defined as

$$W(U, B) = \int_U^\infty \frac{1}{\xi} \exp \left( -\xi - \frac{B^2}{4\xi} \right) d\xi \quad (19)$$

where  $\xi$  is a dummy integration variable. This function is often referred to as the "well function for leaky artesian aquifers" (Hantush; 1956, 1964).

The steady-state solution of Equations 14 and 15 can be obtained by noting as  $t \rightarrow \infty$ ,  $U \rightarrow 0$  and the well function (Hantush, 1956) can be expressed as

$$W(0, B) = 2K_0(B) \quad (20)$$

where  $K_0(B)$  is the modified Bessel function of the second kind of order zero. At steady-state the vertically-averaged solution can be written as

$$C = \frac{C_0 Q' \exp \left( \frac{V^* x}{2D_x} \right)}{2\pi \theta (D_x D_y)^{0.5}} K_0(B) \quad (21)$$

The units of the variables in Equations 16 and 21 can be eliminated by defining the following dimensionless groups:

Modified Peclet Numbers  $\sim \frac{\text{Convective mass transport}}{\text{Dispersive mass transport}}$

$$Pe_x = \frac{V^* x}{D_x} \quad (22)$$

$$Pe_y = \frac{V^* y}{D_x} \quad (23)$$

Damkohler Group II  $\sim \frac{\text{Mass decay rate}}{\text{Mass dispersion rate}}$

$$D_k = \frac{D_x R_d \lambda}{V^{*2}} \quad (24)$$

Number of Pore Volumes Injected  $\sim \frac{\text{Mass transport rate}}{\text{Mass accumulation rate}}$

$$I = \frac{V^{*2} t}{R_d D_x} \quad (25)$$

Dimensionless Source Term  $\sim \frac{\text{Mass injection rate}}{\text{Mass diffusion rate}}$

$$\Gamma = \frac{Q'}{\Theta(D_x D_y)^{0.5}} \quad (26)$$

Dimensionless Concentration

$$\gamma = \frac{c}{c_0} \quad (27)$$

Note that the number of pore volumes injected can be written as

$$I = \frac{V^2 t}{D_x R_d} = \left( \frac{V^* L}{D_x} \right)^2 \frac{D_x t}{R_d L^2} \quad (28)$$

where  $L$  is a characteristic length defined as

$$L^2 = x^2 + \frac{D_x}{D_y} y^2 \quad (29)$$

The first group on the right-hand-side of Equation 28 is the Modified Peclet number

$$Pe_{xy} = \left[ \left( \frac{V^* x}{D_x} \right)^2 + \frac{D_x}{D_y} \left( \frac{V^* y}{D_x} \right)^2 \right]^{1/2}$$

or

$$Pe_{xy} = (Pe_x^2 + \beta Pe_y^2)^{1/2} \quad (30)$$

where

$$\beta = \frac{D_x}{D_y}$$

The second group on the right-hand-side of Equation 28 is a dimensionless time variable,

$$\tau = \frac{D_x t}{R_d L^2} \quad (31)$$

The transient and steady-state solutions to Equations 14 which are given by Equations 16 and 21 can be written in terms of the dimensionless variables defined above. The transient solution is

$$\gamma = \frac{\Gamma}{4\pi} \exp\left(\frac{1}{2} Pe_x\right) W(U, B) \quad (32)$$

and at steady state

$$\gamma = \frac{\Gamma}{2\pi} \exp\left(\frac{1}{2} Pe_x\right) K_0(B) \quad (33)$$

with

$$U = \frac{Pe_{xy}^2}{4I} \quad (34)$$

and

$$B = \frac{1}{2} Pe_{xy} (1 + 4D_k)^{\frac{1}{2}} \quad (35)$$

The values of dimensionless concentrations evaluated using Equation 32 or Equation 33 are valid for any consistent set of units. Using dimensionless variables also tends to "scale" numerical values when working in various systems of units.

Horizontally-averaged solution. Consider a homogeneous aquifer with a continuous line source of infinite length located at the water table and normal to the direction of ground-water flow as shown in Figure 2. In other words the tracer is assumed to be well mixed over the width of the aquifer. A problem which might fit this conceptual model is seepage from a trench perpendicular to the direction of ground-water flow.

The horizontally-averaged formulation of Equation 13 is

$$R_d \frac{\partial C}{\partial t} + V^* \frac{\partial C}{\partial x} = D_x \frac{\partial^2 C}{\partial x^2} + D_z \frac{\partial^2 C}{\partial z^2} - R_d \lambda C \quad (36)$$

For an aquifer of infinite depth and a uniform continuous line source, the appropriate boundary conditions can be written as follows

$$C(x, z, 0) = 0 \quad (37a)$$

$$C(\pm\infty, z, t) = 0 \quad (37b)$$

$$C(x, \infty, t) = 0 \quad (37c)$$

$$\frac{\partial C(x, 0, t)}{\partial z} = 0 \quad (37d)$$

A solution to Equation 36 with the Equation 37 boundary conditions and a continuous line source of strength  $C_0 Q'$  is

$$C = \frac{C_0 Q' \exp\left(\frac{\sqrt{D_x} x}{2D_z}\right)}{2\pi\theta (D_x D_z)^{0.5}} W(U, B) \quad (38)$$

At steady state the horizontally-averaged solution can be written as

$$C = \frac{C_0 Q' \exp\left(\frac{\sqrt{D_x} x}{2D_z}\right)}{\pi\theta (D_x D_z)^{0.5}} K_0(B) \quad (39)$$

where

$$U = \frac{\left(\frac{V^* x}{D_x}\right)^2 + \frac{D_x}{D_z} \left(\frac{V^* z}{D_x}\right)^2}{\frac{4 V^{*2} t}{R_d D_x}} \quad (40)$$

$$B = \frac{1}{2} \left[ \left( \frac{V^* x}{D_x} \right)^2 + \frac{D_x}{D_z} \left( \frac{V^* z}{D_x} \right)^2 \right]^{1/2} \left[ 1 + \frac{4 D_x R_d \lambda}{V^{*2}} \right]^{1/2} \quad (41)$$

and  $Q'$  ( $L^3/t/L$ ) is the volumetric contaminant source rate per unit width of the aquifer (or unit length of the line source).

Changing subscripts, the definition of the dimensionless groups leads to

$$Pe_z = \frac{V^* z}{D_x} \quad (42)$$

and

$$\Gamma = \frac{Q'}{\theta(D_x D_z) 0.5} \quad (43)$$

with

$$Pe_{xz} = (Pe_x^2 + \beta Pe_z^2)^{1/2} \quad (44)$$

where

$$\beta = \frac{D_x}{D_z} \quad (45)$$

By substituting the dimensionless groups described in vertically-averaged solution and those defined above, Equations 38 through 41 can be written in terms of dimensionless variables.

The transient solution becomes

$$\gamma = \frac{\Gamma}{2\pi} \exp\left(\frac{1}{2} Pe_x\right) W(U, B) \quad (46)$$

and at steady state, the horizontally-averaged solution is

$$\gamma = \frac{\Gamma}{\pi} \exp\left(\frac{1}{2} Pe_x\right) K_0(B) \quad (47)$$

where

$$U = \frac{Pe_{xz}^2}{4I} \quad (48)$$

and

$$B = \frac{1}{2} Pe_{xz} \left(1 + 4D_k\right)^{\frac{1}{2}} \quad (49)$$

The similarity of the solutions of the vertically-averaged and horizontally-averaged problems facilitates their numerical evaluation using a common computational algorithm. For the same numerical values of the independent variables, concentration values for the horizontally-averaged solutions are obtained by doubling the vertically-averaged solution values.

### Assumptions and Limitations

Equations 32-33 and 46-47 can be used to calculate the concentrations in leachate plumes under the following assumptions and limitations:

1. The ground-water flow regime is completely saturated.
2. All aquifer properties are constant and uniform throughout the aquifer.
3. All ground-water flow is horizontal, continuous, and uniform throughout the aquifer.
4. The aquifer is infinite in extent for the vertically-averaged solution, or semi-finite in extent for the horizontally-averaged solution.
5. The leachate source is a line located at the origin of the coordinate system.
6. The mass flow rate of the source is constant.
7. At zero time the concentration of leachate in the aquifer is zero.

The assumptions of an infinite aquifer depth and a uniform source mass rate can be overcome by using the principles of superposition in space and time, respectively (Walton, 1962). Both of these provisions have been incorporated in the computer program described in the next section.

### Superposition

The differential equation describing component mass concentration in a porous medium, Equation 1, is a linear partial differential equation. The principle of superposition can be used directly to solve complex ground-water contamination problems in terms of the simpler solutions described above. Unfortunately, the scattered applications of this principle are not explained in any single reference. Some texts indicate that superposition means that any sum of solutions is also a solution. Superposition is commonly used to generate a linear no-flow boundary condition through the use of "image wells"

or to simulate multiple sources and sinks (Walton; 1962, 1970). The principle of superposition is also complicated by referring to the "Duhamel theorem," the "Faltung integral," and/or "convolution integrals." These terms often have no apparent physical interpretation. For the purposes of this report, "superposition in space" will refer to the approximation of sources of finite area or volume as the sum of a finite number of point sources or the generation of no-flow boundaries using image wells. "Superposition in time" will refer to the approximation of a variable source rate of contamination as the sum of a finite number of constant source rates distributed in time.

Both the horizontally-averaged and vertically-averaged solutions can be used to simulate aquifers of finite width or depth, respectively, or plane sources of finite width. Applications of this type require a thorough understanding of the physical interpretation of the principle of superposition.

Some applications are relatively straight forward, and the computer program provides for the approximation of a non-uniform source rate using superposition in time. Multiple sources and aquifers of finite thickness are also included using superposition in space.

Consider the variable source of contamination shown in Figure 3. The solutions of the governing differential equation presented in this report are of the form

$$C(x,z,t) = C_0 Q' f(x,z,t) = \dot{Q}' f(x,z,t) \quad (50)$$

where  $\dot{Q}'$  is the source mass rate per unit length. The principle of superposition in time can be written for any position as

$$C(x,z,t) = \sum_{i=1}^n \dot{Q}_i f(x,z,t_i) \quad (51)$$

Now, the variable rate schedule shown in Figure 3a can be decomposed into a series of positive and negative mass rates as shown in Figure 3b. The concentration at a point  $x,y,z$  at the end of the simulation,  $t_s$ , can be evaluated as

$$\begin{aligned} C(x,y,z,t) &= \dot{Q}_1' f(x,y,z,t_1) - \dot{Q}_1' f(x,y,z,t_2) \\ &\quad + \dot{Q}_2' f(x,y,z,t_2) - \dot{Q}_2' f(x,y,z,t_3) \\ &\quad + \dot{Q}_3' f(x,y,z,t_3) - \dot{Q}_3' f(x,y,z,t_4) \\ &\quad + \dot{Q}_4' f(x,y,z,t_4) \end{aligned} \quad (52)$$

In general terms

$$C(x,y,z,t_s) = \sum_{i=1}^n (\dot{Q}_i' - \dot{Q}_{i-1}') f(x,y,z,t_i) \quad (53)$$

with  $\dot{Q}_0' = 0$

Note the time corresponding to a given source rate,  $t_i$ , is the period beginning with the start of the given rate to the end of the simulation period; time is not the duration of a given rate. For ease of application, Equation 53 can be rewritten as

$$C(x,y,z,t_s) = \sum_{k=1}^n (\dot{Q}_k' - \dot{Q}_{k-1}') f(x,y,z,t_s - t_{k-1}) \quad (54)$$

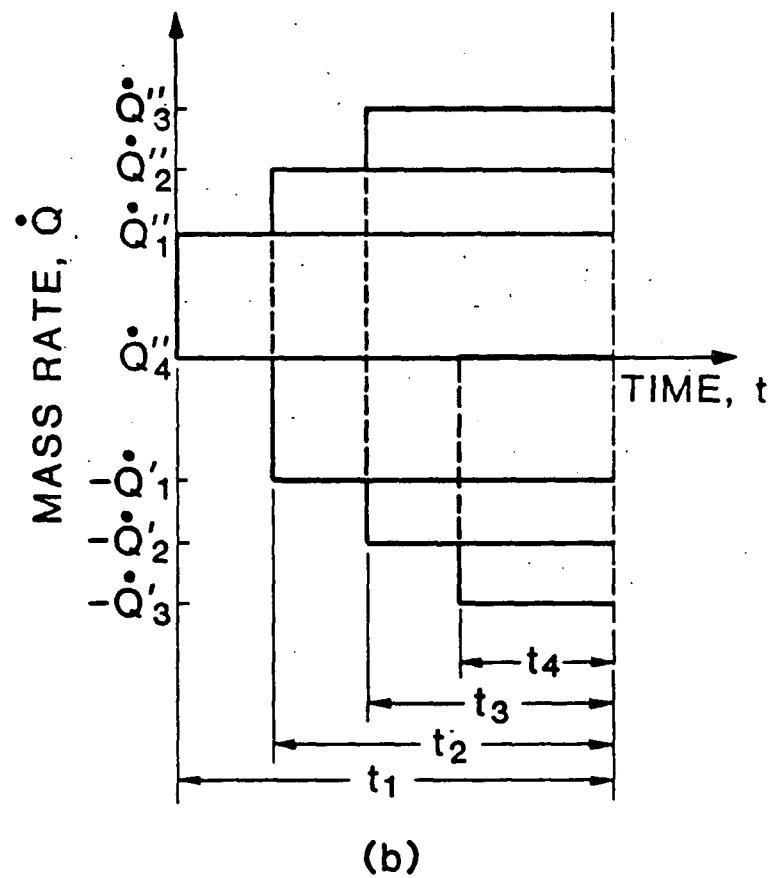
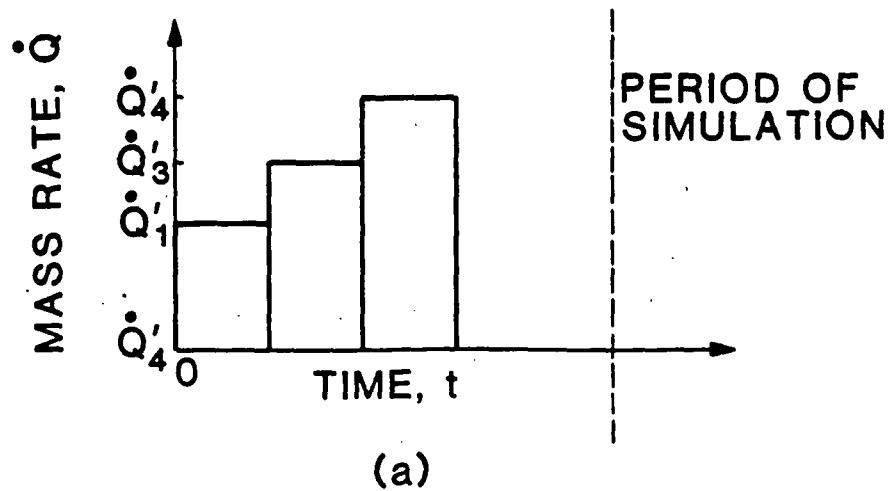


Figure 3. Decomposition of a variable source rate using superposition in time.

where  $t_{k-1}$  is the time corresponding to the end of mass rate  $Q_{k-1}$  or the beginning of rate  $Q_k$  with  $Q_0 = 0$  and  $t_0 = 0$ .


A continuous non-uniform rate schedule may be approximated as closely as desired by increasing the number of discrete rates in the source rate schedule. In theory an infinite number of discrete rates would be required. An understanding of the physical problem and the assumptions incorporated in the mathematical model are the best guidelines for decomposing a continuous non-uniform source of contamination.

The influence of geohydrologic boundaries on the movement of a tracer is similar to the influence of these boundaries on the drawdown response of an aquifer to pumping. The applications of image well theory described by Walton (1962, 1970) can be extended to the horizontally-averaged solution to the solute transport problem considered in this report. The following discussion parallels Walton's examples of the use of image wells to account for barrier boundaries.


Consider the contaminant plume which would exist if the aquifer were of infinite depth as shown in Figure 4a. If the contaminant plume was to intersect an impermeable base of the aquifer as shown in Figure 4b, the vertical concentration gradient must change since there can be no transport of mass across the boundary as a result of dispersion. In mathematical terms

$$D_z \frac{\partial C}{\partial z} = 0$$


at  $z = B$ . Now, if an imaginary, or image, source were placed across the boundary at a distance equal to the depth of the aquifer, as shown in Figure 4c, this source would create a concentration gradient from the boundary to the image water table equal to the concentration gradient from the boundary

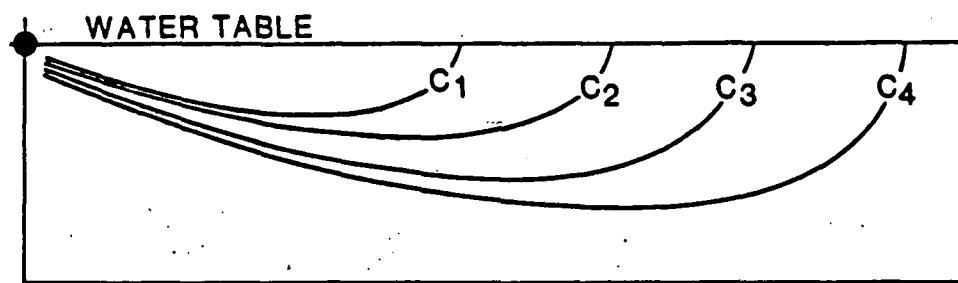


(a)

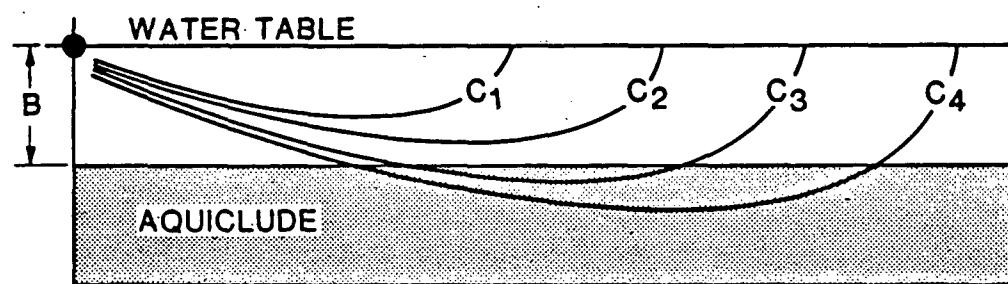

(b)

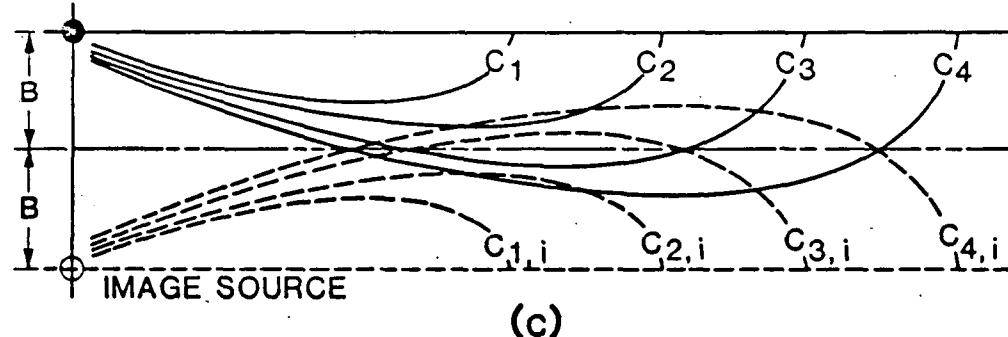

(c)

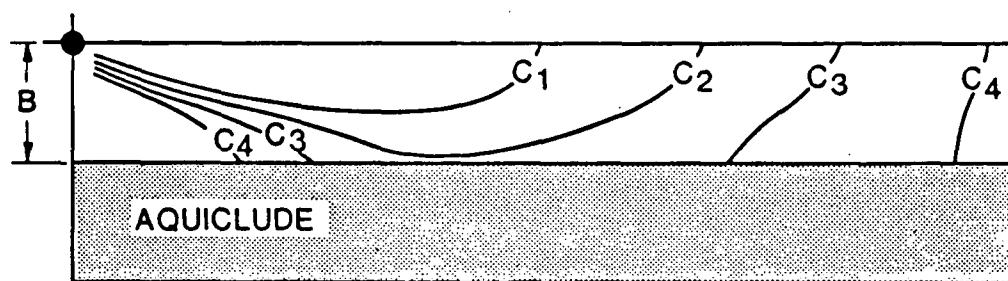


(d)

Figure 4. Use of image sources to account for aquifers of finite depth.

to the real water table. A "concentration divide" would be established at boundary, and the no-transport boundary condition ( $\partial C / \partial z = 0$ ) would be satisfied.

The imaginary system of a contaminant source and its image in an aquifer of infinite depth satisfies the boundary conditions dictated by the finite depth system. The resultant concentration distribution is the sum of concentrations in both the real and image systems as shown in Figure 4d.

In theory an infinite number of image systems may be required. For example, if the plume in the infinite system intersects the water table in the image system, a second no-transport boundary is encountered as shown in Figure 5. This boundary can be handled by introducing another image system across the imaginary boundary and equidistant from the first image system. This process of adding image systems could be repeated indefinitely. In practice only a few image systems are required. The computer program automatically introduces an appropriate number of image systems.

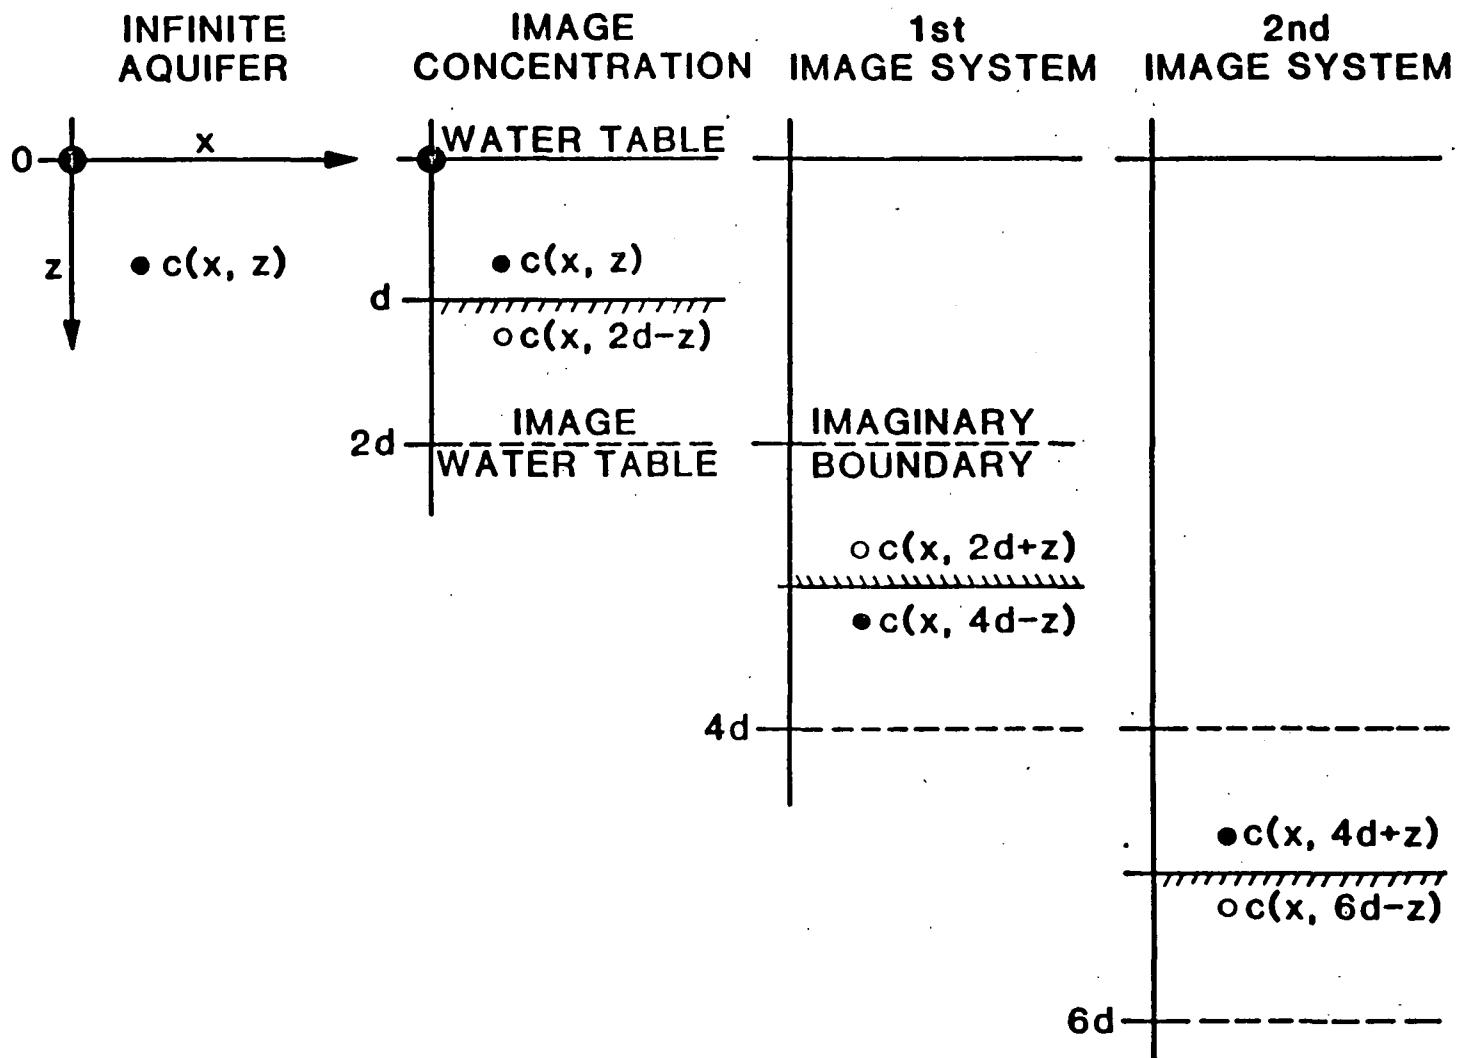

$$c'(x, z) = c(x, z) + \sum_{n=1}^{\infty} [c(x, 2nd-z) + c(x, 2nd+z)]$$

Figure 5. Superposition in space to account for barrier boundaries.

## SECTION II

### COMPUTER PROGRAM

The computer program evaluates the analytical solutions of the differential equation describing concentration distributions in two-dimensional plumes with uniform ground-water flow. The program has been designed for interactive use and requires input data under two modes of operation - "Basic Input Data" and "Edit."

#### Basic Input Data

Basic input data are required to initiate a new problem using the PLUME2D program. The user is prompted for the required data through a series of input commands described below. Numeric data may be entered through the keyboard with or without decimal points and multiple data entries should be separated by comma(s). The first basic input command is:

**ENTER TITLE**  
?

Any valid keyboard characters can be used. The first 60 characters will be retained for further problem identification.

The second input command is used to select the vertically-averaged solution or the horizontally-averaged solution. The command is:

**ENTER COORDINATE SYSTEM**  
**XY FOR VERTICALLY-AVERAGED SOLUTION**  
**XZ FOR HORIZONTALLY-AVERAGED SOLUTION**  
?

Either of the indicated responses is valid.

The next three input commands define the units for all variables used in the calculations. Any consistent set of units may be used.

**ENTER UNITS FOR LENGTH (2 CHARACTERS)**  
?

Any valid keyboard characters can be used. The first two characters will be retained for identifying the units of the length dimensions which may be required for other input data or output listings.

**ENTER UNITS FOR TIME (2 CHARACTERS)**  
?

Any valid keyboard characters can be used. The first two characters will be retained for identifying the units of the time dimensions which may be required for other input data or output listings.

**ENTER UNITS FOR CONCENTRATION (6 CHARACTERS)**  
?

The first six characters of any valid keyboard entries will be retained for identifying the concentration units for data input and output.

The remaining input commands are used to initialize all variables for a given problem. They include both aquifer and contaminant parameters. Input data errors which may interrupt the computational sequence are detected by the program and a command is issued to reenter the data for the appropriate variable.

**ENTER SATURATED THICKNESS, (0 FOR INFINITE THICKNESS), L**  
?

If horizontally-averaged solution was selected (x-z coordinate system) this request is issued. The saturated thickness must be entered in the units requested with dimensions of L. If a zero or negative value is entered, the calculations will be carried out assuming an aquifer of infinite depth. The program automatically includes up to 20 image wells for aquifers of finite depth.

**ENTER AQUIFER POROSITY**  
?

Enter the volume void fraction.

**ENTER SEEPAGE VELOCITY, L/t**  
?

The seepage, or interstitial, velocity must be entered with dimensions of L/t in the units requested. Numerical values must be greater than zero.

**ENTER RETARDATION COEFFICIENT**  
?

The retardation coefficient includes the effects of absorption of the tracer on the solid matrix (see Section I for discussion). The numerical value must be greater than 1.0, or equal to 1.0 if absorption is neglected.

**ENTER X DISPERSION COEFFICIENT, SQ L/t**  
?

Dispersion coefficients have dimensions of  $L^2/t$  and must be entered in the units requested. Numerical values must be greater than zero.

If the X-Y coordinate system has been selected, the next command is:

**ENTER Y DISPERSION COEFFICIENT, SQ L/t**  
?

If, instead, the X-Z coordinate system has been selected, a command for the Z dispersion coefficient will be issued.

**ENTER Z DISPERSION COEFFICIENT, SQ L/t**  
?

The subsequent command will be:

**ENTER DECAY CONSTANT, 1/t**  
?

The first order decay constant has dimensions of  $1/t$  and must be entered in the units requested. The decay constant must be greater than, or equal to, zero.

**SELECT TRANSIENT OR STEADY-STATE SOLUTION**  
TR FOR TRANSIENT SOLUTION  
SS FOR STEADY-STATE SOLUTION  
?

Selection of the transient solution also allows the approximation of a nonuniform rate schedule by a series of uniform rates (see Section I for discussion). Approximation is accomplished through superposition of a series

of uniform rates. If steady-state solution is chosen, the steady state concentration will be evaluated.

**ENTER THE NUMBER OF SOURCES (MAXIMUM OF N)  
?**

The number of sources of contaminant should be entered. The value entered must be greater than zero.

**MASS RATES HAVE UNITS OF (M/L<sup>3</sup>) (L<sup>3</sup>/t)**  
**TIME HAS UNITS OF t**

This statement reminds the user of the units that will be used for mass rates and for time. All mass-rate and time values entered must be in these units.

The next series of commands will be repeated for each source.

**ENTER X AND Z COORDINATES OF SOURCE I (L)  
?**

The input units for the coordinates must be in the units requested. The Z-coordinate must be greater than or equal to zero. If, instead, the X-Y coordinate system has been selected, the following command is issued:

**ENTER X AND Y COORDINATES OF SOURCE I (L)  
?**

If the transient solution was chosen the following two commands will be issued.

**ENTER THE NUMBER OF RATES FOR SOURCE I (MAXIMUM OF N)  
?**

The number of uniform rates used to approximate a nonuniform rate schedule for this source is entered. The value must be greater than zero.

**SOURCE I, RATE J STARTS AT TIME t  
ENTER MASS RATE AND ENDING TIME  
?**

The source mass rate is entered in units of concentration times the volumetric rate. Note the actual source concentration and rate are not required, but the units must be consistent. The time units must also be consistent.

If the steady-state solution has been selected, the following command will be entered instead of the two previously listed commands.

**ENTER STEADY-STATE MASS RATE I**  
?

The next two basic input commands are used to define the matrix of observation points, or coordinates at which concentration will be evaluated.

**ENTER XFIRST, XLAST, DELTAX (L)**  
?,?,?

The input units for the coordinates must also be in the units requested.

XFIRST and XLAST can be positive or negative values. A zero entry for DELTAX will result in a single X-coordinate observation. Results of calculations for multiple X-coordinates will be listed from XFIRST to XLAST.

**ENTER YFIRST, YLAST, DELTAY (L)**  
?,?,?

Any of the numerical values used to define the Y-coordinates of observation points may be positive or negative. If the X-Z coordinate system has been selected, a command to enter the Z-coordinates, rather than the Y-coordinates, will be issued.

**ENTER ZFIRST, ZLAST, DELTAZ (L)**  
?,?,?

**ENTER TFIRST, TLAST, DELTAT (t)**  
?,?,?

The beginning value and ending value of the time interval of contaminant transport being modeled is entered. Both TFIRST and TLAST must be positive values in the units requested. A zero entry for DELTAT will result in model output at a single value of time.

### Edit Commands

Once the basic input data have been entered, the problem as currently defined is listed and the program enters the "edit" mode. The edit commands are listed in Table 1 and are also listed the first time the program enters the edit mode. The request for information is

**ENTER NEXT COMMAND?**

One of the responses from Table 2 should be given. If the response is incorrect or improperly formulated the statement

**ERROR IN LAST COMMAND -- REENTER?**

is issued. Error messages for invalid numerical data will be issued as described under the Basic Input Commands. The request for information will be repeated until one of the responses MU, LI, RN, NP, or DN is entered.

MU will list the table of edit commands.

LI will list the problem as currently defined.

RN will initiate the calculation of concentrations and print the results.

NP will request a complete new problem using the "Basic Input Data" dialog.

DN will terminate the program.

A listing of the dialog and the results for the example problem discussed in Section III are included in Appendix A.

Although many tests for valid input data and properly formulated edit commands have been embedded in the program, the user is encouraged to correct "keyboard errors" before the data are transmitted. These precautions will serve to minimize the frustration of program termination as a result of fatal errors during execution of the numerical computations.

Table 1

EDIT COMMANDS

<u>Command</u>	<u>Variable changed/Execution</u>
ST	Saturated Thickness
PO	Porosity
VX	New Seepage Velocity
RD	Retardation Coefficient
DE	Decay Constant
DX	X-Dispersion Coefficient
DY	Y-Dispersion Coefficient
DZ	Z-Dispersion Coefficient
RT	Source Rate Schedule
OB	Observation Points
XC	X-Coordinates
YC	Y-Coordinates
ZC	Z-Coordinates
TC	Observation Times
CS	Change Solution/Sources
MU	Menu of Edit Commands
LI	List input data
RN	Run
NP	New Problem
DN	Done

### SECTION III

#### APPLICATIONS

The case history of ground-water contamination with hexavalent chromium in South Farmingdale, Nassau County, New York, (Perlmutter and Lieber, 1970), has been used as an example of the application of the two-dimensional plume model. The contaminant plume has been modeled numerically by Pinder (1973) and analytically by Wilson and Miller (1978). Details of the hydrologic system are described in the above references. A brief summary of the problem is presented in the following paragraphs.

The aquifer is assumed to have a saturated thickness of 33.52 m with a porosity of 0.35. Perlmutter and Lieber (1970) estimated the average seepage velocity to be approximately 0.366 m/dy. Using Pinder's (1973) values of dispersivity,  $\alpha_x = 21.3$  m and  $\alpha_y = 4.27$  m, and x and y dispersion coefficients are

$$D_x = (21.3 \text{ m}) (0.366 \text{ m/dy}) = 7.70 \text{ m}^2/\text{dy}$$

and

$$D_y = (4.27 \text{ m}) (0.366 \text{ m/dy}) = 1.56 \text{ m}^2/\text{dy}$$

The source of contamination consisted of three metal-plating-waste disposal ponds as shown in Figure 6. The mass rate of chromium entering the aquifer has been estimated at 23.6 kg/dy during the nine year period from 1941 through 1949 (Perlmutter and Lieber, 1970). Chromium is believed to be a conservative contaminant, thus absorption and degradation can be neglected. The vertically-averaged model parameters are summarized as follows:

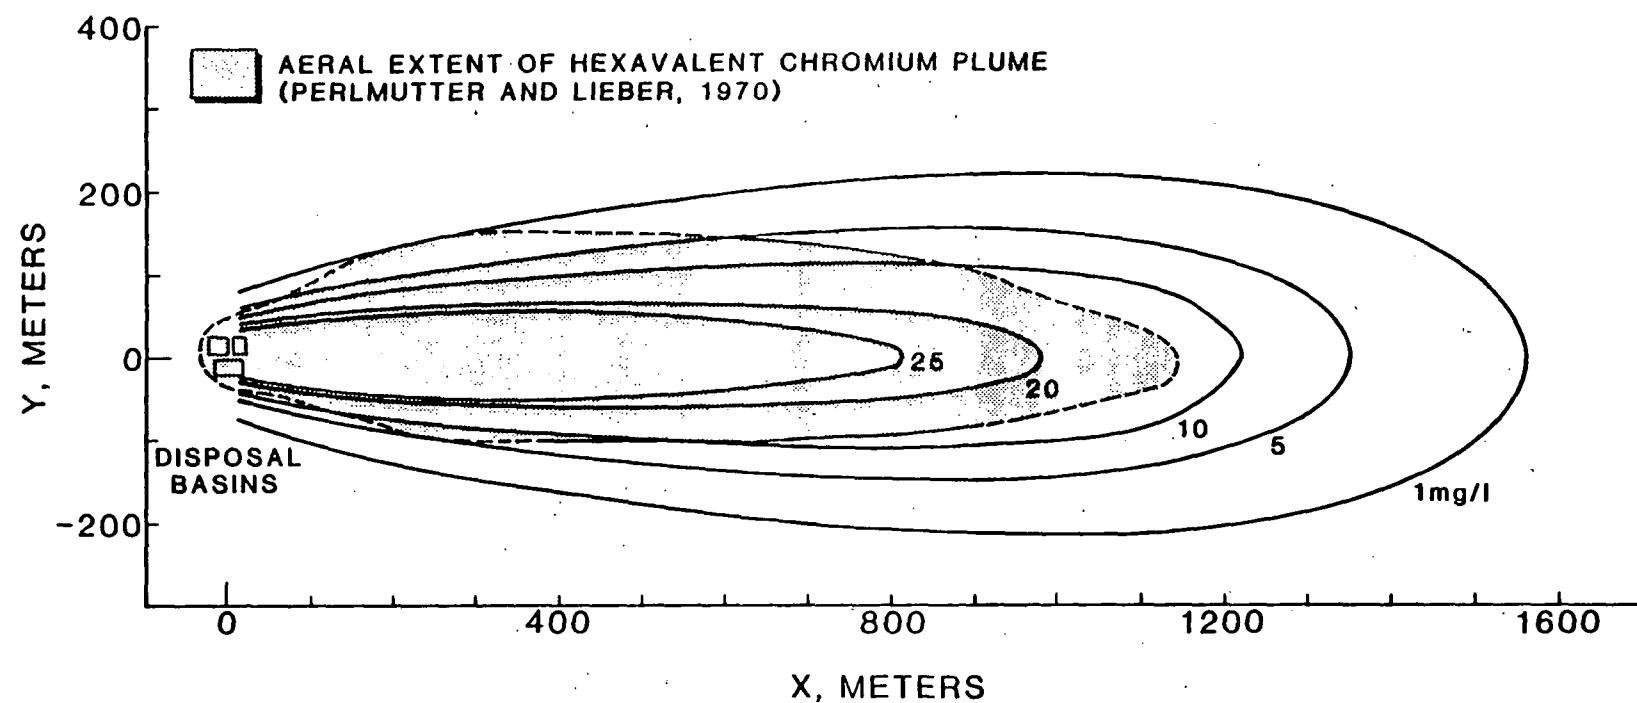


Figure 6. Results of hexavalent chromium plume simulation at 3280 days.

Aquifer porosity	0.35
Seepage velocity	0.366 m/dy
Retardation coefficient	1.0
x-Dispersion coefficient	7.79 m <sup>2</sup> /dy
y-Dispersion coefficient	1.56 m <sup>2</sup> /dy
Decay constant	0.0 1/dy

The contaminant source rate is assumed to be constant, and only one rate period is required. The mass rate can be converted to units of concentration times volume rate per unit depth as

$$\frac{23.6 \text{ kg}}{\text{dy}} \frac{10^6 \text{ mg}}{\text{kg}} \frac{\text{m}^3}{10^3 \text{ l}} \frac{1}{33.52 \text{ m}} = 704 \text{ (mg/l)} (\text{m}^3/\text{dy})/\text{m}$$

for approximately nine years or 3280 days.

The numerical results for the vertically-averaged solution are summarized in Figure 6. The shape and general extent of the predicted plume are in fair agreement with the observed extent of contamination considering the availability of field data and the assumptions which have been made in characterizing the problem as two-dimensional uniform flow with a continuous line source.

Superposition in time will be illustrated using data for the aquifer contaminated with chromium described above. Rather than a continuous source of contamination from the disposal ponds, as "accidental spill" of high strength waste will be simulated. The contaminant source will be assumed to be an "instantaneous line source" of strength 704 (mg/l) (m<sup>3</sup>/m). The source rate schedule for the vertically-averaged model is constructed as follows:

Rate 1: 704 (mg/l) ( $m^3/dy$ )/m from 0 to 1 day

Rate 2: 0 (mg/l) ( $m^3/dy$ )/m from 1 to 365 days

Other model parameters are identical to those used in the previous example.

The results of the simulation are summarized in Figure 7, which shows the center of mass of the plume moving down-gradient at the seepage velocity and spreading longitudinally and transversely by diffusion.

The results of the simulation using superposition in time were compared with the concentrations calculated using

$$C = \frac{C_0 Q'}{4\pi\theta t(D_x D_y)^{0.5}} \exp\left(-\frac{(x - V^* t)^2}{4D_x t} - \frac{y^2}{4D_y t} - \lambda t\right) \quad (54)$$

which is the solution of Equation 14 for an instantaneous line source of strength  $C_0 Q'$  ( $m/L^3$ ) ( $L^3/L$ ). The values of concentration and errors in approximating the instantaneous source through superposition in time are presented in Table 2. Note that the finite duration of the source results in slightly higher concentrations up-gradient from the center of mass than concentrations down-gradient. For an instantaneous source the concentration distribution should be symmetrical about a  $y-z$  plane through the center of mass located as  $x = Vt$ . A better approximation can be obtained by injecting the same total mass of contaminant over a shorter period of time; but for purposes of illustrating superposition in time, the errors in the example problem are not significant.

The example problems presented above are intended to illustrate the application of the two-dimensional plume models developed in this report. These models are tools which can aid in the analysis of ground-water contamination problems. The user must select the best tool for the problem at

9C

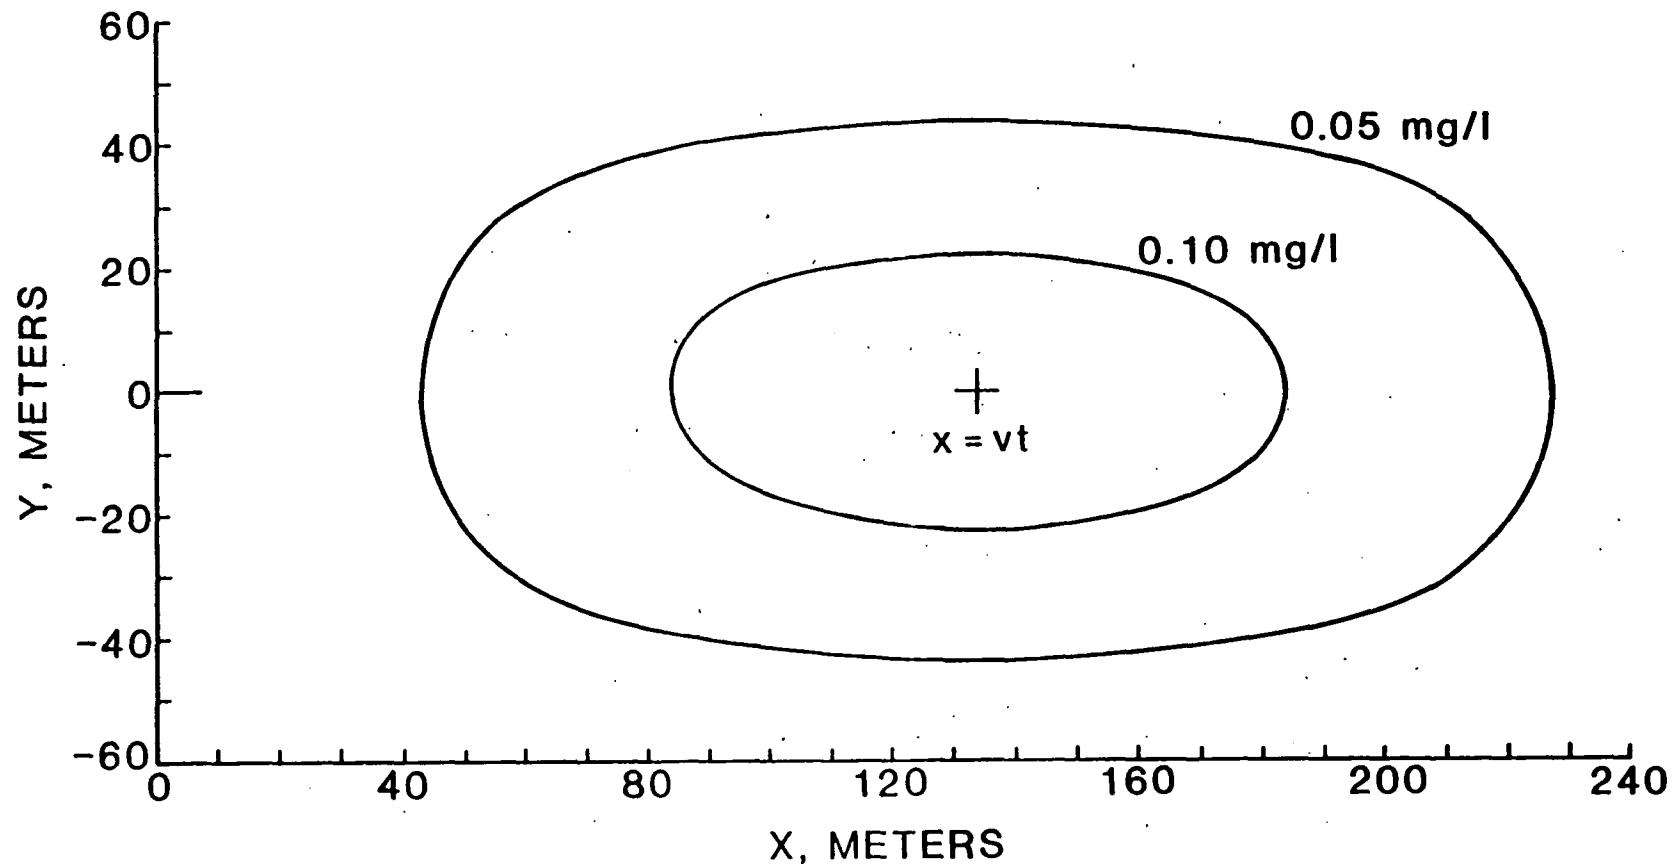


Figure 7. Results of hexavalent chromium spill simulation at 365 days.

hand, based on a sound understanding of the principles of ground-water hydrology, the physical problem, and the limitations of the mathematical model(s).

Perhaps the most difficult step in using any mathematical model is defining the problem to be solved. In addition to developing the physical boundaries of the problem domain, rock and fluid properties must also be quantified. Typical values of aquifer properties are listed in Table 3, but the user must accept the responsibility for developing the required model input data for the specific problem to be solved.

Table 2

COMPARISON OF CONCENTRATIONS CALCULATED  
USING SUPERPOSITION IN TIME AND AN  
ANALYTICAL SOLUTION FOR AN INSTANTANEOUS  
LINE SOURCE

## MODEL PARAMETERS

Aquifer Porosity	0.35
Seepage Velocity	0.366 m/dy
Retardation Coefficient	1.0
x-Dispersion Coefficient	7.79 m <sup>2</sup> /dy
y-Dispersion Coefficient	1.56 m <sup>2</sup> /dy
First-Order Decay Constant	0.0 l/dy
Source Strength	704.0 (mg/l) (m <sup>3</sup> /m)

Concentration at 365 days, mg/l

Superposition  
(Equation 54)  
% Error

y (meters)	x(meters)				
	73.59	103.59	133.59 (= Vt)	163.59	193.59
20.0	0.0919 ( .0917) .22	0.1165 ( .1162) .26	0.1259 ( .1258) .08	0.1163 ( .1162) .01	0.0916 ( .0917) -.11
10.0	0.0878 ( .0877) .11	0.1115 ( .1112) .27	0.1206 ( .1204) .17	0.1113 ( .1112) .09	0.0876 ( .0877) -.11
0.0	0.0771 ( .0769) .26	0.0977 ( .0975) .21	0.1057 ( .1055) .19	0.0975 ( .0975) .0	0.0768 ( .0769) -.13

Table 3  
 Typical Values of Aquifer Properties  
 (after Yeh, 1981)

Material			
Parameter	Clay	Silt	Sand
Bulk density, lb/ft <sup>3</sup>	87.36 - 137.2	80.50 - 112.3	73.63 - 98.59
Effective porosity	0.03 - 0.05	0.05 - 0.10	0.10 - 0.30
Hydraulic Conductivity, gal/day/ft <sup>2</sup>	0.01 - 0.1	1 - 10	100 - 100,000
Dispersivity, ft			
Longitudinal	0.1 - 1.0	1 - 10	10 - 100
Transverse	0.01 - 0.1	0.1 - 1.0	1.0 - 10
Vertical	0.01 - 0.1	0.1 - 1.0	1 - 10

## REFERENCES

- Abramowitz, M. and I. A. Stegan, 1966, Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, National Bureau of Standards Applied Mathematics Series 55, U. S. Department of Commerce, 1046 pp.
- Hantush, M. S., 1956, "Analysis of Data from Pumping Tests in Leaky Aquifers," Transitions, American Geophysical Union, Vol. 37, No. 6, pp. 702-714.
- Hantush, M. S., 1964, "Hydraulics of Wells," Advances in Hydroscience, Vol. 1, pp. 281-432.
- Hantush, M. S. and C. E. Jacob, 1955, "Non-Steady Radial Flow in an Infinite Leaky Aquifer," Transitions, American Geophysical Union, Vol. 26., No. 1, pp. 95-100.
- Hunt, B., 1978, "Dispersive Sources in Uniform Ground-Water Flow," Journal of The Hydraulics Division, ASCE, Vol. 104, No. HY1, pp. 75-85.
- Perlmutter, N. M. and M. Lieber, 1970, "Dispersal of Plating Wastes and Sewage Contaminants in Ground Water and Surface Water, South Farmingdale-Massapequa Area, Nassau County, New York," U. S. Geological Survey Water-Supply Paper 1879-G, pp. G1-G67.
- Pinder, G. F., 1973, "A Galerkin Finite Element Simulation of Ground-water Contamination on Long Island," Water Resources Research, Vol. 9, No. 6, pp. 1657-1669.
- Walton, W. C., 1962, "Selected Analytical Methods for Well and Aquifer Evaluation," Bulletin 49, Illinois State Water Survey, Urbana, Illinois, 81 pp.
- Walton, W. C., 1970, Groundwater Resource Evaluation, Mc-Graw-Hill, New York, New York, 664 pp.
- Wilson, J. L. and P. J. Miller, 1978, "Two-Dimensional Plume in Uniform Ground-Water Flow," Journal of the Hydraulics Division, ASCE, Vol. 104, No. HY4, pp. 503-514.
- Wilson, J. L. and P. J. Miller, 1979, "Two-Dimensional Plume in Uniform Ground-Water Flow, Discussion," Journal of the Hydraulics Division, ASCE, Vol. 105, No. HY12, pp. 1567-1570.
- Yeh, G. T., 1981, "AT123D: Analytical Transient One-, Two-, and Three-Dimensional Simulations of Waste Transport in the Aquifer System," Publication No. 1439, Environmental Sciences Division, Oak Ridge National Laboratory, Oak Ridge, Tennessee, 83 pp.

## APPENDIX A

### Example Problems

The two example problems presented in the following pages are discussed in Section III of this report. The first demonstrates the application of PLUME2D to a continuous source of contamination. The second example approximates an instantaneous source using the principle of superposition in time as discussed in Section I.

ENTER TITLE  
?HEXAVALENT CHROMIUM PLUME

ENTER COORDINATE SYSTEM  
XY FOR VERTICALLY-AVERAGED SOLUTION  
XZ FOR HORIZONTALLY-AVERAGED SOLUTION  
?XY

ENTER UNITS FOR LENGTH (2 CHARACTERS)  
? M

ENTER UNITS FOR TIME (2 CHARACTERS)  
?DY

ENTER UNITS FOR CONCENTRATION (6 CHARACTERS)  
?MG/L

ENTER AQUIFER POROSITY  
?0.35

ENTER SEEPAGE VELOCITY, M/DY  
?0.366

ENTER RETARDATION COEFFICIENT  
?1.0

ENTER X DISPERSION COEFFICIENT, SQ M/DY  
?7.79

ENTER Y DISPERSION COEFFICIENT, SQ M/DY  
?1.56

ENTER DECAY CONSTANT, 1/DY  
?0.0

SELECT TRANSIENT OR STEADY-STATE SOLUTION  
TR FOR TRANSIENT SOLUTION  
SS FOR STEADY-STATE SOLUTION  
?TR

ENTER THE NUMBER OF SOURCES (MAXIMUM OF 10 )  
?1

MASS RATES HAVE UNITS OF (MG/L ) (CU M/DY)  
TIME HAS UNITS OF DY

ENTER X AND Y COORDINATES OF SOURCE 1 ( M)  
?,?0.,0.

ENTER THE NUMBER RATES FOR SOURCE 1 (MAXIMUM OF 10)  
?1

SOURCE 1, RATE 1 STARTS AT 0.0 DY  
ENTER MASS RATE AND ENDING TIME  
?,?704.,3280.

ENTER XFIRST, XLAST, DELTAX ( M)  
?,?,?200.,1200.,200.

ENTER YFIRST, YLAST, DELTAY ( M)  
?,?,?200.,-200.,50.

ENTER TFIRST, TLAST, DELTAT ( DY)  
?,?,?3280.,0.,0.

PLUME2D  
VERSION 2.01  
PAGE 1

HEXAVALENT CHROMIUM PLUME

SEEPAGE VELOCITY, ( M/DY)	.3660
X DISPERSION COEFFICIENT ( M**2/DY)	7.7900
Y DISPERSION COEFFICIENT ( M**2/DY)	1.5600
POROSITY	.3500

RETARDATION COEFFICIENT	1.0000
FIRST ORDER DECAY CONSTANT (1/DY)	0.0000

SOURCE/RATE SCHEDULE (MG/L) (CU M/DY)

NO	SOURCE		RATE NO	MASS RATE	TIME (DY)	
	X ( M)	Y ( M)			START	END
1	0.00	0:00	1	704.00	0.00	3280.00

OBSERVATION POINTS ( M)

XFIRST = 200.00	XLAST = 1200.00	DELX = 200.0000
YFIRST = 200.00	YLAST = -200.00	DELY = 50.0000

OBSERVATION TIMES (DY)

TFIRST = 3280.00	TLAST = 3280.00	DELT = 0.0000
------------------	-----------------	---------------

MENU OF EDIT COMMANDS

RETARDATION COEFFICIENT	RD	OBSERVATION POINTS	OB
POROSITY	PO	X COORDINATES	XC
SEEPAGE VELOCITY	VX	Y COORDINATES	YC
X DISPERSION COEFFICIENT	DX	MENU OF COMMANDS	MU
Y DISPERSION COEFFICIENT	DY	LIST INPUT DATA	LI
DECAY CONSTANT	DE	RUN CALCULATIONS	RN
SOURCE RATE SCHEDULE	RT	DONE	DN
NEW PROBLEM	NP	SATURATED THICKNESS	ST
CHANGE SOLUTION/SOURCES	CS	OBSERVATION TIMES	TC

ENTER NEXT COMMAND  
?RN

PLUME2D  
VERSION 2.01  
PAGE 2

HEXAVALENT CHROMIUM PLUME

CONCENTRATION DISTRIBUTION AT 3280.00 DY (MG/L )

*	* X( M)	*	200.00	400.00	600.00	800.00	1000.00	1200.00
Y( M)	*	*						
200.00	.0372	.	.2773	.8210	1.4371	1.6352	1.1380	
150.00	.4289	.	1.8560	3.6177	4.8444	4.7217	3.0238	
100.00	4.0806	.	8.8387	11.3609	11.9818	10.2348	6.1201	
50.00	24.5165	.	25.3968	23.5539	20.9946	16.4014	9.3721	
0.00	51.8245	.	37.0664	30.2812	25.3930	19.2190	10.8087	
-50.00	24.5165	.	25.3968	23.5539	20.9946	16.4014	9.3721	
-100.00	4.0806	.	8.8387	11.3609	11.9818	10.2348	6.1201	
-150.00	.4289	.	1.8560	3.6177	4.8444	4.7217	3.0238	
-200.00	.0372	.	.2773	.8210	1.4371	1.6352	1.1380	

ENTER NEXT COMMAND  
?DN

STOP

ENTER TITLE  
?ACCIDENTAL HEXAVALENT CHROMIUM SPILL

ENTER COORDINATE SYSTEM  
XY FOR VERTICALLY-AVERAGED SOLUTION  
XZ FOR HORIZONTALLY-AVERAGED SOLUTION  
?XY

ENTER UNITS FOR LENGTH (2 CHARACTERS)  
? M

ENTER UNITS FOR TIME (2 CHARACTERS)  
?DY

ENTER UNITS FOR CONCENTRATION (6 CHARACTERS)  
?MG/L

ENTER AQUIFER POROSITY  
?0.35

ENTER SEEPAGE VELOCITY, M/DY  
?0.366

ENTER RETARDATION COEFFICIENT  
?1.0

ENTER X DISPERSION COEFFICIENT, SQ M/DY  
?7.79

ENTER Y DISPERSION COEFFICIENT, SQ M/DY  
?1.56

ENTER DECAY CONSTANT, 1/DY  
?0.0

SELECT TRANSIENT OR STEADY-STATE SOLUTION  
TR FOR TRANSIENT SOLUTION  
SS FOR STEADY-STATE SOLUTION  
?TR

ENTER THE NUMBER OF SOURCES (MAXIMUM OF 10 )  
?1

MASS RATES HAVE UNITS OF (MG/L ) (CU M/DY)  
TIME HAS UNITS OF DY

ENTER X AND Y COORDINATES OF SOURCE 1 ( M)  
?,?0.,0.

ENTER THE NUMBER RATES FOR SOURCE 1 (MAXIMUM OF 10 )  
?2

SOURCE 1, RATE 1 STARTS AT 0.0 DY  
ENTER MASS RATE AND ENDING TIME  
?,?704.,1.

SOURCE 1, RATE 2 STARTS AT 1.0 DY  
ENTER MASS RATE AND ENDING TIME  
?,?0.,365.

ENTER XFIRST, XLAST, DELTAX ( M)  
?,?,?73.59,193.59,30.

ENTER YFIRST, YLAST, DELTAY ( M)  
?,?,?20.,0.,10.

ENTER TFIRST, TLAST, DELTAT ( DY)  
?,?,?365.,0.,0.

PLUME2D  
VERSION 2.01  
PAGE 1

ACCIDENTAL HEXAVALENT CHROMIUM SPILL

SEEPAGE VELOCITY, ( M/DY)	.3660
X DISPERSION COEFFICIENT ( M**2/DY)	7.7900
Y DISPERSION COEFFICIENT ( M**2/DY)	1.5600
POROSITY	.3500

RETARDATION COEFFICIENT	1.0000
FIRST ORDER DECAY CONSTANT (1/DY)	0.0000

SOURCE/RATE SCHEDULE (MG/L ) (CU M/DY)

NO	SOURCE		RATE NO	MASS RATE	TIME (DY)	
	X ( M)	Y ( M)			START	END
1	0.00	0.00	1	704.00	0.00	1.00
			2	0.00	1.00	365.00

OBSERVATION POINTS ( M)

XFIRST =	73.59	XLAST =	193.59	DELX =	30.0000
YFIRST =	20.00	YLAST =	0.00	DELY =	10.0000

OBSERVATION TIMES (DY)

TFIRST =	365.00	TLAST =	365.00	DELT =	0.0000
----------	--------	---------	--------	--------	--------

MENU OF EDIT COMMANDS

RETARDATION COEFFICIENT	RD	OBSERVATION POINTS	OB
POROSITY	PO	X COORDINATES	XC
SEEPAGE VELOCITY	VX	Y COORDINATES	YC
X DISPERSION COEFFICIENT	DX	MENU OF COMMANDS	MU
Y DISPERSION COEFFICIENT	DY	LIST INPUT DATA	LI
DECAY CONSTANT	DE	RUN CALCULATIONS	RN
SOURCE RATE SCHEDULE	RT	DONE	DN
NEW PROBLEM	NP	SATURATED THICKNESS	ST
CHANGE SOLUTION/SOURCES	CS	OBSERVATION TIMES	TC

ENTER NEXT COMMAND

?RN

PLUME2D  
VERSION 2.01  
PAGE 2

ACCIDENTAL HEXAVALENT CHROMIUM SPILL

CONCENTRATION DISTRIBUTION AT 365.00 DY (MG/L )

*	* X( M)					
	*	73.59	103.59	133.59	163.59	193.59
Y( M)	*					
	*					
20.00	.0771	.0977	.1056	.0975	.0768	
10.00	.0879	.1115	.1204	.1113	.0876	
0.00	.0919	.1165	.1260	.1163	.0916	

ENTER NEXT COMMAND  
?XC

ENTER XFIRST, XLAST, DELTAX ( M)  
?, ?, ?103.59, 163.59, 15.

ENTER NEXT COMMAND  
?RN

PLUME2D  
VERSION 2.01  
PAGE 3

ACCIDENTAL HEXAVALENT CHROMIUM SPILL

CONCENTRATION DISTRIBUTION AT 365.00 DY (MG/L )

\*  
\* X( M)  
\* 103.59 118.59 133.59 148.59 163.59  
Y( M) \*  
\*  
20.00 .0977 .1036 .1056 .1035 .0975  
10.00 .1115 .1183 .1204 .1181 .1113  
0.00 .1165 .1236 .1260 .1234 .1163

ENTER NEXT COMMAND  
?DN

STOP

## APPENDIX B

### Description of Program PLUME2D

Program PLUME2D has been written in an unextended Fortran computer code in an effort to make the program transportable between computer systems. The computer code consists of a main program and several function subroutines which are required to evaluate the Hantush well function. The program has been documented "internally" through the liberal use of comment statements.

The main program has been divided into three sections. A listing of the computer code is presented in Appendix D. Section I provides for the "Basic Input Data" as described in Section II of this report. The numerical evaluation of concentration at specified grid coordinates is accomplished in Section II of the main program which calls subroutine SOL2D, the code for the analytical solution of the governing differential equations. Section III provides for problem redefinition and control of execution under the "Edit" mode discussed in the body of this report.

Ten function subroutines are used to evaluate the Hantush well function using the numerical methods described in Appendix C. Listings of the computer codes are presented in Appendix E. FUNCTION W(U,B) evaluates the Hantush well function for  $B < 20$ . For  $B > 20$ , the term  $\text{EXP}(P_{ex}/2) W(U,B)$  in Equation 45 is evaluated using FUNCTION WELPRD(U,B,PEX). This procedure is used to avoid taking the direct product of very large numbers,  $\text{EXP}(P_{ex}/2)$ , and very small numbers  $W(U,B)$ , for large values of  $B$ .

FUNCTION GAUSS is a 24-point Gauss-Legendre quadrature numerical integration scheme which is used to evaluate the Hantush well function using either Equation C-6 or Equation C-7. FUNCTION FUNCTN evaluates the integrand of Equations C-6 and C-7.

The six remaining function subroutines are used to evaluate mathematical functions using rational approximations or polynomial approximations. They are:

FUNCTION BIO(Z)	Modified Bessel function of the first kind of order zero and the natural logarithm of the function.
FUNCTION BKO(Z)	Modified Bessel function of the second kind of order zero and the natural logarithm of the function.
FUNCTION E1LOG(Z)	Natural logarithm of the exponential integral.
FUNCTION ERFC(Z)	Complimentary error function.

These six function subroutines are used to support FUNCTION W(U,B) and/or FUNCTION WELPRD (U,B,PEX). If system subroutines are available for these functions they may be substituted for the function subroutines provided with Program PLUME2D.

## APPENDIX C

### Numerical Evaluation of the Hantush Well Function

The Hantush well function can be defined as

$$W(U, B) = \int_u^{\infty} \frac{1}{\xi} \exp\left(-\xi - \frac{B^2}{4\xi}\right) d\xi \quad (C-1)$$

or the reciprocal relation

$$W(U, B) = 2K_0(B) - \int_{B^2/4U}^{\infty} \frac{1}{\xi} \exp\left(-\xi - \frac{B^2}{4\xi}\right) d\xi \quad (C-2)$$

where  $\xi$  is a dummy integration variable (Hantush, 1964). Using the identity

$$\int_a^{\infty} f(\xi) d\xi = \int_0^{\infty} f(\xi) d\xi - \int_0^a f(\xi) d\xi \quad (C-3)$$

Equation C-1 can be rewritten as

$$W(U, B) = \int_0^{\infty} \frac{1}{\xi} \exp\left(-\xi - \frac{B^2}{4\xi}\right) d\xi - \int_0^U \frac{1}{\xi} \left(-\xi - \frac{B^2}{4\xi}\right) d\xi \quad (C-4)$$

Now

$$\int_0^{\infty} \frac{1}{\xi} \exp\left(-\xi - \frac{B^2}{4\xi}\right) d\xi = 2K_0(B) \quad (C-5)$$

where  $K_0$  is the modified Bessel function of the second kind of order zero.

Substituting Equation C-5 into Equation C-4, the well function becomes

$$W(U, B) = 2K_0(B) - \int_0^U \frac{1}{\xi} \exp\left(-\xi - \frac{B^2}{4\xi}\right) d\xi \quad (C-6)$$

The reciprocal relation, Equation C-2, can also be written in terms of finite limits. Using the relationship given by Equations C-4 and C-5, the reciprocal relation can be expressed as

$$W(U, B) = \int_0^{B^2/4U} \frac{1}{\xi} \exp\left(-\xi - \frac{B^2}{4\xi}\right) d\xi \quad (C-7)$$

For  $0 < B < 20$ , values of  $W(U, B)$  for  $0 < U < B/2$  are obtained from Equation C-6 by first evaluating the value of the integrand using a 24-point Gauss-Legendre numerical integration scheme. For  $B/2 < U < \infty$ , the reciprocal relation, Equation C-7, is evaluated using the same numerical integration scheme.

For  $0 < B < 0.1$ , values of  $W(U, B)$  are obtained from the series expansions presented by Hantush and Jacob (1955). For  $U < 1$

$$\begin{aligned} W(U, B) &= 2K_0(B) - I_0(B)E_1\left(\frac{B^2}{4U}\right) \\ &+ \exp\left(-\frac{B^2}{4U}\right) \left[ 0.57721566 + \ln(U) + E_1(U) + \frac{U}{4} \frac{B^2}{4} \left(1 - \frac{U}{9}\right) \right] \end{aligned} \quad (C-8)$$

and for  $U > 1$

$$W(U, B) = I_0(B)E_1(U) - \exp(-U) \frac{B^2}{4} \left[ \left( \frac{1}{U} - \frac{1}{36U^2} \right) + \frac{B^4}{16} \left( \frac{1}{4U} - \frac{1}{4U^2} \right) \right] \quad (C-9)$$

where  $I_0$  is the modified Bessel function of the first kind of order zero,  $E_1$  is the exponential integral, and 0.57721566 is Euler's constant.

For  $B > 20$ , the third order approximation for  $W(U, B)$  presented by Wilson and Miller (1979) is used to evaluate the well function. The approximation is

$$W(U, B) = \left(\frac{\pi}{2B}\right)^{1/2} \text{EXP}(-B) \left[ \left(1 - \frac{1}{8B}\right) \text{ERFC}(-\beta) + \frac{\beta}{4B\pi^{1/2}} \text{EXP}(-\beta^2) \right] \quad (\text{C-10})$$

where

$$\beta = \frac{B-2U}{(4U)^{1/2}}$$

and ERFC is the complimentary error function.

Now, for large positive values of  $\beta$ ,

$$W(U, B) \approx 2 \left(\frac{\pi}{2B}\right)^{1/2} \text{EXP}(-B) \left(1 - \frac{1}{8B}\right) \quad (\text{C-11})$$

and an asymptotic expansion for  $K_0(B)$  can be written as

$$K_0(B) = \left(\frac{\pi}{2B}\right)^{1/2} \text{EXP}(-B) \left(1 - \frac{1}{8B} + \frac{9}{2(8B)^2} + \dots\right) \quad (\text{C-12})$$

Thus for  $B > 20$  and  $\beta > 7.5$  the well function is approximated as

$$W(U, B) = 2K_0(B) \quad (\text{C-13})$$

Note that this approximation is equivalent to the relationship

$$W(0, B) = 2K_0(B) \quad (\text{C-14})$$

Evaluations of the Hantush well function using the methods described in the previous paragraphs have been checked for both accuracy and continuity of the function between the various approximations. The Gauss-Legendre quadrature scheme was checked using up to 48 quadrature points. A maximum of 24 quadrature points yielded results accurate to four significant figures in the mantissa over the entire range of arguments which require numerical integration. The other approximations for  $W(U,B)$  are also accurate to four significant figures in the mantissa.

APPENDIX D

*Listing of Program PLUME2D*

```

C PLUME2D PL2D001
C VERSION 2.02 PL2D002
C TWO-DIMENSIONAL PLUMES IN UNIFORM GROUND-WATER FLOW PL2D003
C JAN WAGNER PL2D004
C SCHOOL OF CHEMICAL ENGINEERING PL2D005
C OKLAHOMA STATE UNIVERSITY PL2D006
C STILLWATER, OK 74078 PL2D007
C PHONE (405) 624-5280 PL2D008
C JULY, 1981 PL2D009
C PL2D010
C REVISIONS: 2.00 APR 84 PL2D011
C 2.01 24 NOV 84 PL2D012
C 2.02 9 DEC 84 PL2D013
C 2.02A 3 MAY 85 PL2D014
C PL2D015
C DIMENSION TITLE(30),IC(20),XS(10),YS(10),D(3),LBL(2,6), PL2D016
1 NR(10),IS(4),NP(2),DEL(2),XL(2),XF(2),CON(7),COL(7) PL2D017
REAL LAMBDA PL2D018
INTEGER TITLE PL2D019
COMMON/IO/NI,NO PL2D020
COMMON/RATE/Q(10,12),T(10,12),MT PL2D021
COMMON/PHYPRO/ALPHA,BETA,DX,LAMBDA,PE,RD,V PL2D022
DATA IC//DE', 'VX', 'RD', 'DX', 'DY', 'DZ', 'PO', 'OB', 'XC', 'YC', 'ZC', PL2D023
1 'RT', 'NP', 'RN', 'DN', 'LI', 'MU', 'ST', 'CS', 'TC' / PL2D024
DATA KPRO1//XY//, KPRO2//XZ//, KHARY//Y//, KHZR//Z// PL2D025
DATA NPAGE/1/ PL2D026
DATA KSOL1,KSOL2//TR', 'SS' / PL2D027
DATA IS//R', 'M', 'A', 'D' / PL2D028
DATA IY//Y' / PL2D029
DATA LBL// ' '(C', ' ', 'DN', ' ', 'TI', ' ', 'NU', ' ', 'ED', PL2D030
1 ' ',' ') / PL2D031
C PL2D032
C READ DEVICE: NI WRITE DEVICE: NO PL2D033
C NI=5 PL2D034
C NO=6 PL2D035
C PL2D036
C MAXIMUM NUMBER OF PRINTED COLUMNS PER PAGE IS SET TO MAXCOL PL2D037
C DIMENSION COL(MAXCOL),CON(MAXCOL) PL2D038
MAXCOL = 7 PL2D039
C PL2D040
C MAXIMUM NUMBER OF PRINTED ROWS PER PAGE IS SET TO MAXROW PL2D041
MAXROW = 40 PL2D042
C PL2D043
C MAXIMUM NUMBER OF SOURCES IS SET TO MAXSOR PL2D044
C DIMENSION XS(MAXSOR),YS(MAXSOR),NR(MAXSOR) PL2D045
MAXSOR = 10 PL2D046
C PL2D047
C MAXIMUM NUMBER OF SOURCE RATES FOR SUPERPOSITION IN TIME PL2D048
IS SET TO MAXRT PL2D049
C COMMON/RATE/ Q(MAXSOR,MAXRT+2),T(MAXSOR,MAXRT+2) PL2D050
MAXRT = 10 PL2D051
C PL2D052
C MAXIMUM NUMBER OF IMAGE WELLS FOR SUPERPOSITION IN SPACE PL2D053
IS SET TO MAXIMG PL2D054
MAXIMG = 20 PL2D055
C PL2D056
C PL2D057
C INITIALIZE PROGRAM FLOW CONTROL VARIABLES PL2D058
1 IEDIT = 1 PL2D059
KNTL = 1 PL2D060
C PL2D061
C PL2D062
C **** SECTION I -- BASIC INPUT DATA PL2D063
C PL2D064
C READ TITLE PL2D065
WRITE(NO,3)
3 FORMAT(1H1,2X,'ENTER TITLE',/,' ?')
READ(NI,5)(TITLE(I), I=1,30)
5 FORMAT(30A2)
C PL2D066
PL2D067
PL2D068
PL2D069
PL2D070

```

```

C      SELECT VERTICALLY OR HORIZONTALLLY AVERAGED SOLUTION          PL2D071
      KFLOW = 3                                         PL2D072
      WRITE(NO,7)                                         PL2D073
      7 FORMAT(3X,'ENTER COORDINATE SYSTEM',/,          PL2D074
      16X,'XY FOR VERTICALLY-AVERAGED SOLUTION',/,          PL2D075
      26X,'XZ FOR HORIZONTALLY-AVERAGED SOLUTION',/, '?'          PL2D076
      8 READ(NI,9) KFLG                                         PL2D077
      9 FORMAT(A2)
      IF(KFLG.EQ.KPRO1) KFLOW=1                         PL2D078
      IF(KFLG.EQ.KPRO2) KFLOW=2                         PL2D079
      GO TO (12,12,10), KFLOW                         PL2D080
      10 WRITE(NO,11)                                     PL2D081
      11 FORMAT(3X,'ERROR IN PROBLEM SELECTION -- REENTER',/, '?' ) PL2D082
      GO TO 8                                         PL2D083
      12 CONTINUE                                         PL2D084
      KHAR = KHARY                                         PL2D085
      IF(KFLOW.EQ.2) KHAR=KHARZ                         PL2D086
      IF(KFLOW.EQ.1) KHAR=KHARZ                         PL2D087
      C
      C      DEFINE UNITS                                         PL2D088
      WRITE(NO,15)                                         PL2D089
      15 FORMAT(3X,'ENTER UNITS FOR LENGTH (2 CHARACTERS)',/, '?' ) PL2D090
      READ(NI,25) IL                                         PL2D091
      25 FORMAT(A2)
      WRITE(NO,35)                                         PL2D092
      35 FORMAT(3X,'ENTER UNITS FOR TIME (2 CHARACTERS)',/, '?' ) PL2D093
      READ(NI,25) IT                                         PL2D094
      WRITE(NO,45)                                         PL2D095
      45 FORMAT(3X,'ENTER UNITS FOR CONCENTRATION (6 CHARACTERS)',/, '?' ) PL2D096
      READ(NI,26) IM1,IM2,IM3                         PL2D097
      26 FORMAT(3A2)                                         PL2D098
      C
      C      ENTER DATA FOR FIRST PROBLEM                      PL2D101
      C
      C      SATURATED THICKNESS                           PL2D102
      IF(KFLOW.EQ.1)GO TO 38                         PL2D103
      30 IMAGE = MAXIMG/2                            PL2D104
      44 WRITE(NO,46) IL                            PL2D105
      46 FORMAT(3X,'ENTER SATURATED THICKNESS (0 FOR INFINITE THICKNESS), 1A2,/, '?' ) PL2D106
      36 READ(NI,37,ERR=44) ST                         PL2D107
      37 FORMAT(F10.0)
      IF(ST.GT.0.0) GO TO 39                         PL2D108
      38 IMAGE = 1                                     PL2D109
      ST = 1.0E32                                      PL2D110
      39 CONTINUE                                         PL2D111
      GO TO (50,400),IEDIT                         PL2D112
      C
      C      POROSITY                                         PL2D113
      50 WRITE(NO,55)                                         PL2D114
      55 FORMAT(3X,'ENTER AQUIFER POROSITY',/, '?' ) PL2D115
      READ(NI,56,ERR=50) P                           PL2D116
      56 FORMAT(F10.0)
      57 IF(P.GT.0.0.AND.P.LT.1.0) GO TO 59          PL2D117
      54 WRITE(NO,58)                                         PL2D118
      58 FORMAT(3X,'POROSITY MUST BE GREATER THAN ZERO', 1' AND LESS THAN ONE -- REENTER',/, '?' ) PL2D119
      1' READ(NI,56,ERR=54) P                           PL2D120
      GO TO 57                                         PL2D121
      59 GO TO (60,400),IEDIT                         PL2D122
      C
      C      SEEPAGE VELOCITY                           PL2D123
      60 WRITE(NO,65) IL,IT                           PL2D124
      65 FORMAT(3X,'ENTER SEEPAGE VELOCITY, 'A2,'//,A2,/, '?' ) PL2D125
      READ(NI,56,ERR=60) V                           PL2D126
      66 IF(V.GT.0.0) GO TO 69                         PL2D127
      64 WRITE(NO,67)                                         PL2D128
      67 FORMAT(3X,'SEEPAGE VELOCITY MUST BE GREATER THAN ZERO', 1' -- REENTER',/, '?' ) PL2D129
      1' READ(NI,56,ERR=64) V                           PL2D130
      GO TO 66                                         PL2D131

```

```

C   69 GO TO (70,400),IEDIT          PL2D141
C   C   RETARDATION COEFFICIENT      PL2D142
C   70 WRITE(NO,75)                  PL2D143
C   75 FORMAT(3X,'ENTER RETARDATION COEFFICIENT',/,' ?')    PL2D144
C   READ(NI,56,ERR=70) RD
C   76 IF(RD.GE.1.0) GO TO 79        PL2D145
C   74 WRITE(NO,77)                  PL2D146
C   77 FORMAT(3X,'RETARDATION COEFFICIENT MUST BE GREATER THAN OR',    PL2D147
C   1' EQUAL TO ONE',/,' -- REENTER',/,' ?')    PL2D148
C   READ(NI,56,ERR=74) RD
C   GO TO 76                         PL2D149
C   79 GO TO (80,400),IEDIT          PL2D150
C   C   X DISPERSION COEFFICIENT     PL2D151
C   80 WRITE(NO,81) IL,IT             PL2D152
C   81 FORMAT(3X,'ENTER X DISPERSION COEFFICIENT, SQ ',A2,    PL2D153
C   1'/',A2,' ?')                  PL2D154
C   82 READ(NI,56,ERR=80) DX         PL2D155
C   IF(DX.GT.0.0) GO TO 85          PL2D156
C   WRITE(NO,83)                   PL2D157
C   83 FORMAT(3X,'X DISPERSION COEFFICIENT MUST BE GREATER THAN ZERO',    PL2D158
C   1' -- REENTER',/,' ?')          PL2D159
C   GO TO 82                         PL2D160
C   85 GO TO (86,400),IEDIT          PL2D161
C   C   Y OR Z DISPERSION COEFFICIENT    PL2D162
C   86 WRITE(NO,87) KCHAR,IL,IT       PL2D163
C   87 FORMAT(3X,'ENTER ',A1,' DISPERSION COEFFICIENT, SQ ',A2,    PL2D164
C   1'/',A2,' ?')                  PL2D165
C   88 READ(NI,56,ERR=86) DY         PL2D166
C   IF(DY.GT.0.0) GO TO 90          PL2D167
C   WRITE(NO,89) KCHAR              PL2D168
C   89 FORMAT(3X,A1,' DISPERSION COEFFICIENT MUST BE GREATER THAN ZERO',    PL2D169
C   1' -- REENTER',/,' ?')          PL2D170
C   GO TO 88                         PL2D171
C   90 GO TO (91,400),IEDIT          PL2D172
C   C   FIRST-ORDER DECAY CONSTANT     PL2D173
C   91 WRITE(NO,95) IT               PL2D174
C   95 FORMAT(3X,'ENTER DECAY CONSTANT,,1',A2,' ?')    PL2D175
C   READ(NI,56,ERR=91) DECAY        PL2D176
C   GO TO (1320,400),IEDIT          PL2D177
C   C   SOURCE RATE SCHEDULE.        PL2D178
C   C   DEFINE LOCATIONS AND RATES OF SOURCES    PL2D179
C   C   INITIALIZE SOURCE/RATE ARRAYS    PL2D180
C   1320 MAXRT2 = MAXRT + 2          PL2D181
C   DO 1330 I=1,MAXSOR             PL2D182
C   DO 1330 J=1,MAXRT2             PL2D183
C   Q(I,J) = 0.0                   PL2D184
C   T(I,J) = 0.0                   PL2D185
C   1330 CONTINUE                  PL2D186
C   JFLOW = 3                      PL2D187
C   1340 WRITE(NO,1345)             PL2D188
C   1345 FORMAT(3X,'SELECT TRANSIENT OR STEADY-STATE SOLUTION',/.,    PL2D189
C   16X,'TR FOR TRANSIENT SOLUTION',/;    PL2D190
C   26X,'SS FOR STEADY-STATE SOLUTION',/,' ?')    PL2D191
C   1350 READ(NI,25) KSOL           PL2D192
C   IF(KSOL.EQ.KSOL1) JFLOW=1        PL2D193
C   IF(KSOL.EQ.KSOL2) JFLOW=2        PL2D194
C   GO TO (1370,1370,1360), JFLOW    PL2D195
C   1360 WRITE(NO,1365)             PL2D196
C   1365 FORMAT(3X,'ERROR IN SELECTION -- REENTER',/,' ?')    PL2D197
C   GO TO 1350                      PL2D198
C   C   1370 WRITE(NO,1375) MAXSOR      PL2D199
C   1375 FORMAT(3X,'ENTER THE NUMBER OF SOURCES (MAXIMUM OF',I3,' )',/.,    PL2D200
C   PL2D201
C   PL2D202
C   PL2D203
C   PL2D204
C   PL2D205
C   PL2D206
C   PL2D207
C   PL2D208
C   PL2D209
C   PL2D210

```

```

      1'    ?')
1380 READ(NI,1385,ERR=1370) FDUM          PL2D211
1385 FORMAT(F10.0)                         PL2D212
      NS=FDUM                           PL2D213
      IF(NS.GT.0.AND.NS.LE.MAXSOR) GO TO 1400   PL2D214
      WRITE(NI,1395) MAXSOR                  PL2D215
1395 FORMAT(3X,'NUMBER OF SOURCES MUST BE GREATER THAN ZERO '
      1'AND LESS THAN',I3,' -- REENTER./.' ?')    PL2D216
      GO TO 1380                           PL2D217
1400 WRITE (NO,1405) IM1,IM2,IM3,IL,IT,IL,IT   PL2D218
1405 FORMAT(3X,'MASS RATES HAVE UNITS OF (',A2,') (CU ',A2,'/,A2,
      1')/(',A2,/,3X,'TIME HAS UNITS OF ',A2,/)    PL2D219
      DO 1540 I=1,NS                      PL2D220
      IF(KFLOW.EQ.2) GO TO 1414                PL2D221
1406 WRITE(NO,1410) I,IL                   PL2D222
1410 FORMAT(3X,'ENTER X AND Y COORDINATES OF SOURCE',I2,
      1' ('',A2,'',/,,' ??')                 PL2D223
      READ(NI,1425,ERR=1406) XS(I),YS(I)        PL2D224
      GO TO 1440                           PL2D225
1414 WRITE(NO,1415) I,IL                   PL2D226
1415 FORMAT(3X,'ENTER X AND Z COORDINATES OF SOURCE',I2,
      1' ('',A2,'',/,,' ??')                 PL2D227
      READ(NI,1425,ERR=1414) XS(I),YS(I)        PL2D228
1425 FORMAT(2F10.0)                         PL2D229
1430 IF(YS(I).GE.0.0.AND.YS(I).LE.ST) GO TO 1440   PL2D230
1434 WRITE(NO,1435) ST,IL                  PL2D231
1435 FORMAT(3X,'Z-COORDINATE MUST BE GREATER THAN OR EQUAL TO ZERO',
      1' AND',/,3X,'LESS THAN OR EQUAL TO SATURATED THICKNESS (',
      2F10.4,A3,')/.,3X,' -- REENTER./.' ?')    PL2D232
      READ(NI,37,ERR=1434) YS(I)               PL2D233
      GO TO 1430                           PL2D234
1440 IF(JFLOW.EQ.2) GO TO 1530             PL2D235
      O(I,1) = 0.0                          PL2D236
      T(I,1) = 0.0                          PL2D237
1450 WRITE(NO,1455) I,MAXRT                PL2D238
1455 FORMAT(3X,'ENTER THE NUMBER RATES FOR SOURCE',I2,
      1' (MAXIMUM OF',I3,'',/,,' ?')           PL2D239
1460 READ(NI,1465,ERR=1450) FDUM            PL2D240
1465 FORMAT(F10.0)                         PL2D241
      NR(I)=FDUM                           PL2D242
      IF(NR(I).GT.0.AND.NR(I).LE.MAXRT) GO TO 1480   PL2D243
      WRITE(NO,1475) MAXRT                  PL2D244
1475 FORMAT(3X,'NUMBER OF RATES MUST BE GREATER THAN ZERO AND '
      1'LESS THAN',I3,' -- REENTER./.' ?')       PL2D245
      GO TO 1460                           PL2D246
1480 CONTINUE                            PL2D247
      NRT = NR(I)                          PL2D248
      DO 1520 J=1,NRT                     PL2D249
      M = J + 1                          PL2D250
1484  WRITE(NO,1485) I,J,T(I,M-1),IT       PL2D251
1485  FORMAT(3X,'SOURCE ',I2,' RATE ',I2,' STARTS AT',F8.1,A3,/,
      1' 3X,'ENTER MASS RATE AND ENDING TIME ',/,,' ?')    PL2D252
      READ(NI,1495,ERR=1484) Q(I,M),T(I,M)        PL2D253
1495  FORMAT(2F10.0)                         PL2D254
1500  IF(T(I,M).GT.T(I,M-1)) GO TO 1510    PL2D255
1504  WRITE(NO,1505)                      PL2D256
1505  FORMAT(3X,'ENDING TIME MUST BE GREATER THAN STARTING TIME '
      1' -- REENTER./.' ?')                  PL2D257
      READ(NI,37,ERR=1504) T(I,M)              PL2D258
      GO TO 1500                           PL2D259
1510  CONTINUE                            PL2D260
1520 CONTINUE                            PL2D261
      GO TO 1540                           PL2D262
1530 WRITE(NO,1535) I                     PL2D263
1535 FORMAT(3X,'ENTER STEADY-STATE MASS RATE',I2,'.', ?')  PL2D264
      READ(NI,37,ERR=1530) Q(I,1)              PL2D265
      NR(I) = 0                            PL2D266
1540 CONTINUE                            PL2D267
      IF(IEDIT.EQ.2.AND.JFLOW.EQ.1.AND.TF.LE.1.0E-06) GO TO 720   PL2D268
123  GO TO (124,400),IEDIT                PL2D269
                                         PL2D270
                                         PL2D271
                                         PL2D272
                                         PL2D273
                                         PL2D274
                                         PL2D275
                                         PL2D276
                                         PL2D277
                                         PL2D278
                                         PL2D279
                                         PL2D280

```

```

C
C      COORDINATES OF THE OBSERVATION POINTS
124 WRITE(NO,125) IL PL2D281
125 FORMAT(3X,'ENTER XFIRST, XLAST, DELTAX ('',A2,'')',/,,' ?.,?')
READ(NI,126,ERR=124) XF(1),XL(1),DEL(1) PL2D282
126 FORMAT(3F10.0) PL2D283
DEL(1) = ABS(DEL(1)) PL2D284
IF(DEL(1).LE.1.OE-06) XL(1)=XF(1) PL2D285
IF(KNTL.LE.0) GO TO 400 PL2D286
133 IF(KFLOW.EQ.2) GO TO 136 PL2D287
134 WRITE(NO,135) IL PL2D288
135 FORMAT(3X,'ENTER YFIRST, YLAST, DELTAY ('',A2,'')',/,,' ?.,?')
READ(NI,126,ERR=134) XF(2),XL(2),DEL(2) PL2D289
DEL(2) = ABS(DEL(2)) PL2D290
IF(DEL(2).LE.1.OE-06) XL(2)=XF(2) PL2D291
GO TO 145 PL2D292
136 WRITE(NO,137) IL PL2D293
137 FORMAT(3X,'ENTER ZFIRST, ZLAST, DELTAZ ('',A2,'')',/,,' ?.,?')
READ(NI,126,ERR=136) XF(2),XL(2),DEL(2) PL2D294
DEL(2) = ABS(DEL(2)) PL2D295
138 IF(XF(2).GE.0.0.AND.DEL(2).LE.1.OE-06) GO TO 144 PL2D296
IF(XF(2).GE.0.0.AND.XF(2).LE.ST) GO TO 142 PL2D297
WRITE(NO,139)
139 FORMAT(3X,'ZFIRST MUST BE GREATER THAN OR EQUAL TO ZERO')
IF(IMAGE.GT.1) WRITE(NO,140) ST,IL PL2D300
140 FORMAT(3X,' AND LESS THAN OR EQUAL TO SATURATED THICKNESS
1 ('',F10.4,A3,'')') PL2D301
130 WRITE(NO,141) PL2D302
141 FORMAT(3X,' -- REENTER',/,,' ?')
READ(NI,56,ERR=130) XF(2) PL2D303
GO TO 138 PL2D304
142 IF(XL(2).GE.0.0.AND.XL(2).LE.ST) GO TO 145 PL2D305
WRITE(NO,143)
143 FORMAT(3X,'ZLAST MUST BE GREATER THAN OR EQUAL TO ZERO')
IF(IMAGE.GT.1) WRITE(NO,140) ST,IL PL2D306
131 WRITE(NO,141) PL2D307
READ(NI,56,ERR=131) XL(2) PL2D308
GO TO 142 PL2D309
144 XL(2) = XF(2) PL2D310
145 GO TO (720,400),IEDIT PL2D311
C
C      OBSERVATION TIMES
720 IF(JFLOW.EQ.2) GO TO 770 PL2D312
724 WRITE(NO,725) IT PL2D313
725 FORMAT(3X,'ENTER TFIRST, TLAST, DELTAT ('',A2,'')',/,,' ?.,?')
PL2D314
730 READ(NI,735,ERR=724) TF,TL,DELT PL2D315
735 FORMAT(3F10.0) PL2D316
DELT = ABS(DELT)
740 IF(TF.GT.0.0.AND.DELT.LE.1.OE-06) GO TO 760 PL2D317
IF(TF.GT.0.0) GO TO 750 PL2D318
744 WRITE(NO,745)
745 FORMAT(3X,'TFIRST MUST BE GREATER THAN ZERO -- REENTER',/,,' ?')
READ(NI,37,ERR=744) TF PL2D319
GO TO 740 PL2D320
750 IF(TL.GT.0.0) GO TO 770 PL2D321
754 WRITE(NO,755)
755 FORMAT(3X,'TLAST MUST BE GREATER THAN ZERO -- REENTER',/,,' ?')
READ(NI,37,ERR=754) TL PL2D322
GO TO 750 PL2D323
760 TL = TF PL2D324
770 GO TO (146,780),IEDIT PL2D325
780 IF(JFLOW.EQ.2) WRITE(NO,785)
785 FORMAT(3X,'TIME IS NOT A PARAMETER IN STEADY-STATE SOLUTION')
GO TO 400 PL2D326
C
C      LIST PROBLEM DEFINITION
146 WRITE(NO,147) NPAGE,(TITLE(I),I=1,30) PL2D327
147 FORMAT(1H1,/,3X,'PLUME2D',/,3X,'VERSION 2.02',
1/,3X,'PAGE ',I3,///,3X,30A2,///)
NPAGE = NPAGE + 1 PL2D328
PL2D329
PL2D330
PL2D331
PL2D332
PL2D333
PL2D334
PL2D335
PL2D336
PL2D337
PL2D338
PL2D339
PL2D340
PL2D341
PL2D342
PL2D343
PL2D344
PL2D345
PL2D346
PL2D347
PL2D348
PL2D349
PL2D350

```

```

      IF(IMAGE.GT.1) WRITE(NO,148) IL,ST          PL2D351
148 FORMAT(1HO,7X,'SATURATED THICKNESS, ('',A2,'') ',24X,F10.4) PL2D352
      WRITE(NO,149) IL,IT,V,IL,IT,DX,KHAR,IL,IT,DY,P          PL2D353
149 FORMAT(8X,'SEEPAGE VELOCITY, ('',A2.''/',A2,'') ',25X,F10.4./, PL2D354
      18X,'X DISPERSION COEFFICIENT ('',A2.'''*2//',A2,'') ',13X,F10.4./, PL2D355
      28X,A1,' DISPERSION COEFFICIENT ('',A2.'''*2//',A2,'') ',13X,F10.4./, PL2D356
      38X,'POROSITY ',42X,F10.4)          PL2D357
      WRITE(NO,150) RD,IT,DECAY          PL2D358
150 FORMAT(//,8X,'RETARDATION COEFFICIENT',28X,F10.4./, PL2D359
      18X,'FIRST ORDER DECAY CONSTANT (1/'',A2,'')',18X,F10.4)          PL2D360
      GO TO (159,151),JFLOW          PL2D361
151 WRITE(NO,153) KHAR,IL,IL,IM1,IM2,IM3,IL,IT,IL          PL2D362
153 FORMAT(//,3X,'STEADY-STATE SOURCE RATES'//,
      13X,'SOURCE',6X,'X',11X,A1,17X,'RATE',/,          PL2D363
      25X,NO',6X,'('',A2,'')',8X,'('',A2,'')',6X,'('',3A2.          PL2D364
      3')(CU ',A2.''/',A2,'')//',A2,/          PL2D365
      DO 157 I=1,NS          PL2D366
      WRITE(NO,155) I,XS(I),YS(I),Q(I,1)          PL2D367
155 FORMAT(5X,I2,F10.2,2X,F10.2,6X,F16.4)          PL2D368
157 CONTINUE          PL2D370
      GO TO 171          PL2D371
159 WRITE(NO,160) IM1,IM2,IM3,IL,IT,IL,IT,IL,KHAR,IL          PL2D372
160 FORMAT(//,3X,'SOURCE/RATE SCHEDULE ('',3A2,'')(CU ',A2.''/',A2,
      1')//',A2.'//',15X,'SOURCE',13X,'RATE',4X,'MASS',8X,'TIME ('',A2,''),
      2/,3X,"NO X ('',A2,'') ',A1,' ('',A2,'')',9X,' NO',5X,'RATE',
      35X,'START',7X,'END',//)          PL2D373
      DO 170 I=1,NS          PL2D374
      WRITE(NO,165) I,XS(I),YS(I)          PL2D375
165 FORMAT(/,3X,I2,2F9.2)          PL2D376
      NRT = NR(I)          PL2D377
      DO 170 J=1,NRT          PL2D378
      M = J + 1          PL2D379
      WRITE(NO,167) J,Q(I,M),T(I,M-1),T(I,M)          PL2D380
167 FORMAT(34X,I2,F12.2,2F9.2)          PL2D381
170 CONTINUE          PL2D382
171 WRITE(NO,175) IL,XF(1),XL(1),DEL(1),KHAR,XF(2),KHAR,XL(2),KHAR,
      1 DEL(2)          PL2D383
175 FORMAT(//,8X,'OBSERVATION POINTS ('',A2.'')',//,
      112X,'XFIRST =',F10.2,3X,'XLAST =',F10.2,3X,'DELX =',F10.4./,
      212X,A1,'FIRST =',F10.2,3X,A1,'LAST =',F10.2,3X,'DEL',A1,' =',
      1F10.4)          PL2D384
      IF(JFLOW.EQ.1) WRITE(NO,177) IT,TF,TL,DELT          PL2D385
177 FORMAT(/,8X,'OBSERVATION TIMES ('',A2.'')',//,
      1 12X,'TFIRST =',F10.2,3X,'TLAST =',F10.2,3X,'DELT =',F10.4)          PL2D386
180 CONTINUE          PL2D387
      GO TO 400          PL2D388
C          PL2D389
C          PL2D390
C **** SECTION II -- NUMERICAL EVALUATION OF CONCENTRATION AT          PL2D391
C          SPECIFIED GRID COORDINATES          PL2D392
C          PL2D393
C          NUMBER OF OBSERVATION POINTS IN EACH COORDINATE DIRECTION          PL2D394
2000 CONTINUE          PL2D395
      DO 2020 L=1,2          PL2D396
      NP(L) = 1          PL2D397
      DEL(L) = ABS(DEL(L))          PL2D398
      IF(DEL(L).LE.1.OE-03) GO TO 2020          PL2D399
      DIF = XL(L) - XF(L)          PL2D400
      IF(ABS(DIF).LE.1.OE-03) GO TO 2020          PL2D401
      IF(DIF.LE.0.0) DEL(L)=-DEL(L)          PL2D402
      NPTS = ABS(DIF/DEL(L))          PL2D403
      REM = DIF - DEL(L)*FLOAT(NPTS)          PL2D404
      NPTS = NPTS + 1          PL2D405
      NP(L) = NPTS          PL2D406
      IF(ABS(REM).LT.1.OE-03) GO TO 2020          PL2D407
      NP(L) = NP(L) + 1          PL2D408
2020 CONTINUE          PL2D409
      MAXRW = NP(2)          PL2D410
      MAXCL = NP(1)          PL2D411
      PL2D412
      PL2D413
      PL2D414
      PL2D415
      PL2D416
      PL2D417
      PL2D418
      PL2D419
      PL2D420

```

```

C          TIME COORDINATES          PL2D421
C          NTIME = 1                PL2D422
IF(DELT.LE.1.OE-06) GO TO 2110    PL2D423
NTIME = ABS(TL-TF)/DELT + 1.0    PL2D424
IF(TF.GT.TL) DELT=-DELT        PL2D425
2110 TSOL = TF                  PL2D426
MTIME = NTIME                   PL2D427
C          DAMK = DX*DECAY*RD/(V*V) PL2D428
ALPHA=SQRT(1.0+4.0*DAMK)        PL2D429
PE=V/DX                          PL2D430
BETA = DX/DY                     PL2D431
LAMBDA = 1.0/(12.566731*P*SQRT(DX*DY)) PL2D432
C          DO 2660  NT=1,NTIME      PL2D433
C          2120 LPRT = 1            PL2D434
LP = 1                            PL2D435
NCFLG = 1                         PL2D436
2140 NROW1 = 1                    PL2D437
NROW2 = MAXROW                    PL2D438
2160 IF(NROW2.GT.MAXRW) NROW2=MAXRW PL2D439
DO 2580 NROW=NROW1,NROW2         PL2D440
GO TO (2180,2220,2200),NCFLG     PL2D441
2180 NCOL1 = 1                   PL2D442
NCOL2 = MAXCOL                   PL2D443
2200 IF(NCOL2.GT.MAXCL) NCOL2=MAXCL PL2D444
NCOL = MAXCOL                   PL2D445
IF(NCOL2.EQ.MAXCL) NCOL=NCOL2-NCOL1+1 PL2D446
2220 IX1 = NCOL1                 PL2D447
IX2 = NCOL2                      PL2D448
C          DO 2300  L=1,MAXCOL      PL2D449
CON(L) = 0.0                      PL2D450
2300 CONTINUE                     PL2D451
C          DO 2440  N=1,NS          PL2D452
D(1) = ST - YS(N)                PL2D453
IF(ST.GE.0.9E32) D(1)=0.0        PL2D454
D(2) = YS(N)                     PL2D455
D(3) = D(1)                      PL2D456
COEF = 1.0                        PL2D457
IF(D(1).LT.1.OE-03.OR.D(2).LT.1.OE-03) COEF=2.0 PL2D458
DO 2440  I=IX1,IX2               PL2D459
X = XF(1) + FLOAT(I-1)*DEL(1)   PL2D460
IF(I.EQ.NP(1)) X=XL(1)          PL2D461
XXS = X - XS(N)                 PL2D462
PEX = PE*XXS                     PL2D463
Y = XF(2) + FLOAT(NROW-1)*DEL(2) PL2D464
IF(NROW.EQ.NP(2)) Y=XL(2)       PL2D465
YY = Y - YS(N)                  PL2D466
PEY = PE*YY                      PL2D467
L = I-IX1 + 1                   PL2D468
IF(CON(L).LT.0.0) GO TO 2430    PL2D469
IF(ABS(XXS).LT.1.0.AND.ABS(YY).LT.1.0)GO TO 2330 PL2D470
CALL SOL2D(C,PEX,PEY,TSOL,N,NR(N)) PL2D471
CXYT = COEF*C                   PL2D472
IF(IMAGE.EQ.1) GO TO 2325       PL2D473
C          DO 2320  LM=1,2          PL2D474
ZM = ((-1.0)**(LM+1))*YY
IF(D(LM).LT.1.OE-03) GO TO 2320 PL2D475
ZIMAGE = 2.0*D(LM) - ZM          PL2D476
PEZ = PE*ZIMAGE                  PL2D477
CALL SOL2D(C,PEX,PEZ,TSOL,N,NR(N)) PL2D478
CXYT = CXYT + COEF*C           PL2D479
DO 2310 IM = 1,IMAGE             PL2D480
C          PL2D481
PL2D482
PL2D483
ZM = ((-1.0)**(LM+1))*YY
IF(D(LM).LT.1.OE-03) GO TO 2320 PL2D484
ZIMAGE = 2.0*D(LM) - ZM          PL2D485
PEZ = PE*ZIMAGE                  PL2D486
CALL SOL2D(C,PEX,PEZ,TSOL,N,NR(N)) PL2D487
CXYT = CXYT + COEF*C           PL2D488
DO 2310 IM = 1,IMAGE             PL2D489
C          PL2D490

```

```

      ZIMAGE' = (2.0*D(LM)+ZM) + 2.0*FLOAT(IM)*D(LM+1)          PL2D491
      1           + FLOAT(2*IM-2)*D(LM)
      PEZ = PE*ZIMAGE                                         PL2D492
      CALL SOL2D(C,PEX,PEZ,TSOL,N,NR(N))                      PL2D493
      IF(C.LT.1.0E-06) GO TO 2312                           PL2D494
      CXYT = CXYT + COEF*C                                     PL2D495
2310    CONTINUE                                              PL2D496
2312    CONTINUE                                              PL2D497
      DO 2314 IM=1,IMAGE                                     PL2D498
      ZIMAGE = (2.0*D(LM)-ZM) + 2.0*FLOAT(IM)*D(LM+1)          PL2D499
      1           + FLOAT(2*IM)*D(LM)
      PEZ = PE*ZIMAGE                                         PL2D500
      CALL SOL2D(C,PEX,PEZ,TSOL,N,NR(N))                      PL2D501
      IF(C.LT.1.0E-06) GO TO 2320                           PL2D502
      CXYT = CXYT + COEF*C                                     PL2D503
2314    CONTINUE                                              PL2D504
      WRITE(NO,2315) MAXIMG,X,Y                               PL2D505
2315    FORMAT(3X,'***** WARNING -- SOLUTION DID NOT',     PL2D506
      1           ' CONVERGE USING ./,9X,I2,' IMAGE WELLS AT X =', PL2D507
      2           F10.4,' Z =',F10.4)                          PL2D508
2320    CONTINUE                                              PL2D509
2325    IF(KFLOW.EQ.1) CXYT=CXYT/2.0                         PL2D510
      CON(L) = CON(L) + CXYT                                 PL2D511
      GO TO 2340                                             PL2D512
2330    CON(L) = -9.9999                                    PL2D513
2340    ROW = Y                                           PL2D514
      COL(L) = X                                         PL2D515
2430    CONTINUE                                              PL2D516
2440    CONTINUE                                              PL2D517
C
C
C      PRINT CONCENTRATION DISTRIBUTION
      GO TO (2460,2560), LPRT                                PL2D518
2460    WRITE(NO,147) NPAGE, (TITLE(I),I=1,30)               PL2D519
      NPAGE = NPAGE + 1                                       PL2D520
      IF(JFLOW.EQ.2) GO TO 2500                           PL2D521
      WRITE(NO,2465) TSOL,IT,IM1,IM2,IM3,                 PL2D522
      1LBL(LP,L),L=1,6),IL                                  PL2D523
2465    FORMAT(13X,'CONCENTRATION DISTRIBUTION AT ',F10.2,   PL2D524
      11X,A2,' ('.3A2,'') //,13X,3X,6A2,//,
      2' *',/,' * X(''.A2,''))                            PL2D525
      GO TO 2520                                             PL2D526
2500    WRITE(NO,2505) IM1,IM2,IM3,(LBL(LP,L),L=1,6),       PL2D527
      1IL
2505    FORMAT(13X,'CONCENTRATION DISTRIBUTION AT STEADY STATE',PL2D528
      1' ('.3A2,'') //,13X,3X,6A2,//,
      2' *',/,' * X(''.A2,''))                            PL2D529
2520    CONTINUE                                              PL2D530
      WRITE(NO,2525),(COL(L),L=1,NCOL)                      PL2D531
2525    FORMAT('      ',4X,7F10.2)                         PL2D532
      WRITE(NO,2545) KCHAR,IL                                PL2D533
2545    FORMAT(1X,A1,' ('.A2,'') *',/,9X,'')
C
      2560    WRITE(NO,2565) ROW,(CON(L),L=1,NCOL)             PL2D534
      2565    FORMAT(2X,F8.2,7F10.4)                           PL2D535
      LPRT = 2                                              PL2D536
2580    CONTINUE                                              PL2D537
      IF(NROW2.EQ.MAXRW) GO TO 2600                         PL2D538
      NROW1 = NROW1 + MAXROW                                 PL2D539
      NROW2 = NROW2 + MAXROW                                 PL2D540
      LPRT = 1                                              PL2D541
      LP = 2                                                PL2D542
      NCFLG = 2                                              PL2D543
      GO TO 2160                                             PL2D544
2600    IF(NCOL2.EQ.MAXCL) GO TO 2640                         PL2D545
      NCOL1 = NCOL1 + MAXCOL                                PL2D546
      NCOL2 = NCOL2 + MAXCOL                                PL2D547
      LPRT = 1                                              PL2D548
      LP = 2                                                PL2D549
      NCFLG = 2                                              PL2D550
      GO TO 2160                                             PL2D551
      NCFLG = 3                                              PL2D552
      GO TO 2160                                             PL2D553
2640    IF(NCOL2.EQ.MAXCL) GO TO 2640                         PL2D554
      NCOL1 = NCOL1 + MAXCOL                                PL2D555
      NCOL2 = NCOL2 + MAXCOL                                PL2D556
      LPRT = 1                                              PL2D557
      LP = 2                                                PL2D558
      NCFLG = 3                                              PL2D559
      GO TO 2160                                             PL2D560

```

```

GO TO 2140 PL2D561
2640 CONTINUE PL2D562
    TSOL = TSOL + DELT PL2D563
    IF(NT.EQ.MTIME) TSOL=TL PL2D564
2660 CONTINUE PL2D565
C ***** SECTION III -- PROBLEM REDEFINITION AND CONTROL OF EXECUTION PL2D566
C PL2D567
C PL2D568
400 CONTINUE PL2D569
    IF(IEDIT.EQ.2)GO TO 401 PL2D570
    WRITE(NO,1001)KCHAR,KCHAR,KCHAR,KCHAR PL2D571
    IEDIT = 2 PL2D572
401 KNTL = 0 PL2D573
    WRITE(NO,405) PL2D574
405 FORMAT(//,3X,'ENTER NEXT COMMAND',/,' ?') PL2D575
410 READ(NI,415) NEXT PL2D576
415 FORMAT(A2) PL2D577
C DO 420 I=1,20 PL2D578
    IF(NEXT.EQ.IC(I)) GO TO 430 PL2D579
420 CONTINUE PL2D580
    WRITE(NO,425) PL2D581
425 FORMAT(3X,'ERROR IN LAST COMMAND -- REENTER',/,' ?') PL2D582
    GO TO 410 PL2D583
430 GO TO (91,60,70,80,86,86,50,450,124,133,133,3060,1, PL2D584
     12000,700,146,1000,602,1320,720),I PL2D585
C NEW SET OF X AND Y OBSERVATIONS PL2D586
450 KNTL = 1 PL2D587
    GO TO 124 PL2D588
C PL2D589
C PL2D590
C NEW SOURCE/RATE SCHEDULE PL2D591
3060 WRITE(NO,3065) PL2D592
3065 FORMAT(3X,'ADD(A),DELETE(D),MODIFY(M) A SOURCE OR RETURN(R)', PL2D593
     1: TO EDIT ?') PL2D594
3070 READ(NI,3075) ISK PL2D595
3075 FORMAT(A1) PL2D596
    DO 3080 I=1,4 PL2D597
        IF(ISK.EQ.IS(I)) GO TO 3090 PL2D598
3080 CONTINUE PL2D599
    WRITE(NO,3085) PL2D600
3085 FORMAT(3X,'ERROR IN SELECTION -- REENTER ?') PL2D601
    GO TO 3070 PL2D602
3090 GO TO (400,3100,3450,3490),I PL2D603
C PL2D604
C MODIFY SOURCE PL2D605
C PL2D606
3100 WRITE(NO,3105) NS PL2D607
3105 FORMAT(3X,I2,' SOURCES IN CURRENT SCHEDULE',/,' 13X,'ENTER SOURCE TO MODIFY',/,' ?') PL2D608
    READ(NI,1465,ERR=3100) FDUM PL2D609
    JS=FDUM PL2D610
    IF(JS.GT.0.AND.JS.LE.NS) GO TO 3220 PL2D611
    WRITE(NO,3215) JS PL2D612
3215 FORMAT(3X,'SOURCE',I4,' NOT IN SCHEDULE') PL2D613
    GO TO 3060 PL2D614
3220 GO TO (3230,3260),JFLOW PL2D615
3230 WRITE(NO,3235) JS,XS(JS),IL,KCHAR,YS(JS),IL,IT, PL2D616
     1IM1,IM2,IM3,IL,IT,IL PL2D617
3235 FORMAT(3X,'SOURCE ',I2,' : X =',F8.2,A3,2X,' ,A1, ' =', PL2D618
     1F8.2,A3,/,3X,'RATE',7X,'MASS RATE',14X,'TIME (', PL2D619
     2A2,' ),/.,4X,'NO',3X,' (',3A2,' )(CU ',A2,' /',A2,' )/.,A2, PL2D620
     35X,'START',7X,'END',/) PL2D621
    NRT = NR(JS) PL2D622
    DO 3250 J=1,NRT PL2D623
        M = J + 1 PL2D624
        WRITE(NO,3245) J,Q(JS,M),T(JS,M-1),T(JS,M) PL2D625
3245 FORMAT(4X,I2,5X,F14.2,7X,F8.3,3X,F8.2) PL2D626
3250 CONTINUE PL2D627

```

```

GO TO 3270
3260 WRITE(NO,3265) JS,XS(JS).IL,KHAR,YS(JS),IL,Q(JS,1),
1IM1,IM2,IM3,IL,IT,IL
3265 FORMAT(3X,'SOURCE ',I2,': X =',F8.2,A3,2X,',',A1,' =',
1F8.2,A3,/,3X,'STEADY-STATE MASS RATE =',F16.4,
2' (',3A3,')(CU ',A2,'/',A2,')/',A2,/)
3270 WRITE(NO,3275)
3275 FORMAT(3X,'CHANGE COORDINATES (Y/N)?')
READ(NI,3075).JC
IF(JC.NE.IY) GO TO 3290
IF(KFLOW.EQ.2) GO TO 3277
3276 WRITE(NO,1410) JS,IL
READ(NI,1425,ERR=3276) XS(JS),YS(JS)
GO TO 3290
3277 WRITE(NO,1415) JS,IL
READ(NI,1425,ERR=3277) XS(JS),YS(JS)
3280 IF(YS(JS).GE.0.0.AND.YS(JS).LE.ST) GO TO 3290
3281 WRITE(NO,1435) ST,IL
READ(NI,37,ERR=3281) YS(JS)
GO TO 3280
3290 GO TO (3300,3430),JFLOW
C
C      TRANSIENT SOURCES
3300 WRITE(NO,3305) JS
3305 FORMAT(3X,'MODIFY RATE SCHEDULE FOR SOURCE',I3,' (Y/N) ?')
READ(NI,3075) JY
IF(JY.NE.IY) GO TO 3060
3310 WRITE(NO,3315)
3315 FORMAT(3X,'ENTER RATE TO BE CHANGED',/,
13X,'(ENTER 0 TO CHANGE ALL RATES)',/,' ?')
READ(NI,1465,ERR=3310) FDUM
JR=FDUM
IF(JR.LE.0) GO TO 3350
IF(JR.LE.NR(JS)) GO TO 3330
WRITE(NO,3325) JR
3325 FORMAT(3X,'RATE ',I2,' NOT IN CURRENT SCHEDULE')
GO TO 3300
3330 WRITE(NO,3335) JS,JR,T(JS,JR),T(JS,JR+1),IT
3335 FORMAT(3X,'SOURCE ',I2,' RATE ',I2,' STARTS AT ',F8.2,
1' AND ENDS AT ',F8.2,A3,/,3X,'ENTER NEW MASS RATE',/,' ?')
M = JR + 1
READ(NI,3345,ERR=3330) Q(JS,M)
3345 FORMAT(F10.0)
GO TO 3300
C
3350 NRT = NR(JS)
DO 3360 J=1,NRT
M = J + 1
Q(JS,M) = 0.0
T(JS,M) = 0.0
3360 CONTINUE
3370 WRITE(NO,1455) JS,MAXRT
3380 READ(NI,1465,ERR=3370) FDUM
NR(JS)=FDUM
IF(NR(JS).GT.0.AND.NR(JS).LE.MAXRT) GO TO 3390
WRITE(NO,1475) MAXRT
GO TO 3380
3390 CONTINUE
NRT = NR(JS)
DO 3420 J=1,NRT
M = J + 1
3394 WRITE(NO,1485) JS,J,T(JS,M-1),IT
READ(NI,1495,ERR=3394) Q(JS,M),T(JS,M)
3400 IF(T(JS,M).GT.T(JS,M-1)) GO TO 3410
3404 WRITE(NO,1505)
READ(NI,37,ERR=3404) T(JS,M)
GO TO 3400
3410 CONTINUE
3420 CONTINUE
GO TO 3060
PL2D631
PL2D632
PL2D633
PL2D634
PL2D635
PL2D636
PL2D637
PL2D638
PL2D639
PL2D640
PL2D641
PL2D642
PL2D643
PL2D644
PL2D645
PL2D646
PL2D647
PL2D648
PL2D649
PL2D650
PL2D651
PL2D652
PL2D653
PL2D654
PL2D655
PL2D656
PL2D657
PL2D658
PL2D659
PL2D660
PL2D661
PL2D662
PL2D663
PL2D664
PL2D665
PL2D666
PL2D667
PL2D668
PL2D669
PL2D670
PL2D671
PL2D672
PL2D673
PL2D674
PL2D675
PL2D676
PL2D677
PL2D678
PL2D679
PL2D680
PL2D681
PL2D682
PL2D683
PL2D684
PL2D685
PL2D686
PL2D687
PL2D688
PL2D689
PL2D690
PL2D691
PL2D692
PL2D693
PL2D694
PL2D695
PL2D696
PL2D697
PL2D698
PL2D699
PL2D700

```

```

C STEADY-STATE SOURCES PL2D701
3430 WRITE(NO,3435) JS PL2D702
3435 FORMAT(3X,'CHANGE STEADY-STATE RATE FOR SOURCE ',I2,' (Y/N) ?') PL2D703
    READ(NI,3075) JC PL2D704
    IF(JC.NE.IY) GO TO 3060 PL2D705
3444 WRITE(NO,3445) JS PL2D706
3445 FORMAT(3X,'ENTER NEW STEADY-STATE MASS RATE FOR SOURCE ',I2,'.', PL2D707
    1' ?') PL2D708
    READ(NI,3345,ERR=3444) Q(JS,1) PL2D709
    GO TO 3060 PL2D710
C ADD A NEW SOURCE PL2D711
C PL2D712
3450 NS = NS + 1 PL2D713
    JS = NS PL2D714
    IF(KFLOW.EQ.2) GO TO 3455 PL2D715
3454 WRITE(NO,1410) JS,IL PL2D716
    READ(NI,1425,ERR=3454) XS(JS),YS(JS) PL2D717
    GO TO 3470 PL2D718
3455 WRITE(NO,1415) JS,IL PL2D719
    READ(NI,1425,ERR=3455) XS(JS),YS(JS) PL2D720
3460 IF(YS(JS).GE.0.0.AND.YS(JS).LE.ST) GO TO 3470 PL2D721
3464 WRITE(NO,1435) ST,IL PL2D722
    READ(NI,37,ERR=3464) YS(JS) PL2D723
    GO TO 3460 PL2D724
3470 GO TO (3370,3480),JFLOW PL2D725
C STEADY-STATE SOURCES PL2D726
3480 WRITE(NO,3485) JS PL2D727
3485 FORMAT(3X,'ENTER STEADY-STATE MASS RATE FOR SOURCE ',I2, PL2D728
    1' ?') PL2D729
    READ(NI,3345,ERR=3480) Q(JS,1) PL2D730
    NR(JS) = 0 PL2D731
    GO TO 3060 PL2D732
C DELETE A SOURCE PL2D733
C PL2D734
3490 IF(NS.GT.1) GO TO 3500 PL2D735
    WRITE(NO,3495) PL2D736
3495 FORMAT(3X,'ONLY ONE SOURCE IN SCHEDULE -- CAN NOT DELETE',/) PL2D737
    GO TO 3060 PL2D738
3500 WRITE(NO,3505) IL,IL,IL PL2D739
3505 FORMAT(3X,'SOURCE ',6X,'X ('',A2,''),3X,'Y ('',A2,''),3X, PL2D740
    1'Z ('',A2,''),/) PL2D741
    DO 3520 I=1,NS PL2D742
        WRITE(NO,3515) I,XS(I),YS(I) PL2D743
    3515 FORMAT(5X,I2,3X,F8.2,3X,F8.2) PL2D744
    3520 CONTINUE PL2D745
    3530 WRITE(NO,3535) PL2D746
    3535 FORMAT(3X,'ENTER SOURCE TO DELETE',/, PL2D747
    13X,'(ENTER 0 TO CANCEL)',/,' ?') PL2D748
    READ(NI,1465,ERR=3530) FDUM PL2D749
    JS=FDUM PL2D750
    IF(JS.LE.0) GO TO 3060 PL2D751
    IF(JS.LE.NS) GO TO 3550 PL2D752
    WRITE(NO,3545) JS PL2D753
    3545 FORMAT(3X,'SOURCE ',I2,' NOT IN CURRENT SCHEDULE') PL2D754
    GO TO 3530 PL2D755
    3550 WRITE(NO,3555) JS PL2D756
    3555 FORMAT(3X,'DELETE SOURCE ',I2,' (Y/N)?') PL2D757
    READ(NI,3075) JC PL2D758
    IF(JC.NE.IY) GO TO 3530 PL2D759
    NSD = NS - 1 PL2D760
    GO TO (3560,3590),JFLOW PL2D761
C TRANSIENT SOURCES PL2D762
3560 IF(JS.EQ.NS) GO TO 3575 PL2D763
    DO 3570 J=JS,NSD PL2D764
        XS(J) = XS(J+1) PL2D765
    3570 CONTINUE PL2D766
    WRITE(NO,3580) PL2D767
    3580 FORMAT(3X,'ENTER TRANSIENT SOURCE NUMBER',I2,PL2D768
    1' ?') PL2D769
    READ(NI,3380,ERR=3580) I,J PL2D770
    IF(I.LT.1) GO TO 3570
    IF(I.GT.NS) GO TO 3575
    DO 3590 J=JS,NSD
        XS(J) = XS(J+1)
    3590 CONTINUE
    WRITE(NO,3595) I,J
    3595 FORMAT(3X,'TRANSIENT SOURCE ',I2,' ADDED')
    GO TO 3560

```

```

YS(J) = YS(J+1) PL2D771
NR(J) = NR(J+1) PL2D772
NRT = NR(J) PL2D773
DO 3570 K=1,NRT PL2D774
M = K + 1 PL2D775
Q(J,M) = Q(J+1,M) PL2D776
T(J,M) = T(J+1,M) PL2D777
3570 CONTINUE PL2D778
3575 NRT = NR(NS) PL2D779
DO 3580 K=1,NRT PL2D780
M = K + 1 PL2D781
Q(NS,M) = O.O PL2D782
T(NS,M) = O.O PL2D783
3580 CONTINUE PL2D784
NR(NS) = O PL2D785
NS = NSD PL2D786
GO TO 3060 PL2D787
C PL2D788
C STEADY-STATE SOURCES PL2D789
3590 IF(JS.EQ.NS) GO TO 3605 PL2D790
DO 3600 J=JS,NSD PL2D791
Q(J,1) = Q(J+1,1) PL2D792
XS(J) = XS(J+1) PL2D793
YS(J) = YS(J+1) PL2D794
3600 CONTINUE PL2D795
3605 Q(NS,1) = O.O PL2D796
NS = NSD PL2D797
GO TO 3060 PL2D798
C PL2D799
C CONFIRM WHETHER SATURATED THICKNESS IS A VARIABLE PL2D800
602 IF(KFLOW.EQ.2)GO TO 30 PL2D801
WRITE(ND,605) PL2D802
605 FORMAT(3X,'SATURATED THICKNESS IS NOT A VARIABLE IN'//,
13X,'X-Y COORDINATE SYSTEM (VERTICALLY AVERAGED SOLUTION)') PL2D803
PL2D804
PL2D805
GO TO 400 PL2D806
C PL2D807
C MENU OF EDIT COMMANDS FOR PLUMES VERSION 2.02 PL2D808
1000 WRITE(ND,1001)KHKH,KHKH,KHKH,KHKH PL2D809
1001 FORMAT(1H1,/,.3X,'MENU OF EDIT COMMANDS'//,
1' RETARDATION COEFFICIENT RD OBSERVATION POINTS OB'//, PL2D810
2' POROSITY PO X COORDINATES XC'//, PL2D811
3' SEEPAGE VELOCITY VX',6X,A1,' COORDINATES',7X,A1'C'//, PL2D812
4' X DISPERSION COEFFICIENT DX MENU OF COMMANDS MU'//, PL2D813
52X,A1,' DISPERSION COEFFICIENT D',A1,6X,'LIST INPUT DATA LI'//, PL2D814
6/,,' DECAY CONSTANT DE RUN CALCULATIONS RN'//, PL2D815
7' SOURCE RATE SCHEDULE RT DONE DN'//, PL2D816
8' NEW PROBLEM NP SATURATED THICKNESS ST'//, PL2D817
9' CHANGE SOLUTION/SOURCES CS OBSERVATION TIMES TC') PL2D818
PL2D819
GO TO 400 PL2D820
C PL2D821
700 STOP PL2D822
END

```

APPENDIX E  
Listing of Utility Function Subroutines

```

C FUNCTION BIO(Z)                                BIO 001
C JAN WAGNER                                     BIO 002
C SCHOOL OF CHEMICAL ENGINEERING                 BIO 003
C OKLAHOMA STATE UNIVERSITY                      BIO 004
C STILLWATER, OK 74078                           BIO 005
C TELEPHONE: (405) 624-5280                      BIO 006
C                                                 BIO 007
C                                                 BIO 008
C                                                 BIO 009
C                                                 BIO 010
C                                                 BIO 011
C                                                 BIO 012
C                                                 BIO 013
C                                                 BIO 014
C                                                 BIO 015
C                                                 BIO 016
C                                                 BIO 017
C                                                 BIO 018
C                                                 BIO 019
C                                                 BIO 020
C                                                 BIO 021
C                                                 BIO 022
C                                                 BIO 023
C                                                 BIO 024
C                                                 BIO 025
C                                                 BIO 026
C                                                 BIO 027
C                                                 BIO 028
C                                                 BIO 029
C                                                 BIO 030
C                                                 BIO 031
C                                                 BIO 032
C                                                 BIO 033
C                                                 BIO 034
C                                                 BIO 035
C                                                 BIO 036
C                                                 BIO 037
C                                                 BIO 038
C                                                 BIO 039
C                                                 BIO 040
C                                                 BIO 041
C                                                 BIO 042
C                                                 BIO 043
C                                                 BIO 044
C                                                 BIO 045
C                                                 BIO 046
C                                                 BIO 047
C                                                 BIO 048
C                                                 BIO 049
C                                                 BIO 050

C REVISED: 6 JANUARY 1983

C EVALUATION OF MODIFIED BESSEL FUNCTION OF THE FIRST KIND
C OF ORDER ZERO
C POLYNOMIAL APPROXIMATIONS ARE USED FOR IO(Z)
C SEE SECTION 9.8 OF ABRAMOWITZ AND STEGUN (1966)
C DIMENSION A(9)
C COMMON/IO/NI,NO
C DATA A/0.9189385,4.32105045,6.09540829,6.45308739,4.6926023,
C      13.88357842,3.63608323,4.10583047,5.540702353/
C

C IF(Z.LE.0.0) GO TO 200
C T = Z/3.75
C IF(Z.GT.3.75) GO TO 100
C T2 = T*T
C T4 = T2*T2
C T6 = T2*T4
C T8 = T2*T6
C T10 = T2*T8
C T12 = T2*T10
C BIO = 1.0 + 3.5156229*T2 + 3.0899424*T4 + 1.2067492*T6
C      1 + 0.2659732*T8 + 0.0360768*T10+ 0.0045813*T12
C RETURN
C 100 CONTINUE
C SUM = 0.0
C DO 150 I=1,9
C   SIGN=(-1.0)**(I+1)
C   IF(I.EQ.2) SIGN=1.0
C   ARG = -1.0*A(I) - 0.5*ALOG(Z) - FLOAT(I-1)*ALOG(T)
C   SUM = SUM + SIGN*EXP(ARG)
C 150 CONTINUE
C BIOLOG = ALOG(SUM) + Z
C BIO = EXP(BIOLG)
C RETURN
C 200 CONTINUE
C IF(Z.LT.0.0) GO TO 300
C BIO = 1.0
C RETURN
C 300 WRITE(NO,305) Z
C 305 FORMAT(6X,'ARGUMENT OF BESSEL FUNCTION IO(Z) IS NEGATIVE',//,
C      16X,'Z = ',E12.6,' -- PROGRAM TERMINATED')
C STOP
C END

```

```

C FUNCTION BIOLOG(Z)           BIOLO01
C JAN WAGNER                   BIOLO02
C SCHOOL OF CHEMICAL ENGINEERING BIOLO03
C OKLAHOMA STATE UNIVERSITY     BIOLO04
C STILLWATER, OK 74078          BIOLO05
C TELEPHONE: (405) 624-5280    BIOLO06
C                               BIOLO07
C REVISED: 6 JANUARY 1983      BIOLO08
C                               BIOLO09
C EVALUATION OF THE NATURAL LOG OF A MODIFIED BESSSEL   BIOLO10
C FUNCTION OF THE FIRST KIND OF ORDER ZERO             BIOLO11
C POLYNOMIAL APPROXIMATIONS ARE USED FOR IO(Z)         BIOLO12
C SEE SECTION 9.8 OF ABRAMOWITZ AND STEGUN (1966)       BIOLO13
C DIMENSION A(9)                                     BIOLO14
C COMMON/IO/NI,NO                                     BIOLO15
C DATA A/0.9189385,4.32105045,6.09540829,6.45308739,4.6926023,   BIOLO16
C 13.88357842,3.63608323,4.10583047,5.540702353/   BIOLO17
C
C IF(Z.LE.0.0) GO TO 200           BIOLO18
C T = Z/3.75                      BIOLO19
C IF(Z.GT.3.75) GO TO 100        BIOLO20
C T2 = T*T                         BIOLO21
C T4 = T2*T2                       BIOLO22
C T6 = T2*T4                       BIOLO23
C T8 = T2*T6                       BIOLO24
C T10 = T2*T8                      BIOLO25
C T12 = T2*T10                     BIOLO26
C BIO = 1.0 + 3.5156229*T2 + 3.0899424*T4 + 1.2067492*T6      BIOLO27
C           + 0.2659732*T8 + 0.0360768*T10 + 0.0045813*T12      BIOLO28
C BIOLOG = ALOG(BIO)               BIOLO29
C RETURN                           BIOLO30
C
100 CONTINUE                      BIOLO31
SUM = 0.0                          BIOLO32
DO 150 I=1,9                      BIOLO33
SIGN = (-1.0)**(I+1)               BIOLO34
IF(I.EQ.2) SIGN=1.0                BIOLO35
ARG = -1.0*A(I) - 0.5*ALOG(Z) - FLOAT(I-1)*ALOG(T)      BIOLO36
SUM = SUM + SIGN*EXP(ARG)          BIOLO37
BIOLOG = ALOG(SUM) + Z            BIOLO38
RETURN                           BIOLO39
C
200 CONTINUE                      BIOLO40
IF(Z.LT.0.0) GO TO 300            BIOLO41
BIO = 1.0                          BIOLO42
RETURN                           BIOLO43
C
300 WRITE(NU,305) Z               BIOLO44
305 FORMAT(6X,'ARGUMENT OF BESSSEL FUNCTION IO(Z) IS NEGATIVE',//,
16X,'Z = ',E12.6,' -- PROGRAM TERMINATED')           BIOLO45
STOP                            BIOLO46
END                             BIOLO47
                                BIOLO48
                                BIOLO49
                                BIOLO50

```

```

C FUNCTION BK0(Z)                                BKO 001
C JAN WAGNER                                     BKO 002
C SCHOOL OF CHEMICAL ENGINEERING                 BKO 003
C OKLAHOMA STATE UNIVERSITY                      BKO 004
C STILLWATER, OK 74078                           BKO 005
C TELEPHONE: (405) 624-5280                      BKO 006
C                                                 BKO 007
C REVISED: 6 JANUARY 1983                         BKO 008
C                                                 BKO 009
C EVALUATION OF MODIFIED BESSSEL FUNTION OF SECOND KIND   BKO 010
C OF ORDER ZERO                                     BKO C11
C POLYNOMIAL APPROXIMATIONS ARE USED FOR KO(Z)          BKO C12
C SEE SECTION 9.8 OF ABRAMOWITZ AND STEGUN (1966)        BKO C13
C COMMON/IO/NI,NO                                     BKO C14
C                                                 BKO C15
C IF(Z.LE.0.0) GO TO 200                           BKO C16
C T = Z/2.0                                         BKO C17
C T2 = T*T                                         BKO C18
C T4 = T2*T2                                       BKO C19
C T6 = T2*T4                                       BKO C20
C IF(Z.GT.2.0) GO TO 100                           BKO C21
C T8 = T2*T6                                       BKO C22
C T10 = T2*T8                                      BKO C23
C T12 = T2*T10                                     BKO C24
C BKO = -1.0*ALOG(T)*BIO(Z) - 0.57721566          BKO C25
C 1      + 0.42278420*T2 + 0.23069756*T4 + 0.03488590*T6    BKO C26
C 2      + 0.00262698*T8 + 0.00010750*T10+ 0.0740E-04*T12  BKO C27
C RETURN                                            BKO C28
C 100 CONTINUE                                     BKO C29
C SUM = (1.25331414 - 0.07832358/T + 0.02189566/T2     BKO C30
C 1      - 0.01062446/(T*T2) + 0.00587872/T4           BKO C31
C 2      - 0.00251540/(T*T4) + 0.00053208/T6           BKO C32
C BK0LOG = ALOG(SUM) - Z - 0.5*ALOG(Z)                BKO C33
C BK0 = EXP(BK0LOG)                                    BKO C34
C RETURN                                            BKO C35
C 200 CONTINUE                                     BKO C36
C WRITE(NC,205) .Z                                 BKO C37
C 205 FORMAT(6X,'ARGUMENT OF BESSSEL FUNCTION KO(Z) IS LESS THAN'    BKO C38
C ' OR EQUAL TO ZERO',/,,6X,'Z = ',E12.6,' -- PROGRAM TERMINATED')  BKO C39
C STOP                                              BKO C40
C END                                               BKO C41

```

```

C      FUNCTION BKLOG(Z)                                BKLO01
C      JAN WAGNER                                BKLO02
C      SCHOOL OF CHEMICAL ENGINEERING                BKLO03
C      OKLAHOMA STATE UNIVERSITY                     BKLO04
C      STILLWATER, OK 74078                         BKLO05
C      TELEPHONE: (405) 624-5280                     BKLO06
C
C      REVISED: 6 JANUARY 1983                      BKLO07
C
C      NATURAL LOG OF MODIFIED BESSSEL FUNTION OF SECOND KIND   BKLO08
C      OF ORDER ZERO                                BKLO09
C      POLYNOMIAL APPROXIMATIONS ARE USED FOR KO(Z)          BKLO10
C      SEE SECTION 9.8 OF ABRAMOWITZ AND STEGUN (1966)        BKLO11
C      COMMON/IO/NI,NO                               BKLO12
C
C      IF(Z.LE.0.0) GO TO 200                         BKLO13
C      T = Z/2.0                                     BKLO14
C      T2 = T*T                                     BKLO15
C      T4 = T2*T2                                    BKLO16
C      T6 = T2*T4                                    BKLO17
C      IF(Z.GT.2.0) GO TO 100                         BKLO18
C      T8 = T2*T6                                    BKLO19
C      T10 = T2*T8                                    BKLO20
C      T12 = T2*T10                                 BKLO21
C      BKLO = -1.0*ALOG(T)*B10(Z) - 0.57721566    BKLO22
C      1     + 0.42278420*T2 + 0.23069756*T4 + 0.03488590*T6   BKLO23
C      2     + 0.00262698*T8 + 0.00010750*T10+ 0.0740E-04*T12  BKLO24
C      BKLOG = ALOG(BKO)
C      RETURN                                         BKLO25
C100 CONTINUE                                     BKLO26
C      SUM = (1.25331414 - 0.07832358/T + 0.02189568/T2
C      1     - 0.01062446/(T*T2) + 0.00587872/T4
C      2     - 0.00251540/(T*T4) + 0.00053208/T6)           BKLO27
C      BKLOG = ALOG(SUM) - Z - 0.5*ALOG(Z)
C      RETURN                                         BKLO28
C200 CONTINUE                                     BKLO29
C      WRITE(ND,205) Z
C205 FORMAT('X, 'ARGUMENT OF BESSSEL FUNCTION KO(Z) IS LESS THAN'
C      1' OR EQUAL TO ZERO',/,'Z = ',E12.6,' -- PROGRAM TERMINATED')
C      STOP
C      END

```

```

FUNCTION ERFC(Z)                                ERFCC01
C JAN WAGNER                                     ERFCC02
C SCHOOL OF CHEMICAL ENGINEERING                 ERFCC03
C OKLAHOMA STATE UNIVERSITY                      ERFCC04
C STILLWATER, OK 74078                           ERFCC05
C TELEPHONE: (405) 624-5280                      ERFCC06
C
C REVISED: 6 JANUARY 1983                         ERFCC07
C
C RATIONAL APPROXIMATION OF THE COMPLIMENTARY ERROR FUNCTION    ERFCC08
C SEE SECTION 7.1 OF ABRAMOWITZ AND STEGUN (1966)                ERFCC09
C THE FOLLOWING IDENTITIES ARE USED TO HANDLE NEGATIVE ARGUMENTS   ERFCC0A
C   ERFC( Z ) = 1 - ERF(Z)                               ERFCC0B
C   ERF( -Z ) = -ERF ( Z )                            ERFCC0C
C
C REAL=8 COEFLG,DERFC,DI,FX,TERMI,TERMO,SUM,X          ERFCC0D
C COMMON/IO/NI,NO                                      ERFCC0E
C
C X = ABS(Z)                                         ERFCC0F
C IF (X.GT.3.0DO0) GO TO 50                          ERFCC10
C
C FOR X<3 A RATIONAL APPROXIMATION OF THE COMPLIMENTARY ERROR    ERFCC11
C FUNCTION IS USED.                                       ERFCC12
C
C DERFC = 1.0DO0/((1.0DO0 + 7.05230784D-02*X + 4.22820123D-02*(X**2) ERFCC13
C      + 9.2705272D-03*(X**3) + 1.520143D-04*(X**4)               ERFCC14
C      2 + 2.76572D-04*(X**5) + 4.30638D-05*(X**6))**16).           ERFCC15
C GO TO 100                                         ERFCC16
C
C FOR X>3 AN ASYMPTOTIC EXPANSION OF THE COMPLIMENTARY ERROR     ERFCC17
C FUNCTION IS USED.                                       ERFCC18
C
C 50. COEFLG = X*X + DLOG(X) + 0.57236494D00            ERFCC19
C FX = 2.0DO0-X-X                                     ERFCC20
C SUM = 1.0DO0                                         ERFCC21
C TERMO = 1.0DO0                                         ERFCC22
C DO 60 I=2,50                                         ERFCC23
C DI = I                                              ERFCC24
C TERMI = -TERMO*(2.0DO0+DI - 3.0DO0)/FX             ERFCC25
C IF(DABS(TERMI).GT.DABS(TERMO)) GO TO 70           ERFCC26
C SUM = SUM + TERMI                                    ERFCC27
C TEST = TERMI/SUM                                     ERFCC28
C IF(ABS(TEST).LT.1.0E-16) GO TO 70                  ERFCC29
C TERMO = TERMI                                     ERFCC30
C 60 CONTINUE                                         ERFCC31
C WRITE(NO,65)                                         ERFCC32
C
C 65 FORMAT(6X,'--- WARNING -- ASYMPTOTIC EXPANSION FOR ERFC DID NOT' ERFCC33
C      1' CONVERGE WITH 50 TERMS IN THE SUMMATION')           ERFCC34
C
C 70 SUM = DLOG(SUM) - COEFLG                         ERFCC35
C IF(SUM.LT.-72.0DO0) SUM=-72.0DO0                   ERFCC36
C DERFC = DEXP(SUM)                                    ERFCC37
C
C 100 CONTINUE                                         ERFCC38
C
C FOR Z<0, ERFC(-Z) = 2-ERFC(Z)                     ERFCC39
C ERFC = DERFC                                         ERFCC40
C IF(Z.LT.0.0) ERFC=2.0DO0-DERFC                    ERFCC41
C RETURN                                              ERFCC42
C END                                                 ERFCC43

```

```

FUNCTION E1LOG(Z)                                E1LG001
C JAN WAGNER                                     E1LG002
C SCHOOL OF CHEMICAL ENGINEERING                 E1LG003
C OKLAHOMA STATE UNIVERSITY                      E1LG004
C STILLWATER, OK 74078                           E1LG005
C TELEPHONE: (405) 624-5280                      E1LG006
C                                                 E1LG007
C REVISED: 6 JANUARY 1983                         E1LG008
C                                                 E1LG009
C EVALUATION OF THE NATURAL LOG OF THE EXPONENTIAL INTEGRAL   E1LG010
C POLYNOMIAL APPROXIMATIONS ARE USED FOR E1(Z)                E1LG011
C SEE SECTION 5.1 OF ABRAMOWITZ AND STEGUN (1966)             E1LG012
C COMMON/IO/NI,NO                                         E1LG013
C                                                 E1LG014
C IF(Z.LE.0.0) GO TO 200                            E1LG015
C Z2 = Z*Z                                         E1LG016
C Z3 = Z*Z2                                         E1LG017
C IF(Z.GT.1.0) GO TO 100                           E1LG018
C ARGUMENTS LESS THAN UNITY                         E1LG019
C E1 = - 0.57721566 + 0.99999193*Z - 0.24991055*Z2   E1LG020
C 1 + 0.05519968*Z3 - 0.00976004*Z2*Z2 + 0.00107857*Z2*Z3   E1LG021
C 2 - ALOG(Z)                                       E1LG022
C E1LOG = ALOG(E1)                                 E1LG023
C RETURN                                           E1LG024
C 100 CONTINUE                                     E1LG025
C ARGUMENTS GREATER THAN UNITY                    E1LG026
C E1LOG = ALOG(Z2*Z2 + 8.5733287401*Z3 + 18.0590169730*Z2   E1LG027
C 1 + 8.6347608925*Z + 0.2677737343 )           E1LG028
C 2 - ALOG(Z2*Z2 + 9.5733223454*Z3 + 25.6329561486*Z2   E1LG029
C 3 + 21.0996530827*Z + 3.9584969228 )           E1LG030
C 4 - ALOG(Z) - Z                                E1LG031
C RETURN                                           E1LG032
C 200 WRITE(0,205) Z                             E1LG033
C 205 FORMAT(6X,'ARGUMENT OF EXPONENTIAL INTEGRAL IS LESS THAN'   E1LG034
C 1' OR EQUAL TO ZERO',/6X,'Z = ',E12.6,3X,'-- PROGRAM'   E1LG035
C 2' TERMINATED')                                E1LG036
C STOP                                            E1LG037
C END                                             E1LG038

```

```
C      FUNCTION FUNCTN(Z)          FUNCOO1
      INTEGRAND OF HANTUSH WELL FUNCTION   FUNCOO2
      REAL*8 DB,Z,ARG,FUNCTN             FUNCOO3
      .COMMON BF                         FUNCOO4
      DB=BF                            FUNCOO5
      ARG = DLOG(Z) + Z + DB*DB/(4.0D00-Z) FUNCOO6
      FUNCTN = DEXP(-ARG)                FUNCOO7
      RETURN                           FUNCOO8
      END                               FUNCOO9
```

```

FUNCTION GAUSS(A,B,FUNCTN)                               GAUS001
C                                                       GAUS002
C   NUMERICAL INTEGRATION BY 24 POINT GAUSS-LEGENDRE QUADRATURE  GAUS003
C   ZEROS AND WEIGHTING FACTORS ARE FROM TABLE 25.4, P916, OF  GAUS004
C   ABRAMOWITZ AND STENGUN(1966)                           GAUS005
C                                                       GAUS006
C   REAL*8 A,B,C,D,FUNCTN,GAUSS,SUM,W,Z                 GAUS007
C   DIMENSION Z(12),W(12)                                 GAUS008
C                                                       GAUS009
C                                                       GAUS010
C                                                       GAUS011
C   DATA Z/0.064056892862065,0.191118867473616,0.315042679696163,  GAUS012
C   1          0.433793507626045,0.545421471388839,0.648093651936975,  GAUS013
C   2          0.740124191578554,0.820001985973902,0.886415527004401,  GAUS014
C   3          0.938274552002732,0.974728555971309,0.995187219997021/  GAUS015
C                                                       GAUS016
C   DATA W/0.127938195346752,0.125837456346828,0.121670472927803,  GAUS017
C   1          0.115505668053725,0.107444270115965,0.097618652104113,  GAUS018
C   2          0.086190161531953,0.073346481411080,0.059298584915436,  GAUS019
C   3          0.044277438817419,0.028531388628933,0.012341229799987/  GAUS020
C                                                       GAUS021
C                                                       GAUS022
C.....SET UP INITIAL PARAMETERS                         GAUS023
C   C = (B-A)/2.0D00                                     GAUS024
C   D = (B+A)/2.0D00                                     GAUS025
C                                                       GAUS026
C.....ACCUMULATE THE SUM IN THE 24-POINT FORMULA    GAUS027
C   SUM = 0.0                                              GAUS028
C   DO 5 J = 1, 12                                       GAUS029
C   IF(Z(J).EQ.0.0) SUM = SUM + W(J)*FUNCTN(D)          GAUS030
C   IF(Z(J).NE.0.0) SUM = SUM + W(J)*(FUNCTN(Z(J)*C + D)  GAUS031
C   1           + FUNCTN(-Z(J)*C + D))                  GAUS032
C   5 CONTINUE                                            GAUS033
C                                                       GAUS034
C.....MAKE INTERVAL CORRECTION AND RETURN             GAUS035
C   GAUSS = C*SUM                                         GAUS036
C   RETURN                                                 GAUS037
C   END                                                   GAUS038

```

```

C      SUBROUTINE SOL2D(C,PEX,PEY,TSOL,N,NR)          SOL2001
C      NUMERICAL EVALUATION OF ANALYTICAL SOLUTION      SOL2002
C      REVISED: 18 APRIL 1984                         SOL2003
C
C      REAL LAMBDA                                     SOL2004
C      COMMON/RATE/Q(10,12),T(10,12)                   SOL2005
C      COMMON/PHYPRO/ALPHA,BETA,DX,LAMBDA,PE,RD,V      SOL2006
C
C      PEXY = SQRT(PEX**2 + BETA*(PEY**2))           SOL2007
C      MT = NR + 1                                    SOL2008
C      IF(MT.GT.1) GO TO 10                          SOL2009
C
C      STEADY-STATE SOLUTION                         SOL2010
C
C      S = Q(N,1)                                     SOL2011
C      B = 0.5*PEXY*ALPHA                           SOL2012
C      C = 2.0*LAMBDA*S*EXP(PEX/2.0 + BKLOG(B))     SOL2013
C      GO TO 50                                      SOL2014
C
C      TRANSIENT SOLUTION                          SOL2015
C
10   C = 0.0                                         SOL2016
C      IF(T(N,MT).LT.TSOL) MT=MT+1                 SOL2017
DO 40 K=2,MT
      IF(T(N,K-1).GT.TSOL) GO TO 50                SOL2018
      S = Q(N,K) - Q(N,K-1)                         SOL2019
      PINJ = V*V*(TSOL-T(N,K-1))/(DX*RD)           SOL2020
      TAU = PINJ/(PEXY*PEXY)                         SOL2021
      U = 0.25/TAU                                  SOL2022
      B = 0.5*PEXY*ALPHA                           SOL2023
      IF (B.GT.20.0) GO TO 20                        SOL2024
      WF = W(U,B)                                   SOL2025
      SUMLOG = PEX/2.0 + ALOG(WF)                   SOL2026
      TERM = EXP(SUMLOG)                           SOL2027
      GO TO 30                                      SOL2028
C
C      FOR LARGE VALUES OF B USE THE THIRD ORDER APPROXIMATION      SOL2029
C      OF WILSON AND MILLER (1979) JOUR. HYDRAULICS DIV., ASCE,      SOL2030
C      VOL 105, NO HY12, P 1565.                                SOL2031
C
C      NOTE: THE TERM EXP(PEX/2) IS INCLUDED IN THE NUMERICAL      SOL2032
C      APPROXIMATION FOR W(U,B) TO AVOID COMPUTATIONAL DIFFICULTIES      SOL2033
C      IN TAKING THE PRODUCT EXP(PEX/2)*W(U,B)                  SOL2034
C
C
20   TERM = WELPRD(U,B,PEX)                         SOL2035
30   IF(TERM.LE.1.OE-32) TERM=0.0                  SOL2036
      C = C + LAMBDA*S*TERM                         SOL2037
C
40   CONTINUE
50   RETURN
END

```

```

FUNCTION W(U,B)                               WELL001
C                                              WELL002
C JAN WAGNER                                WELL003
C SCHOOL OF CHEMICAL ENGINEERING             WELL004
C OKLAHOMA STATE UNIVERSITY                  WELL005
C STILLWATER, OK 74078                      WELL006
C TELEPHONE: (405) 624-5280                 WELL007
C                                              WELL008
C REVISED: 6 JANUARY 1983                   WELL009
C                                              WELL010
C EVALUATION OF THE WELL FUNCTION FOR LEAKY ARTESIAN AQUIFERS WELL011
C THIS VERSION HANDLES ARGUMENTS OVER THE ENTIRE RANGE WELL012
C REAL*B A1,A2,FUNCTN,GAUSS,DZ              WELL013
C EXTERNAL FUNCTN                           WELL014
C COMMON BF                                 WELL015
C BF=B                                     WELL016
C IF(B.GT.0.1) GO TO 200                    WELL017
C IF(U.GT.1.0) GO TO 100                    WELL018
C                                              WELL019
C FOR B < 0.1 USE APPROXIMATIONS PRESENTED BY WELL020
C HANTUSH, M.S. AND C.E. JACOB (1955)          WELL021
C TRANSACTIONS AMERICAN GEOPHYSICAL UNION,    WELL022
C VOL 36, NO. 1 PP. 95 - 100.                  WELL023
C                                              WELL024
C                                              WELL025
C IF(U.LE.1.0E-10) GO TO 50                  WELL026
C                                              WELL027
C EQUATION 12, FOR U < 1.0                  WELL028
C                                              WELL029
C                                              WELL030
C                                              WELL031
C CON = B*B/(4.0*U)                         WELL032
C TERM1 = 2.0*BKO(B)                         WELL033
C TERM2 = EXP(BILOG(B) + E1LOG(CON))        WELL034
C E1U = EXP(E1LOG(U))                        WELL035
C SUM = 0.57721566 + ALOG(U) + E1U + (U*B*B/16.0)*(1.0 - U/9.0) WELL036
C SUMLOG = ALOG(SUM)                         WELL037
C TERM3 = EXP(SUMLOG - CON)                  WELL038
C W = TERM1 - TERM2 + TERM3                 WELL039
C RETURN                                     WELL040
C 50 W = 2.0*BKO(B)                         WELL041
C RETURN                                     WELL042
C                                              WELL043
C RECIPROCAL RELATION, EQUATION 17, FOR U > 1.0 WELL044
C                                              WELL045
C                                              WELL046
C 100 TERM1 = EXP(BILOG(B) + E1LOG(U))       WELL047
C SUM = (B*B/4.0)*(1.0/U - 1.0/(36.0*U*U)) WELL048
C     + ((B*B/4.0)**2)*(1.0/(4.0*U) - 1.0/(4.0*U*U)) WELL049
C SUMLOG = ALOG(SUM)                         WELL050
C TERM2 = EXP(SUMLOG - U)                    WELL051
C W = TERM1 - TERM2                         WELL052
C RETURN                                     WELL053
C                                              WELL054
C                                              WELL055
C 200 CONTINUE                                WELL056
C FOR 0.1 < B < 20.0 USE NUMERICAL INTEGRATION WELL057
C FOR U < B/2, W(U,B) = 2KO(B)-INT(0--U) FUNCTION WELL058
C FOR U > B/2 W(U,B) = INT(0--B**2/4U) FUNCTION WELL059
C                                              WELL060
C                                              WELL061
C A1 = 0.0                                    WELL062
C A2 = U                                     WELL063
C B2 = B/2.0D00                                WELL064
C IF(U.GE.B2) A2=B2*B2/U                     WELL065
C DZ = GAUSS(A1,A2,FUNCTN)                  WELL066
C Z = DZ                                     WELL067
C W = 2.0*BKO(B) - Z                         WELL068
C IF(U.GE.B2) W=Z                            WELL069
C RETURN                                     WELL070

```

END

WELLO71

```

FUNCTION WELPRD(U,B,PEX)                               WELP001
C JAN WAGNER                                         WELP002
C SCHOOL OF CHEMICAL ENGINEERING                   WELP003
C OKLAHOMA STATE UNIVERSITY                         WELP004
C STILLWATER, OK 74078                            WELP005
C TELEPHONE: (405) 624-5280                        WELP006
C
C REVISED: 6 JANUARY 1983                           WELP007
C
C THIS FUNCTION SUBROUTINE EVALUATES EXP(PEX/2)=W(U,B)   WELP008
C USING THE THIRD-ORDER APPROXIMATION FOR W(U,B) PRESENTED   WELP009
C BY WILSON AND MILLER (1979) JOUR. HYDRAULICS DIV., ASCE.   WELP010
C VOL 105, NO HY12, P 1565.                          WELP011
C
C REAL*8 DI, FZ, TERMI, TERMO, SUM, Z               WELP012
C COMMON/IO/NI,NO                                     WELP013
C
C PAR = (B-2.0*u)/((4.0*u)**0.5)                   WELP014
C IF(ABS(PAR).GT.3.0) GO TO 50                      WELP015
C TERM1 = (1.0 - 1.0/(8.0*B))*ERFC(-PAR)           WELP016
C TERM2 = ((PAR/(7.0898154*B))/EXP(PAR**2))        WELP017
C W = ((1.5707963/B)**0.5)*EXP(-B)*(TERM1+TERM2)    WELP018
C WELPRD = EXP(PEX/2)*W(U,B)                       WELP019
C = ((1.5707963/B)**0.5)*EXP(PEX/2 - B)*(TERM1+TERM2) WELP020
C SUMLOG = ALOG(TERM1 + TERM2)                     WELP021
C WELOG = 0.5*(0.45158271 - ALOG(B)) + (PEX/2.0 - B) + SUMLOG WELP022
C IF(WELOG.LT.-72.0) GO TO 20                      WELP023
C WELPRD = EXP(WELOG)                                WELP024
C RETURN                                              WELP025
20 CONTINUE                                           WELP026
WELPRD = 1.0E-32                                     WELP027
RETURN                                              WELP028
50 CONTINUE                                           WELP029
IF(PAR.LT.0.0) GO TO 100                           WELP030
C FOR B>20 AND PAR>3.0 W(U,B)=2KO(B)             WELP031
WELOG = PEX/2.0 + BKOLOG(B) + 0.69314718          WELP032
WELPRD = EXP(WELOG)                                WELP033
RETURN                                              WELP034
100 CONTINUE                                          WELP035
C FOR PAR<-3.0 AN ASYMPTOTIC EXPANSION FOR ERFC(-PAR) IS UTILIZED WELP036
C SEE SECTION 7.1 OF ABRAMOWITZ AND STEGUN (1966)          WELP037
COEFLG = PEX/2.0 - B - PAR*PAR - ALOG(-PAR) - 0.5*ALOG(2.0*B) WELP038
1 + ALOG(1.0 - 0.1250/B)                            WELP039
IF(COEFLG.LT.-72.0) GO TO 200                      WELP040
Z = -PAR                                            WELP041
FZ = 2.0DOO-Z*Z                                      WELP042
SUM = 1.0DOO                                         WELP043
TERMO = 1.0DOO                                         WELP044
DO 120 I=2,50                                       WELP045
DI = I                                               WELP046
TERMI = -TERMO-(2.0DOO*DI-3.0DOO)/FZ              WELP047
IF(DABS(TERMI).GT.DABS(TERMO)) GO TO 150          WELP048
SUM = SUM + TERMI                                    WELP049
TEST = TERMI/SUM                                     WELP050
IF(ABS(TEST).LT.1.0E-16) GO TO 150                WELP051
TERMO = TERMI                                         WELP052
120 CONTINUE                                         WELP053
WRITE(NU,500)                                         WELP054
500 FORMAT(6X,'*** WARNING -- ASYMPTOTIC APPROXIMATION FOR ERFC IN'//, WELP055
1      6X,'          FUNCTION WELPRD DID NOT CONVERGE WITH '//, WELP056
2      6X,'          50 TERMS IN THE SUMMATION')          WELP057
150 SUMLOG = DLOG(SUM)                                WELP058
WELOG = COEFLG + SUMLOG                             WELP059
WELPRD = EXP(WELOG)                                WELP060
RETURN                                              WELP061
200 CONTINUE                                           WELP062
C FOR LARGE NEGATIVE VALUES OF PAR, ERFC(-PAR) -> 2 WELP063
WELPRD = 0.0                                         WELP064
RETURN                                              WELP065
END                                                 WELP066

```