

EPA Federal Facilities Toxic Release and Reduction Initiatives Fact Sheet

Background


Executive Order 12856, entitled "Federal Compliance with Right-To-Know Laws and Pollution Prevention Requirements", was signed by President Clinton on August 3, 1993. The primary objectives of EO 12856 are to encourage Federal facilities to:

- Develop pollution prevention plans to reduce toxic releases by 50%;
- Collect and report data on the quantity of hazardous materials stored, used, and released at the facility;
- Ensure public access to use and release information.

Federal facilities are required to submit annual TRI reports starting in 1995 for data collected in 1994.

TETRACHLOROETHYLENE

1995 Waste Management Distribution

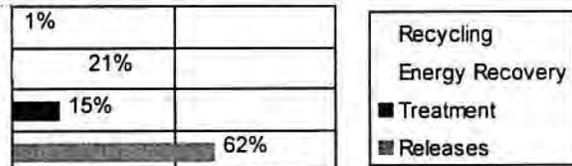


Approach

A study was undertaken to analyze Federal facility TRI data for 1994 and 1995 to: 1) determine the most commonly used and released chemicals; 2) identify currently used pollution prevention (P2) approaches and on-going pollution prevention research and development to lower or substitute the use of a chemical; and 3) identify potential RD/transition needs. As of January 1998, fifteen chemical Fact Sheets have been developed. Please refer to the back page to order Fact Sheets for other chemicals.

This Fact Sheet contains two charts and four main sections:

- The charts represent the waste management distribution and percent change of TRI reported quantities.
- Chemical Profile section.
- Identified and used P2 approaches section.
- On-going P2 research and development section.
- P2 research and development/transition needs section.

TRI Reported Quantities - Percent Change 1994 and 1995

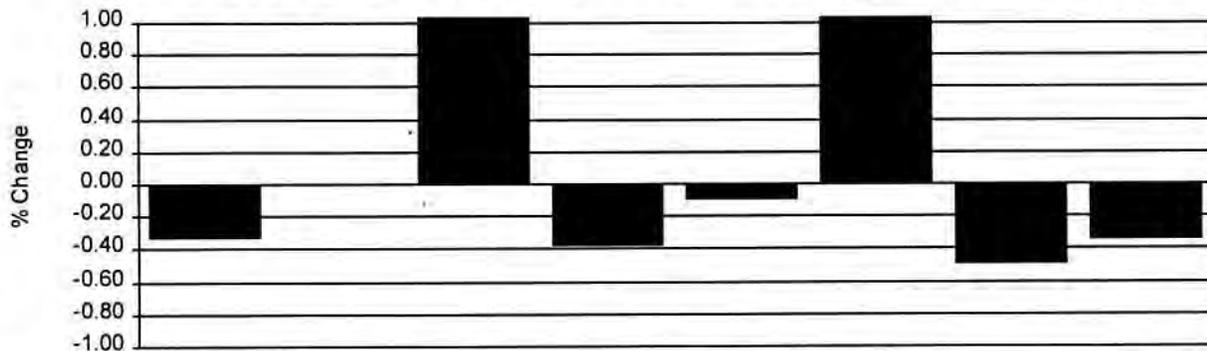

TRI Reporting	Releases	Recycling		Energy Recovery		Treatment		Releases plus Off-site Treatment
		On-Site	Off-Site	On-Site	Off-Site	On-Site	Off-Site	
1994 (lbs)	471,230	0	347	65,225	75,137	673	27,480	498,710
1995 (lbs)	315,390	0	5,959	40,351	67,473	61,841	13,940	329,330
% Change	-33%	0%	1617%	-38%	-10%	9089%	-49%	-34%

SYNONYMS

TETRACHLOROETHYLENE PERK

PERCHLOROETHYLENE

COMMON USES IN THE U.S.

- www.epa.gov/ttn/uatw#http://www.epa.gov/ttn/uatw#
- Tetrachloroethylene is used for rubber coatings, solvent soaps, printing inks, adhesives and glues, sealants, polishes, lubricants, and silicones.
 - Tetrachloroethylene is used for dry cleaning and textile processing, as a chemical intermediate, and as a degreasing agent.

ACUTE HEALTH HAZARDS

- www.epa.gov/ttn/uatw#http://www.epa.gov/ttn/uatw#
- Acute animal tests, such as the LC50 and LD50 tests in mice have shown tetrachloroethylene to have low toxicity from inhalation and oral exposure.
 - Animal studies have reported effects on the liver, kidney, and central nervous system (CNS) from acute inhalation exposure to tetrachloroethylene.
 - Acute exposure to very high levels of tetrachloroethylene in humans has caused death. Effects noted from acute, inhalation exposure include intense irritation of the upper respiratory tract and eyes, kidney dysfunction, and neurological effects such as reversible mood and behavioral changes, impairment of coordination, and anesthetic effects.

CHRONIC HEALTH HAZARDS

- www.epa.gov/ttn/uatw#http://www.epa.gov/ttn/uatw#
- EPA has classified tetrachloroethylene as a Group B2/C, probable human carcinogen.
 - One human study reported that there was a potential association between drinking water contaminated with tetrachloroethylene and other chemicals and an increased risk of childhood leukemia. Other studies reexamined the data and did not agree with the association because the people were exposed to multiple chemicals and the statistical significance of the incidence of leukemia has not been resolved.
 - Tetrachloroethylene, via inhalation exposure, has not been shown to cause birth defects or to impact reproductive performance in animals. Epidemiological studies of dry cleaning workers exposed to tetrachloroethylene and other solvents have shown mixed results; some studies reported an increased incidence of a variety of tumors, while other studies did not show any carcinogenic effects. All of these studies are complicated by potential exposure to numerous chemicals.
 - In a study of residents exposed to drinking water contaminated with solvents, including tetrachloroethylene, there was a suggestion that birth defects were associated with exposure. However, no firm conclusions can be drawn from this study due to multiple chemical exposures and problems with the analysis.
 - Some adverse reproductive effects, such as menstrual disorders and spontaneous abortions, have been reported from occupational exposure to tetrachloroethylene. However, no definitive conclusions can be made because of the limitations of the studies.
 - Animal studies have reported effects on the liver, kidney, and CNS from chronic inhalation exposure to tetrachloroethylene.
 - The major effects from chronic (long-term) inhalation exposure to tetrachloroethylene in humans are neurological effects, including headaches, and impairment of memory, concentration, and intellectual function. Other effects noted in humans include cardiac arrhythmia, liver damage, and possible kidney effects.

Additional information regarding chemical hazards and access to Material Safety Data Sheets can be reached through the Agency for Toxic Substances and Disease Registry web page: <http://atsdr1.atsdr.cdc.gov.8080/> - refer to ToxFAQs.

FEDERAL FACILITIES REPORTING

COMMON USES OF: TETRACHLOROETHYLENE

Federal Facilities Reporting in both 1994 and 1995	7	HAND-WIPE SOLVENT	HEAVY-DUTY SOLVENT
Federal Facilities Reporting Only in 1994	1	PAINT REMOVER	
Federal Facilities Reporting Only in 1995	0		

POLLUTION PREVENTION APPROACHES CURRENTLY IN USE

HAND-WIPE SOLVENT

POLLUTION PREVENTION APPROACHES CURRENTLY IN USE

HAND-WIPE SOLVENT

- KC-135 Systems Program Office, (OC-ALC), switched to cleaners under the MIL-C-87937 specification including DS-108 for wipe-prior-to-paint applications. They are continuing to test and evaluate other commercially available solvents including borothene and hydrofluoroethers. Tinker AFB, Oklahoma City ALC
- Replaced 1,1,1-trichloroethane (TCA) and methyl ethyl ketone (MEK) with a terpene cleaner for hand wiping operations. Martin Marietta Astronautics
- Replaced MEK with a cleaner approved by the KC-135 SPO at Tinker AFB, methyl-n-propyl ketone (MPK). ASC/RAS, Wright Patterson AFB
- Isopropyl alcohol (IPA) is approved as an alternative to MEK. Technical Order 1-1-8 which references T.O. 1-1-691 contains specific procedures for the use of IPA. T.O. 1-1-691 recommends cleaning products qualified to MIL-C-87937, Type II. Cleaners qualified to MIL-C-87937B are the most environmentally friendly cleaners authorized for use on C-141 aircraft and its components. (Reference: PRO-ACT Technical Inquiry 8200)

HEAVY-DUTY SOLVENT

- For heavy soil removal, NAVAIR recommends low vapor pressure (LVP) organic solvents. These solvents are volatile organic compounds, but due to their low vapor pressures and slower evaporation rates, they may be exempt from certain air regulations and produce lower air emissions depending on how they are used, managed, and stored. LVP solvents are generally composed of aliphatic petroleum hydrocarbons, terpenes, esters, or organic blends with vapor pressures below 5 mmHg at 72 degrees F. Normally, these solvents are applied with a solvent soaked cloth, followed by a surface wipe with a clean cloth. In some cases, a second clean cloth wipe may be required to remove residual solvent to speed drying.
- Nonhalogenated Systems for Cleaning Metal Parts: Production testing demonstrated the viability of spray and immersion cleaning systems for specific cleaning applications. Based on the bench scale testing, NDCEE determined that Brulin formula 815GD is the preferred aqueous chemistry for mechanically and ultrasonically agitated immersion systems and will be used for production testing in the Advanced Ultrasonic Cleaning System. Daraclean 282 was selected for use in the Power Washer Cleaning System, although all of the chemistries downselected for the bench scale testing effectively emulsified the soils and prevented recontamination of the parts. NDCEE, POC: Richard Pirota 814-269-2810.
- The Corrosion Control Element, 437 Equipment Maintenance Squadron (EMS), Charleston AFB, South Carolina significantly reduced their hazardous waste stream by reclaiming a majority of the Methyl Ethyl Ketone (MEK) used in their aircraft refinishing operation. They did this using an off-the-shelf recycling unit purchased from a local automobile body shop supply store. This is one example of many recycling options implemented by Federal Facilities to reduce the disposal of used solvents.
- Abrasive blasting is an alternative to solvents for cleaning. In the blasting process, particulate media is propelled by compressed gases or a liquid to impinge on the contaminated surface. No toxic or hazardous chemicals are used; however, the blasting media can become contaminated with the material being blasted from the surface. There are several different types of blasting media, some multi-purpose and others single purpose. The various types of blasting media are: Mineral Grit/Sand Blasting, Steel Shot, Plastic Media, Plastic Foam, Dry Ice (CO₂), Wheat Starch, Walnut Shells and Other Food By Products, and Sodium Bicarbonate.
- Nonhalogenated Systems for Cleaning Metal Parts: Production testing demonstrated the viability of spray and immersion cleaning systems for specific cleaning applications. Based on the bench scale testing, NDCEE determined that Brulin formula 815GD is the preferred aqueous chemistry for mechanically and ultrasonically agitated immersion systems and will be used for production testing in the Advanced Ultrasonic Cleaning System. Daraclean 282 was selected for use in the Power Washer Cleaning System, although all of the chemistries downselected for the bench scale testing effectively emulsified the soils and prevented recontamination of the parts. NDCEE, POC: Richard Pirota 814-269-2810.
- Hill AFB switched to terpenes and an ethyl lactate blend for aircraft cleaning operations. Hill AFB, Ogden ALC
- Steam cabinets or vacuum vapor degreasers will most likely be used at OC-ALC for penetrant removal prior to plating. Steam cleaning is a viable solvent alternative for removing oily or greasy residue. The heat accelerates emulsification break-down, and removal of caked-on dirt and grease. The high temperature of steam is used to heat surfaces long enough for the steam to vaporize or liquefy the oil, grease, or dirt. The residue can then be effectively washed away with the steam condensate. Steam cleaning can also be used with a degreasing agent (often a surfactant) to enhance the solubility of grease in water. Steam cleaners are available to perform medium duty to heavy duty cleaning jobs and are available in a variety of different system configurations. Portable steam cleaners are available through the national stock system. These have been used at DOD facilities for removing oil, grease, sand, rust, carbon, and burnt propellant from weapons. The wastewater generated from the steam cleaning process may be treated at an industrial wastewater treatment plant, depending on the toxicity of the dirt and grease removed.
- Switched to alternative cleaners for MEK and TCA: Pensolv L805 (a terpene-based, four part cleaner); a four part cleaner (containing MEK and toluene); and DS-108. Commodities Directorate, OC-ALC
- Using carbon dioxide blast media system for cleaning KC-135, C-141, B-52, B-1, and F-16 engines. CO₂ is used in conjunction with solvent cleaning methods as an initial cleaning step in the process. Both G.E. and Pratt and Whitney approved the use of CO₂ for cleaning engines. Additional technologies successfully implemented to replace solvent usage in propulsion include: power spray washers, water-based cleaners, and water jet. (Reference: B. Ley "Solvent Substitution in Jet Engine Maintenance at Tinker AFB" Proceedings from the 1996 Tri-Services World-Wide Pollution Prevention Conference). Tinker AFB
- Resolved by switching to terpenes and an ethyl lactate blend for aircraft cleaning operations. Hill AFB, Ogden ALC

POLLUTION PREVENTION APPROACHES CURRENTLY IN USE

HEAVY-DUTY SOLVENT

- Steam cabinets or vacuum vapor degreasers will most likely be used at OC-ALC for penetrant removal prior to plating. Steam cleaning is a viable solvent alternative for removing oily or greasy residue. The heat accelerates emulsification break-down, and removal of caked-on dirt and grease. The high temperature of steam is used to heat surfaces long enough for the steam to vaporize or liquefy the oil, grease, or dirt. The residue can then be effectively washed away with the steam condensate. Steam cleaning can also be used with a degreasing agent (often a surfactant) to enhance the solubility of grease in water. Steam cleaners are available to perform medium duty to heavy duty cleaning jobs and are available in a variety of different system configurations. Portable steam cleaners are available through the national stock system. These have been used at DOD facilities for removing oil, grease, sand, rust, carbon, and burnt propellant from weapons. The wastewater generated from the steam cleaning process may be treated at an industrial wastewater treatment plant, depending on the toxicity of the dirt and grease removed.
- Tinker AFB is installing two vacuum vapor degreasers for wax removal. Vacuum vapor degreasers release less solvent to the atmosphere because the work chamber is completely enclosed. The engine parts are placed in an airtight chamber into which solvent vapors are introduced. After cleaning is complete, the solvent vapors in the chamber are evacuated and captured by chilling and carbon adsorption. Once the solvent in the chamber is evacuated, the door of the chamber is opened and the workload is withdrawn. The cleaned workload is also free from any residual solvent, and there are no subsequent emissions. (Reference: USEPA-Guide to Cleaner Technologies: Cleaning and Degreasing Process Changes. EPA/625/R-93/017. February 1994).
- Using carbon dioxide blast media system for cleaning KC-135, C-141, B-52, B-1, and F-16 engines. CO₂ is used in conjunction with solvent cleaning methods as an initial cleaning step in the process. Both G.E. and Pratt and Whitney approved the use of CO₂ for cleaning engines. Additional technologies successfully implemented to replace solvent usage in propulsion include: power spray washers, water-based cleaners, and water jet. (Reference: B. Ley "Solvent Substitution in Jet Engine Maintenance at Tinker AFB" Proceedings from the 1996 Tri-Services World-Wide Pollution Prevention Conference"). Tinker AFB
- Abrasive blasting is an alternative to solvents for cleaning. In the blasting process, particulate media is propelled by compressed gases or a liquid to impinge on the contaminated surface. No toxic or hazardous chemicals are used; however, the blasting media can become contaminated with the material being blasted from the surface. There are several different types of blasting media, some multi-purpose and others single purpose. The various types of blasting media are: Mineral Grit/Sand Blasting, Steel Shot, Plastic Media, Plastic Foam, Dry Ice (CO₂), Wheat Starch, Walnut Shells and Other Food By Products, and Sodium Bicarbonate.
- Tinker AFB is installing two vacuum vapor degreasers for wax removal. Vacuum vapor degreasers release less solvent to the atmosphere because the work chamber is completely enclosed. The engine parts are placed in an airtight chamber into which solvent vapors are introduced. After cleaning is complete, the solvent vapors in the chamber are evacuated and captured by chilling and carbon adsorption. Once the solvent in the chamber is evacuated, the door of the chamber is opened and the workload is withdrawn. The cleaned workload is also free from any residual solvent, and there are no subsequent emissions. (Reference: USEPA Guide to Cleaner Technologies: Cleaning and Degreasing Process Changes. EPA/625/R-93/017. February 1994).

PAINT REMOVER

- Abrasive blasting is an alternative to solvents for coatings removal. In the blasting process, particulate media is propelled by compressed gases or a liquid to impinge on the contaminated surface. No toxic or hazardous chemicals are used; however, the blasting media can become contaminated with the material being blasted from the surface. There are several different types of blasting media, some multi-purpose and others single purpose. The various types of blasting media are: Mineral Grit/Sand Blasting, Steel Shot, Plastic Media, Plastic Foam, Dry Ice (CO₂), Wheat Starch, Walnut Shells and Other Food By Products, and Sodium Bicarbonate.
- Automated Ultra-High Pressure Waterjet System Workcell UHPWJ (N.020): This project will evaluate the automated UHPWJ process for thermal spray coatings removal, aid in transitioning this technology to DOD repair/refurbishment depots, and explore UHPWJ stripping as a possible alternative to other waste-generating coatings removal processes, which utilize acid dip/media blast steps that generate hazardous waste and damage engine components. ARDEC, Corpus Christi Army Depot (CCAD), NDCEE; POC: Frederick Lancaster, NDCEE, 814-269-2806.
- Abrasive blasting is an alternative to solvents for coatings removal. In the blasting process, particulate media is propelled by compressed gases or a liquid to impinge on the contaminated surface. No toxic or hazardous chemicals are used; however, the blasting media can become contaminated with the material being blasted from the surface. There are several different types of blasting media, some multi-purpose and others single purpose. The various types of blasting media are: Mineral Grit/Sand Blasting, Steel Shot, Plastic Media, Plastic Foam, Dry Ice (CO₂), Wheat Starch, Walnut Shells and Other Food By Products, and Sodium Bicarbonate.
- Mobile Manipulation of a CO₂ Turbine Wheel Coatings Removal System: NDCEE tested and demonstrated the use of a centrifugally accelerated carbon dioxide pellet turbine wheel (CO₂ TW) device manufactured by Cryogenics, Inc. The device was tested using Navy equipment and compared results with current coatings removal methods. POC: Frederick Lancaster, NDCEE, 814-269-2806.
- Automated Ultra-High Pressure Waterjet System Workcell UHPWJ (N.020): This project will evaluate the automated UHPWJ process for thermal spray coatings removal, aid in transitioning this technology to DOD repair/refurbishment depots, and explore UHPWJ stripping as a possible alternative to other waste-generating coatings removal processes, which utilize acid dip/media blast steps that generate hazardous waste and damage engine components. ARDEC, Corpus Christi Army Depot (CCAD), NDCEE; POC: Frederick Lancaster, NDCEE, 814-269-2806.
- Mobile Manipulation of a CO₂ Turbine Wheel Coatings Removal System: NDCEE tested and demonstrated the use of a centrifugally accelerated carbon dioxide pellet turbine wheel (CO₂ TW) device manufactured by Cryogenics, Inc. The device was tested using Navy equipment and compared results with current coatings removal methods. POC: Frederick Lancaster, NDCEE, 814-269-2806.

ON-GOING POLLUTION PREVENTION RESEARCH AND DEVELOPMENT

ON-GOING POLLUTION PREVENTION RESEARCH AND DEVELOPMENT

HAND-WIPE SOLVENT

Solvent Substitution for Fuel Tank Cleaning:

Using isopropyl alcohol (IPA) as a temporary substitute for the cleaning compound (NSN 6850-00-611-7993) that contains MEK for spot cleaning fuel tanks. The B-52 program office is working with Morton Aerospace to test a substitute sealant (MC-250) that could be removed with a substitute cleaner that does not contain HAPS. USAF, B-52 Program Office; POC: Unknown.

Alternatives for General Aircraft Maintenance:

CCAD; POC: Unknown

Non-toxic Small/Medium Caliber Automatic Weapons Cleaning Process:

ARDEC; POC: Unknown

Solvent Substitution/Low VOC Cleaners:

Navy-Patuxant; POC: Unknown

Substitute for Hand-Wipe Solvents:

Conducted extensive testing on commercially available, environmentally-friendly hand-wipe solvents for use on the B-2 program at the Air Force Plant 42 Palmdale site. Selected two solvents for implementation in manufacturing operations, Dynamold DS-108 and DS-108CA. Northrop Grumman; POC: Unknown.

Substitute Hand-Wipe Solvents:

Evaluated 24 cleaners. Testing three potential substitutes for MEK: ISO-BLAST, MD-516F, and Androx 5564. USAF, F-15 Program Office, Wright Patterson AFB; POC: Unknown.

Substitute Hand-Wipe Solvents:

Tested 30 commercially available hand-wipe cleaners. Of the 30 cleaners, only four passed all screening tests: SD 1291 (Burlin Corporation); CitraSafe (Inland Technology); Super 140 (LPS Industries); and De-Solv-It E&E (Orange-Sol, Inc.). USAF, Warner Robins ALC (WR-ALC/IT); POC: Unknown.

Substitute Wipe Solvent:

Testing DS-108 as a substitute wipe solvent. DS-108 Solvent was developed and patented by General Dynamics, Fort Worth Division (now Lockheed-Martin Tactical Aircraft Systems) for use in the F-16 program. DS-108 has been qualified to meet a variety of OEM and military specifications and received toxicity clearance from the Surgeon General, Department of the Army. USAF, OC-ALC; POC: Unknown.

Surface/Solvent Diagnostics for Metal Cleaning Operations:

Army Research Laboratory; POC: Unknown

HEAVY-DUTY SOLVENT

Environmentally Acceptable Cleaning Processes:

U.S. Army, TARDEC; POC: Unknown

Continuous Aqueous Cleaning to Eliminate ODC:

RIA; POC: Unknown

Aqueous-based Degreasing Technology:

The Army's Soldier Systems Command (SSCOM) will develop nonpolluting, nontoxic water-based degreasers for cleaning metal/ glass/plastic surfaces using biopolymer emulsifying materials. Develop microbially produced natural surfactants (emulsans) through fermentation processes and optimize chemical structure of the new materials for specific oil/grease removal needs. Solve production issues for fermentation and purification of new bioemulsifiers. Relate detergency to chemical structure. Tailor chemical structure of bioemulsifiers for specific degreasing applications. Extramural: modify bioemulsifiers by fermentation feeding strategies. Chemically characterize new emulsifiers. Modify other similar biopolymers with fermentation technique. Optimize bioremediation methods for emulsified oil/grease solutions. NRDEC and AMC-IOC; POC: Dr. Fred Allen 508-233-4266

APMS&E for Aircraft Components:

Field demonstration of laser based facility for component cleaning, coating removal and surface preparation. Wright Lab; POC: Robert Hall, WL/MLPJ, DSN 785-2334.

APEDOM for Non-chemical Metal Cleaning of Aircraft Components:

Alternative process, engineering design and operation manual for non-chemical metal cleaning process for aircraft components, including wing skins, fuselage panels and bulkheads, etc., prior to surface preparation, such as anodizing, and subsequent priming in preparation for coating or adhesive bonding. Air Force Research Laboratory; POC: Phil Mykytiuk, WL/MLSE, DSN 785-3953, (513) 255-3953.

APEDOM for a Supercritical Fluid Cleaner for Avionics and Mechanical Components:

Alternative Process Design and Operation Manual for a supercritical fluid cleaner with an internal chamber sized to accommodate both avionics and mechanical components. Air Force Research Laboratory; POC: Phil Mykytiuk, WL/MLSE, DSN 785-3953, (513) 255-3953.

HEAVY-DUTY SOLVENT

Alternative Cleaning Processes for Metal and Composite Honeycomb Parts:

Corpus Christi Army Depot and NDCEE will develop an environmentally friendly cleaning process for cleaning the honeycomb core, skins, and structural members prior to bonding. CCAD, NDCEE; POC: Mr. Al Gonzales, 512-939-4073.

Alternative Bullet Tip Degreasing Agent:

ARDEC/Lake City Army Ammunition Plant; POC: Ms. Bianca Roberts, 816-796-7168

Laser Cleaning and Coatings Removal:

Demonstrate the use of laser cleaning and coating removal on components ranging from turbine engine blades to landing gear and radomes. Prototype laser-based facility will test carbon dioxide and examine laser cleaning and coating removal operations for a variety of aircraft and general equipment cleaning. Wright Lab/MTPN; POC: Mr. Michael Waddell (513) 255-7277.

High Efficiency, Low-Cost Supercritical Fluid Cleaner:

SWRI developed a natural convection supercritical fluids cleaner as a substitute for 1,1,1-trichloroethane. SWRI also designed and built a pre-production natural convection cleaning system. Under this project, SWRI will establish the cleaning envelope for the natural convection process. As of June 1997, SWRI had begun the background contamination study and the particulate filtering system design. Southwest Research Institute and Air Force Research Laboratory; POC: Mary Marshall, (210) 522-2183.

Evaluation of Alternatives to Chlorinated Solvents and Cleaners for Army Vehicles:

Identify candidate replacement solvents and recovery systems for chlorinated solvents for Army vehicle maintenance and repair. Test, evaluate and determine environmental and economic benefits. U.S. Army Materiel Command, TACOM; POC: T.C. Ilandsy, TACOM, 810-574-8834.

Solvent Replacement - Vapor Degreaser:

Allied Signal will demonstrate a replacement for 1,1,1-trichloroethane vapor degreasing. Allied Signal Army Engine Plants; POC: Mr. T. Russell, Mr. J. Morrell, 203-385-3741.

Reduce Toxic Pollutant in Ultrasonic Cleaner Discharge Wastewater:

NDCEE/ Tobyhanna Army Depot; POC: Unknown

Deploy Lactate Esters as Non-toxic, Non-polluting Solvent:

Explore the use of inexpensive lactate esters, such as ethyl lactate, for paint equipment cleaning, and honeycomb structure cleaning prior to bonding. Test recovery process. Conduct economic analysis. NCMS/ORNL; POC: Mr. Jim Frank, 708-252-7693

Laser Cleaning for Semiconductor Manufacturing:

Joint demonstration of a laser cleaning system manufactured by Neuman MicroTechnologies, Inc. for silicon wafers, photomasks, and flat panel display substrates. National Security Agency, Motorola, USEPA, Radiance Services Company; POC: John Robinson, (301) 654-0228, (Radiance Services)

Supercritical Carbon Dioxide for Solvent Replacement:

LANL conducted a project to develop improved techniques for cleaning with supercritical carbon dioxide. LANL has a Supercritical Fluids Experimental User facility available for exploratory evaluation and long-term R&D. Los Alamos National Laboratory; POC: Dale Spall, Ken Laintz.

Plasma Dry Cleaning:

LANL conducted a technology demonstration of plasma dry cleaning on sample components and is developing industrial process techniques. Process uses an oxygen, radio-frequency plasma to remove hydrocarbon surface contamination, such as cutting fluids, oils, and greases from components. Resultant by-products are carbon dioxide and water vapor. Reactive ions generated in a plasma bombard the substrate, releasing contaminants. Los Alamos National Laboratory; POC: Harold Davis.

P2 Technology Maturation:

Ultraviolet Light/Ozone Cleaning. Wright Lab, McDonnell Douglas, SAIC; POC: Harvey Lilienfeld (314) 233-2550.

Nonhalogenated Systems for Cleaning Metal Parts:

Production testing demonstrated the viability of spray and immersion cleaning systems for specific cleaning applications. Based on the bench scale testing, NDCEE determined that Brulin formula 815GD is the preferred aqueous chemistry for mechanically and ultrasonically agitated immersion systems and will be used for production testing in the Advanced Ultrasonic Cleaning System. Daraclean 282 was selected for use in the Power Washer Cleaning System, although all of the chemistries downselected for the bench scale testing effectively emulsified the soils and prevented recontamination of the parts. NDCEE and ARDEC; POC: Richard Pirota NDCEE, 814-269-2810; Ms. D. Demone, ARDEC, 201-724-6773.

Mobile Advanced, Aqueous Solution Recovery Systems:

NDCEE will test advanced separation and filtration technologies for closed loop recovery of aqueous solutions. NDCEE; POC: David Roberts, 814-269-2885.

Liquefied Gases as Substitutes for Traditional Solvents:

U.S. Army, MICOM; POC: Unknown

Supercritical Carbon Dioxide Optical Sub-system Cleaning:

ARDEC; POC: Mr. Curtis Anderson, 201-724-4287.

ON-GOING POLLUTION PREVENTION RESEARCH AND DEVELOPMENT

PAINT REMOVER

Alternate Chemical Paint Strippers:

Environmentally compatible paint strippers provide an alternative to the more hazardous products based on methylene chloride or caustic agents. The products are effective in removing thick layers of paint buildup with minimal damage to the substrate surface. The demonstration/validation (DV) project confirmed that products effectively remove interior and exterior LBP from wood surfaces. POC: CERL, Susan Drodz (217)-373-6732.

Selective Stripping Process Development:

Identify "smart" stripping processes capable of selectively removing topcoats from long-life foundation layers (primers). Would allow use of permanent foundation layers to achieve "paint for Life" systems. Any required HAPs, e.g. chromate corrosion inhibitors, could be contained within the permanent foundation layer. If this is not stripped, then there is no pollution from stripping process. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Evaluation of Polymedia-lite Dry Blast Media:

This effort was to evaluate new dry blast media for paint stripping. Tests will be conducted to determine if acceptable stripping rates can be achieved with the same or less damage to the aircraft than conventional dry blast media. This is applicable to the C-5, F-15, A-10 and C-130. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Water Jet Paint Stripping:

This effort is to develop a process to strip coatings from military ground vehicles, and small aircraft, contain the wastes, and recycle the water. POC: TACOM; Mr. Carl Handsy (313)-574-8834.

Next Generation Energetic Stripping:

Identify and develop novel ideas using energetic means to REMOVE coating layers, i.e. laser-stripping, flashjet, pinchlamp, etc. , which will allow reduction of hazardous waste, cost and downtime of aircraft. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Polymedia Lite Evaluation for Composites:

The effort is to evaluate new dry blast media for stripping paint from composite laminates (graphite, glass , Kevlar). Tests will be conducted to determine if acceptable stripping rates can be achieved with insignificant or no damage to the aircraft. This is applicable to C-17 and F-22 aircraft with potential application to other aircraft. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Medium Pressure Water Stripping:

This effort is to evaluate semi-automation and industrialization of a pressurized water process. This process can replace or enhance methylene chloride chemical applications. It applies to C-130, C-141 and other large aircraft. Recycled water can be used in the water stripping process. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Improved Non-HAPs Chemical Strippers:

Identify/develop environmentally acceptable chemical paint strippers with a maximum dwell time of 1-hour and strip rate comparable to methylene chloride. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Environmentally Acceptable Chemical Strippers:

This effort is to determine the range of parameters for viable environmentally acceptable processes and to evaluate handling issues. Potential benefits are to reduce or eliminate the use of toxic chemicals (HAPs). POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Dry Media Stripping of Thin Skin Aluminum:

This effort will determine the effects of dry media blasting (DMB) on thinner skin aluminum, .032 and .025 inch 2024 - T3 and bare alloy. Three different DMB will be evaluated: acrylic, polymedia-lite and polymerized wheat starch. Material characterization data for comparison of the three media will be developed from the JPATS airframe. If successful, a follow-on integration project will be started in FY98. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Development of NDE for Selective Stripping:

This effort is to develop non destructive evaluation techniques for determining the health of the primer or "foundation layer" that is to be left on the substrate and to inspect for corrosion under the primer or "foundation layer." POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Aqueous Paint Coating & Stripping:

This Army project will design and produce new protein-based coatings for specific substrates (metals) and clean REMOVE strategy based on new aqueous-based systems. Armament Research, Development and Engineering Center (ARDEC); POC: 201-724-6518.

Aircraft Depainting Technology:

This program will identify the best alternatives from existing/developmental methods such as non-hazardous chemical paint strippers (i.e., no chrome, MeCL, etc.) and mechanical procedures (PMB, Flash Lamp, dry ice, water jet, etc.). Procedure efficiency, substrate surface effects, hazardous waste generation and A/C applicability will be investigated in order to determine the best procedure for Navy applications. Comparison of the advantages and disadvantages of each technique will also be performed. Mechanical procedures eliminate hazardous chemicals, but can damage substrate surfaces. Since some aircraft skins are very thin, this is not acceptable. However, combinations of some techniques (i.e., flash lamp/dry ice) could eliminate or minimize surface damage to an acceptable level. POC: NAWCAD, Patuxent River; Mr. Steve Hartle; (301)-342-8006.

ON-GOING POLLUTION PREVENTION RESEARCH AND DEVELOPMENT

PAINT REMOVER

Plastic Laminate As A Replacement For Conventional Topcoats:

This Navy effort involves using plastic laminates developed by 3M as a total-body decal to replace traditional topcoats. The laminates are currently being flight tested on F-3, F-18, and C-130 aircraft. The plastic film is laminated to the aircraft's primer with an acrylic adhesive. Delaminating an aircraft is accomplished by using steam to release and remove the adhesive. The used laminate can then be land-filled. Advantages over traditional coatings include: reduced environmental/OSHA issues associated with traditional paint booth applications, faster installation, elimination of depaint hazardous waste and OSHA issues, lighter weight compared to typical multiple layer coatings, improved corrosion protection due to the impenetrable nature of the plastic film, and improved survivability. In addition to these advantages, commercial airline testing of the laminates have shown a fuel savings due to decreased drag. Navy; POC: Dave Pulley 301/342-8050.

Paint Stripping Methods – Autocrawler:

This program is aimed at developing an autonomous or remotely piloted vehicle prototype designed to remove aircraft coatings. The approach is to take the existing autocrawler prototype and develop end effector delivery systems capable of stripping coatings. The end-effecters being evaluated are 1) medium/high pressure water, 2) wheat starch, and 3) flash lamp. The program includes a prototype built for one system. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

Biodegradable Plastic Media - Foster Miller (SBIR):

This effort is to develop biodegradable plastic media and an associated biotreatment system, which can be, used in current generation plastic media blasting (PMB) aircraft coatings REMOVER processes. This could significantly reduce the amount of heavy metals contaminated waste from stripping chromate and cadmium containing paints. POC: WL/MLSS - CTIO; MAJ W. Kevin Kuhn (937)-255-0943.

POLLUTION PREVENTION RESEARCH AND DEVELOPMENT / TRANSITION NEEDS

HAND-WIPE SOLVENT

- On-going R&D and existing commercial off-the-shelf technology solutions are adequately addressing the pollution prevention needs for this use.

HEAVY-DUTY SOLVENT

- On-going R&D and existing commercial off the shelf technology solutions are adequately addressing the pollution prevention needs for this use.

PAINT REMOVER

- On-going R&D and existing commercial off the shelf technology solutions are adequately addressing the pollution prevention needs for this use.

Federal Facilities Which Reported for Both 1994 and 1995

Facility	1994 Release+ Off-site Treatment	1995 Release+ Off-site Treatment	Percent Change
U.S. PUBLIC HEALTH SERVICE, BETHESDA, MD	0	11	100%
U.S. ARMY TOOELE CHEMICAL, TOOELE, UT	21,222	342	-98%
U.S. ARMY FORT RILEY, FORT RILEY, KS	13,072	0	-100%
U.S. AIR FORCE MCCLELLAN AIR, SACRAMENTO, CA	13,900	20,000	44%
U.S. AIR FORCE, TINKER AFB, OK	104,819	68,035	-35%
U.S. AIR FORCE, KELLY AFB, TX	242,279	129,305	-47%
NASA JOHN F. KENNEDY SPACE, KENNEDY SPACE CENTER, FL	18,408	25,637	39%
NASA, HUNTSVILLE, AL	85,010	86,000	1%

If you have additional information regarding an identified or used P2 approach, on-going P2 research and development, or any P2 research and development/transition needs, please notify Will Garvey, US EPA, 1200 Pennsylvania Avenue, NW, Ariel Rios Building, 3rd Floor, Washington, DC 20004-2403, or fax (202) 501-0069.